



Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:04:57 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_Order_010_CTRL
Author	
Version	1.0
Purpose	
Status	
Description	Enhanced Bundling and modified job to track orders only sending new orders
Creation	Mar 5, 2019 12:39:21 AM
Modification	Dec 4, 2019 10:54:42 AM

Preview Picture

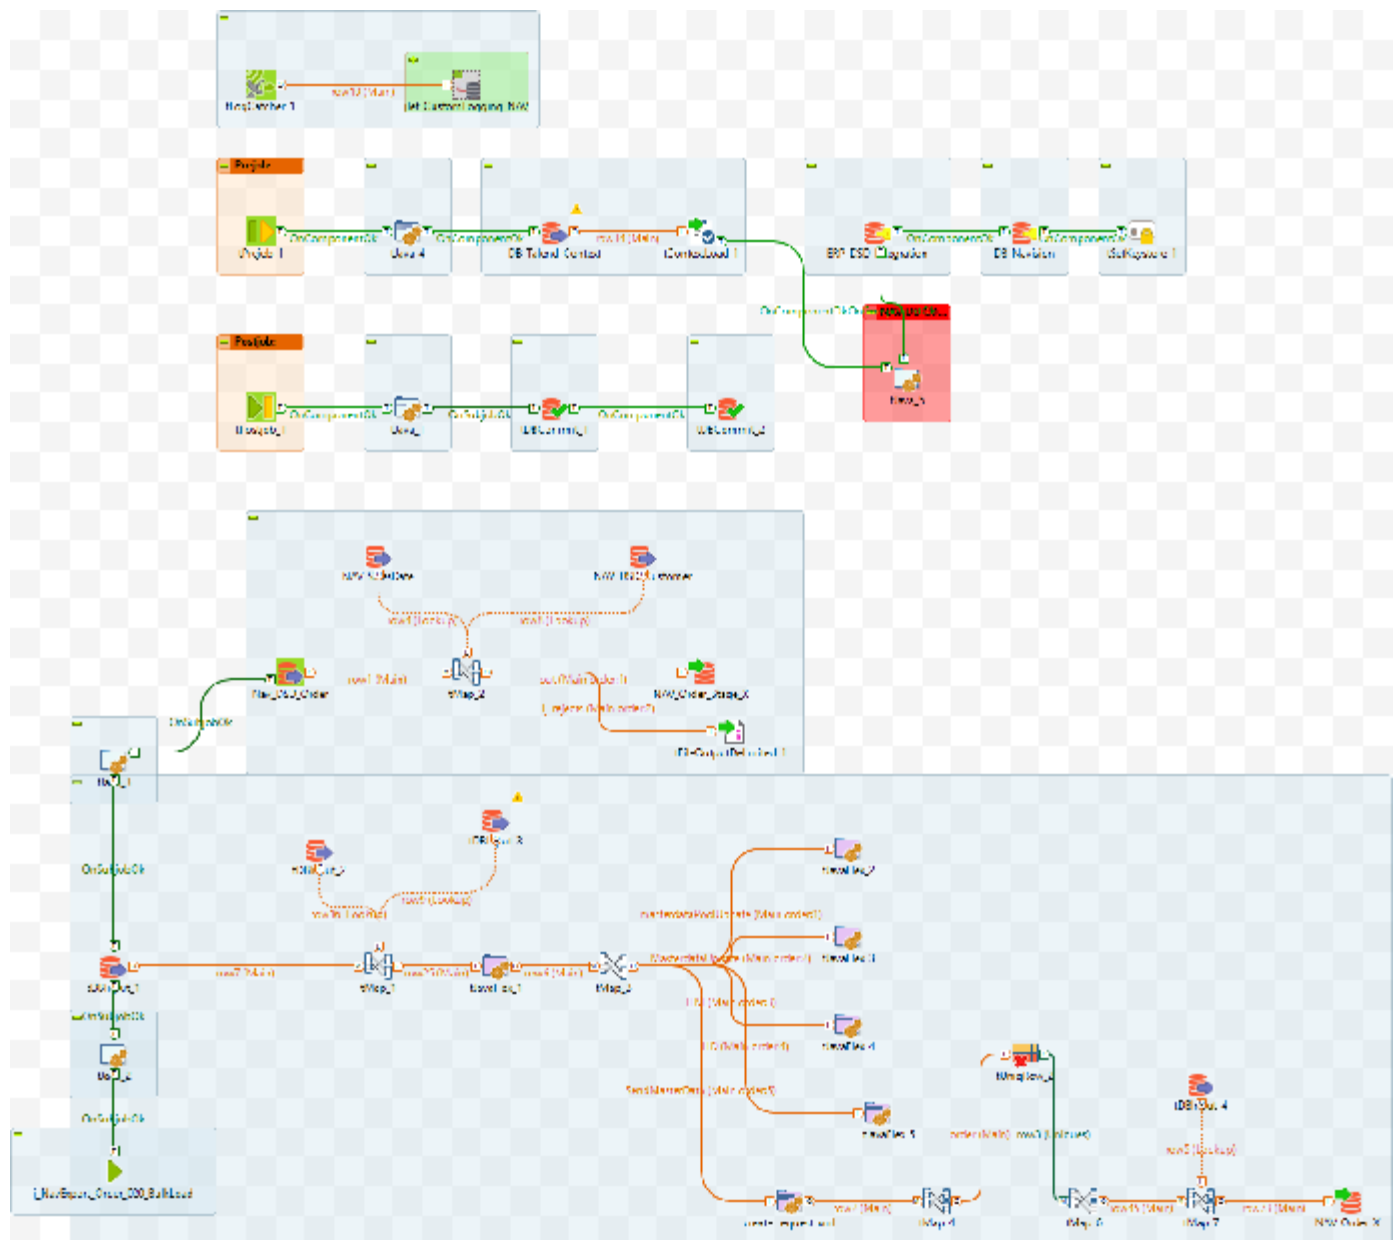

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	true

Implicit tContextLoad	false
-----------------------	-------

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
------	--------	-------------

filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false

instance	instance?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false

movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
requestXML	requestXML?	false
AttName	AttName?	false
batch	batch?	false
certificate_alias	certificate_alias?	false
certificate_validity_email_set_days	certificate_validity_email_set_days?	false
CRC	CRC?	false
customer_email_cc	customer_email_cc?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false

Facility	Facility?	false
file_rowcount	file_rowcount?	false
implicit_db_environment	implicit_db_environment?	false
interruptedRoutesList	interruptedRoutesList?	false
jdk_bin_path	jdk_bin_path?	false
Location	Location?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false

ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
responseXML	responseXML?	false
route_number	route_number?	true
RouteGroup	RouteGroup?	false
routeInterruptedFlag	routeInterruptedFlag?	false
setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
TIMEZONE	TIMEZONE?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false

DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false

DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false

NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false
RM_Order-Encoding	RM_Order-Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

ContextQA

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false

JobName	JobName?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false
instance	instance?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false

filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false

requestXML	requestXML?	false
AttName	AttName?	false
batch	batch?	false
certificate_alias	certificate_alias?	false
certificate_validity_email_set_days	certificate_validity_email_set_days?	false
CRC	CRC?	false
customer_email_cc	customer_email_cc?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
implicit_db_environment	implicit_db_environment?	false

interruptedRoutesList	interruptedRoutesList?	false
jdk_bin_path	jdk_bin_path?	false
Location	Location?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
responseXML	responseXML?	false

route_number	route_number?	true
RouteGroup	RouteGroup?	false
routeInterruptedFlag	routeInterruptedFlag?	false
setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
TIMEZONE	TIMEZONE?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false

DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false

NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

ContextPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false

mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false
value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false
instance	instance?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false

mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
requestXML	requestXML?	false
AttName	AttName?	false
batch	batch?	false

certificate_alias	certificate_alias?	false
certificate_validity_email_set_days	certificate_validity_email_set_days?	false
CRC	CRC?	false
customer_email_cc	customer_email_cc?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
implicit_db_environment	implicit_db_environment?	false
interruptedRoutesList	interruptedRoutesList?	false
jdk_bin_path	jdk_bin_path?	false
Location	Location?	false

message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
responseXML	responseXML?	false
route_number	route_number?	true
RouteGroup	RouteGroup?	false
routeInterruptedFlag	routeInterruptedFlag?	false

setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
TIMEZONE	TIMEZONE?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false

DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false

NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false

NAV_Vehicle	NAV_Vehicle?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false
RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

ContextPREPROD

Name	Prompt	Need Prompt
filepath	filepath?	false
objectType	objectType?	false
source	source?	false
JobName	JobName?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
Pool	Pool?	false
keystore	keystore?	false

value	value?	false
database	database?	false
table_view	table_view?	false
key	key?	false
table	table?	false
viewname	viewname?	false
AttNAme	AttNAme?	false
UseIndex	UseIndex?	false
instance	instance?	false
ProcessDate	ProcessDate?	false
updateKey	updateKey?	false
filter1	filter1?	false
updateNode	updateNode?	false
referencedate	referencedate?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false

mom_To	mom_To?	false
mom_Username	mom_Username?	false
bundleCount	bundleCount?	false
bundledRequestXML	bundledRequestXML?	false
headerCountInBundle	headerCountInBundle?	false
headerCountInTable	headerCountInTable?	false
item_row_counter	item_row_counter?	false
movilizerRequestEndNode	movilizerRequestEndNode?	false
movilizerRequestStartNode	movilizerRequestStartNode?	false
movilizerRequestUpdateNode	movilizerRequestUpdateNode?	false
orderDeletionDays	orderDeletionDays?	false
requestXML	requestXML?	false
AttName	AttName?	false
batch	batch?	false
certificate_alias	certificate_alias?	false
certificate_validity_email_set_days	certificate_validity_email_set_days?	false
CRC	CRC?	false

customer_email_cc	customer_email_cc?	false
customer_email_to	customer_email_to?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database_rm	database_rm?	false
database_trx	database_trx?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
Facility	Facility?	false
file_rowcount	file_rowcount?	false
implicit_db_environment	implicit_db_environment?	false
interruptedRoutesList	interruptedRoutesList?	false
jdk_bin_path	jdk_bin_path?	false
Location	Location?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false

movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
PollSystemID	PollSystemID?	false
ProcessTimeStamp	ProcessTimeStamp?	false
ProfitCenter	ProfitCenter?	false
PromoDate	PromoDate?	false
responseXML	responseXML?	false
route_number	route_number?	true
RouteGroup	RouteGroup?	false
routeInterruptedFlag	routeInterruptedFlag?	false
setRequestTimeout	setRequestTimeout?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false

TIMEZONE	TIMEZONE?	false
transactionDirectory	transactionDirectory?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false

DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Company	NAV_Company?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false

NAV_CustomerAROpenItem	NAV_CustomerAROpenItem?	false
NAV_Delivery	NAV_Delivery?	false
NAV_DescriptionTable	NAV_DescriptionTable?	false
NAV_Events	NAV_Events?	false
NAV_Item	NAV_Item?	false
NAV_Itinerary	NAV_Itinerary?	false
NAV_Order	NAV_Order?	false
NAV_OrderControl	NAV_OrderControl?	false
NAV_Price	NAV_Price?	false
NAV_Route	NAV_Route?	false
NAV_SalesDate	NAV_SalesDate?	false
NAV_Shipment	NAV_Shipment?	false
NAV_Tax	NAV_Tax?	false
NAV_User	NAV_User?	false
NAV_Vehicle	NAV_Vehicle?	false
RM_Order_Encoding	RM_Order_Encoding?	false
RM_Order_FieldSeparator	RM_Order_FieldSeparator?	false

RM_Order_File	RM_Order_File?	false
RM_Order_RowSeparator	RM_Order_RowSeparator?	false

Component List


Component Name	Component Type
jlet_CustomLogging_NAV_1	jlet_CustomLogging_NAV
tContextLoad_1	tContextLoad
tDBCommit_1	tMSSqlCommit
tDBCommit_2	tMSSqlCommit
tDBConnection_1	tMSSqlConnection
tDBConnection_2	tMSSqlConnection
tDBInput_1	tMSSqlInput
tDBInput_2	tMSSqlInput
tDBInput_3	tMSSqlInput
tDBInput_4	tMSSqlInput
tDBInput_5	tMSSqlInput
tDBInput_6	tMSSqlInput

tDBInput_8	tMSSqlInput
tDBInput_9	tMSSqlInput
tDBOutput_2	tMSSqlOutput
tFileOutputDelimited_1	tFileOutputDelimited
tJavaFlex_1	tJavaFlex
tJavaFlex_2	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex
tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJava_1	tJava
tJava_2	tJava
tJava_3	tJava
tJava_4	tJava
tJava_5	tJava
tLogCatcher_1	tLogCatcher
tMSSqlOutput_2	tMSSqlOutput

tMap_1	tMap
tMap_2	tMap
tMap_3	tMap
tMap_4	tMap
tMap_6	tMap
tMap_7	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tRunJob_1	tRunJob
tSetKeystore_1	tSetKeystore
tUniqRow_2	tUniqRow

Components Description

Component tContextLoad

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_5

Component Parameters:

Properties	Values
------------	--------

Unique Name	tContextLoad_1
Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tContextLoad_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_1	INPUT(S)	tJava_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_2

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true


SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	true
Schema	Built-In

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_2	INPUT(S)	tDBCommit_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_2
Component Name	tMSSqlCommit


Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Component List	tDBConnection_2
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tJava_5
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tDBConnection_2

Component Parameters:

--

Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	"srvrsql200.harvestfoodsolutions.com"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"ERP_DSD_Integration_PREPROD"
Username	"talend"
Password	*****
Encoding	"ISO-8859-15"
Additional JDBC Parameters	""

Use or register a shared DB Connection	true
Shared DB Connection Name	"Order_Conn"
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_2	INPUT(S)	tDBConnection_1
	LABEL	DB_Navision	OUTPUT(S)	tSetKeystore_1


Component Parameters:

Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_2
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_Navision
JDBC Provider	MSSQL_PROP
Host	context.DB_Navision_Server
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password

Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false
Share identity insert in multi table	false
Label format	DB_Navision
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_1	INPUT(S)	tJava_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1 , tJava_2

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_1
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"

Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT * FROM NAV_ORDER_STAGE_X where IsProcessed='N' ORDER BY CUSTOMER_NUMBER, REFDATE, Order_date "
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false


Trim column	[{SCHEMA_COLUMN=RTE_NUMBER, TRIM=false}, {SCHEMA_COLUMN=CUSTOMER_NUMBER, TRIM=false}, {SCHEMA_COLUMN=PRODUCT_NUMBER, TRIM=false}, {SCHEMA_COLUMN=ORDER_DATE, TRIM=false}, {SCHEMA_COLUMN=QTYTEMP, TRIM=false}, {SCHEMA_COLUMN=QTYPERM, TRIM=false}, {SCHEMA_COLUMN=QTYORDER, TRIM=false}, {SCHEMA_COLUMN=UOM, TRIM=false}, {SCHEMA_COLUMN=RefDate, TRIM=false}, {SCHEMA_COLUMN=OrderDateInMillis, TRIM=false}, {SCHEMA_COLUMN=ProcessTimeStamp, TRIM=false}, {SCHEMA_COLUMN=IsProcessed, TRIM=false}]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
RTE_NUMBER	false	String	255		false	
CUSTOMER_NUMBER	false	String	255		false	

PRODUCT_NUMBER	false	String	30	3	false	
ORDER_DATE	false	java.util.Date			true	
QTYTEMP	false	int	38		false	
QTYPERM	false	int	38		false	
QTYORDER	false	int	38		false	
UOM	false	String	10		false	
RefDate	false	java.util.Date	10		true	
OrderDateInMillis	false	String	100		true	
ProcessTimeStamp	false	String	255		true	
IsProcessed	false	String	1		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_2	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_2

Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In


Guess Schema	""
Query	"SELECT [Customer#] DB_CUST_CUST_NUMBER, [Name] DB_CUST_SHIP_NAME FROM ["+context.NAV_Customer+"]"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[SCHEMA_COLUMN=DB_CUST_CUST_NUMBER, TRIM=false], {SCHEMA_COLUMN=DB_CUST_SHIP_NAME, TRIM=false}]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tDBInput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
DB_CUST_CUST_NUMBER	false	String	10		false	
DB_CUST_SHIP_NAME	false	String	255		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_3	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_3
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true

SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_1
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration

Host	context.DB_ERP_DSD_Integration_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT COUNT(1), RTE_NUMBER, CUSTOMER_NUMBER, REFDATE, ORDER_DATE FROM NAV_ORDER_STAGE_X where IsProcessed='N' GROUP BY CUSTOMER_NUMBER, REFDATE, ORDER_DATE ,RTE_NUMBER"
Specify a data source alias	false


Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=ITEM_COUNT, TRIM=false}, {SCHEMA_COLUMN=RTE_NUMBER, TRIM=false}, {SCHEMA_COLUMN=CUSTOMER_NUMBER, TRIM=false}, {SCHEMA_COLUMN=REFDATE, TRIM=false}, {SCHEMA_COLUMN=Order_Date, TRIM=false}]
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
ITEM_COUNT	false	Integer			true	

RTE_NUMBER	false	String			true	
CUSTOMER_NUMBER	false	String			true	
REFDATE	false	java.util.Date			true	
Order_Date	false	java.util.Date			true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_4	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_7

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_4
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false

END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_1
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Host	context.DB_ERP_DSD_Integration_Server


JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	" SELECT distinct [key],[group],md5_requestXML from NAV_Order_X "
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams

Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[SCHEMA_COLUMN=Key, TRIM=false], {SCHEMA_COLUMN=Group, TRIM=false}, {SCHEMA_COLUMN=md5_requestXML, TRIM=false}]
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
Key	false	String	100		true	
Group	false	String	100		true	
md5_requestXML	false	String	255		true	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_5	INPUT(S)	tJava_4
	LABEL	DB_Talend_Context	OUTPUT(S)	tContextLoad_1

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_5
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database


Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_environment+"]"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	{[SCHEMA_COLUMN=key, TRIM=false}, {SCHEMA_COLUMN=value, TRIM=false}]

Label format	DB_Talend_Context
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tDBInput_6	INPUT(S)	none
	LABEL	NAV_DSD_Customer	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Database	tMSSqlInput

Unique Name	tDBInput_6
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""


Query Type	Built-In
Guess Schema	""
Query	" select cust.Customer# CustomerNo,cust.Name,iter.[Key] ROUTE,usr.FACILITY,usr.LOCATION,usr.ROUTEGROUP from [dbo].[Nav_DSD_Customer Download_Details] cust join Nav_DSD_Itinerary iter on cust.SHIPPING# = iter.shipto join Nav_DSD_User usr on iter.[Key] = usr.[ID] "
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[{SCHEMA_COLUMN=CustomerNo, TRIM=false}, {SCHEMA_COLUMN=Name, TRIM=false}, {SCHEMA_COLUMN=ROUTE, TRIM=false}, {SCHEMA_COLUMN=FACILITY, TRIM=false}, {SCHEMA_COLUMN=LOCATION, TRIM=false}, {SCHEMA_COLUMN=ROUTEGROUP, TRIM=false}]]
Label format	NAV_DSD_Customer
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_6 :

Column	Key	Type	Length	Precision	Nullable	Comment
CustomerNo	false	String	255		false	
Name	false	String	255		false	
ROUTE	false	String	255		false	
FACILITY	false	String	255		false	
LOCATION	false	String	255		false	
ROUTEGROUP	false	String	255		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_8	INPUT(S)	none
	LABEL	Nav_DSD_Order	OUTPUT(S)	tMap_2 , tJava_3

Component Parameters:

Properties	Values
Database	tMSSqlInput

Unique Name	tDBInput_8
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""


Query Type	Built-In
Guess Schema	""
Query	"SELECT [REFERENCEDATE] ,[SHIPTO] ,[Item No_] ,[QTYTEMP] , [QTYPERM] ,[QTYORDER] ,[UOM] FROM ["+context.NAV_Order+"]"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=REFERENCEDATE, TRIM=false}, {SCHEMA_COLUMN=SHIPTO, TRIM=false}, {SCHEMA_COLUMN=Item_No_, TRIM=false}, {SCHEMA_COLUMN=QTYTEMP, TRIM=false}, {SCHEMA_COLUMN=QTYPERM, TRIM=false}, {SCHEMA_COLUMN=QTYORDER, TRIM=false}, {SCHEMA_COLUMN=UOM, TRIM=false}]
Label format	Nav_DSD_Order
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBInput_8 :

Column	Key	Type	Length	Precision	Nullable	Comment
REFERENCEDATE	false	String	50		false	
SHIPTO	false	String	255		false	
Item_No_	false	String	30		false	
QTYTEMP	false	BigDecimal	38	6	false	
QTYPERM	false	BigDecimal	38	6	false	
QTYORDER	false	BigDecimal	38	6	false	
UOM	false	String	10		false	

Original Function Parameters:
Component tMSSqlInput

	UNIQUE NAME	tDBInput_9	INPUT(S)	none
	LABEL	NAV_SalesDate	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
------------	--------

Database	tMSSqlInput
Unique Name	tDBInput_9
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [DSD_SalesDate] FROM ["+context.NAV_SalesDate+"]"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{(SCHEMA_COLUMN=SalesDate, TRIM=false)}]
Label format	NAV_SalesDate
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false


Validation Rule Type	
----------------------	--

Schema for Nav_DSD_Order :

Column	Key	Type	Length	Precision	Nullable	Comment
SalesDate	false	String			true	

Original Function Parameters:

Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_2	INPUT(S)	tMap_7, tDBInput_4, tDBInput_2
	LABEL	NAV_Order_X	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tDBOutput_2
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	true
Component List	tDBConnection_1
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server

Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_Order_X"
Action on table	NONE
Turn on Identity insert	false
Action on data	UPDATE_OR_INSERT
Specify identity field	false
Identity field	RTE_NUMBER
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In

Specify a data source alias	false
Data source alias	""
Die on error	true
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false

Field options	<pre> [{SCHEMA_COLUMN=RTE_NUMBER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=CUSTOMER_NUMBER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Order_Date, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=OrderDateInMillis, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=RefDate, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ProcessTimeStamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=IsProcessed, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=requestXML, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=md5_requestXML, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ITEM_COUNT, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=type, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=errorMessage, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Group, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Key, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=MovilizerResponseTimestamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}] </pre>
Ignore date out of range	false


Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	NAV_Order_X
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
RTE_NUMBER	false	String	15		true	
CUSTOMER_NUMBER	false	String	15		true	
Order_Date	false	java.util.Date	20		true	
OrderDateInMillis	false	String	100		true	

RefDate	false	java.util.Date	10		true	
ProcessTimeStamp	false	String	255		true	
IsProcessed	false	String	1		true	
requestXML	false	String	20000		true	
md5_requestXML	false	String	255		true	
ITEM_COUNT	false	Integer	50		true	
type	false	String	255		true	
code	false	String	255		true	
errorMessage	false	String	255		true	
Group	true	String	100		true	
Key	true	String	100		true	
MovilizerResponseTimestamp	false	java.util.Date	255		true	

Original Function Parameters:
Component tFileOutputDelimited

	UNIQUE NAME	tFileOutputDelimited_1	INPUT(S)	tMap_2 , tDBInput_9, tDBInput_6
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
------------	--------

Unique Name	tFileOutputDelimited_1
Component Name	tFileOutputDelimited
Version	0.101 (ALPHA)
Family	File/Output
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileOutputDelimited
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Property Type	Built-In
Use Output Stream	false
Output Stream	outputStream
File Name	"C:/TEMP/ij_rejects_Order.txt"
Row Separator	"\n"
Use OS line separator as row separator when CSV Row Separator is set to CR,LF or CRLF.	true
CSV Row Separator	"\n"
Field Separator	" "
Append	true
Include Header	true
Compress as zip file	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Advanced separator (for numbers)	false


Thousands separator	" "
Decimal separator	"."
CSV options	false
Escape char	""
Text enclosure	""
Create directory if does not exist	true
Split output in several files	false
Rows in each output file	1000
Custom the flush buffer size	false
Row number	1
Output in row mode	false
Encoding	"ISO-8859-15"
Don't generate empty file	false
Throw an error if the file already exist	true
Min column number of optimize code	90
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for ij_rejects :

Column	Key	Type	Length	Precision	Nullable	Comment
REFERENCEDATE	false	String	50		false	
SHIPTO	false	String	255		false	
Item_No_	false	String	30		false	

Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMap_1 , tDBInput_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int i = 1; context.headerCountInTable=((Integer)globalMap.get("tDB System.out.println("\nheaderCountInTable: "+context.head System.out.println("\nNow checking for new or changed or few mins.");
Main code	// here is the main part of the component, // a piece of code // loop context.item_row_counter = row25.ITEM_COUNT; / //System.out.println("Source - Directory - PF_Dorder05 - 50 + TalendDate.getCurrentDate()); System.out.println(i+" Rec Processed - Order Object"); }*/ i++;
End code	i--; // System.out.println(i+" Records Have Processed and e Order Object");
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row


Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
RTE_NUMBER	false	String	4		true	
CUSTOMER_NUMBER	false	String	9		true	
PRODUCT_NUMBER	false	String	9		true	
PERM_QUANTITY	false	Integer	6		true	
TEMP_QUANTITY	false	Integer	6		true	
QTYORDER	false	int	38		false	
UOM	false	String	10		false	
RefDate	false	java.util.Date	10		true	
OrderDateInMillis	false	String	100		true	
ITEM_COUNT	false	Integer			true	
Order_Date	false	java.util.Date	20		false	

CustName	false	String	30		true	
ProcessTimeStamp	false	String	255		true	

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_2	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_2
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=1; context.value= true;
Main code	routines.Nav_Order.createAllObjects(); if(context.value){ routines.Nav_Order.populateMasterdataPoolUpdate(maste context.value=false; } b++;
End code	// end of the component, outside/closing the loop // routines.Nav_Order.createAllObjects(); //routines.Nav_Order.populateMasterdataPoolUpdate(masi

TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_3
	LABEL	__ UNIQUE_NAME __	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_3
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	


Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	<pre> routines.Nav_Order.populateMasterdataUpdate(Masterdat = MasterdataUpdate.Group; context.key=MasterdataUpdat </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true


SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true

Start code	// start part of your Java code // context.QTYACT=0;
Main code	routines.Nav_Order.populateDataContainerEntryChildNode
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_5
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true


IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int row_count=0;
Main code	<pre> row_count++; //System.out.println("->" + HD.SHIPTO + " <--> " + HD.REFERENCEDATE); int chk=context.item_row_counter; //System.out.println(chk+" "+HD.SHIPTO+" "+".."+row_count); if(chk==row_count){ routines.Nav_Order.populateDataContainerEntry(HD); routines.Nav_Order.populateUpdateContainerEntry(); context.value=true; //System.out.println("inside hd "+"HD.SHIPTO +" "+context.value+" "+row_count); row_count=0; routines.Nav_Order.clearHmITM(); routines.Generate_StopSequence.clearHm(); } </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false

TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_3
	LABEL	create_request_xml	OUTPUT(S)	tMap_4

Component Parameters:

Properties	Values
------------	--------

Unique Name	tJavaFlex_6
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int a=1;
Main code	//context.key=SendMasterData.Key; //context.group=SendMasterData.Group; context.requestXML= routines.Nav_Order.createRequestMasterData(context.mobilizerVersion); //System.out.println(context.requestXML); row2.requestXML=context.requestXML; if (a==1 && !context.mobilizerRequestStartNode) context.mobilizerRequestStartNode = context.requestXML.substring(0,context.requestXML.indexOf(" ")); System.out.println("context.mobilizerRequestStartNode:"+context.mobilizerRequestStartNode); context.mobilizerRequestEndNode = context.requestXML.substring(context.requestXML.indexOf(" "),context.requestXML.indexOf(" ")); //System.out.println("context.mobilizerRequestEndNode:"+context.mobilizerRequestEndNode); a=2; } } routines.Nav_Order.resetObjects();
End code	// end of the component, outside/closing the loop //routines.Nav_Order.resetObjects();
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;


Label format	create_request_xml
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for SendMasterData :

Column	Key	Type	Length	Precision	Nullable	Comment
RTE_NUMBER	false	String	4		true	
CUSTOMER_NUMBER	false	String	9		true	
Order_Date	false	java.util.Date	20		false	
OrderDateInMillis	false	String	100		true	
RefDate	false	java.util.Date	10		true	
ProcessTimeStamp	false	String	255		true	
IsProcessed	false	String	1		true	
requestXML	false	String			true	

Group	false	String			false	
Key	false	String			false	

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_1

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	String foo = "bar";
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_2	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tRunJob_1

Component Parameters:

Properties	Values
Unique Name	tJava_2
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	System.out.println(((Integer)globalMap.get("tDBOutput_2_NB_LINE"))+ " Orders identified as Delta");
Import	//import java.util.List;
Schema	Built-In

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJava

	UNIQUE NAME	tJava_3	INPUT(S)	tDBInput_8
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_1

Component Parameters:

Properties	Values
Unique Name	tJava_3
Component Name	tJava
Version	0.101 (ALPHA)


Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Code	System.out.println(((Integer)globalMap.get("tMSSqlOutput_2_NB_LINE")) + " Order items loaded into stage table");
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_4	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_5

Component Parameters:


Properties	Values
Unique Name	tJava_4
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	<pre>context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); System.out.println("\n\nPool: "+context.Pool+"\nProcessTimeStamp: "+context.ProcessTimeStamp+"\n\n\n");</pre>
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tJava

	UNIQUE NAME	tJava_5	INPUT(S)	tContextLoad_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBConnection_1

Component Parameters:

Properties	Values
Unique Name	tJava_5
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false

Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	context.DB_Navision_Server= "testnav10.corp.usbakery.com"; context.DB_Navision_Port= "1433"; context.DB_Navision_Schema= "dbo"; context.DB_Navision_Database= "TEST-USB-2013"; context.DB_Navision_Login= "talend_hfs2"; context.DB_Navision_Password= "Talend123!"; context.DB_Navision_AdditionalParams= ""; context.NAV_Customer = "Nav_DSD_Customer Download_Details";
Import	//import java.util.List;
Schema	Built-In
Label format	__ UNIQUE_NAME __
Hint format	__ UNIQUE_NAME __ __ COMMENT __


Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:

Component tLogCatcher

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	jlet_CustomLogging_NAV_1

Component Parameters:

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true

Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In


Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tLogCatcher_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	

project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_2	INPUT(S)	tMap_2
	LABEL	NAV_Order_Stage_X	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_2
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)

Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration

Use an existing connection	true
Component List	tDBConnection_1
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_Order_Stage_X"
Action on table	TRUNCATE
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	RTE_NUMBER
Start value	1

Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	true
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false

Field options	<pre> [{SCHEMA_COLUMN=RTE_NUMBER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=CUSTOMER_NUMBER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRODUCT_NUMBER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ORDER_DATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=QTYTEMP, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=QTYPERM, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=QTYORDER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=UOM, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=RefDate, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=OrderDateInMillis, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ProcessTimeStamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=IsProcessed, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}] </pre>
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true


Batch Size	10000
Label format	NAV_Order_Stage_X
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
RTE_NUMBER	false	String	255		false	
CUSTOMER_NUMBER	false	String	255		false	
PRODUCT_NUMBER	false	String	30	3	false	
ORDER_DATE	false	java.util.Date			true	
QTYTEMP	false	int	38		false	
QTYPERM	false	int	38		false	
QTYORDER	false	int	38		false	

UOM	false	String	10		false	
RefDate	false	java.util.Date	10		true	
OrderDateInMillis	false	String	100		true	
ProcessTimeStamp	false	String	255		true	
IsProcessed	false	String	1		true	

Original Function Parameters:
Component tPostjob

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1


Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_4


Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tRunJob

	UNIQUE NAME	tRunJob_1	INPUT(S)	tJava_2
	LABEL	__PROCESS__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tRunJob_1
Component Name	tRunJob
Version	0.101 (ALPHA)
Family	System Orchestration
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true


DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tRunJob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Use dynamic job	false
Context job	
Job	j_NavExport_Order_020_BulkLoad
Context	Default

Use an independent process to run subjob	false
Die on child error	false
Transmit whole context	true
Context Param	[]
Propagate the child result to the output schema	false
Print Parameters	false
Transmit original context value(if unchecked, there will convert context value to string type before transmitting.)	true
Label format	__PROCESS__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tRunJob_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tSetKeystore

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tDBConnection_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


Component Parameters:

Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tUniqRow

	UNIQUE NAME	tUniqRow_2	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_6

Component Parameters:

Properties	Values
Unique Name	tUniqRow_2
Component Name	tUniqRow
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false

SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tUniqRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Schema	Built-In

Schema	Built-In
Unique key	<pre>[{SCHEMA_COLUMN=RTE_NUMBER, KEY_ATTRIBUTE=false, CASE_SENSITIVE=false}, {SCHEMA_COLUMN=CUSTOMER_NUMBER, KEY_ATTRIBUTE=false, CASE_SENSITIVE=false}, {SCHEMA_COLUMN=Order_Date, KEY_ATTRIBUTE=false, CASE_SENSITIVE=false}, {SCHEMA_COLUMN=OrderDateInMillis, KEY_ATTRIBUTE=false, CASE_SENSITIVE=false}, {SCHEMA_COLUMN=RefDate, KEY_ATTRIBUTE=false, CASE_SENSITIVE=false}, {SCHEMA_COLUMN=ProcessTimeStamp, KEY_ATTRIBUTE=false, CASE_SENSITIVE=false}, {SCHEMA_COLUMN=IsProcessed, KEY_ATTRIBUTE=false, CASE_SENSITIVE=false}, {SCHEMA_COLUMN=requestXML, KEY_ATTRIBUTE=true, CASE_SENSITIVE=false}, {SCHEMA_COLUMN=Group, KEY_ATTRIBUTE=false, CASE_SENSITIVE=false}, {SCHEMA_COLUMN=Key, KEY_ATTRIBUTE=false, CASE_SENSITIVE=false}]</pre>
Only once each duplicated key	false
Use of disk (suitable for processing large row set)	false
Buffer size in memory	M
Directory for temp files	
Ignore trailing zeros for BigDecimal	false

Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
RTE_NUMBER	false	String	4		true	
CUSTOMER_NUMBER	false	String	9		true	
Order_Date	false	java.util.Date	20		true	
OrderDateInMillis	false	String	100		true	
RefDate	false	java.util.Date	10		true	
ProcessTimeStamp	false	String	255		true	
IsProcessed	false	String	1		true	
requestXML	false	String	20000		true	

Group	false	String			false	
Key	false	String			false	

Original Function Parameters:

Component `jlet_CustomLogging_NAV`

	UNIQUE NAME	<code>jlet_CustomLogging_NAV_1</code>	INPUT(S)	<code>tlLogCatcher_1</code>
	LABEL	<code>jlet_CustomLogging_NAV</code>	OUTPUT(S)	none

Component Parameters:


Properties	Values
Version	Latest
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	


Schema for `jlet_CustomLogging_NAV_1` :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	

project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tMap_7 , tDBInput_4, tDBInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_1

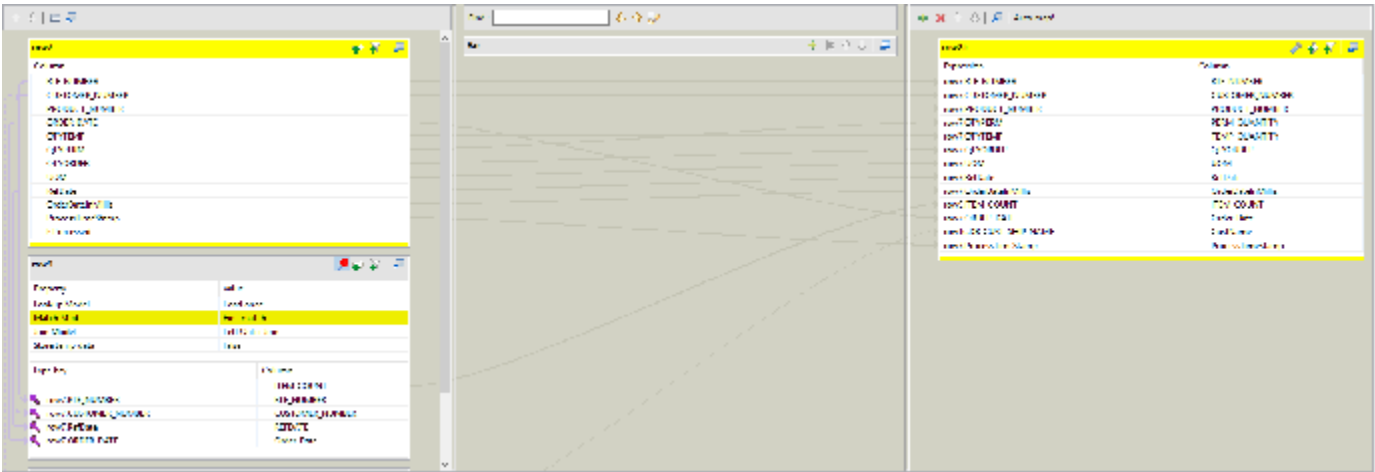

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):
Mapper table Properties(row7):

Properties	Values
Name	row7
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row7):

Name	Type	Expression	isNullable
RTE_NUMBER	String		false
CUSTOMER_NUMBER	String		false
PRODUCT_NUMBER	String		false
ORDER_DATE	java.util.Date		true
QTYTEMP	int		false
QTYPERM	int		false
QTYORDER	int		false
UOM	String		false
RefDate	java.util.Date		true
OrderDateInMillis	String		true
ProcessTimeStamp	String		true
IsProcessed	String		true

Constraint Table Entries(row7):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row9):

Properties	Values
Name	row9
Matching-mode	FIRST_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row9):

Name	Type	Expression	isNullable
ITEM_COUNT	Integer		true
RTE_NUMBER	String	row7.RTE_NUMBER	true
CUSTOMER_NUMBER	String	row7.CUSTOMER_NUMBER	true
REFDATE	java.util.Date	row7.RefDate	true
Order_Date	java.util.Date	row7.ORDER_DATE	true

Constraint Table Entries(row9):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row16):

Properties	Values
Name	row16
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row16):

Name	Type	Expression	isNullable
DB_CUST_CUST_NUMBER	String	row7.CUSTOMER_NUMBER	false
DB_CUST_SHIP_NAME	String		true

Constraint Table Entries(row16):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):**Mapper table Properties(row25):**

Properties	Values
Name	row25
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row25):

Name	Type	Expression	isNullable
RTE_NUMBER	String	row7.RTE_NUMBER	true
CUSTOMER_NUMBER	String	row7.CUSTOMER_NUMBER	true
PRODUCT_NUMBER	String	row7.PRODUCT_NUMBER	true
PERM_QUANTITY	Integer	row7.QTYPERM	true
TEMP_QUANTITY	Integer	row7.QTYTEMP	true
QTYORDER	int	row7.QTYORDER	false
UOM	String	row7.UOM	false
RefDate	java.util.Date	row7.RefDate	true
OrderDateInMillis	String	row7.OrderDateInMillis	true
ITEM_COUNT	Integer	row9.ITEM_COUNT	true
Order_Date	java.util.Date	row7.ORDER_DATE	false
CustName	String	row16.DB_CUST_SHIP_NAME	true
ProcessTimeStamp	String	row7.ProcessTimeStamp	true

Constraint Table Entries(row25):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):


Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tMap_2 , tDBInput_9, tDBInput_6
	LABEL	<u>UNIQUE_NAME</u>	OUTPUT(S)	tMSSqlOutput_2 , tFileOutputDelimited_1

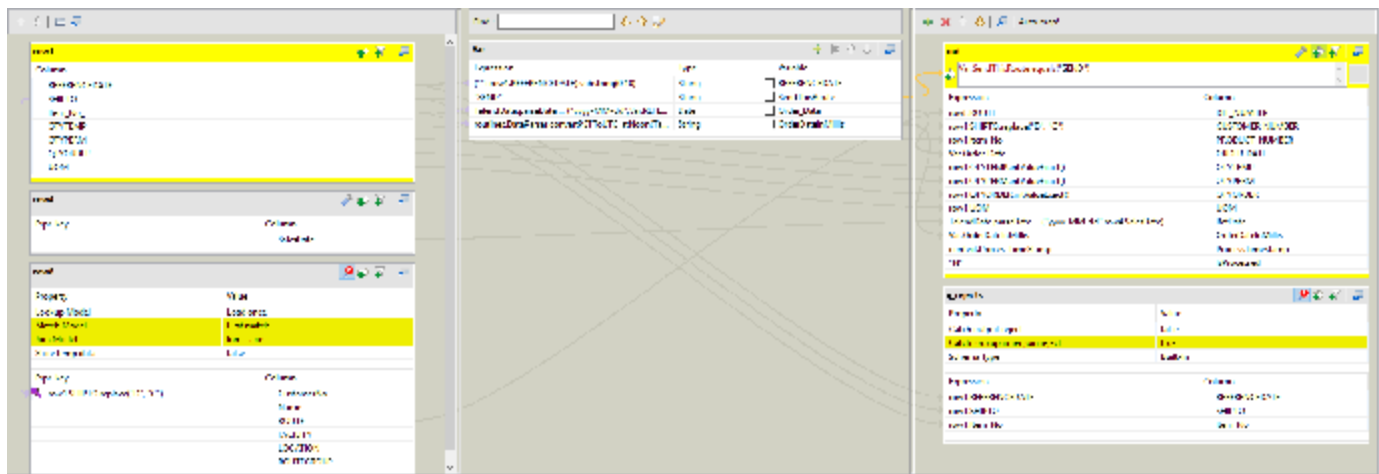

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):

Mapper table Properties(row1):

Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Type	Expression	isNullable
REFERENCEDATE	String		false
SHIPTO	String		false
Item_No_	String		false
QTYTEMP	BigDecimal		false
QTYPERM	BigDecimal		false
QTYORDER	BigDecimal		false
UOM	String		false

Constraint Table Entries(row1):

Name	Type	Expression	isNullable

Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row4):

Name	Type	Expression	isNullable
SalesDate	String		true

Constraint Table Entries(row4):

Name	Type	Expression	isNullable

Mapper table Properties(row8):

Properties	Values
Name	row8
Matching-mode	FIRST_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(row8):

Name	Type	Expression	isNullable
CustomerNo	String	row1.SHIPTO.replace("D","C")	false
Name	String		false
ROUTE	String		false
FACILITY	String		false
LOCATION	String		false
ROUTEGROUP	String		false

Constraint Table Entries(row8):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (output):

Mapper table Properties(out):

Properties	Values
Name	out
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	Var.SendThisRoute.equals("SEND")

Metadata Table Entries(out):

Name	Type	Expression	isNullable
RTE_NUMBER	String	row8.ROUTE	false
CUSTOMER_NUMBER	String	row1.SHIPTO.replace("D", "C")	false
PRODUCT_NUMBER	String	row1.Item_No_	false
ORDER_DATE	java.util.Date	Var.Order_Date	true
QTYTEMP	int	row1.QTYTEMP.intValueExact()	false
QTYPERM	int	row1.QTYPERM.intValueExact()	false
QTYORDER	int	row1.QTYORDER.intValueExact()	false
UOM	String	row1.UOM	false
RefDate	java.util.Date	TalendDate.parseDate("yyyy-MM-dd",row4.SalesDate)	true
OrderDateInMillis	String	Var.OrderDateInMillis	true
ProcessTimeStamp	String	context.ProcessTimeStamp	true
IsProcessed	String	"N"	true

Constraint Table Entries(out):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(ij_rejects):

Properties	Values
Name	ij_rejects
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	true
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(ij_rejects):

Name	Type	Expression	isNullable
REFERENCEDATE	String	row1.REFERENCEDATE	false
SHIPTO	String	row1.SHIPTO	false
Item_No_	String	row1.Item_No_	false

Constraint Table Entries(ij_rejects):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression
REFERENCEDATE	String	(""+row1.REFERENCEDATE).substring(0,10)
SendThisRoute	String	"SEND"
Order_Date	java.util.Date	TalendDate.parseDate ("yyyy-MM-dd",Var.REFERENCEDATE)
OrderDateInMillis	String	routines.DateParser.convertPSTToUTC_atNoon(TalendDate.forma

Constraint Table Entries(Var):

Name	Type	Expression
------	------	------------

Component tMap

Comment	
Use an existing validation rule	false

Mapper table for tMap_3 (input):

Mapper table Properties(row6):

Properties	Values
Name	row6
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row6):

Name	Type	Expression	isNullable
RTE_NUMBER	String		true
CUSTOMER_NUMBER	String		true
PRODUCT_NUMBER	String		true
PERM_QUANTITY	Integer		true
TEMP_QUANTITY	Integer		true
QTYORDER	int		false
UOM	String		false
RefDate	java.util.Date		true
OrderDateInMillis	String		true
ITEM_COUNT	Integer		true
Order_Date	java.util.Date		false
CustName	String		true
ProcessTimeStamp	String		true

Constraint Table Entries(row6):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (output):

Mapper table Properties(order_key):

Properties	Values
Name	order_key
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(order_key):

Name	Type	Expression	isNullable
project	String	this.projectName	true
job	String	this.jobName	true
context	String	this.contextStr	true
Environment	String	context.implicit_db_environment	true
Source	String	context.source	true
Instance	String	context.instance	true
Object_Type	String	context.objectType	true

Group	String	Var.Group	true
Key	String	Var.Key	true
Pool	String	context.Pool	true
SHIPTO	String	Var.CUSTOMER_NUMBER	true
REFERENCEDATE	String	Var.DATE_MILS+" / "+Var.DATE	true
ITEM_COUNT	Integer	context.item_row_counter	true
type	String	"Request Not Sent. Check Job/Data."	true
code	String		true
errorMessage	String		true
ResponseTimestamp	java.util.Date		true
ProcessTimeStamp	java.util.Date	TalendDate.parseDate("yyyy-MM-dd HH:mm:ss",context.ProcessTimeStamp)	true

Constraint Table Entries(order_key):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(masterdataPoolUpdate):

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

Constraint Table Entries(masterdataPoolUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(MasterdataUpdate):

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
Group	String	Var.Group	true
Key	String	Var.Key	true
Filter1	String	Var.DATE_MILS	true
validTillDate	java.util.Date	Var.ValidTillDate	true
Filter2	String	Var.CUSTOMER_NUMBER	true
Description	String	row6.CustName	true
mafAppSpace	String	context.mafAppSpace	true

Constraint Table Entries(MasterdataUpdate):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(ITM):

Properties	Values
Name	ITM
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(ITM):

Name	Type	Expression	isNullable
ITM	String	Var.ITM1	true
UOM	String	"0"	true
MATNO	String	Var.PRODUCT_NUMBER	true
QTYPERM	Integer	Var.QTYPERM	true
QTYORDER	Integer	Var.QTYORDER	true

Constraint Table Entries(ITM):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(HD):

Properties	Values
Name	HD
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(HD):

Name	Type	Expression	isNullable
SHIPTO	String	Var.CUSTOMER_NUMBER	true
REFERENCEDATE	String	Var.DATE_MILS	true
REFERENCENUMBER	String		true

Constraint Table Entries(HD):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(SendMasterData):

Properties	Values
Name	SendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(SendMasterData):

Name	Type	Expression	isNullable
RTE_NUMBER	String	Var.RTE_NUMBER	true
CUSTOMER_NUMBER	String	Var.CUSTOMER_NUMBER	true
Order_Date	java.util.Date	row6.Order_Date	false
OrderDateInMillis	String	row6.OrderDateInMillis	true
RefDate	java.util.Date	row6.RefDate	true
ProcessTimeStamp	String	row6.ProcessTimeStamp	true
IsProcessed	String	"N"	true
Group	String	Var.Group	false
Key	String	Var.Key	false

Constraint Table Entries(SendMasterData):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression
RTE_NUMBER	String	row6.RTE_NUMBER != null? row6.RTE_NUMBER.replaceFirst row6.RTE_NUMBER
CUSTOMER_NUMBER	String	row6.CUSTOMER_NUMBER != null ? "000" + row6.CUSTOMER_NUMBER:row6.CUSTOMER_NUMBER
PRODUCT_NUMBER	String	row6.PRODUCT_NUMBER != null ? "0000000" + row6.PRODUCT_NUMBER.replaceFirst("F",""):row6.PRODUCT
DATE_MILS	String	row6.OrderDateInMillis
DATE	String	TalendDate.formatDate("yyyy-MM-dd",row6.Order_Date)
ValidTillDate	java.util.Date	TalendDate.addDate(TalendDate.parseDate("yyyy-MM-dd", Va ,20,"dd"))
DATE1	String	TalendDate.formatDate("yyyyMMdd",row6.RefDate)
REFDATE	String	TalendDate.formatDate("yyyy-MM-dd",row6.RefDate)
Group	String	"00000" + Var.RTE_NUMBER
Key	String	Var.CUSTOMER_NUMBER + "_" + Var.DATE_MILS
ITM1	String	/(routines.Generate_StopSequence.generate_StopSequence(\n", "))*10) "00_" + Var.PRODUCT_NUMBER + "_0"
QTYPERM	int	row6.PERM_QUANTITY < 0 ? 0 : row6.PERM_QUANTITY
QTYORDER	int	row6.QTYORDER

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_4	INPUT(S)	tJavaFlex_6
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tUniqRow_2

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_4 (input):
Mapper table Properties(row2):

Properties	Values
Name	row2
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row2):

Name	Type	Expression	isNullable
RTE_NUMBER	String		true
CUSTOMER_NUMBER	String		true
Order_Date	java.util.Date		false
OrderDateInMillis	String		true
RefDate	java.util.Date		true
ProcessTimeStamp	String		true
IsProcessed	String		true
requestXML	String		true
Group	String		false
Key	String		false

Constraint Table Entries(row2):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (output):

Mapper table Properties(order):

Properties	Values
Name	order
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	!(row2.requestXML==null row2.requestXML.isEmpty())

Metadata Table Entries(order):

Name	Type	Expression	isNullable
RTE_NUMBER	String	row2.RTE_NUMBER	true
CUSTOMER_NUMBER	String	row2.CUSTOMER_NUMBER	true
Order_Date	java.util.Date	row2.Order_Date	true
OrderDateInMillis	String	row2.OrderDateInMillis	true
RefDate	java.util.Date	row2.RefDate	true
ProcessTimeStamp	String	row2.ProcessTimeStamp	true
IsProcessed	String	row2.IsProcessed	true
requestXML	String	row2.requestXML	true
Group	String	row2.Group	false
Key	String	row2.Key	false

Constraint Table Entries(order):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_6	INPUT(S)	tUniqRow_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_7

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_6 (input):
Mapper table Properties(row3):

Properties	Values
Name	row3
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row3):

Name	Type	Expression	isNullable
RTE_NUMBER	String		true
CUSTOMER_NUMBER	String		true
Order_Date	java.util.Date		true
OrderDateInMillis	String		true
RefDate	java.util.Date		true
ProcessTimeStamp	String		true
IsProcessed	String		true
requestXML	String		true
Group	String		false
Key	String		false

Constraint Table Entries(row3):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_6 (output):

Mapper table Properties(row45):

Properties	Values
Name	row45
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row45):

Name	Type	Expression	isNullable
RTE_NUMBER	String	row3.RTE_NUMBER	true
CUSTOMER_NUMBER	String	row3.CUSTOMER_NUMBER	true
Order_Date	java.util.Date	row3.Order_Date	true
OrderDateInMillis	String	row3.OrderDateInMillis	true
RefDate	java.util.Date	row3.RefDate	true
ProcessTimeStamp	String	row3.ProcessTimeStamp	true
IsProcessed	String	row3.IsProcessed	true
requestXML	String	row3.requestXML	true
md5_requestXML	String	MD5Digest.getMD5HexValue(row3.requestXML)	true
Group	String	row3.Group	false
Key	String	row3.Key	false

Constraint Table Entries(row45):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_6 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_7	INPUT(S)	tMap_7 , tDBInput_4, tDBInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBOutput_2

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_7 (input):
Mapper table Properties(row45):

Properties	Values
Name	row45
Matching-mode	ALL_ROWS
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row45):

Name	Type	Expression	isNullable
RTE_NUMBER	String		true
CUSTOMER_NUMBER	String		true
Order_Date	java.util.Date		true
OrderDateInMillis	String		true
RefDate	java.util.Date		true
ProcessTimeStamp	String		true
IsProcessed	String		true
requestXML	String		true
md5_requestXML	String		true
Group	String		false
Key	String		false

Constraint Table Entries(row45):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table Properties(row5):

Properties	Values
Name	row5
Matching-mode	FIRST_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row5):

Name	Type	Expression	isNullable
Key	String	row45.Key	true
Group	String	row45.Group	true
md5_requestXML	String		true

Constraint Table Entries(row5):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_7 (output):**Mapper table Properties(row73):**

Properties	Values
Name	row73
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	row5.md5_requestXML == null (row5.md5_requestXML != null && !row45.md5_requestXML.equalsIgnoreCase(row5.md5_requestXML))

Metadata Table Entries(row73):

Name	Type	Expression	isNullable
RTE_NUMBER	String	row45.RTE_NUMBER	true
CUSTOMER_NUMBER	String	row45.CUSTOMER_NUMBER	true
Order_Date	java.util.Date	row45.Order_Date	true
OrderDateInMillis	String	row45.OrderDateInMillis	true
RefDate	java.util.Date	row45.RefDate	true
ProcessTimeStamp	String	row45.ProcessTimeStamp	true
IsProcessed	String	row45.IsProcessed	true
requestXML	String	row45.requestXML	true
md5_requestXML	String	row45.md5_requestXML	true
ITEM_COUNT	Integer	context.item_row_counter	true
type	String		true
code	String		true
errorMessage	String		true
Group	String	row45.Group	true
Key	String	row45.Key	true
MovilizerResponseTimestamp	java.util.Date		true

Constraint Table Entries(row73):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_7 (var):**Mapper table Properties(Var):**

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------