



# Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 12:54:44 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

## Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

## Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	
-------------	--

Description

Properties	Values
Name	j_NavExport_010_Customer
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Feb 27, 2019 7:58:11 AM
Modification	Dec 11, 2019 3:34:08 AM

Preview Picture

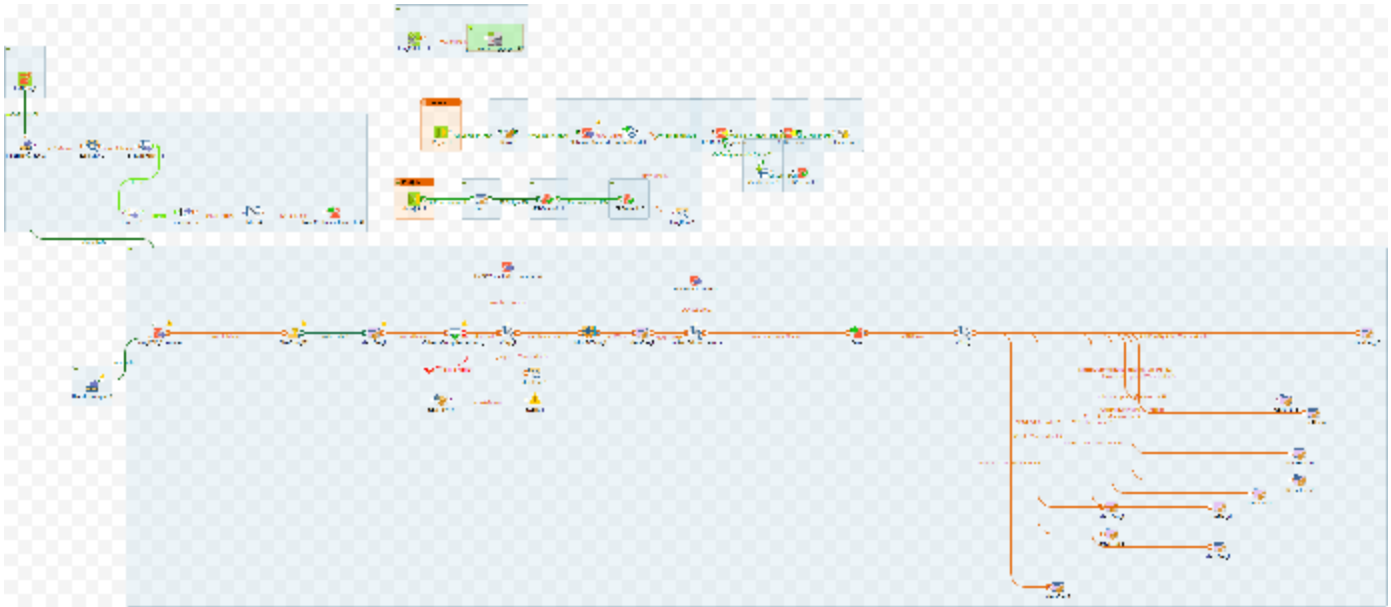

# Settings

## Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

## Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false

On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

## Context List

### ContextDefault

Name	Prompt	Need Prompt
objectType	objectType?	false
Pool	Pool?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
source	source?	false

customer_bundle_count	customer_bundle_count?	false
responseXML	responseXML?	false
whereClause	whereClause?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
AttName	AttName?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
filepath	filepath?	false

implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
table_view	table_view?	false

type	type?	false
UseIndex	UseIndex?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_DSD_Navision_AdditionalParams	DB_DSD_Navision_AdditionalParams?	false
DB_DSD_Navision_Database	DB_DSD_Navision_Database?	false
DB_DSD_Navision_Login	DB_DSD_Navision_Login?	false
DB_DSD_Navision_Password	DB_DSD_Navision_Password?	false
DB_DSD_Navision_Port	DB_DSD_Navision_Port?	false
DB_DSD_Navision_Schema	DB_DSD_Navision_Schema?	false
DB_DSD_Navision_Server	DB_DSD_Navision_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false



DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
RM_Customer_Encoding	RM_Customer_Encoding?	false
RM_Customer_FieldSeparator	RM_Customer_FieldSeparator?	false
RM_Customer_File	RM_Customer_File?	false
RM_Customer_RowSeparator	RM_Customer_RowSeparator?	false

## ContextQA

Name	Prompt	Need Prompt
objectType	objectType?	false
Pool	Pool?	false
group	group?	false
description	description?	false

mafAppSpace	mafAppSpace?	false
source	source?	false
customer_bundle_count	customer_bundle_count?	false
responseXML	responseXML?	false
whereClause	whereClause?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
AttName	AttName?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false
directory	directory?	false
environment	environment?	false

ErrorMsg	ErrorMsg?	false
filepath	filepath?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false

SystemPassword	SystemPassword?	false
table_view	table_view?	false
type	type?	false
UseIndex	UseIndex?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_DSD_Navision_AdditionalParams	DB_DSD_Navision_AdditionalParams?	false
DB_DSD_Navision_Database	DB_DSD_Navision_Database?	false
DB_DSD_Navision_Login	DB_DSD_Navision_Login?	false
DB_DSD_Navision_Password	DB_DSD_Navision_Password?	false
DB_DSD_Navision_Port	DB_DSD_Navision_Port?	false
DB_DSD_Navision_Schema	DB_DSD_Navision_Schema?	false

DB_DSD_Navision_Server	DB_DSD_Navision_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false

DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
RM_Customer_Encoding	RM_Customer_Encoding?	false
RM_Customer_FieldSeparator	RM_Customer_FieldSeparator?	false
RM_Customer_File	RM_Customer_File?	false
RM_Customer_RowSeparator	RM_Customer_RowSeparator?	false

## ContextPROD

Name	Prompt	Need Prompt
objectType	objectType?	false
Pool	Pool?	false

group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
source	source?	false
customer_bundle_count	customer_bundle_count?	false
responseXML	responseXML?	false
whereClause	whereClause?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
AttName	AttName?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false

directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
filepath	filepath?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false



ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
table_view	table_view?	false
type	type?	false
UseIndex	UseIndex?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_DSD_Navision_AdditionalParams	DB_DSD_Navision_AdditionalParams?	false
DB_DSD_Navision_Database	DB_DSD_Navision_Database?	false
DB_DSD_Navision_Login	DB_DSD_Navision_Login?	false
DB_DSD_Navision_Password	DB_DSD_Navision_Password?	false

DB_DSD_Navision_Port	DB_DSD_Navision_Port?	false
DB_DSD_Navision_Schema	DB_DSD_Navision_Schema?	false
DB_DSD_Navision_Server	DB_DSD_Navision_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false

DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
RM_Customer_Encoding	RM_Customer_Encoding?	false
RM_Customer_FieldSeparator	RM_Customer_FieldSeparator?	false
RM_Customer_File	RM_Customer_File?	false
RM_Customer_RowSeparator	RM_Customer_RowSeparator?	false

## ContextPREPROD

Name	Prompt	Need Prompt
------	--------	-------------

objectType	objectType?	false
Pool	Pool?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
source	source?	false
customer_bundle_count	customer_bundle_count?	false
responseXML	responseXML?	false
whereClause	whereClause?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
AttName	AttName?	false
batch	batch?	false
CRC	CRC?	false

Customer_Process_Queue	Customer_Process_Queue?	false
database	database?	false
directory	directory?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
filepath	filepath?	false
implicit_db_environment	implicit_db_environment?	false
instance	instance?	false
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false

objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
table_view	table_view?	false
type	type?	false
UseIndex	UseIndex?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_DSD_Navision_AdditionalParams	DB_DSD_Navision_AdditionalParams?	false
DB_DSD_Navision_Database	DB_DSD_Navision_Database?	false

DB_DSD_Navision_Login	DB_DSD_Navision_Login?	false
DB_DSD_Navision_Password	DB_DSD_Navision_Password?	false
DB_DSD_Navision_Port	DB_DSD_Navision_Port?	false
DB_DSD_Navision_Schema	DB_DSD_Navision_Schema?	false
DB_DSD_Navision_Server	DB_DSD_Navision_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false

DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Navision_Target_Staging	DB_Navision_Target_Staging?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
NAV_Contact	NAV_Contact?	false
NAV_Customer	NAV_Customer?	false
RM_Customer_Encoding	RM_Customer_Encoding?	false
RM_Customer_FieldSeparator	RM_Customer_FieldSeparator?	false
RM_Customer_File	RM_Customer_File?	false
RM_Customer_RowSeparator	RM_Customer_RowSeparator?	false



## Component List

Component Name	Component Type
jlet_CustomLogging_NAV_1	jlet_CustomLogging_NAV
tAddCRCRow_1	tAddCRCRow
tContextLoad_1	tContextLoad
tCreateTable_1	tCreateTable
tDBCommit_1	tMSSqlCommit
tDBCommit_2	tMSSqlCommit
tDBCommit_3	tMSSqlCommit
tDBConnection_1	tMSSqlConnection
tDBConnection_2	tMSSqlConnection
tDBInput_1	tMSSqlInput
tDBInput_2	tMSSqlInput
tDBOutput_1	tMSSqlOutput
tDBRow_1	tMSSqlRow
tFileInputPositional_1	tFileInputPositional
tFileList_1	tFileList


tFilterRow_122	tFilterRow
tFixedFlowInput_1	tFixedFlowInput
tFixedFlowInput_2	tFixedFlowInput
tFlowTolterate_1	tFlowTolterate
tJavaFlex_1	tJavaFlex
tJavaFlex_10	tJavaFlex
tJavaFlex_11	tJavaFlex
tJavaFlex_12	tJavaFlex
tJavaFlex_13	tJavaFlex
tJavaFlex_2	tJavaFlex
tJavaFlex_3	tJavaFlex
tJavaFlex_4	tJavaFlex
tJavaFlex_5	tJavaFlex
tJavaFlex_6	tJavaFlex
tJavaFlex_7	tJavaFlex
tJavaFlex_8	tJavaFlex
tJavaFlex_9	tJavaFlex

tJavaRow_3	tJavaRow
tJava_1	tJava
tJava_2	tJava
tLogCatcher_1	tLogCatcher
tLogRow_1	tLogRow
tLogRow_2	tLogRow
tLogRow_3	tLogRow
tMSSqlInput_1	tMSSqlInput
tMSSqlInput_2	tMSSqlInput
tMSSqlOutput_1	tMSSqlOutput
tMap_1	tMap
tMap_2	tMap
tMap_3	tMap
tMap_4	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob
tSchemaComplianceCheck_1	tSchemaComplianceCheck

tSetKeystore_1	tSetKeystore
tWarn_1	tWarn

## Components Description

### Component tAddCRCRow

	UNIQUE NAME	tAddCRCRow_1	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_2

### Component Parameters:

Properties	Values
Unique Name	tAddCRCRow_1
Component Name	tAddCRCRow
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tAddCRCRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
	{SCHEMA_COLUMN=CustomerNo, USE_IN_CRC=true}, {SCHEMA_COLUMN=ShippingNo, USE_IN_CRC=false}, {SCHEMA_COLUMN=Name, USE_IN_CRC=true}, {SCHEMA_COLUMN=Address, USE_IN_CRC=true}, {SCHEMA_COLUMN=Address_2, USE_IN_CRC=true}, {SCHEMA_COLUMN=Region_Code, USE_IN_CRC=false}, {SCHEMA_COLUMN=ZIP, USE_IN_CRC=true}, {SCHEMA_COLUMN=Phone, USE_IN_CRC=true}, {SCHEMA_COLUMN=Tax_Area_Code, USE_IN_CRC=false}, {SCHEMA_COLUMN=Shipping_Address, USE_IN_CRC=false}, {SCHEMA_COLUMN=Shipping_Address2, USE_IN_CRC=false}, {SCHEMA_COLUMN=Shipping_Region_Code, USE_IN_CRC=false}, {SCHEMA_COLUMN=Shipping_City

Implication

USE\_IN\_CRC=false}, {SCHEMA\_COLUMN=Shipping\_ZIP  
USE\_IN\_CRC=false}, {SCHEMA\_COLUMN=Shipping\_Ph  
USE\_IN\_CRC=false},  
{SCHEMA\_COLUMN=Shipping\_Tax\_Area,  
USE\_IN\_CRC=false},  
{SCHEMA\_COLUMN=Customer\_Buying\_Group\_Code,  
USE\_IN\_CRC=true},  
{SCHEMA\_COLUMN=Payment\_Terms\_Code,  
USE\_IN\_CRC=true},  
{SCHEMA\_COLUMN=Bill\_to\_Customer\_No,  
USE\_IN\_CRC=false},  
{SCHEMA\_COLUMN=Order\_Rule\_Group,  
USE\_IN\_CRC=false},  
{SCHEMA\_COLUMN=Credit\_Limit\_LCY,  
USE\_IN\_CRC=false},  
{SCHEMA\_COLUMN=Minimum\_Sales\_Order\_Amount,  
USE\_IN\_CRC=false},  
{SCHEMA\_COLUMN=Guaranteed\_Order,  
USE\_IN\_CRC=false}, {SCHEMA\_COLUMN=Blocked,  
USE\_IN\_CRC=true}, {SCHEMA\_COLUMN=Invoice\_Copie  
USE\_IN\_CRC=true},  
{SCHEMA\_COLUMN=Payment\_Method\_Code,  
USE\_IN\_CRC=true},  
{SCHEMA\_COLUMN=Store\_Identification,  
USE\_IN\_CRC=true},  
{SCHEMA\_COLUMN=Retail\_Price\_Group,  
USE\_IN\_CRC=false}, {SCHEMA\_COLUMN=Latitude,  
USE\_IN\_CRC=true}, {SCHEMA\_COLUMN=Longitude,  
USE\_IN\_CRC=true},  
{SCHEMA\_COLUMN=Customer\_Invoice\_Service\_Type,  
USE\_IN\_CRC=false}, {SCHEMA\_COLUMN=DiscountPerc  
USE\_IN\_CRC=false}, {SCHEMA\_COLUMN=ROUTE,  
USE\_IN\_CRC=false}, {SCHEMA\_COLUMN=FACILITY,  
USE\_IN\_CRC=false}, {SCHEMA\_COLUMN=LOCATION,  
USE\_IN\_CRC=false}, {SCHEMA\_COLUMN=ROUTE GROU  
USE\_IN\_CRC=false},

	{SCHEMA_COLUMN=DB_CUST_WHOLESALE_PRICE_1 USE_IN_CRC=true}, {SCHEMA_COLUMN=CRC, USE_IN_CRC=true}]
CRC Type	crc32
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tAddCRCRow\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
CustomerNo	false	String	255		false	
ShippingNo	false	String	255		false	
Name	false	String	255		false	
Address	false	String	255		false	
Address_2	false	String	255		false	
Region_Code	false	String	255		false	


ZIP	false	String	255		false	
Phone	false	String	255		false	
Tax_Area_Code	false	String	255		false	
Shipping_Address	false	String	255		false	
Shipping_Address2	false	String	255		false	
Shipping_Region_Code	false	String	255		false	
Shipping_City	false	String	255		false	
Shipping_ZIP	false	String	255		false	
Shipping_Phone	false	String	255		false	
Shipping_Tax_Area	false	String	255		false	
Customer_Buying_Group_Code	false	String	255		false	
Payment_Terms_Code	false	String	255		false	
Bill_to_Customer_No	false	String	255		false	
Order_Rule_Group	false	String	255		false	
Credit_Limit_LCY	false	BigDecimal	38	6	false	
Minimum_Sales_Order_Amount	false	BigDecimal	38	6	false	
Guaranteed_Order	false	int	30		false	



Blocked	false	int	30		false	
Invoice_Copies	false	int	30		false	
Payment_Method_Code	false	String	255		false	
Store_Identification	false	String	255		false	
Retail_Price_Group	false	String	255		false	
Latitude	false	BigDecimal	38	6	false	
Longitude	false	BigDecimal	38	6	false	
Customer_Invoice_Service_Type	false	int	30		false	
DiscountPercent	false	BigDecimal	38	6	false	
ROUTE	false	String	255		false	
FACILITY	false	String	255		false	
LOCATION	false	String	255		false	
ROUTEGROUP	false	String	255		false	
DB_CUST_WHOLESALE_PRICE_TAB	false	Integer	4		true	
CRC	false	Long	255		true	

**Original Function Parameters:**  
**Component tContextLoad**

---

	UNIQUE NAME	tContextLoad_1	INPUT(S)	tDBInput_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogRow_1 , tDBConnection_1

### Component Parameters:

Properties	Values
Unique Name	tContextLoad_1
Component Name	tContextLoad
Version	0.101 (ALPHA)
Family	Misc
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tContextLoad
Update components	true
IREPORT_PATH	


JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
If a variable loaded, but not in the context	Warning
If a variable in the context, but not loaded	Warning
Print operations	false
Disable errors	true
Disable warnings	true
Disable info	true
Die on error	false
Label format	__ UNIQUE_NAME __
Hint format	<b>__ UNIQUE_NAME __</b> __ COMMENT __

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tContextLoad\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

#### Original Function Parameters: Component tCreateTable

	UNIQUE NAME	tCreateTable_1	INPUT(S)	<a href="#">tDBConnection_1</a>
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tDBCommit_3</a>

#### Component Parameters:

Properties	Values
Unique Name	tCreateTable_1
Component Name	tCreateTable
Version	0.102 (ALPHA)

Family	Databases
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tCreateTable
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Property Type	Built-In
Database Type	MSSQL
Table Action	DROP_IF_EXIST_CREATE
Case Sensitive	false
Use an existing connection	true
Host	""
Database Name	""
Local Service Name	""
URL	"jdbc:oracle:oci:/@db10g_test"
UserName	""
Password	**
Port	""
Schema	""
Access File	"C:/Talend/7.0.1/studio/workspace-remote-dev-multi-comp:
DB Version	jt400_V6R1.jar
Firebird File	"C:/Talend/7.0.1/studio/workspace-remote-dev-multi-comp:
Running Mode	HSQldb_SERVER

Use TLS/SSL Sockets	false
DB Path	""
Database Name	""
DB Alias	""
Instance	""
Interbase File	"C:/Talend/7.0.1/studio/workspace-remote-dev-multi-compa
Framework Type	EMBEDED
Has been connected to a network server	false
Database Name	""
DB Root Path	""
	tDBConnection_1
JDBC Provider	JTDS
Temporary Table	false
DB Version	MYSQL_5
Connection Type	ORACLE_SID
URL	""
DB Version	ORACLE_12

DB Version	PRIOR_TO_V9
SQLite File	"C:/Talend/7.0.1/studio/workspace-remote-dev-multi-compa
DB Version	SYBSEIQ_16
ODBC Name	""
Use "drop cascade"	true
DB Version	vertica_3.0_jdk_5.jar
Table Name	"NAV_Customer"
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Mapping	id_MSSQL
Create	SET
Additional JDBC Parameters	"prompt=false"
!!!ENCODING.NAME!!!	"ISO-8859-15"
Create projection	true
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row



Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


**Schema for tCreateTable\_1 :**

Column	Key	Type	Length	Precision	Nullable	Comment
CustomerNo	false	String	255		false	
ShippingNo	false	String	255		true	
Name	false	String	255		true	
Address	false	String	255		true	
Address_2	false	String	255		true	
Region_Code	false	String	255		true	
ZIP	false	String	255		true	
Phone	false	String	255		true	
Tax_Area_Code	false	String	255		true	
Shipping_Address	false	String	255		true	
Shipping_Address2	false	String	255		true	

Shipping_Region_Code	false	String	255		true	
Shipping_City	false	String	255		true	
Shipping_ZIP	false	String	255		true	
Shipping_Phone	false	String	255		true	
Shipping_Tax_Area	false	String	255		true	
Customer_Buying_Group_Code	false	String	255		true	
Payment_Terms_Code	false	String	255		true	
Bill_to_Customer_No	false	String	255		true	
Order_Rule_Group	false	String	255		true	
Credit_Limit_LCY	false	BigDecimal	38	6	true	
Minimum_Sales_Order_Amount	false	BigDecimal	38	6	true	
Guaranteed_Order	false	Integer	30		true	
Blocked	false	Integer	30		true	
Invoice_Copies	false	Integer	30		true	
Payment_Method_Code	false	String	255		true	
Store_Identification	false	String	255		true	
Retail_Price_Group	false	String	255		true	

Latitude	false	BigDecimal	38	6	true	
Longitude	false	BigDecimal	38	6	true	
Customer_Invoice_Service_Type	false	Integer	30		true	
DiscountPercent	false	BigDecimal	38	6	true	
ROUTE	false	String	255		true	
FACILITY	false	String	255		true	
LOCATION	false	String	255		true	
ROUTEGROUP	false	String	255		true	
DB_CUST_WHOLESALE_PRICE_TAB	false	Integer	4		true	
CRC	false	long	30		false	
ProcessTimeStamp	false	String	255		false	

**Original Function Parameters:**  
**Component tMSSqlCommit**

	UNIQUE NAME	tDBCommit_1	INPUT(S)	tJava_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_2

**Component Parameters:**

Properties	Values
Database	tMSSqlCommit

Unique Name	tDBCommit_1
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	


Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	true
Schema	Built-In
Label format	__ UNIQUE_NAME __
Hint format	<b>__ UNIQUE_NAME __</b> __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tDBCommit\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

**Original Function Parameters:**  
**Component tMSSqlCommit**

---

	UNIQUE NAME	tDBCommit_2	INPUT(S)	tDBCommit_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

### Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_2
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_2
Close Connection	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tDBCommit\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tMSSqlCommit

	UNIQUE NAME	tDBCommit_3	INPUT(S)	tCreateTable_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlCommit
Unique Name	tDBCommit_3
Component Name	tMSSqlCommit
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true




END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlCommit
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tDBConnection_1
Close Connection	false
Schema	Built-In
Label format	__UNIQUE_NAME__

Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tDBCommit\_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

#### Original Function Parameters: Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tContextLoad_1
	LABEL	ERP_DSD_Integration	OUTPUT(S)	tDBConnection_2 , tCreateTable_1

#### Component Parameters:


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)

Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
JDBC Provider	JTDS
Host	"srvrsql200.harvestfoodsolutions.com"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"ERP_DSD_Integration_PREPROD"
Username	"talend"
Password	*****
Encoding	"ISO-8859-15"
Additional JDBC Parameters	""
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Auto Commit	false

Share identity insert in multi table	false
Label format	ERP_DSD_Integration
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component tMSSqlConnection**

	UNIQUE NAME	tDBConnection_2	INPUT(S)	tDBConnection_1
	LABEL	DB_Navision	OUTPUT(S)	tSetKeystore_1

**Component Parameters:**


Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_2
Component Name	tMSSqlConnection

Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false
Property Type	Built-In
JDBC Provider	MSSQL_PROP
Host	"SRVRNAV110.corp.usbakery.com "
Database Driver	MSSQL
Port	"1433"
Schema	context.DB_Navision_Schema
Database	"DSD-NAV_Interface"
Username	"talend_hfs2"
Password	*****
Encoding	"ISO-8859-15"
Additional JDBC Parameters	""
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""

Auto Commit	false
Share identity insert in multi table	false
Label format	DB_Navision
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component tMSSqlInput**

	UNIQUE NAME	tDBInput_1	INPUT(S)	<a href="#">tJava_2</a>
	LABEL	DB_Talend_Context	OUTPUT(S)	<a href="#">tContextLoad_1</a>

**Component Parameters:**

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_1



Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Use an existing connection	false
Component List	
Property Type	repository: DB (MSSQL):DB_Talend_Context
Host	context.DB_Talend_Context_Server
JDBC Provider	JTDS
Database Driver	MSSQL
Port	context.DB_Talend_Context_Port
Schema	context.DB_Talend_Context_Schema
Database	context.DB_Talend_Context_Database
Username	context.DB_Talend_Context_Login
Password	context.DB_Talend_Context_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In


Guess Schema	""
Query	"SELECT [key] ,[value] FROM [" +context.DB_Talend_Context_Database+ "].[" +context.DB_Talend_Context_Schema+ "].[IMPLICIT_CONTEXT_" +context.implicit_db_environment+"]"
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Talend_Context_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true
Trim column	[{SCHEMA_COLUMN=key, TRIM=false}, {SCHEMA_COLUMN=value, TRIM=false}]
Label format	DB_Talend_Context
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tDBInput\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	
value	false	String	255		true	

Original Function Parameters:  
Component tMSSqlInput

	UNIQUE NAME	tDBInput_2	INPUT(S)	none
	LABEL	Lkp_NAV_Customer_PriceTab_All	OUTPUT(S)	<a href="#">tMap_2</a>

Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tDBInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true

SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_1
Property Type	Built-In

Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"
Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In
Guess Schema	""
Query	"SELECT [DB_CUST_CUST_NUMBER] ,[DB_CUST_WHOLESALE_PRICE_TAB] ,[Instance] ,[DB_CUST_CUST_NUMBER_Original] FROM [NAV_Customer_PriceTab_All]"
Specify a data source alias	false
Data source alias	""


Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[SCHEMA_COLUMN=DB_CUST_CUST_NUMBER, TRIM=false], {SCHEMA_COLUMN=DB_CUST_WHOLESALE_PRICE_1, TRIM=false}, {SCHEMA_COLUMN=Instance, TRIM=false} {SCHEMA_COLUMN=DB_CUST_CUST_NUMBER_Origir, TRIM=false}]
Label format	Lkp_NAV_Customer_PriceTab_All
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tDBInput\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
DB_CUST_CUST_NUMBER	false	String	20		false	
DB_CUST_WHOLESALE_PRICE_TAB	false	Integer	4		true	

Instance	false	String	20		true	
DB_CUST_CUST_NUMBER_Original	false	Integer	9		true	

Original Function Parameters:  
Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_1	INPUT(S)	tMap_4
	LABEL	NAV_Customer_PriceTab_All	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tDBOutput_1
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false



tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	true
Component List	tDBConnection_1
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema

Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_Customer_PriceTab_All"
Action on table	CREATE_IF_NOT_EXISTS
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	DB_CUST_CUST_NUMBER
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""


Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false
Field options	[{SCHEMA_COLUMN=DB_CUST_CUST_NUMBER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=DB_CUST_WHOLESALE_PRICE_1, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Instance, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=DB_CUST_CUST_NUMBER_Origir, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	NAV_Customer_PriceTab_All

Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBOutput\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
DB_CUST_CUST_NUMBER	false	String	20		false	
DB_CUST_WHOLESALE_PRICE_TAB	false	Integer	4		true	
Instance	false	String	20		true	
DB_CUST_CUST_NUMBER_Original	false	Integer	9		true	

Original Function Parameters:  
Component tMSSqlRow

	UNIQUE NAME	tDBRow_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tFixedFlowInput_2</a>

Component Parameters:

Properties	Values
------------	--------

Database	tMSSqlRow
Unique Name	tDBRow_1
Component Name	tMSSqlRow
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	

Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_1
Property Type	Built-In
JDBC Provider	JTDS
Host	""
Port	"1433"
Schema	""
Database	""
Database Driver	MSSQL
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In


Reject Schema	Built-In
Table Name	""
Turn on identity insert	false
Query Type	Built-In
Query	"truncate table NAV_Customer_PriceTab_All"
Specify a data source alias	false
Data source alias	""
Die on error	false
Additional JDBC Parameters	""
Propagate QUERY's recordset	false
use column	
Use PreparedStatement	false
Set PreparedStatement Parameters	[]
Encoding	"ISO-8859-15"
Commit every	10000
Label format	__ UNIQUE_NAME __
Hint format	<b>__ UNIQUE_NAME __</b> __ COMMENT __

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tDBRow\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

#### Original Function Parameters: Component tFileInputPositional

	UNIQUE NAME	tFileInputPositional_1	INPUT(S)	tFileList_1
	LABEL	Customer File	OUTPUT(S)	tMap_4

#### Component Parameters:

Properties	Values
Unique Name	tFileInputPositional_1
Component Name	tFileInputPositional
Version	0.102 (ALPHA)
Family	File/Input
Start	false



Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	true
Help	org.talend.help.tFileInputPositional
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Use existing dynamic	false

Component List	
File name/Stream	((String)globalMap.get("tFileList_1_CURRENT_FILEPATH
Row Separator	"\n"
Customize	false
Pattern	context.RM_Customer_FieldSeparator
Pattern units	SYMBOLS
	<pre> {{SCHEMA_COLUMN=DB_CUST_CUST_NUMBER, SIZE PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_SHIP_NAME, SIZE=30, PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_SHIP_ADDR2, SIZE=30 PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_SHIP_ADDR3, SIZE=30 PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_SHIP_CITY, SIZE=20, PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_SHIP_STATE, SIZE=2, PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_SHIP_ZIP_CODE, SIZE PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_SHIP_AREA_CODE, SI PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_SHIP_PHONE_3, SIZE= PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_SHIP_PHONE_4, SIZE= PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_ACCOUNT_TYPE, SIZE PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_ACTIVE_SWITCH, SIZE PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_PAYMENT_TYPE, SIZE PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_WHOLESALE_PRICE_1 SIZE=4, PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_RETAIL_PRICE_TABLE SIZE=4, PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_DELIVERY_DAYS, SIZE PADDING_CHAR=' ', ALIGN='L'}, </pre>

{SCHEMA\_COLUMN=DB\_CUST\_CHAIN\_NUMBER, SIZE  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_AR\_NUMBER, SIZE=9,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_GROUP\_CODE, SIZE=,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_COMM\_TYPE, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_COMP\_BID\_SHR\_TABL  
SIZE=4, PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_DSTB\_BID\_SHR\_TABL  
SIZE=4, PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_LBS\_PRICE\_TABLE, SI  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_STORE\_NUMBER, SIZI  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_ROUTE\_NUMBER, SIZI  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BILL\_NAME, SIZE=30,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BILL\_ADDR2, SIZE=30,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BILL\_ADDR3, SIZE=30,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BILL\_CITY, SIZE=20,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BILL\_STATE, SIZE=2,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BILL\_ZIP\_CODE, SIZE=  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BILL\_AREA\_CODE, SIZ  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BILL\_PHONE\_3, SIZE=  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BILL\_PHONE\_4, SIZE=  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_PRINT\_INVOICE, SIZE=  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_NO\_OF\_INVOICE\_COF  
SIZE=1, PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_PAGE\_PER\_CATG, SIZ  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_SUBTOTAL\_CATG, SIZ  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_PRINT\_CREDIT\_INVOI  
SIZE=1, PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_MESSAGE\_1, SIZE=20,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_MESSAGE\_2, SIZE=20,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_CAT\_DISC\_1, SIZE=7,

```

PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_CAT_DISC_2, SIZE=7,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_CAT_DISC_3, SIZE=7,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_CAT_DISC_4, SIZE=7,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_CAT_DISC_5, SIZE=7,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_CAT_DISC_6, SIZE=7,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_CAT_DISC_7, SIZE=7,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_CAT_DISC_8, SIZE=7,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_CAT_DISC_9, SIZE=7,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_CAT_DISC_10, SIZE=7,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_PRINT_WHSLE_PRICE
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_BALANCE_METHOD, S
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_TERMS_DISC_PERCEI
SIZE=7, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_TERMS_DISC_DAYS,
SIZE=5, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_TERMS_NET_DAYS, S
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_CREDIT_LIMIT, SIZE=1
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_BILLING_FREQ, SIZE=
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_SALES_TAX_CODE, SI
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_UNIT_BILLING, SIZE=1
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_PRINT_STATEMENTS,
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_UNIT_HISTORY, SIZE=
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_ADDITIONAL_DISC, SI
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_LBS_BILLING, SIZE=1,
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_LAST_PMT_DATE, SIZI
PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_LAST_PMT_AMOUNT,
SIZE=11, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_CHECK_AUTH_PROD_
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},

```

Formats

```
{SCHEMA_COLUMN=DB_CUST_STOP_NO, SIZE=4,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_TAX_RATE, SIZE=5,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_CONTRACT_POINTER  
SIZE=3, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_STOP_INV_DISC_PCT,  
SIZE=5, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_ONHAND_METHOD, SI  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_PRINT_UPC, SIZE=1,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_PRINT_PRICE_CTRL,  
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_PRINT_RETAIL, SIZE='  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_STAMP_SIG_SWITCH,  
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_RETURN_CTRL, SIZE=  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_AUTH_PROD, SIZE=2,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_INV_PRICE_GROUP, S  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_BALANCE_CORRECTIO  
SIZE=10, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_REDIST_CTRL, SIZE=1  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_PICK_LIST_FLAG, SIZE  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_PREORDER_FLAG, SIZ  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_GST_EXEMPT_FLAG,  
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_DEX_FLAG, SIZE=1,  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_PRINT_MARGIN_CTRL  
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_FAMILY_GROUP_COD  
SIZE=2, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_MASTER_CHAIN, SIZE  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_COMM_TABLE, SIZE=2  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_FORECASTING_TABLE  
SIZE=3, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_ORDER_ADJ_CONTRC  
SIZE=1, PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_BALANCE_TYPE, SIZE  
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_AUTH_PROD_TBL, SIZ
```

PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_STATEMENT\_GROUP,  
SIZE=1, PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_AR\_CUST\_SW, SIZE=1  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_CHAIN\_CUST\_SW, SIZE=1  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_MAST\_CHAIN\_CUST\_SW, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_CONTACT\_PERSON,  
SIZE=20, PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_SH\_FAX\_AREA\_CODE,  
SIZE=3, PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_SH\_FAX\_PHONE\_3, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_SH\_FAX\_PHONE\_4, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BL\_FAX\_AREA\_CODE,  
SIZE=3, PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BL\_FAX\_PHONE\_3, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_BL\_FAX\_PHONE\_4, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_INACTIVE\_DATE, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_ACCOUNT\_DATE, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=OCCURS\_7\_TIMES, SIZE=21,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_SS\_UNIT\_CASE, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_STALE\_PRICING\_SW, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_PREVIOUS\_LINK, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_LOAD\_SEQUENCE, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_INV\_ACCNT\_NUMBER, SIZE=9,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_ESCL\_DISC\_TYPE, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_SETTL\_COMM\_RTE\_N, SIZE=4,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_IVR\_FLAG, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_IVR\_PASSWORD, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_SALES\_MANAGER, SIZE=1,  
PADDING\_CHAR=' ', ALIGN='L'},  
{SCHEMA\_COLUMN=DB\_CUST\_SALES\_MANAGER\_DEPT, SIZE=25,  
PADDING\_CHAR=' ', ALIGN='L'},

```

{SCHEMA_COLUMN=DB_CUST_SALES_REP, SIZE=3,
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_SALES_REP_DESC,
 SIZE=25, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_BUYING_GROUP_COD
 SIZE=3, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_STOP_RATE, SIZE=8,
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_LITRE_RATE, SIZE=11,
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_DEPT_INVOICE, SIZE=
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_LBS_TABLE, SIZE=4,
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_COMM_TABLE_NEW,
 SIZE=4, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_RET_CAP_TABLE, SIZI
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_SALES_MODE_FLAG, SIZE=1
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_LAST_SERVICE_DATE
 SIZE=8, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_LANGUAGE_CODE, SI
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_DEI_ACTIVE_SW, SIZE
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_EDT_TRANS_SET_1, SI
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_EDT_TRANS_SET_2, SI
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_EDT_PARTNER_DUNS_
 SIZE=9, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_EDT_PARTNER_SUFFI
 SIZE=4, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_EDT_PARTNER_TRADI
 SIZE=13, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_EDT_PARTNER_ID_CO
 SIZE=2, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_EDT_PARTNER_ID, SIZ
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_RETAIL_DISC_TABLE, SIZE=4
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_MERCHANDISER_ACCT, SIZE
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_DROP_ROUTE_NUMBER, SIZ
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_MIN_ORDER_CONTROL_TAB
 SIZE=4, PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_INV_ALT_NUMBER, SI
 PADDING_CHAR=' ', ALIGN='L'},
{SCHEMA_COLUMN=DB_CUST_ANTI_DISC_TABLE, SI

```

```
PADDING_CHAR=' ', ALIGN='L'},  
{SCHEMA_COLUMN=DB_CUST_CPART_PRICE_TABLE
```



	SIZE=4, PADDING_CHAR=' ', ALIGN='L'}, {SCHEMA_COLUMN=DB_CUST_END_OF_RECORD, SIZE=4, PADDING_CHAR=' ', ALIGN='L']}
Skip empty rows	false
Uncompress as zip file	false
Die on error	false
Header	0
Footer	0
Limit	
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Schema	Built-In
Needed to process rows longer than 100 000 characters	false
Advanced separator (for numbers)	false
Thousands separator	","
Decimal separator	"."
Trim all columns	true
Validate date	false
	[{SCHEMA_COLUMN=DB_CUST_CUST_NUMBER,

TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_SHIP\_NAME,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_SHIP\_ADDRESS,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_SHIP\_ADDRESS2,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_SHIP\_CITY,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_SHIP\_STATE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_SHIP\_ZIP\_CODE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_SHIP\_AREA\_CODE,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_SHIP\_PHONE,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_SHIP\_PHONE2,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_ACCOUNT\_TYPE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_ACTIVE\_SWITCH,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_PAYMENT\_TYPE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_WHOLESALE\_PRICE\_TABLE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_RETAIL\_PRICE\_TABLE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_DELIVERY\_DAYS,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_CHAIN\_NUMBER,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_AR\_NUMBER,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_GROUP\_CODE,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_COMM\_TYPE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_COMP\_BID\_SHR\_TABLE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_DSTB\_BID\_SHR\_TABLE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_LBS\_PRICE\_TABLE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_STORE\_NUMBER,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_ROUTE\_NUMBER,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_BILL\_NAME,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_BILL\_ADDRESS,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_BILL\_ADDRESS2,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_BILL\_CITY,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_BILL\_STATE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_BILL\_ZIP\_CODE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_BILL\_AREA\_CODE,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_BILL\_PHONE,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_BILL\_PHONE2,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_PRINT\_INVOICE,

TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_NO\_OF\_INVOICE\_COPIES,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_PAGE\_PER\_CATALOG,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_SUBTOTAL\_CATALOG,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_PRINT\_CREDIT\_INVOICE,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_MESSAGE\_1,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_MESSAGE\_2,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_CAT\_DISCOUNT\_1,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_CAT\_DISCOUNT\_2,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_CAT\_DISCOUNT\_3,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_CAT\_DISCOUNT\_4,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_CAT\_DISCOUNT\_5,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_CAT\_DISCOUNT\_6,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_CAT\_DISCOUNT\_7,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_CAT\_DISCOUNT\_8,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_CAT\_DISCOUNT\_9,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_CAT\_DISCOUNT\_10,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_PRINT\_WHOLESALE\_PRICE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_BALANCE\_METHOD,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_TERMS\_DISC\_PERCENT,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_TERMS\_DISC\_DAYS,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_TERMS\_NET\_DAYS,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_CREDIT\_LIMIT,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_BILLING\_FREQUENCY,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_SALES\_TAX\_CODE,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_UNIT\_BILLING,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_PRINT\_STATEMENTS,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_UNIT\_HISTORY,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_ADDITIONAL\_DISC,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_LBS\_BILLING,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_LAST\_PMT\_DATE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_LAST\_PMT\_AMOUNT,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_CHECK\_AUTH\_PROD,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_STOP\_NC,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_TAX\_RATE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_CONTRACT\_POINTER

Check column to trim

```
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_STOP_INV_DISC_PCT,
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_ONHAND_METHOD,
TRIM=false}, {SCHEMA_COLUMN=DB_CUST_PRINT_UF
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_PRINT_PRICE_CTRL,
TRIM=false}, {SCHEMA_COLUMN=DB_CUST_PRINT_RE
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_STAMP_SIG_SWITCH,
TRIM=false}, {SCHEMA_COLUMN=DB_CUST_RETURN_
TRIM=false}, {SCHEMA_COLUMN=DB_CUST_AUTH_PR
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_INV_PRICE_GROUP,
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_BALANCE_CORRECTIO
TRIM=false}, {SCHEMA_COLUMN=DB_CUST_REDIST_C
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_PICK_LIST_FLAG,
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_PREORDER_FLAG,
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_GST_EXEMPT_FLAG,
TRIM=false}, {SCHEMA_COLUMN=DB_CUST_DEX_FLAG
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_PRINT_MARGIN_CTRL
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_FAMILY_GROUP_COD
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_MASTER_CHAIN,
TRIM=false}, {SCHEMA_COLUMN=DB_CUST_COMM_T/
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_FORECASTING_TABLE
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_ORDER_ADJ_CONTRC
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_BALANCE_TYPE,
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_AUTH_PROD_TBL,
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_STATEMENT_GROUP,
TRIM=false}, {SCHEMA_COLUMN=DB_CUST_AR_CUST
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_CHAIN_CUST_SW,
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_MAST_CHAIN_CUST_S
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_CONTACT_PERSON,
TRIM=false},
{SCHEMA_COLUMN=DB_CUST_SH_FAX_AREA_CODE
TRIM=false},
```

{SCHEMA\_COLUMN=DB\_CUST\_SH\_FAX\_PHONE\_3,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_SH\_FAX\_PHONE\_4,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_BL\_FAX\_AREA\_CODE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_BL\_FAX\_PHONE\_3,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_BL\_FAX\_PHONE\_4,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_INACTIVE\_DATE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_ACCOUNT\_DATE,  
TRIM=false}, {SCHEMA\_COLUMN=OCCURS\_7\_TIMES,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_SS\_UNIT\_  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_STALE\_PRICING\_SW,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_PREVIOUS\_LINK,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_LOAD\_SEQUENCE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_INV\_ACCNT\_NUMBER  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_ESCL\_DISC\_TYPE,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_SETTL\_COMM\_RTE\_N  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_IVR\_FLAG  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_IVR\_PASSWORD,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_SALES\_MANAGER,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_SALES\_MANAGER\_DE  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_SALES\_RI  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_SALES\_REP\_DESC,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_BUYING\_GROUP\_COD  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_STOP\_RA  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_LITRE\_RA  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_DEPT\_INV  
TRIM=false}, {SCHEMA\_COLUMN=DB\_CUST\_LBS\_TABI  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_COMM\_TABLE\_NEW,  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_RET\_CAP\_TABLE,  
TRIM=false}, {SCHEMA\_COLUMN=DB\_SALES\_MODE\_F  
TRIM=false},  
{SCHEMA\_COLUMN=DB\_CUST\_LAST\_SERVICE\_DATE  
TRIM=false},

	{SCHEMA_COLUMN=DB_CUST_LANGUAGE_CODE, TRIM=false}, {SCHEMA_COLUMN=DB_CUST_DEI_ACTIVE_SW, TRIM=false}, {SCHEMA_COLUMN=DB_CUST_EDT_TRANS_SET_1, TRIM=false}, {SCHEMA_COLUMN=DB_CUST_EDT_TRANS_SET_2, TRIM=false}, {SCHEMA_COLUMN=DB_CUST_EDT_PARTNER_DUNS_ TRIM=false}, {SCHEMA_COLUMN=DB_CUST_EDT_PARTNER_SUFFIX_ TRIM=false}, {SCHEMA_COLUMN=DB_CUST_EDT_PARTNER_TRADING_ TRIM=false}, {SCHEMA_COLUMN=DB_CUST_EDT_PARTNER_ID_CO TRIM=false}, {SCHEMA_COLUMN=DB_CUST_EDT_PARTNER_ID, TRIM=false}, {SCHEMA_COLUMN=DB_RETAIL_DISC_T/ TRIM=false}, {SCHEMA_COLUMN=DB_MERCHANDISER_ACCT, TRIM=false}, {SCHEMA_COLUMN=DB_DROP_ROUTE_NUMBER, TRIM=false}, {SCHEMA_COLUMN=DB_MIN_ORDER_CONTROL_TAB TRIM=false}, {SCHEMA_COLUMN=DB_CUST_INV_ALT_NUMBER, TRIM=false}, {SCHEMA_COLUMN=DB_CUST_ANTI_DISC_TABLE, TRIM=false}, {SCHEMA_COLUMN=DB_CUST_CPART_PRICE_TABLE TRIM=false}, {SCHEMA_COLUMN=DB_CUST_END_OF_RECORD, TRIM=false}]
Encoding	context.RM_Customer_Encoding
Label format	Customer File
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

**Schema for Customer :**

Column	Key	Type	Length	Precision	Nullable	Comment
DB_CUST_CUST_NUMBER	false	Integer	9		true	
DB_CUST_SHIP_NAME	false	String	30		true	
DB_CUST_SHIP_ADDR2	false	String	30		true	
DB_CUST_SHIP_ADDR3	false	String	30		true	
DB_CUST_SHIP_CITY	false	String	20		true	
DB_CUST_SHIP_STATE	false	String	2		true	
DB_CUST_SHIP_ZIP_CODE	false	String	10		true	
DB_CUST_SHIP_AREA_CODE	false	String	3		true	
DB_CUST_SHIP_PHONE_3	false	String	3		true	
DB_CUST_SHIP_PHONE_4	false	String	4		true	
DB_CUST_ACCOUNT_TYPE	false	Integer	2		true	
DB_CUST_ACTIVE_SWITCH	false	String	1		true	

DB_CUST_PAYMENT_TYPE	false	String	1		true	
DB_CUST_WHOLESALE_PRICE_TAB	false	Integer	4		true	
DB_CUST_RETAIL_PRICE_TABLE	false	Integer	4		true	
DB_CUST_DELIVERY_DAYS	false	String	7		true	
DB_CUST_CHAIN_NUMBER	false	Integer	9		true	
DB_CUST_AR_NUMBER	false	Integer	9		true	
DB_CUST_GROUP_CODE	false	String	2		true	
DB_CUST_COMM_TYPE	false	String	1		true	
DB_CUST_COMP_BID_SHR_TABLE	false	Integer	4		true	
DB_CUST_DSTB_BID_SHR_TABLE	false	Integer	4		true	
DB_CUST_LBS_PRICE_TABLE	false	Integer	4		true	
DB_CUST_STORE_NUMBER	false	String	10		true	
DB_CUST_ROUTE_NUMBER	false	Integer	9		true	
DB_CUST_BILL_NAME	false	String	30		true	
DB_CUST_BILL_ADDR2	false	String	30		true	
DB_CUST_BILL_ADDR3	false	String	30		true	
DB_CUST_BILL_CITY	false	String	20		true	



DB_CUST_BILL_STATE	false	String	2		true	
DB_CUST_BILL_ZIP_CODE	false	String	10		true	
DB_CUST_BILL_AREA_CODE	false	Integer	3		true	
DB_CUST_BILL_PHONE_3	false	Integer	3		true	
DB_CUST_BILL_PHONE_4	false	Integer	4		true	
DB_CUST_PRINT_INVOICE	false	String	1		true	
DB_CUST_NO_OF_INVOICE_COPIES	false	Integer	1		true	
DB_CUST_PAGE_PER_CATG	false	String	1		true	
DB_CUST_SUBTOTAL_CATG	false	String	1		true	
DB_CUST_PRINT_CREDIT_INVOICE	false	String	1		true	
DB_CUST_MESSAGE_1	false	String	20		true	
DB_CUST_MESSAGE_2	false	String	20		true	
DB_CUST_CAT_DISC_1	false	Float	7	4	true	
DB_CUST_CAT_DISC_2	false	Float	7	4	true	
DB_CUST_CAT_DISC_3	false	Float	7	4	true	
DB_CUST_CAT_DISC_4	false	Float	7	4	true	
DB_CUST_CAT_DISC_5	false	Float	7	4	true	

DB_CUST_CAT_DISC_6	false	Float	7	4	true	
DB_CUST_CAT_DISC_7	false	Float	7	4	true	
DB_CUST_CAT_DISC_8	false	Float	7	4	true	
DB_CUST_CAT_DISC_9	false	Float	7	4	true	
DB_CUST_CAT_DISC_10	false	Float	7	4	true	
DB_CUST_PRINT_WHSLE_PRICE	false	String	1		true	
DB_CUST_BALANCE_METHOD	false	String	1		true	
DB_CUST_TERMS_DISC_PERCENT	false	Float	7	3	true	
DB_CUST_TERMS_DISC_DAYS	false	Integer	5		true	
DB_CUST_TERMS_NET_DAYS	false	Integer	5		true	
DB_CUST_CREDIT_LIMIT	false	Integer	10		true	
DB_CUST_BILLING_FREQ	false	String	1		true	
DB_CUST_SALES_TAX_CODE	false	String	2		true	
DB_CUST_UNIT_BILLING	false	String	1		true	
DB_CUST_PRINT_STATEMENTS	false	String	1		true	
DB_CUST_UNIT_HISTORY	false	String	1		true	
DB_CUST_ADDITIONAL_DISC	false	String	1		true	

DB_CUST_LBS_BILLING	false	String	1		true	
DB_CUST_LAST_PMT_DATE	false	String	8		true	
DB_CUST_LAST_PMT_AMOUNT	false	Float	11	4	true	
DB_CUST_CHECK_AUTH_PROD_SW	false	String	1		true	
DB_CUST_STOP_NO	false	String	4		true	
DB_CUST_TAX_RATE	false	Float	5	3	true	
DB_CUST_CONTRACT_POINTER	false	String	3		true	
DB_CUST_STOP_INV_DISC_PCT	false	Float	5	3	true	
DB_CUST_ONHAND_METHOD	false	Integer	1		true	
DB_CUST_PRINT_UPC	false	String	1		true	
DB_CUST_PRINT_PRICE_CTRL	false	Integer	1		true	
DB_CUST_PRINT_RETAIL	false	String	1		true	
DB_CUST_STAMP_SIG_SWITCH	false	Integer	1		true	
DB_CUST_RETURN_CTRL	false	Integer	1		true	
DB_CUST_AUTH_PROD	false	Integer	2		true	
DB_CUST_INV_PRICE_GROUP	false	String	1		true	
DB_CUST_BALANCE_CORRECTION	false	Float	10	3	true	

DB_CUST_REDIST_CTRL	false	Integer	1		true	
DB_CUST_PICK_LIST_FLAG	false	String	1		true	
DB_CUST_PREORDER_FLAG	false	String	1		true	
DB_CUST_GST_EXEMPT_FLAG	false	String	1		true	
DB_CUST_DEX_FLAG	false	String	1		true	
DB_CUST_PRINT_MARGIN_CTRL	false	Integer	1		true	
DB_CUST_FAMILY_GROUP_CODE	false	String	2		true	
DB_CUST_MASTER_CHAIN	false	Integer	9		true	
DB_CUST_COMM_TABLE	false	String	2		true	
DB_CUST_FORECASTING_TABLE	false	Integer	3		true	
DB_CUST_ORDER_ADJ_CONTROL	false	String	1		true	
DB_CUST_BALANCE_TYPE	false	String	1		true	
DB_CUST_AUTH_PROD_TBL	false	Integer	5		true	
DB_CUST_STATEMENT_GROUP	false	Integer	1		true	
DB_CUST_AR_CUST_SW	false	String	1		true	
DB_CUST_CHAIN_CUST_SW	false	String	1		true	
DB_CUST_MAST_CHAIN_CUST_SW	false	String	1		true	


DB_CUST_CONTACT_PERSON	false	String	20		true	
DB_CUST_SH_FAX_AREA_CODE	false	Integer	3		true	
DB_CUST_SH_FAX_PHONE_3	false	Integer	3		true	
DB_CUST_SH_FAX_PHONE_4	false	Integer	4		true	
DB_CUST_BL_FAX_AREA_CODE	false	Integer	3		true	
DB_CUST_BL_FAX_PHONE_3	false	Integer	3		true	
DB_CUST_BL_FAX_PHONE_4	false	Integer	4		true	
DB_CUST_INACTIVE_DATE	false	String	8		true	
DB_CUST_ACCOUNT_DATE	false	String	8		true	
OCCURS_7_TIMES	false	String	21		true	
DB_CUST_SS_UNIT_CASE	false	String	1		true	
DB_CUST_STALE_PRICING_SW	false	String	1		true	
DB_CUST_PREVIOUS_LINK	false	String	9		true	
DB_CUST_LOAD_SEQUENCE	false	Integer	1		true	
DB_CUST_INV_ACCNT_NUMBER	false	Integer	9		true	
DB_CUST_ESCL_DISC_TYPE	false	Integer	2		true	
DB_CUST_SETTL_COMM_RTE_NUM	false	Integer	4		true	

DB_CUST_IVR_FLAG	false	String	1		true	
DB_CUST_IVR_PASSWORD	false	String	7		true	
DB_CUST_SALES_MANAGER	false	Integer	3		true	
DB_CUST_SALES_MANAGER_DESC	false	String	25		true	
DB_CUST_SALES_REP	false	Integer	3		true	
DB_CUST_SALES_REP_DESC	false	String	25		true	
DB_CUST_BUYING_GROUP_CODE	false	String	3		true	
DB_CUST_STOP_RATE	false	Float	8		true	
DB_CUST_LITRE_RATE	false	Float	11		true	
DB_CUST_DEPT_INVOICE	false	Integer	1		true	
DB_CUST_LBS_TABLE	false	Integer	4		true	
DB_CUST_COMM_TABLE_NEW	false	Integer	4		true	
DB_CUST_RET_CAP_TABLE	false	Integer	4		true	
DB_SALES_MODE_FLAG	false	Integer	1		true	
DB_CUST_LAST_SERVICE_DATE	false	String	8		true	
DB_CUST_LANGUAGE_CODE	false	Integer	1		true	
DB_CUST_DEI_ACTIVE_SW	false	Integer	1		true	

DB_CUST_EDI_TRANS_SET_1	false	Integer	3		true	
DB_CUST_EDI_TRANS_SET_2	false	Integer	3		true	
DB_CUST_EDI_PARTNER_DUNS_NO	false	Integer	9		true	
DB_CUST_EDI_PARTNER_SUFFIX	false	Integer	4		true	
DB_CUST_EDI_PARTNER_TRADING_ID	false	String	13		true	
DB_CUST_EDI_PARTNER_ID_CODE	false	String	2		true	
DB_CUST_EDI_PARTNER_ID	false	String	15		true	
DB_RETAIL_DISC_TABLE	false	Integer	4		true	
DB_MERCHANDISER_ACCT	false	String	1		true	
DB_DROP_ROUTE_NUMBER	false	Integer	4		true	
DB_MIN_ORDER_CONTROL_TABLE	false	Integer	4		true	
DB_CUST_INV_ALT_NUMBER	false	String	12		true	
DB_CUST_ANTI_DISC_TABLE	false	Integer	4		true	
DB_CUST_CPART_PRICE_TABLE	false	Integer	4		true	
DB_CUST_END_OF_RECORD	false	String	1		true	

**Original Function Parameters:**  
**Component tFileList**

---

	UNIQUE NAME	tFileList_1	INPUT(S)	tFlowTolterate_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFileInputPositional_1

### Component Parameters:


Properties	Values
Unique Name	tFileList_1
Component Name	tFileList
Version	0.102 (ALPHA)
Family	File/Management Orchestration
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileList
Update components	true



IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Directory	context.directory.replace("CUST04",(String)globalMap.get("row16.instance"))
FileList Type	FILES
Includes subdirectories	false
Case Sensitive	YES
Generate Error if no file found	false
Use Glob Expressions as Filemask (Unchecked means Perl5 Regex Expressions)	true
Files	[{FILEMASK="*CUST*"}]
By default	true

By file name	false
By file size	false
By modified date	false
ASC	true
DESC	false
Use Exclude Filemask	false
Exclude Filemask	"*.txt"
Format file path to slash(/) style (useful on Windows)	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component** tFilterRow

	UNIQUE NAME	tFilterRow_122	INPUT(S)	<a href="#">tMSSqlInput_2</a>
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tJavaFlex_1</a>

### Component Parameters:

Properties	Values
Unique Name	tFilterRow_122
Component Name	tFilterRow
Version	0.102 (ALPHA)
Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFilterRow
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Schema	Built-In
Schema	Built-In
Logical operator used to combine conditions	&&
Conditions	[]
Use advanced mode	true
Advanced	row1.Customer_.startsWith("C"+context.instance.substring
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


**Schema for tFilterRow\_122 :**

Column	Key	Type	Length	Precision	Nullable	Comment
Customer_	false	String	20		false	
Shipping_	false	String	10		false	
Name	false	String	50		false	
Address	false	String	50		false	
Address_2	false	String	50		false	
Region_Code	false	String	10		false	
ZIP	false	String	20		false	
Phone	false	String	30		false	
Tax_Area_Code	false	String	20		false	
Shipping_Address	false	String	50		false	
Shipping_Address2	false	String	50		false	

Shipping_Region_Code	false	String	10		false	
Shipping_City	false	String	30		false	
Shipping_ZIP	false	String	20		false	
Shipping_Phone	false	String	30		false	
Shipping_Tax_Area_	false	String	20		false	
Customer_Buying_Group_Code	false	String	20		false	
Payment_Terms_Code	false	String	10		false	
Bill_to_Customer_No_	false	String	20		false	
Order_Rule_Group	false	String	20		false	
Credit_Limit__LCY_	false	BigDecimal	38	20	false	
Minimum_Sales_Order_Amount	false	BigDecimal	38	20	false	
Guaranteed_Order	false	short	3		false	
Blocked	false	int	10		false	
Invoice_Copies	false	int	10		false	
Payment_Method_Code	false	String	10		false	
Store_Identification	false	String	20		false	
Retail_Price_Group	false	String	10		false	

Latitude	false	BigDecimal	38	20	false	
Longitude	false	BigDecimal	38	20	false	
Customer_Invoice_Service_Type	false	int	10		false	
Discount__	false	BigDecimal	38	20	false	
Starting_Date	false	java.util.Date	23	3	false	
End_Date	false	java.util.Date	23	3	false	
Current_route	false	String	10		false	
Bin_Code	false	String	20		false	
Home_Location	false	String	10		false	
Facility_Location	false	String	10		false	
SRCGC	false	String	20		true	

Original Function Parameters:  
Component   tFixedFlowInput

	UNIQUE NAME	tFixedFlowInput_1	INPUT(S)	tMSSqlInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tFixedFlowInput_1

Component Name	tFixedFlowInput
Version	0.102 (ALPHA)
Family	Misc
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFixedFlowInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false




Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Number of rows	1
Use Single Table	true
Values	[[SCHEMA_COLUMN=responseXML, VALUE=context.responseXML]]
Use Inline Table	false
Inline Table	[]
Use Inline Content(delimited file)	false
Row Separator	"\n"
Field Separator	","
Content	
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false

Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFixedFlowInput\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters:  
Component tFixedFlowInput

	UNIQUE NAME	tFixedFlowInput_2	INPUT(S)	tDBRow_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tLogRow_3 , tMSSqlInput_2

Component Parameters:

Properties	Values
Unique Name	tFixedFlowInput_2
Component Name	tFixedFlowInput
Version	0.102 (ALPHA)
Family	Misc
Start	false
Startable	true

SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFixedFlowInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Number of rows	1

Use Single Table	false
Values	[[SCHEMA_COLUMN=instance, VALUE=]]
Use Inline Table	true
Inline Table	[[instance="CUST01"}, {instance="CUST02"}, {instance="CUST04"}, {instance="CUST05"}]
Use Inline Content(delimited file)	false
Row Separator	"\n"
Field Separator	","
Content	
Label format	__ UNIQUE_NAME __
Hint format	<b>__ UNIQUE_NAME __</b> __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


#### Schema for tFixedFlowInput\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

---

instance	false	String			true	
----------	-------	--------	--	--	------	--

**Original Function Parameters:**  
**Component tFlowTolterate**

	UNIQUE NAME	tFlowTolterate_1	INPUT(S)	tLogRow_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFileList_1

**Component Parameters:**

Properties	Values
Unique Name	tFlowTolterate_1
Component Name	tFlowTolterate
Version	0.101 (ALPHA)
Family	Orchestration
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFlowTolterate


Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use the default (key, value) in global variables.	true
Customize	[]
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tFlowTolterate\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_1	INPUT(S)	tFilterRow_122
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tSchemaComplianceCheck_1

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	int i =1;



Main code	// here is the main part of the component, // a piece of code executed in the row // loop //context.objectId=row1.Customer_No+" - "+row1.Ship_to_No+" - "+row1.Name; context.objectName= ""; if( i%5000 == 0) { System.out.println(i+"----- 5000 Records Processed"); } i++;
End code	// end of the component, outside/closing the loop i--; System.out.println(i+" Records Processed and end of records");
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJavaFlex\_1 :


Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Customer_	false	String	20		false	
Shipping_	false	String	10		false	
Name	false	String	50		false	
Address	false	String	50		false	
Address_2	false	String	50		false	
Region_Code	false	String	10		false	
ZIP	false	String	20		false	
Phone	false	String	30		false	
Tax_Area_Code	false	String	20		false	
Shipping_Address	false	String	50		false	
Shipping_Address2	false	String	50		false	
Shipping_Region_Code	false	String	10		false	
Shipping_City	false	String	30		false	
Shipping_ZIP	false	String	20		false	
Shipping_Phone	false	String	30		false	
Shipping_Tax_Area_	false	String	20		false	
Customer_Buying_Group_Code	false	String	20		false	

Payment_Terms_Code	false	String	10		false	
Bill_to_Customer_No_	false	String	20		false	
Order_Rule_Group	false	String	20		false	
Credit_Limit__LCY_	false	BigDecimal	38	20	false	
Minimum_Sales_Order_Amount	false	BigDecimal	38	20	false	
Guaranteed_Order	false	short	3		false	
Blocked	false	int	10		false	
Invoice_Copies	false	int	10		false	
Payment_Method_Code	false	String	10		false	
Store_Identification	false	String	20		false	
Retail_Price_Group	false	String	10		false	
Latitude	false	BigDecimal	38	20	false	
Longitude	false	BigDecimal	38	20	false	
Customer_Invoice_Service_Type	false	int	10		false	
Discount__	false	BigDecimal	38	20	false	
Starting_Date	false	java.util.Date	23	3	false	
End_Date	false	java.util.Date	23	3	false	

Current_route	false	String	10		false	
Bin_Code	false	String	20		false	
Home_Location	false	String	10		false	
Facility_Location	false	String	10		false	
SRCGC	false	String	20		true	

**Original Function Parameters:**  
**Component**   tJavaFlex

	UNIQUE NAME	tJavaFlex_10	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

**Component Parameters:**

Properties	Values
Unique Name	tJavaFlex_10
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false


END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code

Main code	<code> routines.Nav_Customer.populateAttributeUpdate(attributeL</code>
End code	<code>// end of the component, outside/closing the loop</code>
TOS2.0	<code>false</code>
TOS3.2	<code>false</code>
TOS4.0	<code>true</code>
Import	<code>//import java.util.List;</code>
Label format	<code>__UNIQUE_NAME__</code>
Hint format	<code>&lt;b&gt;__UNIQUE_NAME__&lt;/b&gt;&lt;br&gt;__COMMENT__</code>
Connection format	<code>row</code>
Show Information	<code>false</code>
Comment	
Use an existing validation rule	<code>false</code>
Validation Rule Type	

Schema for tJavaFlex\_10 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_11	INPUT(S)	tMap_1
---	----------------	--------------	----------	--------

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none
--	-------	-----------------	-----------	------

**Component Parameters:**

Properties	Values
Unique Name	tJavaFlex_11
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	<pre> routines.Nav_Customer.populateDataContainerEntryvalStr( //Kshyap commented out //routines.Nav_Customer.populateUpdateContainerEntry(); </pre>
End code	<pre> // end of the component, outside/closing the loop // Kashya out routines.Nav_Customer.populateDataContainerEntryPz </pre>
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;




Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJavaFlex\_11 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

#### Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_12	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

#### Component Parameters:

Properties	Values
Unique Name	tJavaFlex_12
Component Name	tJavaFlex
Version	0.101 (ALPHA)


Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.Nav_Customer.populateAttributeDataContainerEn routines.Nav_Customer.populateAttributeDataContainerEn
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_12 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_13	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_13
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false


tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=1;
Main code	<pre> routines.Nav_Customer.createAllObjects(); if(b==1) { routines.Nav_Customer.populateMasterdataPoolUpdate(m if(b==context.customer_bundle_count) { //routines.r_HarvestRoutine_A.populateMasterdataPoolUp b=0; } b++; </pre>

End code	// end of the component, outside/closing the loop routines.Nav_Customer.createAllObjects(); routines.Nav_Customer.populateMasterdataPoolUpdate(m
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_13 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_2	INPUT(S)	tAddCRCRow_1

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tMap_3</a>
--	-------	-----------------	-----------	------------------------

**Component Parameters:**

Properties	Values
Unique Name	tJavaFlex_2
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	// here is the main part of the component, // a piece of code executed in the row // loop context.CRC=row3.CRC;
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;



Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


#### Schema for tJavaFlex\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
CustomerNo	false	String	255		false	
ShippingNo	false	String	255		false	
Name	false	String	255		false	
Address	false	String	255		false	
Address_2	false	String	255		false	
Region_Code	false	String	255		false	
ZIP	false	String	255		false	
Phone	false	String	255		false	

Tax_Area_Code	false	String	255		false	
Shipping_Address	false	String	255		false	
Shipping_Address2	false	String	255		false	
Shipping_Region_Code	false	String	255		false	
Shipping_City	false	String	255		false	
Shipping_ZIP	false	String	255		false	
Shipping_Phone	false	String	255		false	
Shipping_Tax_Area	false	String	255		false	
Customer_Buying_Group_Code	false	String	255		false	
Payment_Terms_Code	false	String	255		false	
Bill_to_Customer_No	false	String	255		false	
Order_Rule_Group	false	String	255		false	
Credit_Limit_LCY	false	BigDecimal	38	6	false	
Minimum_Sales_Order_Amount	false	BigDecimal	38	6	false	
Guaranteed_Order	false	int	30		false	
Blocked	false	int	30		false	
Invoice_Copies	false	int	30		false	

Payment_Method_Code	false	String	255		false	
Store_Identification	false	String	255		false	
Retail_Price_Group	false	String	255		false	
Latitude	false	BigDecimal	38	6	false	
Longitude	false	BigDecimal	38	6	false	
Customer_Invoice_Service_Type	false	int	30		false	
DiscountPercent	false	BigDecimal	38	6	false	
ROUTE	false	String	255		false	
FACILITY	false	String	255		false	
LOCATION	false	String	255		false	
ROUTEGROUP	false	String	255		false	
DB_CUST_WHOLESALE_PRICE_TAB	false	Integer	4		true	
CRC	false	Long	255		true	

**Original Function Parameters:**  
**Component tJavaFlex**

	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

**Component Parameters:**

---

Properties	Values
Unique Name	tJavaFlex_3
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	


Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.Nav_Customer.populateDataContainerEntry(ADDI //Kshyap commented out //routines.Nav_Customer.populateUpdateContainerEntry();
End code	// end of the component, outside/closing the loop // Kashya commented out routines.Nav_Customer.populateDataContainerEntryParen
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false

Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In

Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.Nav_Customer.populateDataContainerEntryChildf //Kshyap commented out //routines.Nav_Customer.populateUpdateContainerEntry();
End code	// end of the component, outside/closing the loop // Kashya commented out routines.Nav_Customer.populateDataContainerEntryParen
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


**Schema for tJavaFlex\_4 :**

---



Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_5
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false


Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.Nav_Customer.populateMasterdataAttributeUpdat
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false

TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_5 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_6

Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.Nav_Customer.populateDataContainerEntry(CUS routines.Nav_Customer.populateUpdateContainerEntry();
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex\_6 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_7	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_7
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int a=1;

Main code	<pre>//row14.responseXML = ""; if(a==context.customer_bundle //row14.responseXML= routines.Nav_Customer.sendMasterData(context.movilizer context.movilizerVersion); //System.out.println(row14.respc //System.out.println(f); } a++; routines.Nav_Customer.reset</pre>
End code	<pre>// end of the component, outside/closing the loop if(((Integer)globalMap.get("tMSSqlOutput_1_NB_LINE")) != context.responseXML=routines.Nav_Customer.sendMaste context.movilizerVersion); routines.Nav_Customer.resetOb</pre>
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__ UNIQUE_NAME __
Hint format	<b>__ UNIQUE_NAME __</b> __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


#### Schema for tJavaFlex\_7 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------



responseXML	false	String			true	
-------------	-------	--------	--	--	------	--

Original Function Parameters:  
Component tJavaFlex

	UNIQUE NAME	tJavaFlex_8	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tJavaFlex_8
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false


Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.Nav_Customer.populateDataContainerEntryChildf //routines.Nav_Customer.populateUpdateContainerEntry();
End code	// end of the component, outside/closing the loop //routines.Nav_Customer.populateDataContainerEntryPare
TOS2.0	false

TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__ UNIQUE_NAME __
Hint format	<b>__ UNIQUE_NAME __</b> __ COMMENT __
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Schema for tJavaFlex\_8 :**

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

**Original Function Parameters:**  
**Component tJavaFlex**

	UNIQUE NAME	tJavaFlex_9	INPUT(S)	tMap_1
	LABEL	__ UNIQUE_NAME __	OUTPUT(S)	none

**Component Parameters:**

Properties	Values
------------	--------

Unique Name	tJavaFlex_9
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	<pre> routines.Nav_Customer.populateMasterdataUpdate(Maste context.group = MasterdataUpdate.Group; context.key=MasterdataUpdate.Key; </pre>
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row


Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJavaFlex\_9 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

#### Original Function Parameters:

Component tJavaRow

	UNIQUE NAME	tJavaRow_3	INPUT(S)	tSchemaComplianceCheck_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tWarn_1

#### Component Parameters:

Properties	Values
Unique Name	tJavaRow_3
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false

END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Code	//Code generated according to input schema and output schema context.ErrorMessage = input_row.errorMessage;

Import	//import java.util.List;
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJavaRow\_3 :


Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Customer_No	false	String	20		false	
Name	false	String	50		false	
Distribution_Method	false	int	10		false	
Payment_Terms_Code	false	String	10		false	
Payment_Term_Description	false	String	50		true	



Price_List_Group_Code	false	String	20		false	
Shipment_Method_Code	false	String	10		false	
Location_Code	false	String	10		false	
Customer_Buying_Group_Code	false	String	20		false	
Currency_Code	false	String	10		false	
Language_Code	false	String	10		false	
Customer_Price_Group	false	String	10		false	
Invoice_Discount_Code	false	String	20		false	
Blocked	false	int	10		false	
Invoice_Copies	false	int	10		false	
Bill_to_Customer_No	false	String	20		false	
Payment_Method_Code	false	String	10		false	
Store_Identification	false	String	20		false	
Address	false	String	50		false	
Address_2	false	String	50		false	
Latitude	false	BigDecimal	38	20	false	
Longitude	false	BigDecimal	38	20	false	

Post_Code	false	String	20		false	
City	false	String	30		false	
Country_Region_Code	false	String	10		false	
County	false	String	30		false	
Phone_No	false	String	30		false	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters:  
Component tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCommit_1

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false


Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	String foo = "bar";
Import	//import java.util.List;

Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:  
Component tJava

	UNIQUE NAME	tJava_2	INPUT(S)	tPrejob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBInput_1

Component Parameters:

Properties	Values
Unique Name	tJava_2
Component Name	tJava

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false


Number of parallel executions	2
	false
Code	context.ProcessTimeStamp=TalendDate.formatDate("yyyy-MM-dd HH:mm:ss", TalendDate.getCurrentDate()); System.out.println("\n\nPool: "+context.Pool+"\nProcessTimestamp: "+context.ProcessTimeStamp+"\n\n\n");
Import	//import java.util.List;
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tJava\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

**Original Function Parameters:**  
**Component** tLogCatcher

---

	UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">jlet_CustomLogging_NAV_1</a>

### Component Parameters:

Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false




Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tLogCatcher\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

#### Original Function Parameters:

Component tLogRow

	UNIQUE NAME	tLogRow_1	INPUT(S)	tContextLoad_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tLogRow_1
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	true
Table (print values in cells of a table)	false
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false


Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[[{SCHEMA_COLUMN=key, LENGTH=10}, {SCHEMA_COLUMN=value, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tLogRow\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
key	false	String	255		true	

value	false	String	255		true	
-------	-------	--------	-----	--	------	--

Original Function Parameters:  
Component tLogRow

	UNIQUE NAME	tLogRow_2	INPUT(S)	tMap_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tLogRow_2
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	false
Table (print values in cells of a table)	true
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "


Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[[{SCHEMA_COLUMN=CustomerNo, LENGTH=10}, {SCHEMA_COLUMN=Name, LENGTH=10}]]
Print content with log4j	true
Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for ij\_rejects :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

CustomerNo	false	String	255		false	
Name	false	String	255		false	

Original Function Parameters:  
Component tLogRow

	UNIQUE NAME	tLogRow_3	INPUT(S)	tFixedFlowInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFlowTolterate_1

Component Parameters:

Properties	Values
Unique Name	tLogRow_3
Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false



Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	true
Table (print values in cells of a table)	false
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false


Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[(SCHEMA_COLUMN=instance, LENGTH=10)]
Print content with log4j	true
Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tLogRow\_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

instance	false	String			true	
----------	-------	--------	--	--	------	--

**Original Function Parameters:**  
**Component tMSSqlInput**

	UNIQUE NAME	tMSSqlInput_1	INPUT(S)	none
	LABEL	Lkp_NAV_Customer	OUTPUT(S)	<a href="#">tMap_3</a>

**Component Parameters:**

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_1
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_1
Property Type	Built-In
Host	""
JDBC Provider	JTDS
Database Driver	MSSQL
Port	"1433"


Schema	""
Database	""
Username	""
Password	**
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"NAV_Customer"
Query Type	Built-In
Guess Schema	""
Query	"SELECT distinct CRC FROM NAV_Customer where CRC='"+context.CRC+'""
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	"noDatetimeStringSync=true"
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[[SCHEMA_COLUMN=CRC, TRIM=false]]

Label format	Lkp_NAV_Customer
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tMSSqlInput\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
CRC	true	Long	255		true	

#### Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	tFixedFlowInput_2
	LABEL	NAV_DSD_Customer	OUTPUT(S)	tFilterRow_122 , tFixedFlowInput_1

#### Component Parameters:

Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_2

Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
Use an existing connection	true
Component List	tDBConnection_2
Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	""
Query Type	Built-In



Guess Schema	""
Query	<pre>"select [Customer#] ,[Shipping#] ,[Name] ,[Address] ,[Address 2] ,[Region Code] ,[ZIP] ,[Phone] ,[Tax Area Code] ,[Shipping Address] ,[Shipping Address2] ,[Shipping Region Code] ,[Shipping City] ,[Shipping ZIP] ,[Shipping Phone] ,[Shipping Tax Area#] ,[Customer Buying Group Code] ,[Payment Terms Code] ,[Bill-to Customer No_] ,[Order Rule Group] ,[Credit Limit (LCY)] ,[Minimum Sales Order Amount] ,[Guaranteed Order] ,[Blocked] ,[Invoice Copies] ,[Payment Method Code] ,[Store Identification] ,[Retail Price Group] ,[Latitude] ,[Longitude] ,[Customer Invoice Service Type] ,[Discount %] ,[Starting Date] ,[End Date] ,[Current route] ,[Bin Code] ,[Home Location] ,[Facility Location] ,[SRCGC] from [vw_Nav_DSD_Customer Download_Details] "+context.whereClause</pre>
Specify a data source alias	false
Data source alias	""
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false

Trim column

```
{ {SCHEMA_COLUMN=Customer_, TRIM=false},  
{SCHEMA_COLUMN=Shipping_, TRIM=false},  
{SCHEMA_COLUMN=Name, TRIM=false},  
{SCHEMA_COLUMN=Address, TRIM=false},  
{SCHEMA_COLUMN=Address_2, TRIM=false},  
{SCHEMA_COLUMN=Region_Code, TRIM=false},  
{SCHEMA_COLUMN=ZIP, TRIM=false},  
{SCHEMA_COLUMN=Phone, TRIM=false},  
{SCHEMA_COLUMN=Tax_Area_Code, TRIM=false},  
{SCHEMA_COLUMN=Shipping_Address, TRIM=false},  
{SCHEMA_COLUMN=Shipping_Address2, TRIM=false},  
{SCHEMA_COLUMN=Shipping_Region_Code,  
TRIM=false}, {SCHEMA_COLUMN=Shipping_City,  
TRIM=false}, {SCHEMA_COLUMN=Shipping_ZIP,  
TRIM=false}, {SCHEMA_COLUMN=Shipping_Phone,  
TRIM=false},  
{SCHEMA_COLUMN=Shipping_Tax_Area_,  
TRIM=false},  
{SCHEMA_COLUMN=Customer_Buying_Group_Code,  
TRIM=false},  
{SCHEMA_COLUMN=Payment_Terms_Code,  
TRIM=false},  
{SCHEMA_COLUMN=Bill_to_Customer_No_,  
TRIM=false}, {SCHEMA_COLUMN=Order_Rule_Group,  
TRIM=false},  
{SCHEMA_COLUMN=Credit_Limit__LCY_,  
TRIM=false},  
{SCHEMA_COLUMN=Minimum_Sales_Order_Amount,  
TRIM=false}, {SCHEMA_COLUMN=Guaranteed_Order,  
TRIM=false}, {SCHEMA_COLUMN=Blocked,  
TRIM=false}, {SCHEMA_COLUMN=Invoice_Copies,  
TRIM=false},  
{SCHEMA_COLUMN=Payment_Method_Code,  
TRIM=false}, {SCHEMA_COLUMN=Store_Identification,  
TRIM=false},  
{SCHEMA_COLUMN=Retail_Price_Group,  
TRIM=false}, {SCHEMA_COLUMN=Latitude,  
TRIM=false}, {SCHEMA_COLUMN=Longitude,  
TRIM=false},  
{SCHEMA_COLUMN=Customer_Invoice_Service_Type,  
TRIM=false}, {SCHEMA_COLUMN=Discount__,  
TRIM=false}, {SCHEMA_COLUMN=Starting_Date,  
TRIM=false}, {SCHEMA_COLUMN=End_Date,  
TRIM=false}, {SCHEMA_COLUMN=Current_route,  
TRIM=false}, {SCHEMA_COLUMN=Bin_Code,  
TRIM=false}, {SCHEMA_COLUMN=Home_Location,  
TRIM=false}, {SCHEMA_COLUMN=Facility_Location,  
TRIM=false}, {SCHEMA_COLUMN=SRCGC,  
TRIM=false}]
```

Label format	NAV_DSD_Customer
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


#### Schema for tMSSqlInput\_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
Customer_	false	String	20		false	
Shipping_	false	String	10		false	
Name	false	String	50		false	
Address	false	String	50		false	
Address_2	false	String	50		false	
Region_Code	false	String	10		false	
ZIP	false	String	20		false	
Phone	false	String	30		false	

Tax_Area_Code	false	String	20		false	
Shipping_Address	false	String	50		false	
Shipping_Address2	false	String	50		false	
Shipping_Region_Code	false	String	10		false	
Shipping_City	false	String	30		false	
Shipping_ZIP	false	String	20		false	
Shipping_Phone	false	String	30		false	
Shipping_Tax_Area_	false	String	20		false	
Customer_Buying_Group_Code	false	String	20		false	
Payment_Terms_Code	false	String	10		false	
Bill_to_Customer_No_	false	String	20		false	
Order_Rule_Group	false	String	20		false	
Credit_Limit__LCY_	false	BigDecimal	38	20	false	
Minimum_Sales_Order_Amount	false	BigDecimal	38	20	false	
Guaranteed_Order	false	short	3		false	
Blocked	false	int	10		false	
Invoice_Copies	false	int	10		false	

Payment_Method_Code	false	String	10		false	
Store_Identification	false	String	20		false	
Retail_Price_Group	false	String	10		false	
Latitude	false	BigDecimal	38	20	false	
Longitude	false	BigDecimal	38	20	false	
Customer_Invoice_Service_Type	false	int	10		false	
Discount__	false	BigDecimal	38	20	false	
Starting_Date	false	java.util.Date	23	3	false	
End_Date	false	java.util.Date	23	3	false	
Current_route	false	String	10		false	
Bin_Code	false	String	20		false	
Home_Location	false	String	10		false	
Facility_Location	false	String	10		false	
SRCGC	false	String	20		true	

Original Function Parameters:  
Component tMSSqlOutput

	UNIQUE NAME	tMSSqlOutput_1	INPUT(S)	tMap_3 , tMSSqlInput_1

	LABEL	Delta	OUTPUT(S)	<a href="#">tMap_1</a>
--	-------	-------	-----------	------------------------

### Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_1
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	true
Component List	tDBConnection_1
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password

Table	"NAV_Customer"
Action on table	NONE
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	CRC
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"



Commit every	10000
Additional columns	[]
Use field options	false
	<pre> {{SCHEMA_COLUMN=CustomerNo, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=ShippingNo, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=Name, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=Address, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=Address_2, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=Region_Code, UPDATE_KEY=false DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=ZIP, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=Phone, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=Tax_Area_Code, UPDATE_KEY=fa DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=Shipping_Address, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Shipping_Address2, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Shipping_Region_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Shipping_City, UPDATE_KEY=false DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=Shipping_ZIP, UPDATE_KEY=false DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=Shipping_Phone, UPDATE_KEY=fa DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr {SCHEMA_COLUMN=Shipping_Tax_Area, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Customer_Buying_Group_Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Payment_Terms_Code, UPDATE_KEY=false, DELETE_KEY=false, </pre>

## Field options

```
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Bill_to_Customer_No,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Order_Rule_Group,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Credit_Limit_LCY,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Minimum_Sales_Order_Amount,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Guaranteed_Order,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Blocked, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr
{SCHEMA_COLUMN=Invoice_Copies, UPDATE_KEY=fals
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr
{SCHEMA_COLUMN=Payment_Method_Code,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Store_Identification,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Retail_Price_Group,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=Latitude, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr
{SCHEMA_COLUMN=Longitude, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr
{SCHEMA_COLUMN=Customer_Invoice_Service_Type,
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=DiscountPercent, UPDATE_KEY=fa
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr
{SCHEMA_COLUMN=ROUTE, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr
{SCHEMA_COLUMN=FACILITY, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr
{SCHEMA_COLUMN=LOCATION, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr
{SCHEMA_COLUMN=ROUTEGROUP, UPDATE_KEY=fal
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr
{SCHEMA_COLUMN=DB_CUST_WHOLESALE_PRICE_]
UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=CRC, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=tr
```

	{SCHEMA_COLUMN=ProcessTimeStamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}}
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	Delta
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tMSSqlOutput\_1 :


Column	Key	Type	Length	Precision	Nullable	Comment
CustomerNo	false	String	255		false	
ShippingNo	false	String	255		false	

Name	false	String	255		false	
Address	false	String	255		false	
Address_2	false	String	255		false	
Region_Code	false	String	255		false	
ZIP	false	String	255		false	
Phone	false	String	255		false	
Tax_Area_Code	false	String	255		false	
Shipping_Address	false	String	255		false	
Shipping_Address2	false	String	255		false	
Shipping_Region_Code	false	String	255		false	
Shipping_City	false	String	255		false	
Shipping_ZIP	false	String	255		false	
Shipping_Phone	false	String	255		false	
Shipping_Tax_Area	false	String	255		false	
Customer_Buying_Group_Code	false	String	255		false	
Payment_Terms_Code	false	String	255		false	
Bill_to_Customer_No	false	String	255		false	

Order_Rule_Group	false	String	255		false	
Credit_Limit_LCY	false	BigDecimal	38	6	false	
Minimum_Sales_Order_Amount	false	BigDecimal	38	6	false	
Guaranteed_Order	false	int	30		false	
Blocked	false	int	30		false	
Invoice_Copies	false	int	30		false	
Payment_Method_Code	false	String	255		false	
Store_Identification	false	String	255		false	
Retail_Price_Group	false	String	255		false	
Latitude	false	BigDecimal	38	6	false	
Longitude	false	BigDecimal	38	6	false	
Customer_Invoice_Service_Type	false	int	30		false	
DiscountPercent	false	BigDecimal	38	6	false	
ROUTE	false	String	255		false	
FACILITY	false	String	255		false	
LOCATION	false	String	255		false	
ROUTEGROUP	false	String	255		false	

DB_CUST_WHOLESALE_PRICE_TAB	false	Integer	4		true	
CRC	false	Long	30		true	
ProcessTimeStamp	false	String	255		true	

**Original Function Parameters:**  
**Component   tPostjob**

	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	<a href="#">tJava_1</a>


**Component Parameters:**

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:  
Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_2

Component Parameters:


Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true



DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:  
Component tSchemaComplianceCheck

	UNIQUE NAME	tSchemaComplianceCheck_1	INPUT(S)	tJavaFlex_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2 , tJavaRow_3

Component Parameters:

Properties	Values
Unique Name	tSchemaComplianceCheck_1
Component Name	tSchemaComplianceCheck
Version	0.101 (ALPHA)
Family	Data_Quality
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tSchemaComplianceCheck
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Base Schema	Built-In
Check all columns from schema	false
Custom defined	true
	{SCHEMA_COLUMN=Customer_, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Shipping_, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Name, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false},

{SCHEMA\_COLUMN=Address,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Address\_2,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Region\_Code,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=ZIP, SELECTED\_TYPE=String,  
DATEPATTERN=, NULLABLE=true,  
MAX\_LENGTH=false}, {SCHEMA\_COLUMN=Phone,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Tax\_Area\_Code,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Shipping\_Address,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Shipping\_Address2,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Shipping\_Region\_Code,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Shipping\_City,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Shipping\_ZIP,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Shipping\_Phone,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Shipping\_Tax\_Area\_,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Customer\_Buying\_Group\_Code,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Payment\_Terms\_Code,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Bill\_to\_Customer\_No\_,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Order\_Rule\_Group,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Credit\_Limit\_\_LCY\_,

## Checked Columns

SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Minimum\_Sales\_Order\_Amount,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Guaranteed\_Order,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Blocked,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Invoice\_Copies,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Payment\_Method\_Code,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Store\_Identification,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Retail\_Price\_Group,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Latitude,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Longitude,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Customer\_Invoice\_Service\_Type,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Discount\_\_,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Starting\_Date,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=End\_Date,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Current\_route,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Bin\_Code,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Home\_Location,  
SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},  
{SCHEMA\_COLUMN=Facility\_Location,

SELECTED\_TYPE=String, DATEPATTERN=,  
NULLABLE=true, MAX\_LENGTH=false},

	{SCHEMA_COLUMN=SRCGC, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}}
Use another schema for compliance check	false
Schema To Test	Built-In
Trim the excess content of column when length checking chosen and the length is great than defined length.	false
Schema	Built-In
Use Fastest Date check	false
Ignore TimeZone when check date	false
!!!EMPTY_IS_NULL.NAME!!!	false
Treat all empty string as NULL	true
	[[{SCHEMA_COLUMN=Customer_, EMPTY_NULL=false}, {SCHEMA_COLUMN=Shipping_, EMPTY_NULL=false}, {SCHEMA_COLUMN=Name, EMPTY_NULL=false}, {SCHEMA_COLUMN=Address, EMPTY_NULL=false}, {SCHEMA_COLUMN=Address_2, EMPTY_NULL=false}, {SCHEMA_COLUMN=Region_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=ZIP, EMPTY_NULL=false}, {SCHEMA_COLUMN=Phone, EMPTY_NULL=false}, {SCHEMA_COLUMN=Tax_Area_Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Shipping_Address, EMPTY_NULL=false}, {SCHEMA_COLUMN=Shipping_Address2, EMPTY_NULL=false}, {SCHEMA_COLUMN=Shipping_Region_Code, EMPTY_NULL=false},

Choose Column(s)

{SCHEMA\_COLUMN=Shipping\_City,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Shipping\_ZIP,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Shipping\_Phone,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Shipping\_Tax\_Area\_,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Customer\_Buying\_Group\_Code,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Payment\_Terms\_Code,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Bill\_to\_Customer\_No\_,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Order\_Rule\_Group,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Credit\_Limit\_\_LCY\_,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Minimum\_Sales\_Order\_Amount,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Guaranteed\_Order,  
EMPTY\_NULL=false}, {SCHEMA\_COLUMN=Blocked,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Invoice\_Copies,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Payment\_Method\_Code,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Store\_Identification,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Retail\_Price\_Group,  
EMPTY\_NULL=false}, {SCHEMA\_COLUMN=Latitude,  
EMPTY\_NULL=false}, {SCHEMA\_COLUMN=Longitude,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Customer\_Invoice\_Service\_Type,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Discount\_\_,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Starting\_Date,  
EMPTY\_NULL=false}, {SCHEMA\_COLUMN=End\_Date,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Current\_route,  
EMPTY\_NULL=false}, {SCHEMA\_COLUMN=Bin\_Code,  
EMPTY\_NULL=false},  
{SCHEMA\_COLUMN=Home\_Location,  
EMPTY\_NULL=false},



	{SCHEMA_COLUMN=Facility_Location, EMPTY_NULL=false}, {SCHEMA_COLUMN=SRCGC, EMPTY_NULL=false}]
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Schema for tSchemaComplianceCheck\_1 :**


Column	Key	Type	Length	Precision	Nullable	Comment
Customer_	false	String	20		false	
Shipping_	false	String	10		false	
Name	false	String	50		false	
Address	false	String	50		false	
Address_2	false	String	50		false	
Region_Code	false	String	10		false	
ZIP	false	String	20		false	

Phone	false	String	30		false	
Tax_Area_Code	false	String	20		false	
Shipping_Address	false	String	50		false	
Shipping_Address2	false	String	50		false	
Shipping_Region_Code	false	String	10		false	
Shipping_City	false	String	30		false	
Shipping_ZIP	false	String	20		false	
Shipping_Phone	false	String	30		false	
Shipping_Tax_Area_	false	String	20		false	
Customer_Buying_Group_Code	false	String	20		false	
Payment_Terms_Code	false	String	10		false	
Bill_to_Customer_No_	false	String	20		false	
Order_Rule_Group	false	String	20		false	
Credit_Limit__LCY_	false	BigDecimal	38	20	false	
Minimum_Sales_Order_Amount	false	BigDecimal	38	20	false	
Guaranteed_Order	false	short	3		false	
Blocked	false	int	10		false	

Invoice_Copies	false	int	10		false	
Payment_Method_Code	false	String	10		false	
Store_Identification	false	String	20		false	
Retail_Price_Group	false	String	10		false	
Latitude	false	BigDecimal	38	20	false	
Longitude	false	BigDecimal	38	20	false	
Customer_Invoice_Service_Type	false	int	10		false	
Discount__	false	BigDecimal	38	20	false	
Starting_Date	false	java.util.Date	23	3	false	
End_Date	false	java.util.Date	23	3	false	
Current_route	false	String	10		false	
Bin_Code	false	String	20		false	
Home_Location	false	String	10		false	
Facility_Location	false	String	10		false	
SRCGC	false	String	20		true	

**Original Function Parameters:**  
**Component tSetKeystore**

---

	UNIQUE NAME	tSetKeystore_1	INPUT(S)	tDBConnection_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none


### Component Parameters:

Properties	Values
Unique Name	tSetKeystore_1
Component Name	tSetKeystore
Version	0.102 (ALPHA)
Family	Internet
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	**
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	*****
Check server identity	true
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

**Original Function Parameters:**  
**Component   tWarn**

	UNIQUE NAME	tWarn_1	INPUT(S)	<a href="#">tJavaRow_3</a>
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

**Component Parameters:**

Properties	Values
Unique Name	tWarn_1
Component Name	tWarn
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	false
Startable	true

---

SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tWarn
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Warn message	context.ErrorMsg
Code	599
Priority	5

Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	<b>__UNIQUE_NAME__</b> __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for tWarn\_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
Company_ID	false	String	6		false	
Company_Name	false	String	27		false	
Customer_No	false	String	20		false	
Name	false	String	50		false	
Distribution_Method	false	int	10		false	
Payment_Terms_Code	false	String	10		false	
Payment_Term_Description	false	String	50		true	




Price_List_Group_Code	false	String	20		false	
Shipment_Method_Code	false	String	10		false	
Location_Code	false	String	10		false	
Customer_Buying_Group_Code	false	String	20		false	
Currency_Code	false	String	10		false	
Language_Code	false	String	10		false	
Customer_Price_Group	false	String	10		false	
Invoice_Discount_Code	false	String	20		false	
Blocked	false	int	10		false	
Invoice_Copies	false	int	10		false	
Bill_to_Customer_No	false	String	20		false	
Payment_Method_Code	false	String	10		false	
Store_Identification	false	String	20		false	
Address	false	String	50		false	
Address_2	false	String	50		false	
Latitude	false	BigDecimal	38	20	false	
Longitude	false	BigDecimal	38	20	false	

Post_Code	false	String	20		false	
City	false	String	30		false	
Country_Region_Code	false	String	10		false	
County	false	String	30		false	
Phone_No	false	String	30		false	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

#### Original Function Parameters:

#### Component jlet\_CustomLogging\_NAV

	UNIQUE NAME	jlet_CustomLogging_NAV_1	INPUT(S)	<a href="#">tLogCatcher_1</a>
	LABEL	jlet_CustomLogging_NAV	OUTPUT(S)	none

#### Component Parameters:


Properties	Values
Version	Latest
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code
Show Information	false
Comment	

#### Schema for jlet\_CustomLogging\_NAV\_1 :

---

Column	Key	Type	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

**Component**
tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tMSSqlOutput_1 , tDBInput_2

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJavaFlex_13  tJavaFlex_5, tJavaFlex_9, tJavaFlex_10, tJavaFlex_12, tJavaFlex_8, tJavaFlex_3, tJavaFlex_4, tJavaFlex_11, tJavaFlex_6, tJavaFlex_7
--	-------	-----------------	-----------	---

### Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

**Mapper table for tMap\_1 ( input ):**

**Mapper table Properties( row90 ):**

Properties	Values
Name	row90
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row90 ):**

Name	Type	Expression	isNullable
CustomerNo	String		false
ShippingNo	String		false
Name	String		false
Address	String		false
Address_2	String		false
Region_Code	String		false
ZIP	String		false

Phone	String		false
Tax_Area_Code	String		false
Shipping_Address	String		false
Shipping_Address2	String		false
Shipping_Region_Code	String		false
Shipping_City	String		false
Shipping_ZIP	String		false
Shipping_Phone	String		false
Shipping_Tax_Area	String		false
Customer_Buying_Group_Code	String		false
Payment_Terms_Code	String		false
Bill_to_Customer_No	String		false
Order_Rule_Group	String		false
Credit_Limit_LCY	BigDecimal		false
Minimum_Sales_Order_Amount	BigDecimal		false
Guaranteed_Order	int		false
Blocked	int		false

Invoice_Copies	int		false
Payment_Method_Code	String		false
Store_Identification	String		false
Retail_Price_Group	String		false
Latitude	BigDecimal		false
Longitude	BigDecimal		false
Customer_Invoice_Service_Type	int		false
DiscountPercent	BigDecimal		false
ROUTE	String		false
FACILITY	String		false
LOCATION	String		false
ROUTEGROUP	String		false
DB_CUST_WHOLESALE_PRICE_TAB	Integer		true
CRC	Long		true
ProcessTimeStamp	String		true

**Constraint Table Entries( row90 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_1 ( output ):**

**Mapper table Properties( masterdataPoolUpdate ):**

Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( masterdataPoolUpdate ):**

Name	Type	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

**Constraint Table Entries( masterdataPoolUpdate ):**

Name	Type	Expression	isNullable
------	------	------------	------------



**Mapper table Properties( MasterDataAttributeUpdate ):**

Properties	Values
Name	MasterDataAttributeUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( MasterDataAttributeUpdate ):**

Name	Type	Expression	isNullable
Pool	String	context.Pool	true
Key	String	Var.ShipppingNo	true

**Constraint Table Entries( MasterDataAttributeUpdate ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( MasterdataUpdate ):**

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( MasterdataUpdate ):**

Name	Type	Expression	isNullable
Group	String	"DEFAULT"	true
Key	String	Var.ShipppingNo	true
Description	String	row90.Name	true
mafAppSpace	String	"MD_GEN"	true
Filter1	String	Var.DB_CUST_CUST_NUMBER	true
Filter2	String	Var.Filter2	true

**Constraint Table Entries( MasterdataUpdate ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( attributeUpdate ):**

Properties	Values
Name	attributeUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( attributeUpdate ):**

Name	Type	Expression	isNullable
Name	String	context.AttName	true
UseIndex	Boolean	context.UseIndex	true

**Constraint Table Entries( attributeUpdate ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( AttributeEntry ):**

Properties	Values
Name	AttributeEntry
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( AttributeEntry ):**

Name	Type	Expression	isNullable
PROFITCENTER	String	Var.ProfitCenter	true
FACILITY	String	Var.Facility	true
LOCATION	String	Var.Location	true

**Constraint Table Entries( AttributeEntry ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( CONTACT ):**

Properties	Values
Name	CONTACT
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( CONTACT ):**

Name	Type	Expression	isNullable
CONTACT	String	Var.ShippppingNo	true
FIRSTNAME	String		true
LASTNAME	String		true
JOBTITLE	String		true
PHONENR	String	row90.Phone	true
MOBILEPHONENR	String		true
COMPANYNAME	String	row90.Name	true

COMPANYNR	String		true
ADDRESS	String		true
ADDRESS2	String		true
POSTCODE	String		true
COUNTY	String		true
CITY	String		true
COUNTRYREGIONCODE	String		true
FAXNO	String		true
MAIL	String		true
EXTENSION	String		true
BUSINESSRELATIONCODE	String		true

**Constraint Table Entries( CONTACT ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( ADDR ):**

Properties	Values
Name	ADDR
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( ADDR ):**

Name	Type	Expression	isNullable
ADDRESS	String	row90.Address_2	true
ADDRESS2	String	row90.Address	true
LATITUDE	String	row90.Latitude + ""	true
LONGITUDE	String	row90.Longitude+ ""	true
POSTCODE	String	row90.ZIP	true
CITY	String		true
COUNTRY	String	row90.Region_Code	true
COUNTY	String		true
PHONENR	String	row90.Phone	true

**Constraint Table Entries( ADDR ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( TAX ):**



Properties	Values
Name	TAX
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( TAX ):**

Name	Type	Expression	isNullable
TAX	String	"1"	true
TAXCATEGORY	String	"UTX2"	true
TAXCLASSIFICATION	String	"1"	true
TAXEXEMPTNO	String		true
TAXAREACODE	String	row90.Tax_Area_Code	true
JURISDICTIONCODEFED	String		true
JURISDICTIONCODESTATE	String	row90.Shipping_Tax_Area	true
JURISDICTIONCODEMUNCOUNTY	String		true
JURISDICTIONCODEMUNCITY	String		true

**Constraint Table Entries( TAX ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( MD\_GROUPS ):**

Properties	Values
Name	MD_GROUPS
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( MD\_GROUPS ):**

Name	Type	Expression	isNullable
MD_GROUPS	String	Var.Filter2	true

**Constraint Table Entries( MD\_GROUPS ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( CUST ):**

Properties	Values
Name	CUST
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( CUST ):**

Name	Type	Expression
CUSTNO	String	Var.ShipppingNo
BILLTO	String	Var.Bill_to_Customer_No
SOLDTO	String	Var.DB_CUST_CUST_NUMBER
ACCESSEQUENCE	String	"43210"
SBTCUSTOMER	String	
REGION	String	Var.Group
CHAINPRICE	String	(row90.DB_CUST_WHOLESALE_PRICE_TAB > 999 && row90.DB_CUST_WHOLESALE_PRICE_TAB < 10000)? String.format("%04d",row90.DB_CUST_WHOLESALE_PI

PRICEGROUP	String	"0000"
ZONEPRICE	String	(row90.DB_CUST_WHOLESALE_PRICE_TAB > 1 && row90.DB_CUST_WHOLESALE_PRICE_TAB < 100)? String.format("%04d",row90.DB_CUST_WHOLESALE_PI
NAME	String	row90.Name
SENDDOCUMENTEMAIL	String	
DOCUMENTEMAIL	String	
PAYTERMS	String	row90.Payment_Terms_Code
VOLUMEDISCOUNT	String	
RETURNFLAG	Boolean	
AUTHPRODUCTTABLE	String	row90.Order_Rule_Group
SHIPCONDITION	String	
PRINTWHOLESALEPRICE	Boolean	
CREDITLIMIT	BigDecimal	row90.Credit_Limit_LCY
MINSALESAMOUNT	String	row90.Minimum_Sales_Order_Amount+""
DAYOFDELIVERY	String	"Sunday, Monday, Tuesday, Wednesday, Thursday, Friday
CUSTTYPE	String	row90.Customer_Buying_Group_Code
FIXED	Boolean	r_HarvestRoutineLoop.Boolean_Convert_Integer(row90.C

BULK	String	
LANGUAGE	String	"EN"
ORDERCONTROLGROUP	String	"04"
INVOICEDISCCODE	String	
BLOCKED	Boolean	r_HarvestRoutineLoop.Boolean_Convert_Integer(row90.E
INVOICECOPY	Integer	row90.Invoice_Copies
PAYMETHOD	String	row90.Payment_Method_Code
DELIVERYTYPE	String	
RETURNINVOICESFLAG	String	"false"
STOREID	String	row90.Store_Identification
RETAILPRICE	String	row90.Retail_Price_Group
DEXCUSTOMER	String	Var.DB_CUST_CUST_NUMBER
DEXDUNS	Integer	765432900
DEXCOMMID	String	"1111111111"
DEXSTORENUMBER	Integer	716551
DEXVERSION	String	"005010UCS"
DEXCOMMMODE	Integer	2

DEXCOMMMATCHINGMODE	Integer	7
DEXPRODUCTDESCRIPTION	String	"true"
DEXACKFLAG	String	"true"
SIGNATUREREQUIRED	String	"true"
ONHANDSFLAG	Integer	
SPLITINVOICE	String	"3"
SERVICEHOURS	String	Var.ServiceHours
PRINTRETAIL	String	
PRINTUPC	String	
POREQUIRED	String	
PAYREQUIRED	String	"2"
ACCEPTCHECKS	String	"true"

**Constraint Table Entries( CUST ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( sendMasterData ):**

Properties	Values
Name	sendMasterData
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( sendMasterData ):**

Name	Type	Expression	isNullable
newColumn	String		true

**Constraint Table Entries( sendMasterData ):**

Name	Type	Expression	isNullable

**Mapper table for tMap\_1 ( var ):**

**Mapper table Properties( Var ):**



Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


**Metadata Table Entries( Var ):**

Name	Type	Expression	isNullable
DB_CUST_CUST_NUMBER	String	row90.CustomerNo != null ? "000" + row90.CustomerNo: row90.CustomerNo	false
ShippingNo	String	row90.ShippingNo == null    row90.ShippingNo.isEmpty() ? "EMPTY" : "000" + row90.ShippingNo	false
Bill_to_Customer_No	String	row90.Bill_to_Customer_No == null    row90.Bill_to_Customer_No.isEmpty() ? "EMPTY" : "000" + row90.Bill_to_Customer_No	false
ProfitCenter	String	context.instance.substring(4,6)	false
RouteGroup	String	row90.ROUTEGROUP	false
Facility	String	row90.FACILITY	false
Location	String	row90.LOCATION	false
Route	String	row90.ROUTE==null    row90.ROUTE.isEmpty()?"EMPTY": "00000" + row90.ROUTE.substring(1)	false
Group	String	Var.ProfitCenter+ "_" + Var.Facility+"_" + Var.Location + "_" + Var.RouteGroup	false
ServiceHours	String	"6:00am-9:00am"	false
Filter2	String	Var.Route	false

#### Constraint Table Entries( Var ):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tMSSqlOutput_1 , tDBInput_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tAddCRCRow_1 , tLogRow_2

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap\_2 ( input ):  
Mapper table Properties( row2 ):

Properties	Values
Name	row2
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row2 ):**

Name	Type	Expression	isNullable
Customer_	String		false
Shipping_	String		false
Name	String		false
Address	String		false
Address_2	String		false
Region_Code	String		false
ZIP	String		false

Phone	String		false
Tax_Area_Code	String		false
Shipping_Address	String		false
Shipping_Address2	String		false
Shipping_Region_Code	String		false
Shipping_City	String		false
Shipping_ZIP	String		false
Shipping_Phone	String		false
Shipping_Tax_Area_	String		false
Customer_Buying_Group_Code	String		false
Payment_Terms_Code	String		false
Bill_to_Customer_No_	String		false
Order_Rule_Group	String		false
Credit_Limit__LCY_	BigDecimal		false
Minimum_Sales_Order_Amount	BigDecimal		false
Guaranteed_Order	short		false
Blocked	int		false

Invoice_Copies	int		false
Payment_Method_Code	String		false
Store_Identification	String		false
Retail_Price_Group	String		false
Latitude	BigDecimal		false
Longitude	BigDecimal		false
Customer_Invoice_Service_Type	int		false
Discount__	BigDecimal		false
Starting_Date	java.util.Date		false
End_Date	java.util.Date		false
Current_route	String		false
Bin_Code	String		false
Home_Location	String		false
Facility_Location	String		false
SRCGC	String		true

**Constraint Table Entries( row2 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( row17 ):**

Properties	Values
Name	row17
Matching-mode	FIRST_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row17 ):**

Name	Type	Expression
DB_CUST_CUST_NUMBER	String	row2.Shipping_== null?"emptyvalue": row2.Shipping_.contains("-")? row2.Shipping_.replace("D","").substring(0, row2.Shipping_.indexOf("-")-1):row2.Shipping_.replac
DB_CUST_WHOLESALE_PRICE_TAB	Integer	
Instance	String	
DB_CUST_CUST_NUMBER_Original	Integer	

**Constraint Table Entries( row17 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_2 ( output ):**  
**Mapper table Properties( out ):**

Properties	Values
Name	out
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( out ):**

Name	Type	Expression	isMinimized
CustomerNo	String	row2.Customer_	false
ShippingNo	String	row2.Shipping_	false
Name	String	row2.Name	false
Address	String	row2.Address	false
Address_2	String	row2.Address_2	false
Region_Code	String	row2.Region_Code	false
ZIP	String	row2.ZIP	false



Phone	String	row2.Phone	false
Tax_Area_Code	String	row2.Tax_Area_Code	false
Shipping_Address	String	row2.Shipping_Address	false
Shipping_Address2	String	row2.Shipping_Address2	false
Shipping_Region_Code	String	row2.Shipping_Region_Code	false
Shipping_City	String	row2.Shipping_City	false
Shipping_ZIP	String	row2.Shipping_ZIP	false
Shipping_Phone	String	row2.Shipping_Phone	false
Shipping_Tax_Area	String		false
Customer_Buying_Group_Code	String	row2.Customer_Buying_Group_Code	false
Payment_Terms_Code	String	row2.Payment_Terms_Code	false
Bill_to_Customer_No	String		false
Order_Rule_Group	String	row2.Order_Rule_Group	false
Credit_Limit_LCY	BigDecimal		false
Minimum_Sales_Order_Amount	BigDecimal	row2.Minimum_Sales_Order_Amount	false
Guaranteed_Order	int	row2.Guaranteed_Order	false
Blocked	int	row2.Blocked	false

Invoice_Copies	int	row2.Invoice_Copies	false
Payment_Method_Code	String	row2.Payment_Method_Code	false
Store_Identification	String	row2.Store_Identification	false
Retail_Price_Group	String	row2.Retail_Price_Group	false
Latitude	BigDecimal	row2.Latitude	false
Longitude	BigDecimal	row2.Longitude	false
Customer_Invoice_Service_Type	int	row2.Customer_Invoice_Service_Type	false
DiscountPercent	BigDecimal		false
ROUTE	String	row2.Current_route	false
FACILITY	String	row2.Facility_Location	false
LOCATION	String	row2.Home_Location	false
ROUTEGROUP	String	row2.Bin_Code	false
DB_CUST_WHOLESALE_PRICE_TAB	Integer	row17.DB_CUST_WHOLESALE_PRICE_TAB	true

**Constraint Table Entries( out ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table Properties( ij\_rejects ):**

Properties	Values
Name	ij_rejects
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	true
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( ij\_rejects ):**

Name	Type	Expression	isNullable
CustomerNo	String	row2.CustomerNo	false
Name	String	row2.Name	false

**Constraint Table Entries( ij\_rejects ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_2 ( var ):**

Mapper table Properties( Var ):

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries( Var ):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries( Var ):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tMap_3 , tMSSqlInput_1
	LABEL	Lookup Existing records	OUTPUT(S)	tMSSqlOutput_1

Component Parameters:

---

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

**Mapper table for tMap\_3 ( input ):**

**Mapper table Properties( row11 ):**

Properties	Values
Name	row11
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( row11 ):**

Name	Type	Expression	isNullable
CustomerNo	String		false
ShippingNo	String		false
Name	String		false
Address	String		false
Address_2	String		false
Region_Code	String		false
ZIP	String		false

Phone	String		false
Tax_Area_Code	String		false
Shipping_Address	String		false
Shipping_Address2	String		false
Shipping_Region_Code	String		false
Shipping_City	String		false
Shipping_ZIP	String		false
Shipping_Phone	String		false
Shipping_Tax_Area	String		false
Customer_Buying_Group_Code	String		false
Payment_Terms_Code	String		false
Bill_to_Customer_No	String		false
Order_Rule_Group	String		false
Credit_Limit_LCY	BigDecimal		false
Minimum_Sales_Order_Amount	BigDecimal		false
Guaranteed_Order	int		false
Blocked	int		false

Invoice_Copies	int		false
Payment_Method_Code	String		false
Store_Identification	String		false
Retail_Price_Group	String		false
Latitude	BigDecimal		false
Longitude	BigDecimal		false
Customer_Invoice_Service_Type	int		false
DiscountPercent	BigDecimal		false
ROUTE	String		false
FACILITY	String		false
LOCATION	String		false
ROUTEGROUP	String		false
DB_CUST_WHOLESALE_PRICE_TAB	Integer		true
CRC	Long		true

**Constraint Table Entries( row11 ):**

Name	Type	Expression	isNullable
------	------	------------	------------



**Mapper table Properties( row4 ):**

Properties	Values
Name	row4
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

**Metadata Table Entries( row4 ):**

Name	Type	Expression	isNullable
CRC	Long	row11.CRC	true

**Constraint Table Entries( row4 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_3 ( output ):**  
**Mapper table Properties( customer\_out2 ):**

Properties	Values
Name	customer_out2
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	true
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( customer\_out2 ):**

Name	Type	Expression	isN
CustomerNo	String	row11.CustomerNo	false
ShippingNo	String	row11.ShippingNo	false
Name	String	row11.Name	false
Address	String	row11.Address	false
Address_2	String	row11.Address_2	false
Region_Code	String	row11.Region_Code	false
ZIP	String	row11.ZIP	false

Phone	String	row11.Phone	false
Tax_Area_Code	String	row11.Tax_Area_Code	false
Shipping_Address	String	row11.Shipping_Address	false
Shipping_Address2	String	row11.Shipping_Address2	false
Shipping_Region_Code	String	row11.Shipping_Region_Code	false
Shipping_City	String	row11.Shipping_City	false
Shipping_ZIP	String	row11.Shipping_ZIP	false
Shipping_Phone	String	row11.Shipping_Phone	false
Shipping_Tax_Area	String	row11.Shipping_Tax_Area	false
Customer_Buying_Group_Code	String	row11.Customer_Buying_Group_Code	false
Payment_Terms_Code	String	row11.Payment_Terms_Code	false
Bill_to_Customer_No	String	row11.Bill_to_Customer_No	false
Order_Rule_Group	String	row11.Order_Rule_Group	false
Credit_Limit_LCY	BigDecimal	row11.Credit_Limit_LCY	false
Minimum_Sales_Order_Amount	BigDecimal	row11.Minimum_Sales_Order_Amount	false
Guaranteed_Order	int	row11.Guaranteed_Order	false
Blocked	int	row11.Blocked	false

Invoice_Copies	int	row11.Invoice_Copies	false
Payment_Method_Code	String	row11.Payment_Method_Code	false
Store_Identification	String	row11.Store_Identification	false
Retail_Price_Group	String	row11.Retail_Price_Group	false
Latitude	BigDecimal	row11.Latitude	false
Longitude	BigDecimal	row11.Longitude	false
Customer_Invoice_Service_Type	int	row11.Customer_Invoice_Service_Type	false
DiscountPercent	BigDecimal	row11.DiscountPercent	false
ROUTE	String	row11.ROUTE	false
FACILITY	String	row11.FACILITY	false
LOCATION	String	row11.LOCATION	false
ROUTEGROUP	String	row11.ROUTEGROUP	false
DB_CUST_WHOLESALE_PRICE_TAB	Integer	row11.DB_CUST_WHOLESALE_PRICE_TAB	true
CRC	Long	row11.CRC	true
ProcessTimeStamp	String	context.ProcessTimeStamp	true

**Constraint Table Entries( customer\_out2 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_3 ( var ):**

Mapper table Properties( Var ):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries( Var ):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries( Var ):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_4	INPUT(S)	tFileInputPositional_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBOutput_1

Component Parameters:

Properties	Values
------------	--------

---

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

**Mapper table for tMap\_4 ( input ):**

**Mapper table Properties( xrow1 ):**

Properties	Values
Name	xrow1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( xrow1 ):**

Name	Type	Expression	isNullable
DB_CUST_CUST_NUMBER	Integer		true
DB_CUST_SHIP_NAME	String		true
DB_CUST_SHIP_ADDR2	String		true
DB_CUST_SHIP_ADDR3	String		true
DB_CUST_SHIP_CITY	String		true
DB_CUST_SHIP_STATE	String		true
DB_CUST_SHIP_ZIP_CODE	String		true

DB_CUST_SHIP_AREA_CODE	String		true
DB_CUST_SHIP_PHONE_3	String		true
DB_CUST_SHIP_PHONE_4	String		true
DB_CUST_ACCOUNT_TYPE	Integer		true
DB_CUST_ACTIVE_SWITCH	String		true
DB_CUST_PAYMENT_TYPE	String		true
DB_CUST_WHOLESALE_PRICE_TAB	Integer		true
DB_CUST_RETAIL_PRICE_TABLE	Integer		true
DB_CUST_DELIVERY_DAYS	String		true
DB_CUST_CHAIN_NUMBER	Integer		true
DB_CUST_AR_NUMBER	Integer		true
DB_CUST_GROUP_CODE	String		true
DB_CUST_COMM_TYPE	String		true
DB_CUST_COMP_BID_SHR_TABLE	Integer		true
DB_CUST_DSTB_BID_SHR_TABLE	Integer		true
DB_CUST_LBS_PRICE_TABLE	Integer		true
DB_CUST_STORE_NUMBER	String		true



DB_CUST_ROUTE_NUMBER	Integer		true
DB_CUST_BILL_NAME	String		true
DB_CUST_BILL_ADDR2	String		true
DB_CUST_BILL_ADDR3	String		true
DB_CUST_BILL_CITY	String		true
DB_CUST_BILL_STATE	String		true
DB_CUST_BILL_ZIP_CODE	String		true
DB_CUST_BILL_AREA_CODE	Integer		true
DB_CUST_BILL_PHONE_3	Integer		true
DB_CUST_BILL_PHONE_4	Integer		true
DB_CUST_PRINT_INVOICE	String		true
DB_CUST_NO_OF_INVOICE_COPIES	Integer		true
DB_CUST_PAGE_PER_CATG	String		true
DB_CUST_SUBTOTAL_CATG	String		true
DB_CUST_PRINT_CREDIT_INVOICE	String		true
DB_CUST_MESSAGE_1	String		true
DB_CUST_MESSAGE_2	String		true

DB_CUST_CAT_DISC_1	Float		true
DB_CUST_CAT_DISC_2	Float		true
DB_CUST_CAT_DISC_3	Float		true
DB_CUST_CAT_DISC_4	Float		true
DB_CUST_CAT_DISC_5	Float		true
DB_CUST_CAT_DISC_6	Float		true
DB_CUST_CAT_DISC_7	Float		true
DB_CUST_CAT_DISC_8	Float		true
DB_CUST_CAT_DISC_9	Float		true
DB_CUST_CAT_DISC_10	Float		true
DB_CUST_PRINT_WHSLE_PRICE	String		true
DB_CUST_BALANCE_METHOD	String		true
DB_CUST_TERMS_DISC_PERCENT	Float		true
DB_CUST_TERMS_DISC_DAYS	Integer		true
DB_CUST_TERMS_NET_DAYS	Integer		true
DB_CUST_CREDIT_LIMIT	Integer		true
DB_CUST_BILLING_FREQ	String		true

DB_CUST_SALES_TAX_CODE	String		true
DB_CUST_UNIT_BILLING	String		true
DB_CUST_PRINT_STATEMENTS	String		true
DB_CUST_UNIT_HISTORY	String		true
DB_CUST_ADDITIONAL_DISC	String		true
DB_CUST_LBS_BILLING	String		true
DB_CUST_LAST_PMT_DATE	String		true
DB_CUST_LAST_PMT_AMOUNT	Float		true
DB_CUST_CHECK_AUTH_PROD_SW	String		true
DB_CUST_STOP_NO	String		true
DB_CUST_TAX_RATE	Float		true
DB_CUST_CONTRACT_POINTER	String		true
DB_CUST_STOP_INV_DISC_PCT	Float		true
DB_CUST_ONHAND_METHOD	Integer		true
DB_CUST_PRINT_UPC	String		true
DB_CUST_PRINT_PRICE_CTRL	Integer		true
DB_CUST_PRINT_RETAIL	String		true

DB_CUST_STAMP_SIG_SWITCH	Integer		true
DB_CUST_RETURN_CTRL	Integer		true
DB_CUST_AUTH_PROD	Integer		true
DB_CUST_INV_PRICE_GROUP	String		true
DB_CUST_BALANCE_CORRECTION	Float		true
DB_CUST_REDIST_CTRL	Integer		true
DB_CUST_PICK_LIST_FLAG	String		true
DB_CUST_PREORDER_FLAG	String		true
DB_CUST_GST_EXEMPT_FLAG	String		true
DB_CUST_DEX_FLAG	String		true
DB_CUST_PRINT_MARGIN_CTRL	Integer		true
DB_CUST_FAMILY_GROUP_CODE	String		true
DB_CUST_MASTER_CHAIN	Integer		true
DB_CUST_COMM_TABLE	String		true
DB_CUST_FORECASTING_TABLE	Integer		true
DB_CUST_ORDER_ADJ_CONTROL	String		true
DB_CUST_BALANCE_TYPE	String		true

DB_CUST_AUTH_PROD_TBL	Integer		true
DB_CUST_STATEMENT_GROUP	Integer		true
DB_CUST_AR_CUST_SW	String		true
DB_CUST_CHAIN_CUST_SW	String		true
DB_CUST_MAST_CHAIN_CUST_SW	String		true
DB_CUST_CONTACT_PERSON	String		true
DB_CUST_SH_FAX_AREA_CODE	Integer		true
DB_CUST_SH_FAX_PHONE_3	Integer		true
DB_CUST_SH_FAX_PHONE_4	Integer		true
DB_CUST_BL_FAX_AREA_CODE	Integer		true
DB_CUST_BL_FAX_PHONE_3	Integer		true
DB_CUST_BL_FAX_PHONE_4	Integer		true
DB_CUST_INACTIVE_DATE	String		true
DB_CUST_ACCOUNT_DATE	String		true
OCCURS_7_TIMES	String		true
DB_CUST_SS_UNIT_CASE	String		true
DB_CUST_STALE_PRICING_SW	String		true

DB_CUST_PREVIOUS_LINK	String		true
DB_CUST_LOAD_SEQUENCE	Integer		true
DB_CUST_INV_ACCNT_NUMBER	Integer		true
DB_CUST_ESCL_DISC_TYPE	Integer		true
DB_CUST_SETTL_COMM_RTE_NUM	Integer		true
DB_CUST_IVR_FLAG	String		true
DB_CUST_IVR_PASSWORD	String		true
DB_CUST_SALES_MANAGER	Integer		true
DB_CUST_SALES_MANAGER_DESC	String		true
DB_CUST_SALES_REP	Integer		true
DB_CUST_SALES_REP_DESC	String		true
DB_CUST_BUYING_GROUP_CODE	String		true
DB_CUST_STOP_RATE	Float		true
DB_CUST_LITRE_RATE	Float		true
DB_CUST_DEPT_INVOICE	Integer		true
DB_CUST_LBS_TABLE	Integer		true
DB_CUST_COMM_TABLE_NEW	Integer		true

DB_CUST_RET_CAP_TABLE	Integer		true
DB_SALES_MODE_FLAG	Integer		true
DB_CUST_LAST_SERVICE_DATE	String		true
DB_CUST_LANGUAGE_CODE	Integer		true
DB_CUST_DEI_ACTIVE_SW	Integer		true
DB_CUST_EDT_TRANS_SET_1	Integer		true
DB_CUST_EDT_TRANS_SET_2	Integer		true
DB_CUST_EDT_PARTNER_DUNS_NO	Integer		true
DB_CUST_EDT_PARTNER_SUFFIX	Integer		true
DB_CUST_EDT_PARTNER_TRADING_ID	String		true
DB_CUST_EDT_PARTNER_ID_CODE	String		true
DB_CUST_EDT_PARTNER_ID	String		true
DB_RETAIL_DISC_TABLE	Integer		true
DB_MERCHANDISER_ACCT	String		true
DB_DROP_ROUTE_NUMBER	Integer		true
DB_MIN_ORDER_CONTROL_TABLE	Integer		true
DB_CUST_INV_ALT_NUMBER	String		true

DB_CUST_ANTI_DISC_TABLE	Integer		true
DB_CUST_CPART_PRICE_TABLE	Integer		true
DB_CUST_END_OF_RECORD	String		true

**Constraint Table Entries( xrow1 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_4 ( output ):**



**Mapper table Properties( out12 ):**

Properties	Values
Name	out12
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( out12 ):**

Name	Type	Expression	isNullable
DB_CUST_CUST_NUMBER	String	Var.DB_CUST_CUST_NUMBER	false
DB_CUST_WHOLESALE_PRICE_TAB	Integer	xrow1.DB_CUST_WHOLESALE_PRICE_TAB	true
Instance	String	(String)globalMap.get("row16.instance")	true
DB_CUST_CUST_NUMBER_Original	Integer	xrow1.DB_CUST_CUST_NUMBER	true

**Constraint Table Entries( out12 ):**

Name	Type	Expression	isNullable
------	------	------------	------------

**Mapper table for tMap\_4 ( var ):**

**Mapper table Properties( Var ):**

Properties	Values
Name	Var
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( Var ):**

Name	Type	Expression
DB_CUST_CUST_NUMBER	String	((String)globalMap.get("row16.instance")).replace("CUST0","")+xr

**Constraint Table Entries( Var ):**

Name	Type	Expression	isN
------	------	------------	-----