

Jobs

Generated by Talend Data Management Platform

Project Name	NAV_MOV	GENERATION DATE	Dec 17, 2019 1:04:55 PM
AUTHOR		Talend Data Management Platform VERSION	7.0.1.20180411_1414

Summary

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description

Project Description


Properties	Values
Name	NAV_MOV
Language	java

Description	

Description

Properties	Values
Name	j_NavExport_010_Vehicle
Author	
Version	0.1
Purpose	
Status	
Description	
Creation	Jul 6, 2016 10:48:02 AM
Modification	Nov 15, 2019 10:12:16 AM

Preview Picture

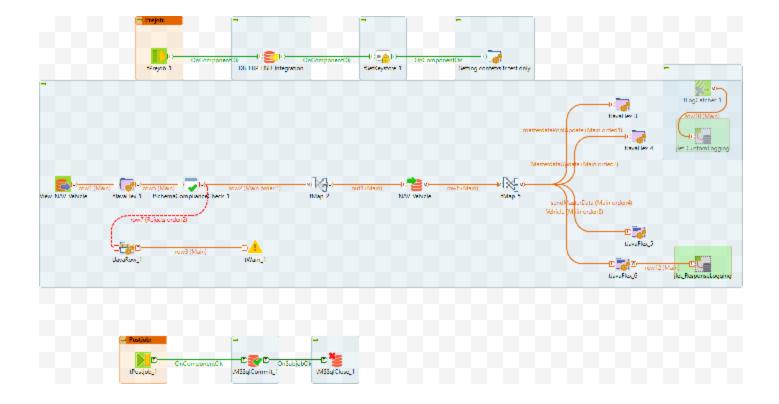

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false

Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt
source	source?	false
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false
Pool	Pool?	false

group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
NAV_Vehicle	NAV_Vehicle?	false
viewname	viewname?	false
table_view	table_view?	false
database	database?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false
message2	message2?	false

movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false
DB_AMC_Schema	DB_AMC_Schema?	false

DB_AMC_Server?	false
DB_ERP_DSD_Integration_AdditionalParams?	false
DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server?	false
DB_Navision_AdditionalParams?	false
DB_Navision_Database?	false
DB_Navision_Login?	false
DB_Navision_Password?	false
DB_Navision_Port?	false
DB_Navision_Schema?	false
DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database?	false
	DB_ERP_DSD_Integration_AdditionalParams? DB_ERP_DSD_Integration_Database? DB_ERP_DSD_Integration_Login? DB_ERP_DSD_Integration_Password? DB_ERP_DSD_Integration_Port? DB_ERP_DSD_Integration_Schema? DB_ERP_DSD_Integration_Server? DB_Navision_AdditionalParams? DB_Navision_Database? DB_Navision_Login? DB_Navision_Password? DB_Navision_Port? DB_Navision_Schema? DB_Navision_Schema? DB_Navision_Server? DB_Talend_Context_AdditionalParams?

DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false

ContextQA

Name	Prompt	Need Prompt
source	source?	false
objectType	objectType?	false
filepath	filepath?	false
directory	directory?	false

Pool	Pool?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
NAV_Vehicle	NAV_Vehicle?	false
viewname	viewname?	false
table_view	table_view?	false
database	database?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false
message1	message1?	false

message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false
DB_AMC_Port	DB_AMC_Port?	false

DB_AMC_Schema	DB_AMC_Schema?	false
DB_AMC_Server	DB_AMC_Server?	false
DB_Navision_AdditionalParams	DB_Navision_AdditionalParams?	false
DB_Navision_Database	DB_Navision_Database?	false
DB_Navision_Login	DB_Navision_Login?	false
DB_Navision_Password	DB_Navision_Password?	false
DB_Navision_Port	DB_Navision_Port?	false
DB_Navision_Schema	DB_Navision_Schema?	false
DB_Navision_Server	DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams	DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database	DB_Talend_Context_Database?	false
DB_Talend_Context_Login	DB_Talend_Context_Login?	false
DB_Talend_Context_Password	DB_Talend_Context_Password?	false
DB_Talend_Context_Port	DB_Talend_Context_Port?	false
DB_Talend_Context_Schema	DB_Talend_Context_Schema?	false
DB_Talend_Context_Server	DB_Talend_Context_Server?	false
mom_Host	mom_Host?	false

mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

ContextPREPROD

Name	Prompt	Need Prompt
source	source?	false
objectType	objectType?	false
filepath	filepath?	false

directory	directory?	false
Pool	Pool?	false
group	group?	false
description	description?	false
mafAppSpace	mafAppSpace?	false
NAV_Vehicle	NAV_Vehicle?	false
viewname	viewname?	false
table_view	table_view?	false
database	database?	false
batch	batch?	false
CRC	CRC?	false
Customer_Process_Queue	Customer_Process_Queue?	false
environment	environment?	false
ErrorMsg	ErrorMsg?	false
instance	instance?	true
key	key?	false
keystore	keystore?	false

message1	message1?	false
message2	message2?	false
movilizerURL	movilizerURL?	false
movilizerVersion	movilizerVersion?	false
Nested_Context	Nested_Context?	false
object	object?	false
objectId	objectId?	false
objectName	objectName?	false
partition	partition?	false
ProcessTimeStamp	ProcessTimeStamp?	false
SystemId	SystemId?	false
SystemPassword	SystemPassword?	false
type	type?	false
DB_AMC_AdditionalParams	DB_AMC_AdditionalParams?	false
DB_AMC_Database	DB_AMC_Database?	false
DB_AMC_Login	DB_AMC_Login?	false
DB_AMC_Password	DB_AMC_Password?	false

DB_AMC_Port?	false
DB_AMC_Schema?	false
DB_AMC_Server?	false
DB_Navision_AdditionalParams?	false
DB_Navision_Database?	false
DB_Navision_Login?	false
DB_Navision_Password?	false
DB_Navision_Port?	false
DB_Navision_Schema?	false
DB_Navision_Server?	false
DB_Talend_Context_AdditionalParams?	false
DB_Talend_Context_Database?	false
DB_Talend_Context_Login?	false
DB_Talend_Context_Password?	false
DB_Talend_Context_Port?	false
DB_Talend_Context_Schema?	false
DB_Talend_Context_Server?	false
	DB_AMC_Schema? DB_AMC_Server? DB_Navision_AdditionalParams? DB_Navision_Database? DB_Navision_Login? DB_Navision_Password? DB_Navision_Port? DB_Navision_Schema? DB_Navision_Server? DB_Talend_Context_AdditionalParams? DB_Talend_Context_Database? DB_Talend_Context_Login? DB_Talend_Context_Password? DB_Talend_Context_Password? DB_Talend_Context_Port? DB_Talend_Context_Port?

mom_Host	mom_Host?	false
mom_Password	mom_Password?	false
mom_Port	mom_Port?	false
mom_To	mom_To?	false
mom_Username	mom_Username?	false
DB_ERP_DSD_Integration_Login	DB_ERP_DSD_Integration_Login?	false
DB_ERP_DSD_Integration_Port	DB_ERP_DSD_Integration_Port?	false
DB_ERP_DSD_Integration_Database	DB_ERP_DSD_Integration_Database?	false
DB_ERP_DSD_Integration_Password	DB_ERP_DSD_Integration_Password?	false
DB_ERP_DSD_Integration_Schema	DB_ERP_DSD_Integration_Schema?	false
DB_ERP_DSD_Integration_Server	DB_ERP_DSD_Integration_Server?	false
DB_ERP_DSD_Integration_AdditionalParams	DB_ERP_DSD_Integration_AdditionalParams?	false

Component List

Component Name	Component Type
jlet_CustomLogging_1	jlet_CustomLogging
jlet_ResponseLogging_1	jlet_ResponseLogging

tJavaFlex_3 tJavaFlex_4 tJavaFlex_5 tJavaFlex_5 tJavaFlex tJavaFlex tJavaFlex_6 tJavaFlex tJavaRow tJava_1 tJava tLogCatcher_1 ttLogCatcher tMSSqlClose_1 tMSSqlClose tMSSqlCommit_1 tMSSqlCommit_1 tMSSqlConnection_1 tMSSqlInput_2 tMSSqlInput_2 tMSSqlOutput_1 tMap_2 tMap tPostjob_1		
tJavaFlex_4 tJavaFlex_5 tJavaFlex tMSSqlCow tMSSqlCow tMSSqlClose tMSSqlClose tMSSqlClose tMSSqlClose tMSSqlConnection tMSSqlConnection tMSSqlConnection tMSSqlInput tMSSqlInput tMSSqlOutput tMap tMap tPostjob	tJavaFlex_1	tJavaFlex
tJavaFlex_5 tJavaFlex tJavaFlex tJavaFlex tJavaRow tJava tLogCatcher_1 tMSSqlClose_1 tMSSqlClose tMSSqlConnection_1 tMSSqlConnection tMSSqlInput_2 tMSSqlOutput_1 tMSSqlOutput_1 tMap_ tPostjob_1 tJavaFlex tMSSqlClose tMSSqlClose tMSSqlClose tMSSqlClose tMSSqlClose tMSSqlClose tMSSqlConnection tMSSqlConnection tMSSqlOutput tMSSqlOutput tMap	tJavaFlex_3	tJavaFlex
tJavaFlex_6 tJavaRow tJava tJava tLogCatcher_1 tMSSqlClose_1 tMSSqlCommit_1 tMSSqlConnection_1 tMSSqlInput_2 tMSSqlOutput_1 tMSSqlOutput_1 tMap_2 tPostjob_1 tJava tJava tJava tJava tJava tJava tLogCatcher tMSSqlConnection tMSSqlConnection tMSSqlClose tMSSqlClose tMSSqlConnection tMSSqlConnection tMSSqlConnection	tJavaFlex_4	tJavaFlex
tJavaRow tJava tLogCatcher_1 tLogCatcher tMSSqlClose_1 tMSSqlCommit_1 tMSSqlConnection_1 tMSSqlInput_2 tMSSqlInput_2 tMSSqlOutput_1 tMSSqlOutput_1 tMap_2 tMap tPostjob_1	tJavaFlex_5	tJavaFlex
tLogCatcher_1 tLogCatcher tMSSqlClose_1 tMSSqlCommit_1 tMSSqlConnection_1 tMSSqlInput_2 tMSSqlInput_2 tMSSqlOutput_1 tMSSqlOutput_1 tMSSqlOutput tMSplOutput tMSplOutput tMSplOutput tMSplOutput tMSplOutput tMSplOutput tMap_2 tMap tMap tPostjob_1	tJavaFlex_6	tJavaFlex
tLogCatcher_1 tMSSqlClose_1 tMSSqlClose tMSSqlCommit_1 tMSSqlConnection_1 tMSSqlConnection tMSSqlInput_2 tMSSqlInput_2 tMSSqlOutput_1 tMSSqlOutput_1 tMap_2 tMap tPostjob_1 tPostjob_1	tJavaRow_1	tJavaRow
tMSSqlClose_1 tMSSqlCommit_1 tMSSqlConnection_1 tMSSqlConnection tMSSqlInput_2 tMSSqlInput tMSSqlOutput_1 tMSSqlOutput tMSSqlOutput tMap_2 tMap tMap tPostjob_1	tJava_1	tJava
tMSSqlCommit_1 tMSSqlConnection_1 tMSSqlConnection tMSSqlInput_2 tMSSqlInput tMSSqlOutput_1 tMSSqlOutput tMSSqlOutput tMSSqlOutput tMap_2 tMap tMap tPostjob_1	tLogCatcher_1	tLogCatcher
tMSSqlConnection_1 tMSSqlInput_2 tMSSqlInput tMSSqlOutput_1 tMSSqlOutput tMap_2 tMap tMap tMap tPostjob_1 tMSSqlConnection tMSSqlInput tMSSqlInput tMSSqlOutput tMSSqlOutput tMap	tMSSqlClose_1	tMSSqlClose
tMSSqlInput_2 tMSSqlOutput_1 tMSSqlOutput tMap_2 tMap tMap tMap tPostjob_1 tMSSqlInput tMSSqlInput tMSSqlOutput tMSSqlOutput tMap	tMSSqlCommit_1	tMSSqlCommit
tMSSqlOutput_1 tMap_2 tMap tMap tMap tMap tMap tMap tPostjob_1	tMSSqlConnection_1	tMSSqlConnection
tMap_2 tMap tMap tMap tPostjob_1 tPostjob	tMSSqlInput_2	tMSSqlInput
tMap_5 tPostjob_1 tPostjob	tMSSqlOutput_1	tMSSqlOutput
tPostjob_1 tPostjob	tMap_2	tMap
	tMap_5	tMap
tPrejob_1 tPrejob	tPostjob_1	tPostjob
	tPrejob_1	tPrejob

tSchemaComplianceCheck_1	tSchemaComplianceCheck
tSetKeystore_1	tSetKeystore
tWarn_1	tWarn

Components Description

Component tJavaFlex

UNIQUE NAME	tJavaFlex_1	INPUT(S)	tMSSqlInput_2
LABEL	UNIQUE_NAME	OUTPUT(S)	tSchemaComplianceCheck_1

Component i didiliciore:	
Properties	Values
Unique Name	tJavaFlex_1
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false

true
false
false
org.talend.help.tJavaFlex
true
C:\Talend\7.0.1\studio\configuration\lib\java
false
2
false
true
Built-In
true
int i =1;

Main code	context.objectId=row1.Code+" - "+row1.Route_Stop_Type; context.objectName=""; if(i%5000 == 0) { System.out.println("5000 Records Have Processed"); } i++;
End code	// end of the component, outside/closing the loop //System.out.println(i+" Records Processed"); i; System.out.println(i+" Records Processed");
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_1 :

Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	int	6		false	

Company_Name	false	String	27	false	
Route_Stop_Type	false	String	10	false	
Code	false	String	10	false	
Description	false	String	50	false	

Original Function Parameters: Component tJavaFlex

_ 400	UNIQUE NAME	tJavaFlex_3	INPUT(S)	tMap_5	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

Component Parameters:			
Properties	Values		
Unique Name	tJavaFlex_3		
Component Name	tJavaFlex		
Version	0.101 (ALPHA)		
Family	Custom_Code		
Start	false		
Startable	true		
SUBTREE_START	false		
END_OF_FLOW	true		

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int b=1;

routines.r_HarvestRoutineLoop.createAllObjects(); if(b==1) routines.r_HarvestRoutineLoop.populateMasterdataPoolUpelse if(b==50) { //routines.r_HarvestRoutine_A.populateMasterdataPoolUpeb=0; } b++;
// end of the component, outside/closing the loop routines.r_HarvestRoutineLoop.createAllObjects(); routines.r_HarvestRoutineLoop.populateMasterdataPoolUp
false
false
true
//import java.util.List;
UNIQUE_NAME
UNIQUE_NAME COMMENT
row
false
false

Schema for tJavaFlex_3 :

Column	Key	Туре	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:

Component tJavaFlex

 UNIQUE NAME	tJavaFlex_4	INPUT(S)	tMap_5
LABEL	UNIQUE_NAME	OUTPUT(S)	none

Component Parameters:	
Properties	Values
Unique Name	tJavaFlex_4
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code
Main code	routines.r_HarvestRoutineLoop.populateMasterdataUpdate
End code	// end of the component, outside/closing the loop
TOS2.0	false
TOS3.2	false
TOS4.0	true

Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_4:

	Column	Key	Туре	Length	Precision	Nullable	Comment
--	--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: Component tJavaFlex

UNIQUE NAME	tJavaFlex_5	INPUT(S)	tMap_5
LABEL	UNIQUE_NAME	OUTPUT(S)	none

oompononer aramotoror			
Properties	Values		
Unique Name	tJavaFlex_5		
Component Name	tJavaFlex		

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

false
true
Built-In
true
// start part of your Java code
routines.r_HarvestRoutineLoop.populateDataContainerEnt routines.r_HarvestRoutineLoop.populateUpdateContainerE
// end of the component, outside/closing the loop
false
false
true
//import java.util.List;
UNIQUE_NAME
UNIQUE_NAME COMMENT
row
false
false

Validation Rule Type

Schema for tJavaFlex_5 :

Column Ke	у Туре	Length	Precision	Nullable	Comment
-----------	--------	--------	-----------	----------	---------

Original Function Parameters: Component tJavaFlex

	UNIQUE NAME	tJavaFlex_6	INPUT(S)	tMap_5
	LABEL	UNIQUE_NAME	OUTPUT(S)	jlet_ResponseLogging_1

Component Farameters.	
Properties	Values
Unique Name	tJavaFlex_6
Component Name	tJavaFlex
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaFlex
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Data Auto Propagate	true
Start code	// start part of your Java code int a=1;
Main code	if(a==50 /*&& f==(a-50)*/){ row12.responseXML=routines.r_HarvestRoutineLoop.send context.movilizerVersion); //f = a; a=0; //System.out.println(routines.r_HarvestRoutineLoop.resetObjects();

End code	// end of the component, outside/closing the loop //if(((Integer)globalMap.get("tMSSqlOutput_1_NB_LINE")) ! routines.r_HarvestRoutineLoop.sendMasterData(context.m context.movilizerVersion); routines.r_HarvestRoutineLoop.
TOS2.0	false
TOS3.2	false
TOS4.0	true
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJavaFlex_6:

Column	Key	Туре	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Original Function Parameters: Component tJavaRow

	UNIQUE NAME	tJavaRow_1	INPUT(S)	tSchemaComplianceCheck_1	
	LABEL	UNIQUE_NAME	OUTPUT(S)	tWarn_1	

Component Parameters:	,
Properties	Values
Unique Name	tJavaRow_1
Component Name	tJavaRow
Version	0.101 (ALPHA)
Family	Custom_Code
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJavaRow
Update components	true
IREPORT_PATH	

JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Code	//Code generated according to input schema and output schema context.ErrorMsg = input_row.errorMessage;
Import	//import java.util.List;
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tJavaRow_1:

Odilollia for toave	 -					
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	int	6		false	
Company_Name	false	String	27		false	
Route_Stop_Type	false	String	10		false	
Code	false	String	10		false	
Description	false	String	50		false	
errorCode	false	String	255		true	
errorMessage	false	String	255		true	

Original Function Parameters: Component tJava

UNIQUE NAME	tJava_1	INPUT(S)	tSetKeystore_1
LABEL	Setting contetxs fr test only	OUTPUT(S)	none

Properties	Values
Unique Name	tJava_1
Component Name	tJava

Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

	false		
Code	String foo = "bar"; context.DB_Navision_Database = "HFS_Master_DataAccess_DB"; //context.DB_Navision_Schema = "dbo";		
Import	//import java.util.List;		
Schema	Built-In		
Label format	Setting contetxs fr test only		
Hint format	UNIQUE_NAME COMMENT		
Connection format	row		
Show Information	false		
Comment			
Use an existing validation rule	false		
Validation Rule Type			

Schema for tJava_1 :

Original Function Parameters: Component tLogCatcher

UNIQUE NAME	tLogCatcher_1	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	jlet_CustomLogging_1

Component Parameters:	
Properties	Values
Unique Name	tLogCatcher_1
Component Name	tLogCatcher
Version	0.101 (ALPHA)
Family	Logs_Errors
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogCatcher
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Catch Java Exception	true
Catch tDie	true
Catch tWarn	true
Catch tJobFailure	true
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false

Validation Rule Type	
----------------------	--

Schema for tLogCatcher_1 :

Schema to	LLUgua	CHELLI.				
Column	Key	Туре	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	
project	false	String	50		true	
job	false	String	255		true	
context	false	String	50		true	
priority	false	Integer	3		true	
type	false	String	255		true	
origin	false	String	255		true	
message	false	String	255		true	
code	false	Integer	3		true	

Original Function Parameters: Component tMSSqlClose

NAME tMSSqlClose_1 INPUT(S) tMSSqlCommit_1	*	UNIQUE NAME	tMSSqlClose_1	INPUT(S)	tMSSqlCommit_1
--	---	----------------	---------------	----------	----------------

LABEL	UNIQUE_NAME_	OUTPUT(S)	none
-------	--------------	-----------	------

Properties	Values
Database	tMSSqlClose
Unique Name	tMSSqlClose_1
Component Name	tMSSqlClose
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlClose
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tMSSqlCommit

UNIQUE NAME	tMSSqlCommit_1	INPUT(S)	tPostjob_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlClose_1

Component Parameters:		
Properties	Values	
Database	tMSSqlCommit	
Unique Name	tMSSqlCommit_1	
Component Name	tMSSqlCommit	
Version	0.102 (ALPHA)	
Family	Databases/DB Specifics/MS_SQL_Server	
Start	false	
Startable	true	
SUBTREE_START	true	
END_OF_FLOW	true	
Activate	true	
DUMMY	false	
tStatCatcher Statistics	false	
Help	org.talend.help.tMSSqlCommit	

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Component List	tMSSqlConnection_1
Close Connection	true
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlCommit_1:

Column	Key	Туре	Length	Precision	Nullable	Comment

Original Function Parameters: Component tMSSqlConnection

and the same of th	UNIQUE NAME	tMSSqlConnection_1	INPUT(S)	tPrejob_1
	LABEL	DB_ERP_DSD_Integration	OUTPUT(S)	tSetKeystore_1

Component Parameters.		
Properties	Values	
Database	tMSSqlConnection	
Unique Name	tMSSqlConnection_1	
Component Name	tMSSqlConnection	
Version	0.102 (ALPHA)	
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections	
Start	false	
Startable	true	
SUBTREE_START	true	

END_OF_FLOW	true	
Activate	true	
DUMMY	false	
tStatCatcher Statistics	false	
Help	org.talend.help.tMSSqlConnection	
Update components	true	
IREPORT_PATH		
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java	
Subjob color		
Title color		
Enable parallel execution	false	
Number of parallel executions	2	
	false	
Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration	
JDBC Provider	JTDS	
Host	context.DB_ERP_DSD_Integration_Server	
Database Driver	MSSQL	

Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Encoding	"ISO-8859-15"
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Use or register a shared DB Connection	false
Shared DB Connection Name	
Specify a data source alias	false
Data source alias	11.11
Auto Commit	false
Share identity insert in multi table	false
Label format	DB_ERP_DSD_Integration
Hint format	UNIQUE_NAME COMMENT

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tMSSqlInput

	UNIQUE NAME	tMSSqlInput_2	INPUT(S)	none
	LABEL	View_NAV_Vehicle	OUTPUT(S)	tJavaFlex_1

Component i diameters.	
Properties	Values
Database	tMSSqlInput
Unique Name	tMSSqlInput_2
Component Name	tMSSqlInput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Start	true

Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlInput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Use an existing connection	false
Component List	

Property Type	repository: DB (MSSQL):DB_Navision
Host	context.DB_Navision_Server
JDBC Provider	MSSQL_PROP
Database Driver	MSSQL
Port	context.DB_Navision_Port
Schema	context.DB_Navision_Schema
Database	context.DB_Navision_Database
Username	context.DB_Navision_Login
Password	context.DB_Navision_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	context.NAV_Vehicle
Query Type	Built-In
Guess Schema	пп

Query	"SELECT \""+context.DB_Navision_Schema+"\".\""+context.NAV_VellD\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Velname\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_VelStop Type\", \""+context.DB_Navision_Schema+"\".\""+context.NAV_Vel\""+context.DB_Navision_Schema+"\".\""+context.NAV_Vel\""+context.DB_Navision_Schema+"\".\""+context.NAV_Vel+"FROM \""+context.DB_Navision_Schema+"\".\""+context.NAV_Vel
Specify a data source alias	false
Data source alias	1111
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_Navision_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	false
Trim column	[{SCHEMA_COLUMN=Company_ID, TRIM=false}, {SCHEMA_COLUMN=Company_Name, TRIM=false}, {SCHEMA_COLUMN=Route_Stop_Type, TRIM=false}, {SCHEMA_COLUMN=Code, TRIM=false}, {SCHEMA_COLTRIM=false}]
Label format	View_NAV_Vehicle
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlInput_2:

ochema for two	<u>'qımpat_z</u>	•				
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	int	6		false	
Company_Name	false	String	27		false	
Route_Stop_Type	false	String	10		false	
Code	false	String	10		false	
Description	false	String	50		false	

Original Function Parameters: Component tMSSqlOutput

UNIQUE NAME	tMSSqlOutput_1	INPUT(S)	tMap_2
LABEL	NAV_Vehicle	OUTPUT(S)	tMap_5

Properties	Values
Database	tMSSqlOutput
Unique Name	tMSSqlOutput_1
Component Name	tMSSqlOutput

Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Property Type	repository: DB (MSSQL):DB_ERP_DSD_Integration
Use an existing connection	false
Component List	
JDBC Provider	JTDS
Host	context.DB_ERP_DSD_Integration_Server
Port	context.DB_ERP_DSD_Integration_Port
Schema	context.DB_ERP_DSD_Integration_Schema
Database	context.DB_ERP_DSD_Integration_Database
Database Driver	MSSQL
Username	context.DB_ERP_DSD_Integration_Login
Password	context.DB_ERP_DSD_Integration_Password
Table	"NAV_Vehicle"
Action on table	CREATE_IF_NOT_EXISTS
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	Company_ID

Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	context.DB_ERP_DSD_Integration_AdditionalParams
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	
Use field options	false

Field options	[{SCHEMA_COLUMN=Company_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Company_Name, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Route_Stop_Type, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Code, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=Description, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ProcessTimeStamp, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]
Ignore date out of range	false
Enable debug mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	NAV_Vehicle
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for tMSSqlOutput_1:

Scrienia for tivisso	Schema for twissquoutput_1.					
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	Integer	255		true	
Company_Name	false	String	255		true	
Route_Stop_Type	false	String	255		true	
Code	false	String	255		true	
Description	false	String	255		true	
ProcessTimeStamp	false	String	30		true	

Original Function Parameters: Component tPostjob

UNIQUE NAME	tPostjob_1	INPUT(S)	none
LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlCommit_1

Component Farameters.		
Properties	Values	
Unique Name	tPostjob_1	
Component Name	tPostjob	

Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2

	false
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tPrejob

	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlConnection_1

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)

Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
	false

Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tSchemaComplianceCheck

	UNIQUE NAME	tSchemaComplianceCheck_1	INPUT(S)	tJavaFlex_1	
	LABEL	UNIQUE_NAME	OUTPUT(S)	tMap_2 , tJavaRow_1	

Properties	Values
Unique Name	tSchemaComplianceCheck_1
Component Name	tSchemaComplianceCheck
Version	0.101 (ALPHA)
Family	Data_Quality

false
false
false
true
false
false
org.talend.help.tSchemaComplianceCheck
true
C:\Talend\7.0.1\studio\configuration\lib\java
false
2
false
true
Built-In

Check all columns from schema	false
Custom defined	true
Checked Columns	[{SCHEMA_COLUMN=Company_ID, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Company_Name, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Route_Stop_Type, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Code, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}, {SCHEMA_COLUMN=Description, SELECTED_TYPE=String, DATEPATTERN=, NULLABLE=true, MAX_LENGTH=false}]
Use another schema for compliance check	false
Schema To Test	Built-In
Trim the excess content of column when length checking chosen and the length is great than defined length.	false
Schema	Built-In
Use Fastest Date check	false
Ignore TimeZone when check date	false
!!!EMPTY_IS_NULL.NAME!!!	false
Treat all empty string as NULL	true

[{SCHEMA_COLUMN=Company_ID, EMPTY_NULL=false}, {SCHEMA_COLUMN=Company_Name, EMPTY_NULL=false}, {SCHEMA_COLUMN=Route_Stop_Type, EMPTY_NULL=false}, {SCHEMA_COLUMN=Code, EMPTY_NULL=false}, {SCHEMA_COLUMN=Description, EMPTY_NULL=false}]
UNIQUE_NAME
UNIQUE_NAME COMMENT
row
false
false

Schema for tSchemaComplianceCheck_1:

Contonia for toom						
Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	int	6		false	
Company_Name	false	String	27		false	
Route_Stop_Type	false	String	10		false	
Code	false	String	10		false	

Description	false	String	50	false	
2000				14.00	

Original Function Parameters: Component tSetKeystore

UNIQUE NAME	tSetKeystore_1	INPUT(S)	tMSSqlConnection_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tJava_1

Component Parameters:				
Properties	Values			
Unique Name	tSetKeystore_1			
Component Name	tSetKeystore			
Version	0.102 (ALPHA)			
Family	Internet			
Start	false			
Startable	true			
SUBTREE_START	true			
END_OF_FLOW	true			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			

Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
TrustStore type	JKS
TrustStore file	context.keystore
TrustStore password	*****
Need Client authentication	false
KeyStore type	JKS
KeyStore file	"C:/client.keystore"
KeyStore password	******
Check server identity	true

Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tWarn

	UNIQUE NAME	tWarn_1	INPUT(S)	tJavaRow_1	
	LABEL	UNIQUE_NAME	OUTPUT(S)	none	

on pononer aramotoror				
Properties	Values			
Unique Name	tWarn_1			
Component Name	tWarn			
Version	0.101 (ALPHA)			
Family	Logs_Errors			

Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tWarn
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend\7.0.1\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Warn message	context.ErrorMsg

Code	599
Priority	5
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	UNIQUE_NAME COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tWarn_1 :

Column	Key	Туре	Length	Precision	Nullable	Comment
Company_ID	false	int	6		false	
Company_Name	false	String	27		false	
Route_Stop_Type	false	String	10		false	
Code	false	String	10		false	
Description	false	String	50		false	

errorCode	false	String	255	true	
errorMessage	false	String	255	true	

Original Function Parameters: Component jlet_CustomLogging

The second second	UNIQUE NAME	jlet_CustomLogging_1	INPUT(S)	tLogCatcher_1	
	LABEL	jlet_CustomLogging	OUTPUT(S)	none	

Component Parameters:

component diamotors.					
Properties	Values				
Version	Latest				
Schema	INPUT_1:moment pid root_pid father_pid project job context priority type origin message code				
Show Information	false				
Comment					

Schema for jlet_CustomLogging_1:

Comonia roi	J.ot_Cacto.	<u>iiLoggiiig_i</u>	<u> </u>			
Column	Key	Туре	Length	Precision	Nullable	Comment
moment	false	java.util.Date			true	
pid	false	String	20		true	
root_pid	false	String	20		true	
father_pid	false	String	20		true	

project	false	String	50	true	
job	false	String	255	true	
context	false	String	50	true	
priority	false	Integer	3	true	
type	false	String	255	true	
origin	false	String	255	true	
message	false	String	255	true	
code	false	Integer	3	true	

Component jlet_ResponseLogging

UNIQUE NAME	jlet_ResponseLogging_1	INPUT(S)	tJavaFlex_6
LABEL	jlet_ResponseLogging	OUTPUT(S)	none

Properties	Values
Version	Latest
Schema	INPUT_1:responseXML
Show Information	false
Comment	

Schema for jlet_ResponseLogging_1 :

Column	Key	Туре	Length	Precision	Nullable	Comment
responseXML	false	String			true	

Component tMap

UNIQUE NAME	tMap_2	INPUT(S)	tSchemaComplianceCheck_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tMSSqlOutput_1

Component Parameters:				
Properties	Values			
tStatCatcher Statistics	false			
Enable parallel execution	false			
Mapping links display as:	AUTO			
Temp data directory path:				
Max buffer size (nb of rows):	2000000			
Ignore trailing zeros for BigDecimal	false			
Show Information	false			
Comment				

Use an existing validation rule	false
---------------------------------	-------

Mapper table for tMap_2 (input):

Mapper table Properties (row2):

mapper table i toperties (towz).			
Values			
row2			
UNIQUE_MATCH			
false			
null			

Metadata Table Entries(row2):

Name	Туре	Expression	isNullable
Company_ID	int		false
Company_Name	String		false
Route_Stop_Type	String		false
Code	String		false
Description	String		false

Constraint Table Entries(row2):

Name	Туре	Expression	isNullable
		-	

Mapper table for tMap_2 (output):

Mapper table Properties(out1):

Properties	Values
Name	out1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out1):

Name	Туре	Expression	isNullable
Company_ID	Integer	row2.Company_ID	true
Company_Name	String	StringHandling.TRIM(row2.Company_Name)	true
Route_Stop_Type	String	StringHandling.TRIM(row2.Route_Stop_Type)	true
Code	String	StringHandling.TRIM(row2.Code)	true
Description	String	StringHandling.TRIM(row2.Description)	true
ProcessTimeStamp	String	context.ProcessTimeStamp	true

Constraint Table Entries(out1):

Name Type Expression isNullable	
---------------------------------	--

Mapper table for tMap_2 (var):

			-	-	-
Mapper	table	Prop	ertie	s(Va	ar):
			• •	-, -,	<i> </i> -

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

ame	Туре	Expression	isNullable
-----	------	------------	------------

Constraint Table Entries(Var):

	Name	Туре	Expression	isNullable
--	------	------	------------	------------

Component tMap

UNIQUE NAME	tMap_5	INPUT(S)	tMSSqlOutput_1
LABEL	UNIQUE_NAME	OUTPUT(S)	tJavaFlex_3 , tJavaFlex_4, tJavaFlex_5, tJavaFlex_6

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_5 (input):

Mapper table Properties (row6):

mapper table i reperties (i ene):			
Properties	Values		
Name	row6		
Matching-mode	UNIQUE_MATCH		
isMinimized	false		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries(row6):

Mictadata Table Ent			
Name	Туре	Expression	isNullable
Company_ID	Integer		true
Company_Name	String		true
Route_Stop_Type	String		true
Code	String		true
Description	String		true
ProcessTimeStamp	String		true

Constraint Table Entries(row6):

Name Ty	уре	Expression	isNullable
---------	-----	------------	------------

Mapper table for tMap_5 (output):

Mapper table Properties (masterdataPoolUpdate):

mapper table i repertiet	s masteruatar ooropuate).
Properties	Values
Name	masterdataPoolUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(masterdataPoolUpdate):

Name	Туре	Expression	isNullable
SystemId	String	context.SystemId	true
SystemPassword	String	context.SystemPassword	true
Pool	String	context.Pool	true

Constraint Table Entries(masterdataPoolUpdate):

Name	Туре	Expression	isNullable	

Mapper table Properties (MasterdataUpdate):

Properties	Values
Name	MasterdataUpdate
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(MasterdataUpdate):

Name	Туре	Expression	isNullable
Group	String	context.group	true
Key	String	Var.ID	true
Description	String	context.description	true
mafAppSpace	String	"MD_GEN"	true

Constraint Table Entries (MasterdataUpdate):

Name Type Expression isNullable

Mapper table Properties (Vehicle):

Properties	Values
Name	Vehicle
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries (Vehicle):

Name	Туре	Expression	isNullable
ID	String	Var.ID	true
NUMBER	Integer	Var.Number	true
MODEL	String		true
DESCRIPTION	String	row6.Description	true
LICENSEPLATE	String		true

Constraint Table Entries (Vehicle):

Name	Туре	Expression	isNullable

Mapper table Properties(sendMasterData):

mapper table i reperties (seriamasterbata).		
Properties	Values	
Name	sendMasterData	
Matching-mode		
isMinimized	false	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries(sendMasterData):

Name		Expression	isNullable
newColumn	String		true

Constraint Table Entries(sendMasterData):

Name	Туре	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_5 (var):

Mapper table Properties (Var):

mapper table Properties val j.		
Properties	Values	
Name	Var	
Matching-mode		
isMinimized	false	
isReject	false	
isRejectInnerJoin	false	
isInnerJoin	false	
expressionFilter	null	

Metadata Table Entries(Var):

Name	Туре	Expression	isNullable
Number	int	Integer.parseInt(row6.Code.substring(row6.Code.indexOf("R")+1))	false
ID	String	String.format("%018d", Var.Number)	false

Constraint Table Entries(Var):

Name	Туре	Expression	isNullable