**EXPT NO: 5** A python program to implement Multi Layer

**DATE:** Perceptron With Backpropagation

#### AIM:

To write a python program to implement Multilayer perceptron with backpropagation.

### **PROCEDURE:**

Implementing Multilayer perceptron with backpropagation using the Keras dataset involve the following steps:

## **Step 1: Import Necessary Libraries**

First, import the libraries that are essential for data manipulation, visualization, and model building.

```
# importing modules
import tensorflow as tf
import numpy as np
from tensorflow.keras.models import Sequential
from tensorflow.keras.layers import Flatten
from tensorflow.keras.layers import Dense
from tensorflow.keras.layers import Activation
import matplotlib.pyplot as plt
```

## **Step 2: Load the Keras Dataset**

The Keras dataset can be loaded.

```
(x_train, y_train), (x_test, y_test) = tf.keras.datasets.mnist.load_data()
OUTPUT:
```

## **Step 3: Data Preprocessing**

Ensure the data is clean and ready for modeling. Since the Iris dataset is clean, minimal preprocessing is needed.

```
# Cast the records into float values
x train = x train.astype('float32')
x_test = x_test.astype('float32')
# normalize image pixel values by dividing
# by 255
gray scale = 255
x train /= gray scale
x_test /= gray_scale
print("Feature matrix:", x train.shape)
print("Target matrix:", x test.shape)
print("Feature matrix:", y train.shape)
print("Target matrix:", y_test.shape)
```

#### **OUTPUT:**

```
Feature matrix: (60000, 28, 28)
Target matrix: (10000, 28, 28)
Feature matrix: (60000,)
Target matrix: (10000,)
```

## **Step 4 : Train a Model**

```
model = Sequential([
  # reshape 28 row * 28 column data to 28*28 rows
  Flatten(input_shape=(28, 28)),
  # dense layer 1
  Dense(256, activation='sigmoid'),
  # dense layer 2
  Dense(128, activation='sigmoid'),
  # output layer
  Dense(10, activation='sigmoid'),
1)
```

#### **OUTPUT:**

```
/usr/local/lib/python3.10/dist-packages/keras/src/layers/reshaping/flatten.py:37: UserWarning: super().__init__(**kwargs)
```

### **Step 5: Make Predictions**

Use the model to make predictions based on the independent variable.

#### **OUTPUT:**

```
→ ▼ Epoch 1/10
                             - 5s 115ms/step - accuracy: 0.3546 - loss: 2.1596 - val_accuracy: 0.68
    24/24 -
    Epoch 2/10
    24/24 ---
                              - 4s 53ms/step - accuracy: 0.7116 - loss: 1.3743 - val_accuracy: 0.820
    Epoch 3/10
    24/24 -
                             - 1s 53ms/step - accuracy: 0.8221 - loss: 0.8221 - val_accuracy: 0.872
    Epoch 4/10
    24/24 -
                              - 3s 65ms/step - accuracy: 0.8720 - loss: 0.5676 - val_accuracy: 0.892
    Epoch 5/10
    24/24 -
                              - 2s 99ms/step - accuracy: 0.8907 - loss: 0.4444 - val_accuracy: 0.902
    Epoch 6/10
    24/24 -
                             - 3s 102ms/step - accuracy: 0.8993 - loss: 0.3852 - val_accuracy: 0.91
    Epoch 7/10
    24/24 ---
                             - 3s 104ms/step - accuracy: 0.9088 - loss: 0.3416 - val_accuracy: 0.91
    Epoch 8/10
    24/24 -
                             2s 92ms/step - accuracy: 0.9119 - loss: 0.3188 - val_accuracy: 0.922
    Epoch 9/10
    24/24 -
                              - 2s 92ms/step - accuracy: 0.9191 - loss: 0.2911 - val_accuracy: 0.926
    Epoch 10/10
                             - 3s 99ms/step - accuracy: 0.9245 - loss: 0.2704 - val accuracy: 0.925
    <keras.src.callbacks.history.History at 0x7d9ca1406a40>
```


# **Step 6 : Evaluate the Model**

Evaluate the model performance.

```
results = model.evaluate(x_test, y_test, verbose = 0)
print('test loss, test acc:', results)
```

### **OUTPUT:**

₹ test loss, test acc: [0.2589016258716583, 0.9277999997138977]

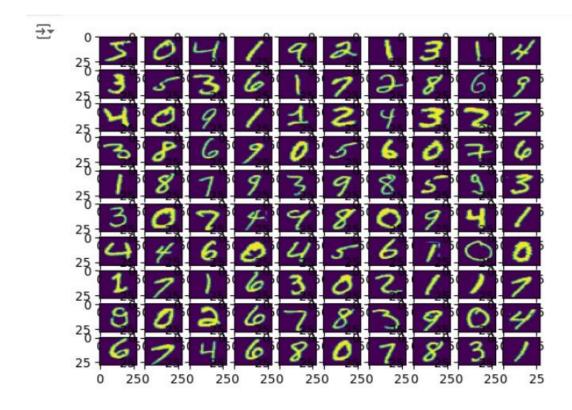

771. * 1	Annual Control of the	
	tep process will help us to implement MultiLayer Perceptron with ion models using the Keras dataset and analyze their performance.	
Dackpropagan	ion models using the Keras dataset and analyze their performance.	