SECTION 8 · SUBSECTION 8.1
KNOWN DEFECTS AND LIMITATIONS

8.1.1 INTRODUCTION.

This register lists defects and limitations confirmed by reading the working tree. Each entry names a file, the symptom, and the class of harm. None was fixed for this handbook. Severity is an engineering judgement, not a project rating: **HIGH** means a lost deliverable, a failed run on a supported path, or a credential exposure; **MEDIUM** means misleading output or an operational trap; **LOW** means dead code, stale text or cosmetic drift (figure 8.1-1).

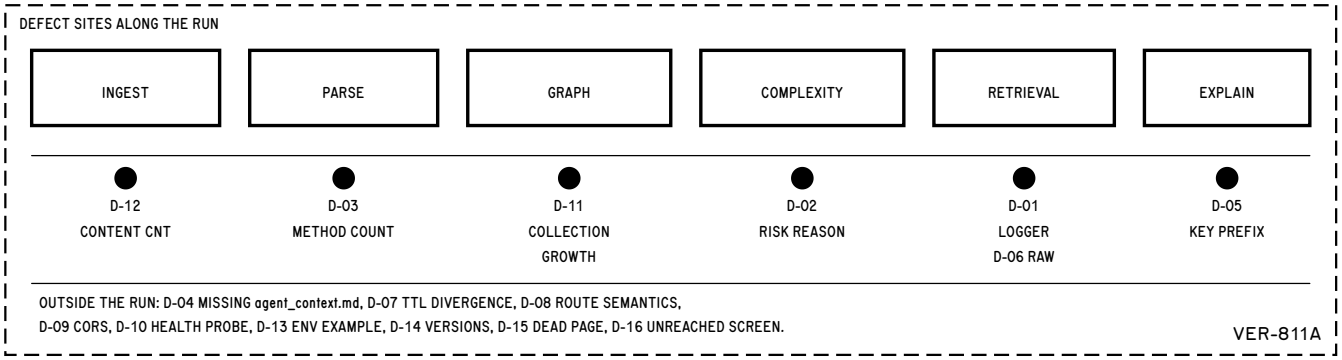


Figure 8.1-1. Where Each Confirmed Defect Enters the Run

8.1.2 DEFECT REGISTER.

Locations are line numbers at the change date. “Latent” means the path is not exercised by the current suite; it does not mean the path is unreachable in production.

Table 8.1-1. Confirmed Defects, Limitations and Their Effects

ID	Location	Severity	Symptom and consequence
D-01	agents/code_rag.py:109	HIGH	*logger* is undefined; a failed stale-chunk delete raises *NameError* and aborts the run instead of logging. Latent: needs incremental mode plus a delete failure.
D-02	agents/complexity_scorer.py:297	MEDIUM	CRITICAL reason prints the complexity value where the function name belongs, e.g. “Function '24' has cyclomatic complexity 24”.
D-03	agents/doc_generator.py:738	MEDIUM	*ClassInfo* exposes *method_names*, but the section reads *methods*; every class is reported with 0 methods.
D-04	run.py:149–157	HIGH	*agent_context_md* is generated but never saved by the CLI; only the API returns it. The advertised deliverable is missing on disk.
D-05	agents/explainability.py:61	HIGH	The first eight characters of the API key are printed to logs. Any log aggregation or screenshot leaks key material.
D-06	agents/code_rag.py:246	MEDIUM	Raw text is cleared before explainability's fallback reads it; Agent 6 must rely on Chroma chunks and silently loses context if retrieval stored none.
D-07	api/job_store.py:345	MEDIUM	RQ results expire after 86,400 s, but job records default to no expiry. The record outlives its result and reports a complete job with nothing to return.
D-08	api/main.py:238–254	MEDIUM	*/api/jobs/{id}* returns HTTP 200 with *{"error":"job not found"}*, while */jobs/{id}* returns 404. Clients must branch on body shape.
D-09	api/main.py:55–59	MEDIUM	CORS allows every origin with credentials enabled. Starlette reflects the caller's origin for credentialed requests, so any site can call the API with cookies if a browser has them.
D-10	api/worker.py:45–56	MEDIUM	The worker health endpoint always answers “ok”; it does not test Redis, queue depth or the pipeline. A live worker can be idle or wedged.
D-11	utils/retriever.py:make_collection_name	MEDIUM	Collections are per job; only *DELETE /jobs/{id}* removes one, best-effort and never called by the client. Disk use grows with every run.
D-12	orchestrator.py:166	LOW	*files_with_content* is computed after retrieval clears raw text, so the manifest always reports 0 despite successful ingestion.
D-13	.env.example:17	LOW	Example model is *llama-3.3-70b-instruct*; code default is *llama-3.2-11b-vision-instruct*. Copying the example changes behaviour.
D-14	main.py:47, App.tsx:8, package.json	LOW	API reports 1.0.0, client 1.1.0, package 1.0.0, change log has two 1.1.0 entries. No single version authority.
D-15	frontend/src/pages/ResultsPage.tsx	LOW	762 lines of an earlier results implementation are compiled by nothing; *react-router-dom* is installed but unused.
D-16	frontend/src/App.tsx:23, 1646	LOW	The *error* screen is declared and rendered but never set; failures appear inside the progress screen instead.

WARNING

D-05 is a credential-handling fault, not a cosmetic log line. The value is truncated, but a prefix narrows a brute-force search and is enough to correlate keys across logs. Do not paste production logs into issues or documents.

DEFECT CHECK — **MAINTAINER**

```
1 REPRODUCE - name the path
2 LOCATE - file and line
  √ CLASS - lost output, wrong output, trap
3 TEST - add a seam case first
4 FIX - one defect per change
```