

sosicon

Version v 0.1 prerelease
19.03.15 22:35

Table of Contents

Module Index	2
Namespace Index	3
Hierarchical Index	4
Class Index	6
File Index	8
Module Documentation	10
Converters	10
Interfaces	10
SOSI Elements	11
sosicon	18
sosicon::byteOrder	22
sosicon::shape	25
sosicon::sosi	27
sosicon::utils	29
Class Documentation	33
sosicon::CommandLine	33
sosicon::ConverterSosi2psql	40
sosicon::ConverterSosi2shp	48
sosicon::ConverterSosi2tsv	52
sosicon::ConverterSosi2xml	54
sosicon::ConverterSosiStat	56
sosicon::Coordinate	59
sosicon::CoordinateCollection	63
sosicon::sosi::CoordSys	69
sosicon::shape::DoubleField	71
sosicon::Factory	72
sosicon::IBinaryStreamable	74
sosicon::IConverter	76
sosicon::ICoordinate	78
sosicon::ILookupTable	81
imaxdiv_t	83
sosicon::shape::Int16Field	84
sosicon::shape::Int32Field	85
sosicon::shape::Int32TField	86
sosicon::shape::Int8Field	87
sosicon::IRectangle	88
sosicon::IShapeElement	91
sosicon::IShapeElementHeader	94
sosicon::IShapefile	95
sosicon::IShapefileDbfPart	97
sosicon::IShapefilePrjPart	99
sosicon::IShapefileShpPart	101
sosicon::IShapefileShxPart	103
sosicon::IShapeHeader	105
sosicon::ISosiElement	107
sosicon::ISosiHeadMember	110
sosicon::Parser	112
sosicon::sosi::ReferenceData	116
sosicon::shape::Shapefile	117
sosicon::shape::ShxIndex	131
sosicon::sosi::SosiElement	132
sosicon::sosi::SosiElementSearch	138

sosicon::sosi::SosiJunctionPoint.....	141
sosicon::sosi::SosiNorthEast.....	143
sosicon::sosi::SosiOrigoNE	148
sosicon::sosi::SosiRefList.....	151
sosicon::sosi::SosiTranslationTable	153
sosicon::sosi::SosiUnit.....	156
File Documentation	159
/prosjekter/sosicon/sosicon/src/byte_order.cpp	159
/prosjekter/sosicon/sosicon/src/byte_order.h	160
/prosjekter/sosicon/sosicon/src/command_line.cpp.....	161
/prosjekter/sosicon/sosicon/src/command_line.h	162
/prosjekter/sosicon/sosicon/src/common_types.h	163
/prosjekter/sosicon/sosicon/src/converter_sosi2psql.cpp	164
/prosjekter/sosicon/sosicon/src/converter_sosi2psql.h	165
/prosjekter/sosicon/sosicon/src/converter_sosi2shp.cpp.....	166
/prosjekter/sosicon/sosicon/src/converter_sosi2shp.h	167
/prosjekter/sosicon/sosicon/src/converter_sosi2tsv.cpp	168
/prosjekter/sosicon/sosicon/src/converter_sosi2tsv.h	169
/prosjekter/sosicon/sosicon/src/converter_sosi2xml.cpp.....	170
/prosjekter/sosicon/sosicon/src/converter_sosi2xml.h	171
/prosjekter/sosicon/sosicon/src/converter_sosi_stat.cpp.....	172
/prosjekter/sosicon/sosicon/src/converter_sosi_stat.h	173
/prosjekter/sosicon/sosicon/src/coordinate.h	174
/prosjekter/sosicon/sosicon/src/coordinate_collection.cpp.....	175
/prosjekter/sosicon/sosicon/src/coordinate_collection.h.....	176
/prosjekter/sosicon/sosicon/src/factory.cpp	177
/prosjekter/sosicon/sosicon/src/factory.h.....	178
/prosjekter/sosicon/sosicon/src/interface/i_binary_streamable.h	179
/prosjekter/sosicon/sosicon/src/interface/i_converter.h.....	180
/prosjekter/sosicon/sosicon/src/interface/i_coordinate.h	181
/prosjekter/sosicon/sosicon/src/interface/i_lookup_table.h	182
/prosjekter/sosicon/sosicon/src/interface/i_rectangle.h	183
/prosjekter/sosicon/sosicon/src/interface/i_shape_element.h	184
/prosjekter/sosicon/sosicon/src/interface/i_shape_element_header.h.....	185
/prosjekter/sosicon/sosicon/src/interface/i_shape_header.h	186
/prosjekter/sosicon/sosicon/src/interface/i_shapefile.h.....	187
/prosjekter/sosicon/sosicon/src/interface/i_shapefile_dbf_part.h	188
/prosjekter/sosicon/sosicon/src/interface/i_shapefile_prj_part.h	189
/prosjekter/sosicon/sosicon/src/interface/i_shapefile_shp_part.h.....	190
/prosjekter/sosicon/sosicon/src/interface/i_shapefile_shx_part.h.....	191
/prosjekter/sosicon/sosicon/src/interface/i_sosi_element.h	192
/prosjekter/sosicon/sosicon/src/interface/i_sosi_head_member.h	193
/prosjekter/sosicon/sosicon/src/inttypes.h	194
/prosjekter/sosicon/sosicon/src/main.cpp	214
/prosjekter/sosicon/sosicon/src/main.h	215
/prosjekter/sosicon/sosicon/src/parser.cpp.....	216
/prosjekter/sosicon/sosicon/src/parser.h	217
/prosjekter/sosicon/sosicon/src/parser_ragel.cpp.....	218
/prosjekter/sosicon/sosicon/src/ragel/parser.rl.....	219
/prosjekter/sosicon/sosicon/src/ragel/sosi_north_east.rl.....	220
/prosjekter/sosicon/sosicon/src/ragel/sosi_north_east_height.rl.....	221
/prosjekter/sosicon/sosicon/src/ragel/sosi_origo_ne.rl	222
/prosjekter/sosicon/sosicon/src/ragel/sosi_ref.rl	223
/prosjekter/sosicon/sosicon/src/shape/shapefile.cpp.....	224
/prosjekter/sosicon/sosicon/src/shape/shapefile.h.....	225
/prosjekter/sosicon/sosicon/src/shape/shapefile_types.h	226

/projekter/sosicon/sosicon/src/sosi/sosi_element.cpp	227
/projekter/sosicon/sosicon/src/sosi/sosi_element.h	228
/projekter/sosicon/sosicon/src/sosi/sosi_element_search.cpp	229
/projekter/sosicon/sosicon/src/sosi/sosi_element_search.h	230
/projekter/sosicon/sosicon/src/sosi/sosi_junction_point.h	231
/projekter/sosicon/sosicon/src/sosi/sosi_north_east.cpp	232
/projekter/sosicon/sosicon/src/sosi/sosi_north_east.h	233
/projekter/sosicon/sosicon/src/sosi/sosi_origo_ne.cpp	234
/projekter/sosicon/sosicon/src/sosi/sosi_origo_ne.h	235
/projekter/sosicon/sosicon/src/sosi/sosi_ref_list.cpp	236
/projekter/sosicon/sosicon/src/sosi/sosi_ref_list.h	237
/projekter/sosicon/sosicon/src/sosi/sosi_translation_table.cpp	238
/projekter/sosicon/sosicon/src/sosi/sosi_translation_table.h	239
/projekter/sosicon/sosicon/src/sosi/sosi_types.h	240
/projekter/sosicon/sosicon/src/sosi/sosi_unit.cpp	242
/projekter/sosicon/sosicon/src/sosi/sosi_unit.h	243
/projekter/sosicon/sosicon/src/sosi_north_east_height_ragel.cpp	244
/projekter/sosicon/sosicon/src/sosi_north_east_ragel.cpp	245
/projekter/sosicon/sosicon/src/sosi_origo_ne_ragel.cpp	246
/projekter/sosicon/sosicon/src/sosi_ref_ragel.cpp	247
/projekter/sosicon/sosicon/src/utils.cpp	248
/projekter/sosicon/sosicon/src/utils.h	249
Index	250

Module Index

Modules

Here is a list of all modules:

Converters.....	10
Interfaces	10
SOSI Elements.....	11

Namespace Index

Namespace List

Here is a list of all namespaces with brief descriptions:

sosicon (Application root)	18
sosicon::byteOrder (Big/low-endian conversions)	22
sosicon::shape (ESRI Shape)	25
sosicon::sosi (SOSI)	27
sosicon::utils (String manipulation routines)	29

Hierarchical Index

Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

sosicon::CommandLine	33
sosicon::CoordinateCollection.....	63
sosicon::sosi::CoordSys	69
sosicon::shape::DoubleField.....	71
sosicon::Factory	72
sosicon::IBinaryStreamable.....	74
sosicon::IShapeElement	91
sosicon::IShapeElementHeader.....	94
sosicon::IShapefileDbfPart.....	97
sosicon::IShapefile	95
sosicon::shape::Shapefile.....	117
sosicon::IShapefilePrjPart	99
sosicon::IShapefile	95
sosicon::IShapefileShpPart.....	101
sosicon::IShapefile	95
sosicon::IShapefileShxPart.....	103
sosicon::IShapefile	95
sosicon::IShapeHeader	105
sosicon::IConverter.....	76
sosicon::ConverterSosi2psql	40
sosicon::ConverterSosi2shp	48
sosicon::ConverterSosi2tsv	52
sosicon::ConverterSosi2xml.....	54
sosicon::ConverterSosiStat.....	56
sosicon::ICoordinate	78
sosicon::Coordinate	59
sosicon::ILookupTable	81
imaxdiv_t.....	83
sosicon::shape::Int16Field.....	84
sosicon::shape::Int32Field.....	85
sosicon::shape::Int32TField.....	86
sosicon::shape::Int8Field	87
sosicon::IRectangle.....	88

sosicon::ISosiElement	107
sosicon::sosi::SosiElement	132
sosicon::ISosiHeadMember	110
sosicon::sosi::SosiOrigoNE	148
sosicon::sosi::SosiUnit	156
sosicon::Parser	112
sosicon::sosi::ReferenceData	116
sosicon::shape::ShxIndex	131
sosicon::sosi::SosiElementSearch	138
sosicon::sosi::SosiJunctionPoint	141
sosicon::sosi::SosiNorthEast	143
sosicon::sosi::SosiRefList	151
sosicon::sosi::SosiTranslationTable	153

Class Index

Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

sosicon::CommandLine (Command-line parser)	33
sosicon::ConverterSosi2psql (SOSI to PostgreSQL/PostGIS converter)	40
sosicon::ConverterSosi2shp (SOSI to ESRI Shape converter)	48
sosicon::ConverterSosi2tsv (SOSI to TSV converter)	52
sosicon::ConverterSosi2xml (SOSI to ESRI Shape converter)	54
sosicon::ConverterSosiStat (SOSI to ESRI Shape converter)	56
sosicon::Coordinate (Coordinate container)	59
sosicon::CoordinateCollection (Coordinate container)	63
sosicon::sosi::CoordSys (SOSI coordinate system)	69
sosicon::shape::DoubleField (32 bit double / byte field)	71
sosicon::Factory (Factory class)	72
sosicon::IBinaryStreamable (Interface: Binary streamable object)	74
sosicon::IConverter (Interface: Converter)	76
sosicon::ICoordinate (Interface: Coordinate)	78
sosicon::ILookupTable (Interface: Lookup table)	81
imaxdiv_t	83
sosicon::shape::Int16Field (16 bit integer / byte field)	84
sosicon::shape::Int32Field (32 bit integer / byte field)	85
sosicon::shape::Int32TField (32 bit integer / byte / geom::ShapeType field)	86
sosicon::shape::Int8Field (8 bit integer / byte field)	87
sosicon::IRectangle (Interface: Rectangle)	88
sosicon::IShapeElement (Interface: Shape element)	91
sosicon::IShapeElementHeader (Interface: Shape element header)	94
sosicon::IShapefile (Interface: Shapefile)	95
sosicon::IShapefileDbfPart (Interface: ShapefileDbfPart)	97
sosicon::IShapefilePrjPart (Interface: ShapefilePrjPart)	99
sosicon::IShapefileShpPart (Interface: ShapefileShpPart)	101
sosicon::IShapefileShxPart (Interface: ShapefileShxPart)	103
sosicon::IShapeHeader (Interface: Shape element)	105
sosicon::ISosiElement (Interface: SOSI element)	107
sosicon::ISosiHeadMember (Interface: SOSI header element)	110
sosicon::Parser (SOSI file parser)	112
sosicon::sosi::ReferenceData (SOSI reference number)	116
sosicon::shape::Shapefile (Shapefile implementation)	117
sosicon::shape::ShxIndex	131
sosicon::sosi::SosiElement (Basic SOSI element)	132
sosicon::sosi::SosiElementSearch	138
sosicon::sosi::SosiJunctionPoint (SOSI Junction point)	141
sosicon::sosi::SosiNorthEast (SOSI North-east element)	143
sosicon::sosi::SosiOrigoNE (SOSI Junction point)	148

sosicon::sosi::SosiRefList (SOSI REF list) 151
sosicon::sosi::SosiTranslationTable 153
sosicon::sosi::SosiUnit (SOSI Unit) 156

File Index

File List

Here is a list of all files with brief descriptions:

/prosjekter/sosicon/sosicon/src/byte_order.cpp	159
/prosjekter/sosicon/sosicon/src/byte_order.h	160
/prosjekter/sosicon/sosicon/src/command_line.cpp	161
/prosjekter/sosicon/sosicon/src/command_line.h	162
/prosjekter/sosicon/sosicon/src/common_types.h	163
/prosjekter/sosicon/sosicon/src/converter_sosi2psql.cpp	164
/prosjekter/sosicon/sosicon/src/converter_sosi2psql.h	165
/prosjekter/sosicon/sosicon/src/converter_sosi2shp.cpp	166
/prosjekter/sosicon/sosicon/src/converter_sosi2shp.h	167
/prosjekter/sosicon/sosicon/src/converter_sosi2tsv.cpp	168
/prosjekter/sosicon/sosicon/src/converter_sosi2tsv.h	169
/prosjekter/sosicon/sosicon/src/converter_sosi2xml.cpp	170
/prosjekter/sosicon/sosicon/src/converter_sosi2xml.h	171
/prosjekter/sosicon/sosicon/src/converter_sosi_stat.cpp	172
/prosjekter/sosicon/sosicon/src/converter_sosi_stat.h	173
/prosjekter/sosicon/sosicon/src/coordinate.h	174
/prosjekter/sosicon/sosicon/src/coordinate_collection.cpp	175
/prosjekter/sosicon/sosicon/src/coordinate_collection.h	176
/prosjekter/sosicon/sosicon/src/factory.cpp	177
/prosjekter/sosicon/sosicon/src/factory.h	178
/prosjekter/sosicon/sosicon/src/inttypes.h	194
/prosjekter/sosicon/sosicon/src/main.cpp	214
/prosjekter/sosicon/sosicon/src/main.h	215
/prosjekter/sosicon/sosicon/src/parser.cpp	216
/prosjekter/sosicon/sosicon/src/parser.h	217
/prosjekter/sosicon/sosicon/src/parser_ragel.cpp	218
/prosjekter/sosicon/sosicon/src/sosi_north_east_height_ragel.cpp	244
/prosjekter/sosicon/sosicon/src/sosi_north_east_ragel.cpp	245
/prosjekter/sosicon/sosicon/src/sosi_origo_ne_ragel.cpp	246
/prosjekter/sosicon/sosicon/src/sosi_ref_ragel.cpp	247
/prosjekter/sosicon/sosicon/src/utils.cpp	248
/prosjekter/sosicon/sosicon/src/utils.h	249
/prosjekter/sosicon/sosicon/src/interface/i_binary_streamable.h	179
/prosjekter/sosicon/sosicon/src/interface/i_converter.h	180
/prosjekter/sosicon/sosicon/src/interface/i_coordinate.h	181
/prosjekter/sosicon/sosicon/src/interface/i_lookup_table.h	182
/prosjekter/sosicon/sosicon/src/interface/i_rectangle.h	183
/prosjekter/sosicon/sosicon/src/interface/i_shape_element.h	184
/prosjekter/sosicon/sosicon/src/interface/i_shape_element_header.h	185
/prosjekter/sosicon/sosicon/src/interface/i_shape_header.h	186

/prosjekter/sosicon/sosicon/src/interface/i_shapefile.h	187
/prosjekter/sosicon/sosicon/src/interface/i_shapefile_dbf_part.h	188
/prosjekter/sosicon/sosicon/src/interface/i_shapefile_prj_part.h	189
/prosjekter/sosicon/sosicon/src/interface/i_shapefile_shp_part.h	190
/prosjekter/sosicon/sosicon/src/interface/i_shapefile_shx_part.h	191
/prosjekter/sosicon/sosicon/src/interface/i_sosi_element.h	192
/prosjekter/sosicon/sosicon/src/interface/i_sosi_head_member.h	193
/prosjekter/sosicon/sosicon/src/ragel/parser.rl	219
/prosjekter/sosicon/sosicon/src/ragel/sosi_north_east.rl	220
/prosjekter/sosicon/sosicon/src/ragel/sosi_north_east_height.rl	221
/prosjekter/sosicon/sosicon/src/ragel/sosi_origo_ne.rl	222
/prosjekter/sosicon/sosicon/src/ragel/sosi_ref.rl	223
/prosjekter/sosicon/sosicon/src/shape/shapefile.cpp	224
/prosjekter/sosicon/sosicon/src/shape/shapefile.h	225
/prosjekter/sosicon/sosicon/src/shape/shapefile_types.h	226
/prosjekter/sosicon/sosicon/src/sosi/sosi_element.cpp	227
/prosjekter/sosicon/sosicon/src/sosi/sosi_element.h	228
/prosjekter/sosicon/sosicon/src/sosi/sosi_element_search.cpp	229
/prosjekter/sosicon/sosicon/src/sosi/sosi_element_search.h	230
/prosjekter/sosicon/sosicon/src/sosi/sosi_junction_point.h	231
/prosjekter/sosicon/sosicon/src/sosi/sosi_north_east.cpp	232
/prosjekter/sosicon/sosicon/src/sosi/sosi_north_east.h	233
/prosjekter/sosicon/sosicon/src/sosi/sosi_origo_ne.cpp	234
/prosjekter/sosicon/sosicon/src/sosi/sosi_origo_ne.h	235
/prosjekter/sosicon/sosicon/src/sosi/sosi_ref_list.cpp	236
/prosjekter/sosicon/sosicon/src/sosi/sosi_ref_list.h	237
/prosjekter/sosicon/sosicon/src/sosi/sosi_translation_table.cpp	238
/prosjekter/sosicon/sosicon/src/sosi/sosi_translation_table.h	239
/prosjekter/sosicon/sosicon/src/sosi/sosi_types.h	240
/prosjekter/sosicon/sosicon/src/sosi/sosi_unit.cpp	242
/prosjekter/sosicon/sosicon/src/sosi/sosi_unit.h	243

Module Documentation

Converters

Classes

- class **sosicon::ConverterSosi2psql**
 - *SOSI to PostgreSQL/PostGIS converter.* class **sosicon::ConverterSosi2shp**
 - *SOSI to ESRI Shape converter.* class **sosicon::ConverterSosi2tsv**
 - *SOSI to TSV converter.* class **sosicon::ConverterSosi2xml**
 - *SOSI to ESRI Shape converter.* class **sosicon::ConverterSosiStat**
- SOSI to ESRI Shape converter.*
-

Detailed Description

Collection of **sosicon::IConverter** implementations for handling and generating file output. Different command-line arguments will employ different converters. The factory class **sosicon::Factory** is responsible for creating correct **IConverter** instance. The following arguments are currently interpreted:

- -2shp: **sosicon::ConverterSosi2shp** Shapefile conversion
- -2tsv: **sosicon::ConverterSosi2tsv** TSV file conversion
- -2xml: **sosicon::ConverterSosi2xml** Shape file conversion
- -stat: **sosicon::ConverterSosiStat** SOSI statistics (printout)

Collection of **sosicon::IConverter** implementations for handling and generating file output. Different command-line arguments will employ different converters. The factory class **sosicon::Factory** is responsible for creating correct **IConverter** instance. The following arguments are currently interpreted:

- -2shp: **sosicon::ConverterSosi2shp** Shapefile conversion
- -2tsv: **sosicon::ConverterSosi2tsv** TSV file conversion
- -2xml: **sosicon::ConverterSosi2Xml** XML conversion
- -2psql: **sosicon::ConverterSosi2Psql** PostgreSQL dump file conversion
- -stat: **sosicon::ConverterSosiStat** SOSI statistics (printout)

Interfaces

Classes

- class **sosicon::IBinaryStreamable**
- *Interface: Binary streamable object.* class **sosicon::IConverter**
- *Interface: Converter.* class **sosicon::ICoordinate**
- *Interface: **Coordinate**.* class **sosicon::ILookupTable**
- *Interface: Lookup table.* class **sosicon::IRectangle**
- *Interface: Rectangle.* class **sosicon::IShapeElement**
- *Interface: Shape element.* class **sosicon::IShapeElementHeader**
- *Interface: Shape element header.* class **sosicon::IShapeHeader**
- *Interface: Shape element.* class **sosicon::IShapefile**
- *Interface: Shapefile.* class **sosicon::IShapefileDbfPart**
- *Interface: ShapefileDbfPart.* class **sosicon::IShapefilePrjPart**
- *Interface: ShapefilePrjPart.* class **sosicon::IShapefileShpPart**
- *Interface: ShapefileShpPart.* class **sosicon::IShapefileShxPart**
- *Interface: ShapefileShxPart.* class **sosicon::ISosiElement**
- *Interface: SOSI element.* class **sosicon::ISosiHeadMember**

Interface: SOSI header element. Functions

- `std::ostream & sosicon::operator<< (std::ostream &os, IBinaryStreamable &binaryStreamable)`
Stream output operator.

Detailed Description

This is a listing of generic interfaces used within sosicon.

Function Documentation

`std::ostream& sosicon::operator<< (std::ostream &os, IBinaryStreamable &binaryStreamable) [inline]`

Stream output operator.

Placed outside any class definitions. Invokes WriteBinary() on the source **IBinaryStreamable** object.

Parameters:

<i>os</i>	target stream.
<i>binaryStreamable</i>	target object.

Returns:

The stream object is returned to allow for chaining.

Definition at line 58 of file `i_binary_streamable.h`.

SOSI Elements

Classes

- class **`sosicon::sosi::SosiElement`**
- *Basic SOSI element.* class **`sosicon::sosi::SosiElementSearch`**
- class **`sosicon::sosi::SosiJunctionPoint`**
- *SOSI Junction point.* class **`sosicon::sosi::SosiNorthEast`**
- *SOSI North-east element.* class **`sosicon::sosi::SosiOrigoNE`**
- *SOSI Junction point.* class **`sosicon::sosi::SosiRefList`**
- *SOSI REF list.* class **`sosicon::sosi::SosiTranslationTable`**
- struct **`sosicon::sosi::ReferenceData`**
- *SOSI reference number.* class **`sosicon::sosi::CoordSys`**
- *SOSI coordinate system.* class **`sosicon::sosi::SosiUnit`**

SOSI Unit. Typedefs

- `typedef std::map< std::string,`
- `ISosiElement * > sosicon::sosi::SosiElementMap`
Element index type.
- `typedef std::vector`
- `< ISosiElement * > sosicon::sosi::SosiChildrenList`
- `typedef SosiChildrenList::iterator sosicon::sosi::SosiChildrenIterator`

- typedef std::vector
- < ReferenceData * > **sosicon::sosi::GeometryRef**
List of SOSI references.
- typedef std::vector
- < GeometryRef * > **sosicon::sosi::GeometryCollection**
Collection of SOSI reference lists.

Enumerations

- enum **sosicon::sosi::ElementType** { **sosicon::sosi::sosi_element_unknown**,
sosicon::sosi::sosi_element_address_identifier, **sosicon::sosi::sosi_element_airport_roads**,
sosicon::sosi::sosi_element_airport_type, **sosicon::sosi::sosi_element_area**,
sosicon::sosi::sosi_element_charset, **sosicon::sosi::sosi_element_coordsys**,
sosicon::sosi::sosi_element_curve, **sosicon::sosi::sosi_element_eof**, **sosicon::sosi::sosi_element_head**,
sosicon::sosi::sosi_element_height, **sosicon::sosi::sosi_element_iata_code**,
sosicon::sosi::sosi_element_icao_code, **sosicon::sosi::sosi_element_kp**, **sosicon::sosi::sosi_element_level**,
sosicon::sosi::sosi_element_max_ne, **sosicon::sosi::sosi_element_min_ne**,
sosicon::sosi::sosi_element_municipality, **sosicon::sosi::sosi_element_name**,
sosicon::sosi::sosi_element_ne, **sosicon::sosi::sosi_element_neh**, **sosicon::sosi::sosi_element_objtype**,
sosicon::sosi::sosi_element_origo_ne, **sosicon::sosi::sosi_element_owner**,
sosicon::sosi::sosi_element_point, **sosicon::sosi::sosi_element_quality**, **sosicon::sosi::sosi_element_ref**,
sosicon::sosi::sosi_element_surface, **sosicon::sosi::sosi_element_text**,
sosicon::sosi::sosi_element_traffic_type, **sosicon::sosi::sosi_element_transpar**,
sosicon::sosi::sosi_element_unit, **sosicon::sosi::sosi_element_updatedate**,
sosicon::sosi::sosi_element_water_width, **sosicon::sosi::sosi_element_vendor**,
sosicon::sosi::sosi_element_version }
- *List of SOSI element types.* enum **sosicon::sosi::ObjType** { **sosicon::sosi::sosi_objtype_unknown**,
sosicon::sosi::sosi_objtype_airport, **sosicon::sosi::sosi_objtype_airport_type**,
sosicon::sosi::sosi_objtype_baseline, **sosicon::sosi::sosi_objtype_carriageway**,
sosicon::sosi::sosi_objtype_cadastral_address, **sosicon::sosi::sosi_objtype_coastline**,
sosicon::sosi::sosi_objtype_county_boundary, **sosicon::sosi::sosi_objtype_data_delineation**,
sosicon::sosi::sosi_objtype_edge_view, **sosicon::sosi::sosi_objtype_fictitious_dividing_line**,
sosicon::sosi::sosi_objtype_forest, **sosicon::sosi::sosi_objtype_developed_area**,
sosicon::sosi::sosi_objtype_golf_course, **sosicon::sosi::sosi_objtype_industrial_area**,
sosicon::sosi::sosi_objtype_lake, **sosicon::sosi::sosi_objtype_lane**, **sosicon::sosi::sosi_objtype_lake_edge**,
sosicon::sosi::sosi_objtype_lake_river_barrier, **sosicon::sosi::sosi_objtype_land_use_boundary**,
sosicon::sosi::sosi_objtype_level_crossing, **sosicon::sosi::sosi_objtype_municipal_divide**,
sosicon::sosi::sosi_objtype_municipality, **sosicon::sosi::sosi_objtype_municipality_boundary**,
sosicon::sosi::sosi_objtype_marsh, **sosicon::sosi::sosi_objtype_national_border**,
sosicon::sosi::sosi_objtype_pedestrian_bicycle_road_centre_line,
sosicon::sosi::sosi_objtype_sea_river_delineation, **sosicon::sosi::sosi_objtype_snow_field**,
sosicon::sosi::sosi_objtype_open_land, **sosicon::sosi::sosi_objtype_river_brook**,
sosicon::sosi::sosi_objtype_river_brook_edge, **sosicon::sosi::sosi_objtype_road_block**,
sosicon::sosi::sosi_objtype_road_centre_line, **sosicon::sosi::sosi_objtype_road_under_railway**,
sosicon::sosi::sosi_objtype_sea_surface, **sosicon::sosi::sosi_objtype_sidewalk**,
sosicon::sosi::sosi_objtype_spelling, **sosicon::sosi::sosi_objtype_stone_quarry**,
sosicon::sosi::sosi_objtype_street_address, **sosicon::sosi::sosi_objtype_territorial_boundary**,
sosicon::sosi::sosi_objtype_turn_connecting_segment }
- *List of SOSI OBJTYPES.* enum **sosicon::sosi::JunctionPoint** { **sosicon::sosi::sosi_junction_node**,
sosicon::sosi::sosi_junction_connection, **sosicon::sosi::sosi_junction_open_end** }

Default SOSI junction point layer types. Functions

- CoordSys **sosicon::sosi::sysCodeToCoordSys** (int sysCode)
Convert SOSI SYSKODE value to coordinate system data.

- ElementType **sosicon::sosi::sosiNameToType** (std::string sosiElementName)
Convert SOSI element names to ElementType enum value.
- ObjType **sosicon::sosi::sosiObjNameToType** (std::string sosiObjTypeName)
Convert SOSI objtype names to ObjType enum value.

Detailed Description

Implemented representation of SOSI file elements.

Typedef Documentation

typedef std::vector<GeometryRef*> sosicon::sosi::GeometryCollection

Collection of SOSI reference lists.

Definition at line 171 of file sosi_types.h.

typedef std::vector<ReferenceData*> sosicon::sosi::GeometryRef

List of SOSI references.

Definition at line 168 of file sosi_types.h.

typedef SosiChildrenList::iterator sosicon::sosi::SosiChildrenIterator

Definition at line 44 of file sosi_element_search.h.

typedef std::vector<ISosiElement*> sosicon::sosi::SosiChildrenList

Definition at line 42 of file sosi_element_search.h.

typedef std::map<std::string,ISosiElement*> sosicon::sosi::SosiElementMap

Element index type.

Definition at line 40 of file sosi_element_search.h.

Enumeration Type Documentation

enum sosicon::sosi::ElementType

List of SOSI element types.

Enumerator

sosi_element_unknown Unknown element.

sosi_element_address_identifier Street address identifier.

sosi_element_airport_roads Airport roads.
sosi_element_airport_type Airport type.
sosi_element_area Area.
sosi_element_charset Character set.
sosi_element_coordsys Grid type.
sosi_element_curve Curve.
sosi_element_eof End of file.
sosi_element_head Header.
sosi_element_height Height.
sosi_element_iata_code IATA code (aviation)
sosi_element_icao_code ICAO code (aviation)
sosi_element_kp Junction point.
sosi_element_level SOSI level.
sosi_element_max_ne Maximum north-east (bbox)
sosi_element_min_ne Minimum north-east (bbox)
sosi_element_municipality Municipality.
sosi_element_name Name.
sosi_element_ne North-east coordinate.
sosi_element_neh North-east/height coordinate.
sosi_element_objtype Object type.
sosi_element_origo_ne Origo north-east.
sosi_element_owner Dataset owner.
sosi_element_point Point.
sosi_element_quality Quality of data.
sosi_element_ref Element reference.
sosi_element_surface Surface.
sosi_element_text Text.
sosi_element_traffic_type Traffic type.
sosi_element_transpar Datum/projection/coordinate system.
sosi_element_unit Resolution (fraction of a metre)
sosi_element_updatedate Update date.
sosi_element_water_width Water width.
sosi_element_vendor Data vendor.
sosi_element_version SOSI version.

Definition at line 38 of file sosi_types.h.

enum sosicon::sosi::JunctionPoint

Default SOSI junction point layer types.

Enumerator

sosi_junction_node Node point (KP 1)

sosi_junction_connection Connection point (KP 900)

sosi_junction_open_end Valid open-ended point (KP 999)

Definition at line 124 of file sosi_types.h.

enum sosicon::sosi::ObjType

List of SOSI OBJTYPES.

Enumerator

sosi_objtype_unknown Unknown or no feature.

sosi_objtype_airport Airport.

sosi_objtype_airport_type Airport type.

sosi_objtype_baseline Baseline.

sosi_objtype_carriageway Carriageway.

sosi_objtype_cadastral_address Cadastral address.

sosi_objtype_coastline Coast line.

sosi_objtype_county_boundary County boundary.

sosi_objtype_data_delineation Clipping path.

sosi_objtype_edge_view Edge view.

sosi_objtype_fictious_dividing_line Line splitting large surfeces.

sosi_objtype_forest Forest.

sosi_objtype_developed_area Built up area.

sosi_objtype_golf_course Golf course.

sosi_objtype_industrial_area Industrial area.

sosi_objtype_lake Lake.

sosi_objtype_lane Driving lane.

sosi_objtype_lake_edge Lake edge.

sosi_objtype_lake_river_barrier Lake-to-river delimitation.

sosi_objtype_land_use_boundary Land use border.

sosi_objtype_level_crossing Track level crossing.

sosi_objtype_municipal_divide Municipal boundary crossing.

sosi_objtype_municipality Municipality.

sosi_objtype_municipality_boundary Municipality boundary.

sosi_objtype_marsh Marsh.

sosi_objtype_national_border National border.

sosi_objtype_pedestrian_bicycle_road_centre_line mid-way line

sosi_objtype_sea_river_delineation Sea or river delineation.

sosi_objtype_snow_field Snow/glacier.
sosi_objtype_open_land Open land.
sosi_objtype_river_brook River or stream.
sosi_objtype_river_brook_edge River or stream bank.
sosi_objtype_road_block Road block.
sosi_objtype_road_centre_line Road centre line.
sosi_objtype_road_under_railway Road under railway.
sosi_objtype_sea_surface Sea surface.
sosi_objtype_sidewalk Sidewalk.
sosi_objtype_spelling Spelling of place name.
sosi_objtype_stone_quarry Area for stone quarry.
sosi_objtype_street_address Street address.
sosi_objtype_territorial_boundary Territorial boundary (nautical)
sosi_objtype_turn_connecting_segment Turn connection segment (artificial)

Definition at line 78 of file sosi_types.h.

Function Documentation

ElementType sosicon::sosi::sosiNameToType (std::string *sosiElementName*)

Convert SOSI element names to ElementType enum value.

The enum member names are translations of the Norwegian element names.

Parameters:

<i>std::string</i>	<i>sosiElementName</i> The standard SOSI element name in Norwegian.
--------------------	---

Returns:

ElementType enumeration value representing current element type.

ObjType sosicon::sosi::sosiObjNameToType (std::string *sosiObjTypeName*)

Convert SOSI objtype names to ObjType enum value.

The enum member names are translations of the Norwegian geographic features.

Parameters:

<i>std::string</i>	<i>sosiObjtypeName</i> The standard SOSI objtype name in Norwegian.
--------------------	---

Returns:

ObjType enumeration value representing current element objtype.

CoordSys sosicon::sosi::sysCodeToCoordSys (int *sysCode*)

Convert SOSI SYSKODE value to coordinate system data.

Parameters:

<i>int</i>	The SOSI SYSKODE value.
------------	-------------------------

Returns:

CoordSys structure with information about the requested coordinate system.

Namespace Documentation

sosicon Namespace Reference

Application root.

Namespaces

- **byteOrder**
- *Big/low-endian conversions.* **shape**
- *ESRI Shape.* **sosi**
- *SOSI.* **utils**

String manipulation routines. Classes

- class **CommandLine**
- *Command-line parser.* class **ConverterSosi2psql**
- *SOSI to PostgreSQL/PostGIS converter.* class **ConverterSosi2shp**
- *SOSI to ESRI Shape converter.* class **ConverterSosi2tsv**
- *SOSI to TSV converter.* class **ConverterSosi2xml**
- *SOSI to ESRI Shape converter.* class **ConverterSosiStat**
- *SOSI to ESRI Shape converter.* class **Coordinate**
- *Coordinate container.* class **CoordinateCollection**
- *Coordinate container.* class **Factory**
- *Factory class.* class **IBinaryStreamable**
- *Interface: Binary streamable object.* class **IConverter**
- *Interface: Converter.* class **ICoordinate**
- *Interface: Coordinate.* class **ILookupTable**
- *Interface: Lookup table.* class **IRectangle**
- *Interface: Rectangle.* class **IShapeElement**
- *Interface: Shape element.* class **IShapeElementHeader**
- *Interface: Shape element header.* class **IShapefile**
- *Interface: Shapefile.* class **IShapefileDbfPart**
- *Interface: ShapefileDbfPart.* class **IShapefilePrjPart**
- *Interface: ShapefilePrjPart.* class **IShapefileShpPart**
- *Interface: ShapefileShpPart.* class **IShapefileShxPart**
- *Interface: ShapefileShxPart.* class **IShapeHeader**
- *Interface: Shape element.* class **ISosiElement**
- *Interface: SOSI element.* class **ISosiHeadMember**
- *Interface: SOSI header element.* class **Parser**

SOSI file parser. Typedefs

- typedef std::vector
- **< ICoordinate * > CoordinateList**
List of coordinate pairs.

Enumerations

- enum **Wkt** { **wkt_unknown**, **wkt_point**, **wkt_linestring**, **wkt_polygon** }

List of applied, well-known text geometries. Functions

- `bool getNext (ICoordinate *&coord, sosi::NorthEastList &list, sosi::NorthEastList::iterator &i)`
Get next coordinate in list.
 - `bool getNextOffset (int &offset, std::vector< int > &offsets, std::vector< int >::iterator &iterator)`
Get next offset in part offsets list.
 - `bool isClockwise (std::vector< ICoordinate * >::iterator &begin, std::vector< ICoordinate * >::iterator &end)`
Analyzes polygon direction.
 - `bool isCounterClockwise (std::vector< ICoordinate * >::iterator &begin, std::vector< ICoordinate * >::iterator &end)`
Analyzes polygon direction.
 - `void neListToCoordList (sosi::NorthEastList &neList, std::vector< ICoordinate * > &coordList)`
Extracts single coordinates from list of North-East elements.
 - `std::ostream & operator<< (std::ostream &os, IBinaryStreamable &binaryStreamable)`
Stream output operator.
-

Detailed Description

Application root.

Typedef Documentation

typedef std::vector< ICoordinate * > sosicon::CoordinateList

List of coordinate pairs.

Used throughout the application.

Definition at line 30 of file common_types.h.

Enumeration Type Documentation

enum sosicon::Wkt

List of applied, well-known text geometries.

Enumerator

wkt_unknown Unknown geometry.

wkt_point Point geometry.

wkt_linestring Linestring geometry.

wkt_polygon Polygon geometry.

Definition at line 33 of file common_types.h.

Function Documentation

bool sosicon::getNext (ICoordinate *& coord, sosi::NorthEastList & list, sosi::NorthEastList::iterator & i)

Get next coordinate in list.

Definition at line 21 of file coordinate_collection.cpp.

bool sosicon::getNextOffset (int & offset, std::vector< int > & offsets, std::vector< int >::iterator & iterator)

Get next offset in part offsets list.

Definition at line 42 of file coordinate_collection.cpp.

bool sosicon::isClockwise (std::vector< ICoordinate * >::iterator & begin, std::vector< ICoordinate * >::iterator & end)

Analyzes polygon direction.

Checks a series of coordinates to see if they are ordered in a clockwise manner.

Parameters:

<i>begin</i>	Iterator to the first item to be analyzed.
<i>end</i>	Iterator to the end item, one item past the last one to be analyzed.

Returns:

true if the coordinates are ordered clockwise.

Definition at line 60 of file coordinate_collection.cpp.

bool sosicon::isCounterClockwise (std::vector< ICoordinate * >::iterator & begin, std::vector< ICoordinate * >::iterator & end)

Analyzes polygon direction.

Checks a series of coordinates to see if they are ordered in a counter-clockwise manner.

Parameters:

<i>begin</i>	Iterator to the first item to be analyzed.
<i>end</i>	Iterator to the end item, one item past the last one to be analyzed.

Returns:

true if the coordinates are ordered counter-clockwise.

Definition at line 55 of file coordinate_collection.cpp.

void sosicon::neListToCoordList (sosi::NorthEastList & neList, std::vector< ICoordinate * > & coordList)

Extracts single coordinates from list of North-East elements.

Converts a vector of NE elements to a vector of coordinates.

Parameters:

<i>neList</i>	The source vector.
<i>coordList</i>	The destination vector.

Definition at line 71 of file coordinate_collection.cpp.

sosicon::byteOrder Namespace Reference

Big/low-endian conversions.

Enumerations

- enum **Endianness** { **not_set**, **big**, **little** }

Big/little flag. Functions

- **Endianness determine** ()
Determines system endianness.
- void **doubleToLittleEndian** (double from, char *to)
Writes little endian representation of double.
- void **toBigEndian** (const char *from, char *to, size_t bufSize)
Reverses buffer to big endian if required.
- void **toLittleEndian** (const char *from, char *to, size_t bufSize)
Reverses buffer to little endian if required.

Variables

- enum **sosicon::byteOrder::Endianness** **endianness**
Stores system endianness.

Detailed Description

Big/low-endian conversions.

Enumeration Type Documentation

enum sosicon::byteOrder::Endianness

Big/little flag.

Enumerator

not_set
big
little

Definition at line 39 of file byte_order.h.

Function Documentation

sosicon::byteOrder::Endianness sosicon::byteOrder::determine ()

Determines system endianness.

Tests byte-order to see if the program runs on a big endian or a little endian architecture. Flags the `byteOrder::endian` variable.

Returns:

System endianness.

Return values:

<i>Endianness::big</i>	Big endian system.
<i>Endianness::little</i>	Little endian system.

Definition at line 24 of file `byte_order.cpp`.

void sosicon::byteOrder::doubleToLittleEndian (double *from*, char * *to*)

Writes little endian representation of double.

Serializes double-precision floating point value to IEEE little endian representation for binary embedding in files.

Parameters:

<i>from</i>	The double value to parse.
<i>to</i>	pointer to destination buffer. The buffer must be at least 8 bytes wide, as this is the size of the IEEE 754 format.

Definition at line 56 of file `byte_order.cpp`.

void sosicon::byteOrder::toBigEndian (const char * *from*, char * *to*, size_t *bufSize*)

Reverses buffer to big endian if required.

Copies source buffer to destination buffer. If the program runs on a little-endian system, the byte order will be reversed.

Parameters:

<i>from</i>	pointer to source buffer.
<i>to</i>	pointer to destination buffer. The buffer must be at least as big as the source buffer.
<i>bufSize</i>	The number of bytes to copy.

Definition at line 36 of file `byte_order.cpp`.

void sosicon::byteOrder::toLittleEndian (const char * *from*, char * *to*, size_t *bufSize*)

Reverses buffer to little endian if required.

Copies source buffer to destination buffer. If the program runs on a big-endian system, the byte order will be reversed.

Parameters:

<i>from</i>	pointer to source buffer.
<i>to</i>	pointer to destination buffer. The buffer must be at least as big as the source buffer.
<i>bufSize</i>	The number of bytes to copy.

Definition at line 46 of file `byte_order.cpp`.

Variable Documentation

enum sosicon::byteOrder::Endianness

sosicon::byteOrder::endianness

Stores system endianness.

sosicon::shape Namespace Reference

ESRI Shape.

Classes

- union **DoubleField**
- *32 bit double / byte field* union **Int16Field**
- *16 bit integer / byte field* union **Int32Field**
- *32 bit integer / byte field* union **Int32TField**
- *32 bit integer / byte / geom::ShapeType field* union **Int8Field**
- *8 bit integer / byte field* class **Shapefile**
- *Shapefile implementation.* struct **ShxIndex**

Typedefs

- typedef std::map< std::string,
- std::string > **DbfRecord**
- typedef std::vector< **DbfRecord** > **DbfRecordSet**
- typedef std::map< std::string,
- int > **DbfFieldLengths**
- typedef std::vector< **ShxIndex** > **ShxOffsets**

Enumerations

- enum **ShapeType** { **shape_type_none**, **shape_type_nullShape**, **shape_type_point**, **shape_type_polyLine**, **shape_type_polygon**, **shape_type_multipart**, **shape_type_pointZ**, **shape_type_polyLineZ**, **shape_type_polygonZ**, **shape_type_multipartZ**, **shape_type_pointM**, **shape_type_polyLineM**, **shape_type_polygonM**, **shape_type_multiPointM**, **shape_type_multiPatch** }

Geometry types. Functions

- **ShapeType** **getShapeEquivalent** (sosi::ElementType sosiType)
Resolve geometry type.

Detailed Description

ESRI Shape.

Typedef Documentation

typedef std::map<std::string, int> sosicon::shape::DbfFieldLengths

Definition at line 90 of file shapefile_types.h.

typedef std::map<std::string, std::string> sosicon::shape::DbfRecord

Definition at line 88 of file shapefile_types.h.

typedef std::vector<DbfRecord> sosicon::shape::DbfRecordSet

Definition at line 89 of file shapefile_types.h.

typedef std::vector<ShxIndex> sosicon::shape::ShxOffsets

Definition at line 91 of file shapefile_types.h.

Enumeration Type Documentation

enum sosicon::shape::ShapeType

Geometry types.

The numeric values are in accordance with the shapefile specification.

Enumerator

shape_type_none
shape_type_nullShape
shape_type_point
shape_type_polyLine
shape_type_polygon
shape_type_multipoint
shape_type_pointZ
shape_type_polyLineZ
shape_type_polygonZ
shape_type_multipointZ
shape_type_pointM
shape_type_polyLineM
shape_type_polygonM
shape_type_multiPointM
shape_type_multiPatch

Definition at line 34 of file shapefile_types.h.

Function Documentation

sosicon::shape::ShapeType sosicon::shape::getShapeEquivalent (sosi::ElementType *sosiType*)

Resolve geometry type.

Translate SOSI geomtry type to corresponding shape geometry, if applicable

Definition at line 21 of file shapefile.cpp.

sosicon::sosi Namespace Reference

SOSI.

Classes

- class **CoordSys**
- *SOSI coordinate system.* struct **ReferenceData**
- *SOSI reference number.* class **SosiElement**
- *Basic SOSI element.* class **SosiElementSearch**
- class **SosiJunctionPoint**
- *SOSI Junction point.* class **SosiNorthEast**
- *SOSI North-east element.* class **SosiOrigoNE**
- *SOSI Junction point.* class **SosiRefList**
- *SOSI REF list.* class **SosiTranslationTable**
- class **SosiUnit**

SOSI Unit. Typedefs

- typedef std::map< std::string,
- **ISosiElement * > SosiElementMap**
Element index type.
- typedef std::vector
- **< ISosiElement * > SosiChildrenList**
- typedef SosiChildrenList::iterator **SosiChildrenIterator**
- typedef std::vector
- **< SosiNorthEast * > NorthEastList**
List of SosiNorthEast elements.
- typedef std::vector
- **< ReferenceData * > GeometryRef**
List of SOSI references.
- typedef std::vector
- **< GeometryRef * > GeometryCollection**
Collection of SOSI reference lists.

Enumerations

- enum **ElementType** { **sosi_element_unknown**, **sosi_element_address_identifier**, **sosi_element_airport_roads**, **sosi_element_airport_type**, **sosi_element_area**, **sosi_element_charset**, **sosi_element_coordsys**, **sosi_element_curve**, **sosi_element_eof**, **sosi_element_head**, **sosi_element_height**, **sosi_element_iata_code**, **sosi_element_icao_code**, **sosi_element_kp**, **sosi_element_level**, **sosi_element_max_ne**, **sosi_element_min_ne**, **sosi_element_municipality**, **sosi_element_name**, **sosi_element_ne**, **sosi_element_neh**, **sosi_element_objtype**, **sosi_element_origo_ne**, **sosi_element_owner**, **sosi_element_point**, **sosi_element_quality**, **sosi_element_ref**, **sosi_element_surface**, **sosi_element_text**, **sosi_element_traffic_type**, **sosi_element_transpar**, **sosi_element_unit**, **sosi_element_updatedate**, **sosi_element_water_width**, **sosi_element_vendor**, **sosi_element_version** }
- *List of SOSI element types.* enum **ObjType** { **sosi_objtype_unknown**, **sosi_objtype_airport**, **sosi_objtype_airport_type**, **sosi_objtype_baseline**, **sosi_objtype_carriageway**, **sosi_objtype_cadastral_address**, **sosi_objtype_coastline**, **sosi_objtype_county_boundary**, **sosi_objtype_data_delineation**, **sosi_objtype_edge_view**, **sosi_objtype_fictious_dividing_line**, **sosi_objtype_forest**, **sosi_objtype_developed_area**, **sosi_objtype_golf_course**, **sosi_objtype_industrial_area**, **sosi_objtype_lake**, **sosi_objtype_lane**, **sosi_objtype_lake_edge**, **sosi_objtype_lake_river_barrier**, **sosi_objtype_land_use_boundary**, **sosi_objtype_level_crossing**,

- sosi_objtype_municipal_divide, sosi_objtype_municipality, sosi_objtype_municipality_boundary, sosi_objtype_marsh, sosi_objtype_national_border, sosi_objtype_pedestrian_bicycle_road_centre_line, sosi_objtype_sea_river_delineation, sosi_objtype_snow_field, sosi_objtype_open_land, sosi_objtype_river_brook, sosi_objtype_river_brook_edge, sosi_objtype_road_block, sosi_objtype_road_centre_line, sosi_objtype_road_under_railway, sosi_objtype_sea_surface, sosi_objtype_sidewalk, sosi_objtype_spelling, sosi_objtype_stone_quarry, sosi_objtype_street_address, sosi_objtype_territorial_boundary, sosi_objtype_turn_connecting_segment }
- List of SOSI OBJTYPEs. enum JunctionPoint { sosi_junction_node, sosi_junction_connection, sosi_junction_open_end }

Default SOSI junction point layer types. Functions

- CoordSys sysCodeToCoordSys** (int sysCode)
Convert SOSI SYSKODE value to coordinate system data.
- ElementType sosiNameToType** (std::string sosiElementName)
Convert SOSI element names to ElementType enum value.
- ObjType sosiObjNameToType** (std::string sosiObjTypeName)
Convert SOSI objtype names to ObjType enum value.
- void **deleteNorthEast**s (NorthEastList &lst)
*Deletes **SosiNorthEast** elements of NorthEastList.*

Detailed Description

SOSI.

Typedef Documentation

typedef std::vector<SosiNorthEast*> sosicon::sosi::NorthEastList

List of SosiNorthEast elements.

Definition at line 115 of file sosi_north_east.h.

Function Documentation

void sosicon::sosi::deleteNorthEasts (NorthEastList & /sf)

Deletes **SosiNorthEast** elements of NorthEastList.

Definition at line 21 of file sosi_north_east.cpp.

sosicon::utils Namespace Reference

String manipulation routines.

Functions

- `std::string className2FileName (const std::string &className)`
Converts Class name to file name string.
- `std::vector< std::string > explode (char delimiter, std::string str)`
Split a string by a character.
- `bool fileExists (const std::string &name)`
Test if file exists.
- `std::string nonExistingFilename (std::string defaultName)`
Asserts output file name to be non-existing.
- `std::string normalizeAppClassName (const std::string &className)`
Asserts correct name of application classes.
- `std::string repeat (const std::string &seq, unsigned int count)`
Repeat string N times.
- `std::string replaceAll (const std::string &from, const std::string &to, const std::string &subject)`
Replace all occurrences of one string with another.
- `std::string sqlNormalize (const std::string &str)`
Sanitizes SQL data string.
- `std::string trim (const std::string &str)`
Removes leading and trailing space characters.
- `std::string trimLeft (const std::string &str)`
- `std::string trimRight (const std::string &str)`
- `std::string toFieldname (const std::string &from)`
Substitutes Norwegian characters.
- `std::string toLower (const std::string &from)`
- `std::string ucFirst (const std::string &str)`
- `void getPathInfo (std::string path, std::string &dir, std::string &tit, std::string &ext)`
- `std::string wktToStr (Wkt wktGeom)`
Get Well Known Text from Wkt enum.

Detailed Description

String manipulation routines.

Function Documentation

string sosicon::utils::className2FileName (const std::string & className)

Converts Class name to file name string.

Class names are written in pascal case (i.e. 'CarmineEntity', 'XMLParser'). This method constructs a file name string for a given class name (i.e. 'carmine_entity', 'xml_parser'). The file names are always written in lower case, with underscores separating the words.

Parameters:

<i>className</i>	The pascal-cased class name to convert to a file name.
------------------	--

Returns:

The file name string without extension.

Definition at line 23 of file utils.cpp.

std::vector< std::string > sosicon::utils::explode (char *delimiter*, std::string *str*)

Split a string by a character.

The source string *str* is split by the *delimiter* character, and each part is put sequentially in a vector of strings, excluding the *delimiter* character.

Parameters:

<i>delimiter</i>	The delimiter character, typically a comma or a semicolon.
<i>str</i>	The source string to be split into a vector of substrings.

Returns:

A vector of strings, each of which are substrings of *str*.

Definition at line 44 of file utils.cpp.

bool sosicon::utils::fileExists (const std::string & *name*) [inline]

Test if file exists.

Definition at line 60 of file utils.h.

void sosicon::utils::getPathInfo (std::string *path*, std::string & *dir*, std::string & *tit*, std::string & *ext*)

Definition at line 244 of file utils.cpp.

std::string sosicon::utils::nonExistingFilename (std::string *defaultName*)

Asserts output file name to be non-existing.

Tests candidate file paths to find a unique output file name, appending and incrementing a serial number until a "free" name is encountered.

Parameters:

<i>defaultName</i>	If the output file name is not specified on the command-line, the default file name will be used as a starting point.
--------------------	---

Returns:

Path to non-existing output file.

Definition at line 66 of file utils.cpp.

string sosicon::utils::normalizeAppClassName (const std::string & *className*)

Asserts correct name of application classes.

Application classes should always begin with the 'App' prefix. This method adds the prefix to the provided class name if it is missing.

Parameters:

<i>className</i>	The class name string to be resolved and normalized.
------------------	--

Returns:

Normalized and corrected class name string.

Definition at line 87 of file utils.cpp.

string sosicon::utils::repeat (const std::string & *seq*, unsigned int *count*)

Repeat string N times.

Creates a new string containing the provided string sequence for a predetermined number of repetitions.

Parameters:

<i>seq</i>	Reference to the string to be repeated.
<i>count</i>	The numner of times to repeat the string sequence.

Returns:

The result string.

Definition at line 107 of file utils.cpp.

string sosicon::utils::replaceAll (const std::string & *from*, const std::string & *to*, const std::string & *subject*)

Replace all occurences of one string with another.

Searches for a given string sequence, replacing all occurences by th provided substitution string.

Parameters:

<i>from</i>	The string sequence to be changed.
<i>to</i>	The string to replace the 'from' sequence with.
<i>subject</i>	The string to perform the search on.

Returns:

The new string, a copy of 'subject' where all occurences of 'from' are replaced with 'to'.

Definition at line 118 of file utils.cpp.

string sosicon::utils::sqlNormalize (const std::string & *str*)

Sanitizes SQL data string.

Escapes special characters in a string for use in an SQL statement.

Parameters:

<i>str</i>	The target string.
------------	--------------------

Returns:

A copy of the target string, with reserved characters escaped.

Definition at line 132 of file utils.cpp.

string sosicon::utils::toFieldname (const std::string & *from*)

Substitutes Norwegian characters.

Definition at line 156 of file utils.cpp.

string sosicon::utils::toLower (const std::string & *from*)

Definition at line 186 of file utils.cpp.

string sosicon::utils::trim (const std::string & *str*)

Removes leading and trailing space characters.

Space characters in the beginning and at the end of the source string are trimmed.

Parameters:

<i>str</i>	The target string.
------------	--------------------

Returns:

A copy of the target string, without leading and/or trailing space characters.

Definition at line 203 of file utils.cpp.

string sosicon::utils::trimLeft (const std::string & *str*)

Definition at line 209 of file utils.cpp.

string sosicon::utils::trimRight (const std::string & *str*)

Definition at line 216 of file utils.cpp.

string sosicon::utils::ucFirst (const std::string & *str*)

Definition at line 224 of file utils.cpp.

std::string sosicon::utils::wktToStr (Wkt *wktGeom*)

Get Well Known Text from Wkt enum.

Definition at line 282 of file utils.cpp.

Class Documentation

sosicon::CommandLine Class Reference

Command-line parser.

```
#include <command_line.h>
```

Public Member Functions

- void **outputHelpText** ()
Display help text.
- void **outputDisclaimer** ()
Display disclaimer.
- void **outputLicense** ()
Display license.
- void **parse** (int argc, char *argv[])
Read command-line arguments.
- **CommandLine** ()
Constructor.
- virtual ~**CommandLine** ()
Destructor.

Public Attributes

- std::string **mCommand**
Conversion command.
- bool **mCreateStatements**
Build create statements only.
- bool **mInsertStatements**
Build insert statements only.
- std::vector< std::string > **mSourceFiles**
List of input files.
- std::vector< std::string > **mObjTypes**
List of object types to output.
- std::vector< std::string > **mFilterSosiId**
Export specific SOSI elements.
- std::vector< std::string > **mGeomTypes**
List of geometry types to output.
- std::vector< std::string > **mFieldSelection**
List of selected fields.
- std::string **mDestinationDirectory**
Destination directory.
- std::string **mOutputFile**
Destination file.
- bool **mIsTtyIn**
TTY in flag.

- **bool mIsTtyOut**
TTY out flag.
- **bool mAppend**
Append flag.
- **std::string mDbSchema**
PostgreSQL database schema.
- **std::string mDbTable**
PostgreSQL database table.
- **bool mIncludeHeader**
Include column headers.
- **bool mMakeSubDir**
Create a sub directory for the output files.
- **std::string mSrid**
Specifies SRID for exports.
- **int mVerbose**
Verbose output.

Detailed Description

Command-line parser.

Author:

Espen Andersen

Copyright:

GNU General Public License

Takes the arguments from the command-line and parses them into the class member variables. On Linux systems, this class also reads piped content (file list to be processed) from stdin, using it as input parameters.

Definition at line 48 of file `command_line.h`.

Constructor & Destructor Documentation

sosicon::CommandLine::CommandLine ()

Constructor.

Definition at line 21 of file `command_line.cpp`.

sosicon::CommandLine::~~CommandLine () [virtual]

Destructor.

Definition at line 48 of file `command_line.cpp`.

Member Function Documentation

void sosicon::CommandLine::outputDisclaimer ()

Display disclaimer.

Outputs disclaimer text.

Definition at line 248 of file command_line.cpp.

void sosicon::CommandLine::outputHelpText ()

Display help text.

Outputs simple help text to the command-line.

Definition at line 179 of file command_line.cpp.

void sosicon::CommandLine::outputLicense ()

Display license.

Outputs lisence text.

Definition at line 285 of file command_line.cpp.

void sosicon::CommandLine::parse (int *argc*, char * *argv*[])

Read command-line arguments.

Parses the command-line arguments and loads the settings into the member variables. This function will also read piped content (file name list) from stdin on linux systems, adding it to the **CommandLine::mSourceFiles** list of files to be processed.

Parameters:

<i>argc</i>	Number of arguments present. Passed on from main() function.
<i>argv</i>	Array of string pointers to each argument. Passed on from main() function.

Either or both, but not none (!)

Definition at line 63 of file command_line.cpp.

Member Data Documentation

bool sosicon::CommandLine::mAppend

Append flag.

If the destination file (-o ...) is specified together with the -a argument, this flag will be true to signal that data from several source files should be merged into one destination file.

Definition at line 150 of file command_line.h.

std::string sosicon::CommandLine::mCommand

Conversion command.

Specifies what type of conversion to perform. If this string is -2tsv, the SOSI file will be exported as tab separated values. The factory class uses this parameter to determine which **IConverter** implementation to employ upon initialization.

Definition at line 57 of file command_line.h.

bool sosicon::CommandLine::mCreateStatements

Build create statements only.

For PostgreSQL export: If this flag is set (by specifying the -create parameter), database table creation script will be output.

Note:

If neither -create nor -insert is specified, both create and insert statements are included in the export.

Definition at line 67 of file command_line.h.

std::string sosicon::CommandLine::mDbSchema

PostgreSQL database schema.

Name of database schema to export SOSI data to, when using -2psql converter.

Definition at line 156 of file command_line.h.

std::string sosicon::CommandLine::mDbTable

PostgreSQL database table.

Name of database table to export SOSI data to, when using -2psql converter.

Definition at line 162 of file command_line.h.

std::string sosicon::CommandLine::mDestinationDirectory

Destination directory.

Path to the target directory where the output files will be written. Specified by the -d argument.

Definition at line 124 of file command_line.h.

std::vector<std::string> sosicon::CommandLine::mFieldSelection

List of selected fields.

String vector containing the identifiers for the SOSI fields to be included in the export. Specified as a comma-separated list of strings following the -f argument.

Definition at line 117 of file command_line.h.

std::vector<std::string> sosicon::CommandLine::mFilterSosild

Export specific SOSI elements.

List of SOSI IDs of individual element/features to be exported. Specified as a comma-separated list of strings following the -id argument.

Definition at line 101 of file command_line.h.

std::vector<std::string> sosicon::CommandLine::mGeomTypes

List of geometry types to output.

String vector containing the geometry types for the elements to be included in the export. Relevant for shapefile exports, since shapefiles can only contain one geometry type at a time. Specified as a comma-separated list of strings following the -g argument. The converter will output one shapefile for each selected geometry.

Definition at line 110 of file command_line.h.

bool sosicon::CommandLine::mIncludeHeader

Include column headers.

For some output formats, such as tsv, this flag governs whether a line with the column header names should be included in the target file.

Definition at line 169 of file command_line.h.

bool sosicon::CommandLine::mInsertStatements

Build insert statements only.

For PostgreSQL export: If this flag is set (by specifying the -insert parameter), database table insertion script will be output.

Note:

If neither -create nor -insert is specified, both create and insert statements are included in the export.

Definition at line 77 of file command_line.h.

bool sosicon::CommandLine::mIsTtyIn

TTY in flag.

This flag is false if input is redirected (not a terminal window).

Definition at line 136 of file command_line.h.

bool sosicon::CommandLine::mIsTtyOut

TTY out flag.

This flag is false if output is redirected (not a terminal window).

Definition at line 142 of file command_line.h.

bool sosicon::CommandLine::mMakeSubDir

Create a sub directory for the output files.

If the /s switch is specified, this flag is set to true. Instead of emitting the output files directly to current directory, a sub directory will be created, to which the output files are written.

Definition at line 177 of file `command_line.h`.

std::vector<std::string> sosicon::CommandLine::mObjTypes

List of object types to output.

String vector containing the SOSI OBJTYPE identifiers for the elements to be included in the export. Specified as a comma-separated list of strings following the -t argument.

Definition at line 94 of file `command_line.h`.

std::string sosicon::CommandLine::mOutputFile

Destination file.

Specified by the -o argument. The target file name.

Definition at line 130 of file `command_line.h`.

std::vector<std::string> sosicon::CommandLine::mSourceFiles

List of input files.

String vector containing the list of SOSI input files to be converted. This list is populated either by the file names specified directly on the command-line, or by the content of stdin as piped in from other commands (such as `ls *.sos | ...`) on Linux based systems.

Definition at line 86 of file `command_line.h`.

std::string sosicon::CommandLine::mSrid

Specifies SRID for exports.

Used for grid conversion exports to postGIS or other conversions that supports this.

Definition at line 183 of file `command_line.h`.

int sosicon::CommandLine::mVerbose

Verbose output.

Verbose level. If this value is 0, no informative output will be emitted during file parsing. If the value is 1 (-v), limited output will be written to stdout - mostly file header information from each SOSI file to be converted. If the value is 2 (-V), a more comprehensive summary of every SOSI element in all source files will be output.

Definition at line 192 of file `command_line.h`.

The documentation for this class was generated from the following files:


- `/prosjekter/sosicon/sosicon/src/command_line.h`
- `/prosjekter/sosicon/sosicon/src/command_line.cpp`

sosicon::ConverterSosi2psql Class Reference

SOSI to PostgreSQL/PostGIS converter.

```
#include <converter_sosi2psql.h>
```

Inheritance diagram for sosicon::ConverterSosi2psql:

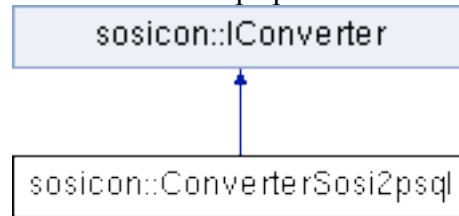

Public Member Functions

- **ConverterSosi2psql ()**
Constructor.
- virtual void **init** (CommandLine *cmd)
Initialize converter.
- virtual void **run** ()
Start conversion.

Private Types

- typedef std::map< std::string,
- std::string::size_type > **FieldsList**
- typedef std::map< Wkt,
- **FieldsList** * > **FieldsListCollection**
- typedef std::vector< std::map
- < std::string, std::string > * > **RowsList**
- typedef std::map< Wkt, RowsList * > **RowsListCollection**

Private Member Functions

- std::string **buildInsertStatements** (std::string dbSchema, std::string dbTable)
Build SQL insert statements for all geometries.
- std::string **buildInsertStatement** (Wkt wktGeom, std::string dbSchema, std::string dbTable)
Build SQL insert statement for one geometry.
- std::string **buildCreateStatements** (std::string sridDest, std::string dbSchema, std::string dbTable)
Build SQL create statements for all geometries.
- std::string **buildCreateStatement** (Wkt wktGeom, std::string sridDest, std::string dbSchema, std::string dbTable)
Build SQL create statements for one geometry.
- void **cleanup** ()
- void **cleanup** (Wkt wktGeom)
- void **extractData** (ISosiElement *parent, FieldsList &hdr, std::map< std::string, std::string > *&row)
Fetch element data fields recursively.
- std::string **getSrid** (ISosiElement *sosiTree)
Read current coordinate system from SOSI tree.
- void **insertLineString** (ISosiElement *lineString, std::string sridSource, std::string sridDest, std::string geomField)

Convert curve geomery (sosi KURVE) to SQL export data.

- void **insertPoint** (**ISosiElement** *point, std::string sridSource, std::string sridDest, std::string geomField)
Convert single point geomery (sosi PUNKT) to SQL export data.
- void **insertPolygon** (**ISosiElement** *polygon, std::string sridSource, std::string sridDest, std::string geomField)
Convert polygons (sosi FLATE) to SQL export data.
- void **makePsql** (**ISosiElement** *sosiTree, std::string sridDest, std::string dbSchema, std::string dbTable)
Make SQL dump from SOSI tree.
- bool **objTypeExcluded** (sosi::SosiElementSearch &src)
Test if current element is filtered out by -t parameter.
- void **writePsql** (std::string sridDest, std::string dbSchema, std::string dbTable)
Write SQL content.
- virtual ~**ConverterSosi2psql** ()
Destructor.

Private Attributes

- **CommandLine** * mCmd
Command line wrapper.
- std::string **mCurrentSourcefile**
Souce file currently in process.
- **FieldsListCollection** mFieldsListCollection
Collection of fields, one item for each geometry type.
- **RowsListCollection** mRowsListCollection
Collection of rows, one item for each geometry type.

Detailed Description

SOSI to PostgreSQL/PostGIS converter.

If command-line parameter -2psql is specified, this converter will handle the output generation. Produces a PostgreSQL/PostGIS dump file from the SOSI source(s).

Definition at line 51 of file converter_sosi2psql.h.

Member Typedef Documentation

```
typedef std::map< std::string, std::string::size_type >  
sosicon::ConverterSosi2psql::FieldsList [private]
```

Definition at line 53 of file converter_sosi2psql.h.

```
typedef std::map< Wkt, FieldsList* > sosicon::ConverterSosi2psql::FieldsListCollection [private]
```

Definition at line 54 of file converter_sosi2psql.h.

```
typedef std::vector< std::map< std::string, std::string >* >
sosicon::ConverterSosi2psql::RowsList [private]
```

Definition at line 55 of file converter_sosi2psql.h.

```
typedef std::map< Wkt, RowsList* > sosicon::ConverterSosi2psql::RowsListCollection [private]
```

Definition at line 56 of file converter_sosi2psql.h.

Constructor & Destructor Documentation

```
virtual sosicon::ConverterSosi2psql::~ConverterSosi2psql () [inline], [private], [virtual]
```

Destructor.

Definition at line 268 of file converter_sosi2psql.h.

```
sosicon::ConverterSosi2psql::ConverterSosi2psql () [inline]
```

Constructor.

Definition at line 273 of file converter_sosi2psql.h.

Member Function Documentation

```
std::string sosicon::ConverterSosi2psql::buildCreateStatement (Wkt wktGeom, std::string
sridDest, std::string dbSchema, std::string dbTable) [private]
```

Build SQL create statements for one geometry.

This function calls **sosicon::ConverterSosi2psql::buildCreateStatements** for each of the WKT geometries types to export.

Parameters:

<i>dbSchema</i>	String representing the name of the database schema.
<i>dbTable</i>	String representing the base name of the database table. The name of the geometry for that table will be prepended to the base name.

See also:

sosicon::ConverterSosi2psql::buildCreateStatements()

Returns:

The SQL/DDDL creation script content.

Definition at line 44 of file converter_sosi2psql.cpp.

```
std::string sosicon::ConverterSosi2psql::buildCreateStatements (std::string sridDest, std::string
dbSchema, std::string dbTable) [private]
```

Build SQL create statements for all geometries.

This function calls **sosicon::ConverterSosi2psql::buildCreateStatement** for each of the WKT geometries types to export.

Parameters:

<i>dbSchema</i>	String representing the name of the database schema.
<i>dbTable</i>	String representing the base name of the database table. The name of the geometry for that table will be prepended to the base name.

See also:

sosicon::ConverterSosi2psql::buildCreateStatement()

Returns:

The SQL/DDDL creation script content.
Definition at line 21 of file converter_sosi2psql.cpp.

std::string sosicon::ConverterSosi2psql::buildInsertStatement (Wkt *wktGeom*, std::string *dbSchema*, std::string *dbTable*) [private]

Build SQL insert statement for one geometry.

Creates the SQL statements required to insert the data for one WKT geometry.

Parameters:

<i>wktGeom</i>	WKT geometry type for current insertion script.
<i>dbSchema</i>	String representing the name of the database schema.
<i>dbTable</i>	String representing the base name of the database table. The name of the geometry for that table will be prepended to the base name.

See also:

sosicon::ConverterSosi2psql::buildInsertStatements()

Returns:

The SQL insertion script content.
Definition at line 135 of file converter_sosi2psql.cpp.

std::string sosicon::ConverterSosi2psql::buildInsertStatements (std::string *dbSchema*, std::string *dbTable*) [private]

Build SQL insert statements for all geometries.

This function calls **sosicon::ConverterSosi2psql::buildInsertStatement** for each of the WKT geometries types to export.

Parameters:

<i>dbSchema</i>	String representing the name of the database schema.
<i>dbTable</i>	String representing the base name of the database table. The name of the geometry for that table will be prepended to the base name.

See also:

sosicon::ConverterSosi2psql::buildInsertStatement()

Returns:

The SQL insertion script content.
Definition at line 116 of file converter_sosi2psql.cpp.

void sosicon::ConverterSosi2psql::cleanup () [private]

Release memory reserved for this converter. Called before destroying object. It may not be necessary to invoke **cleanup()** if the program is about to terminate anyway, as this can be quite time consuming after converting large files.

See also:

sosicon::ConverterSosi2psql::cleanup(Wkt)

Definition at line 221 of file converter_sosi2psql.cpp.

void sosicon::ConverterSosi2psql::cleanup (Wkt wktGeom) [private]

Release memory reserved for one geometry. Called from **sosicon::ConverterSosi2psql::cleanup(Wkt)**

Parameters:

<i>wktGeom</i>	The WKT geometry type for which to delete allocated memory.
----------------	---

See also:

sosicon::ConverterSosi2psql::cleanup()

Definition at line 232 of file converter_sosi2psql.cpp.

void sosicon::ConverterSosi2psql::extractData (ISosiElement * parent, FieldsList & hdr, std::map< std::string, std::string > *& row) [private]

Fetch element data fields recursively.

Traverses the SOSI element tree recursively, extracting plain data fields. The field names are stored in the *hdr* list, and the data values are stored in the *row* list. The data size value associated with each entry in *hdr* is updated to reflect the longest encountered field length.

Parameters:

<i>parent</i>	The SOSI (sub)tree to be traversed.
<i>hdr</i>	The fields list (table header).
<i>row</i>	The record set (table row).

Definition at line 249 of file converter_sosi2psql.cpp.

std::string sosicon::ConverterSosi2psql::getSrid (ISosiElement * sosiTree) [private]

Read current coordinate system from SOSI tree.

Scans the SOSI header, searching for the KOORDSYS element with information about the current coordinate system.

Parameters:

<i>sosiTree</i>	Pointer to the root SOSI element.
-----------------	-----------------------------------

Returns:

The SRID code for the grid used in current file.

Definition at line 281 of file converter_sosi2psql.cpp.

virtual void sosicon::ConverterSosi2psql::init (CommandLine * cmd) [inline], [virtual]

Initialize converter.

Implementation details in **sosicon::IConverter::init()**

Parameters:

<i>cmd</i>	Pointer to (the one and only) CommandLine instance.
------------	--

See also:

sosicon::IConverter::init()

Implements **sosicon::IConverter** (p.76).

Definition at line 281 of file converter_sosi2psql.h.

void sosicon::ConverterSosi2psql::insertLineString (ISosiElement * *lineString*, std::string *sridSource*, std::string *sridDest*, std::string *geomField*) [private]

Convert curve geomery (sosi KURVE) to SQL export data.

Extracts the coordinates from the given SOSI element and builds a linestring WKT geometry from it.

See also:

sosicon::ConverterSosi2psql::insertPoint()

sosicon::ConverterSosi2psql::insertPolygon()

Parameters:

<i>lineString</i>	SOSI geometry element (typically "KURVE").
<i>sridSource</i>	Spatial reference grid ID for the source file.
<i>sridDest</i>	Spatial reference grid ID for the target file.
<i>geomField</i>	The name of the field within the recordset representing the geometry data.

Definition at line 370 of file converter_sosi2psql.cpp.

void sosicon::ConverterSosi2psql::insertPoint (ISosiElement * *point*, std::string *sridSource*, std::string *sridDest*, std::string *geomField*) [private]

Convert single point geomery (sosi PUNKT) to SQL export data.

Extracts the coordinate from the given SOSI element and builds a point WKT geometry from it.

See also:

sosicon::ConverterSosi2psql::insertLineString()

sosicon::ConverterSosi2psql::insertPolygon()

Parameters:

<i>point</i>	SOSI geometry element (typically "PUNKT" or "TEKST").
<i>sridSource</i>	Spatial reference grid ID for the source file.
<i>sridDest</i>	Spatial reference grid ID for the target file.
<i>geomField</i>	The name of the field within the recordset representing the geometry data.

Definition at line 321 of file converter_sosi2psql.cpp.

void sosicon::ConverterSosi2psql::insertPolygon (ISosiElement * *polygon*, std::string *sridSource*, std::string *sridDest*, std::string *geomField*) [private]

Convert polygons (sosi FLATE) to SQL export data.

Extracts the coordinates from the given SOSI element and builds a polygon WKT geometry from it.

See also:

sosicon::ConverterSosi2psql::insertLineString()

sosicon::ConverterSosi2psql::insertPoint()

Parameters:

<i>point</i>	SOSI geometry element (typically "FLATE").
<i>sridSource</i>	Spatial reference grid ID for the source file.
<i>sridDest</i>	Spatial reference grid ID for the target file.
<i>geomField</i>	The name of the field within the recordset representing the geometry data.

Definition at line 423 of file converter_sosi2psql.cpp.

void sosicon::ConverterSosi2psql::makePsql (ISosiElement * *sosiTree*, std::string *sridDest*, std::string *dbSchema*, std::string *dbTable*) [private]

Make SQL dump from SOSI tree.

Iterates the SOSI tree once for each geometry to be exported, extracting relevant elements and passing them on to one of the insertion routines.

Parameters:

<i>sosiTree</i>	Pointer to the root SOSI element.
<i>sridDest</i>	Spatial reference grid ID for the target file.
<i>dbSchema</i>	String representing the name of the database schema.
<i>dbTable</i>	String representing the base name of the database table. The name of the geometry for that table will be prepended to the base name.

See also:

sosicon::ConverterSosi2psql::insertPoint()

sosicon::ConverterSosi2psql::insertLineString()

sosicon::ConverterSosi2psql::insertPolygon()

Definition at line 513 of file converter_sosi2psql.cpp.

bool sosicon::ConverterSosi2psql::objTypeExcluded (sosi::SosiElementSearch & *src*) [private]

Test if current element is filtered out by -t parameter.

If the user uses the -t parameter to specify which OBJTYPE elements to include in the export, this function tests if current element is opted out of the export.

Parameters:

<i>src</i>	SOSI element serch result to test.
------------	------------------------------------

Returns:

True if current element should be excluded from the export file.

Definition at line 549 of file converter_sosi2psql.cpp.

void sosicon::ConverterSosi2psql::run () [virtual]

Start conversion.

Implementation details in **sosicon::IConverter::run()**

See also:

sosicon::IConverter::run()

Implements **sosicon::IConverter** (p.77).

Definition at line 556 of file converter_sosi2psql.cpp.

void sosicon::ConverterSosi2psql::writePsql (std::string *sridDest*, std::string *dbSchema*, std::string *dbTable*) [private]

Write SQL content.

Assembles and prepares the SQL statements before writing them to the destination file.

Parameters:

<i>sridDest</i>	Spatial reference grid ID for the target file.
<i>dbSchema</i>	String representing the name of the database schema.
<i>dbTable</i>	String representing the base name of the database table. The name of the geometry for that table will be prepended to the base name.

Definition at line 610 of file converter_sosi2psql.cpp.

Member Data Documentation

CommandLine* sosicon::ConverterSosi2psql::mCmd [private]

Command line wrapper.

Definition at line 59 of file converter_sosi2psql.h.

std::string sosicon::ConverterSosi2psql::mCurrentSourcefile [private]

Source file currently in process.

Definition at line 62 of file converter_sosi2psql.h.

FieldsListCollection sosicon::ConverterSosi2psql::mFieldsListCollection [private]

Collection of fields, one item for each geometry type.

Definition at line 65 of file converter_sosi2psql.h.

RowsListCollection sosicon::ConverterSosi2psql::mRowsListCollection [private]

Collection of rows, one item for each geometry type.

Definition at line 68 of file converter_sosi2psql.h.

The documentation for this class was generated from the following files:

- /projekter/sosicon/sosicon/src/converter_sosi2psql.h
- /projekter/sosicon/sosicon/src/converter_sosi2psql.cpp

sosicon::ConverterSosi2shp Class Reference

SOSI to ESRI Shape converter.

```
#include <converter_sosi2shp.h>
```

Inheritance diagram for sosicon::ConverterSosi2shp:



Public Member Functions

- **ConverterSosi2shp ()**
Constructor.
- virtual **~ConverterSosi2shp ()**
Destructor.
- virtual void **init (CommandLine *cmd)**
Initialize converter.
- virtual void **run ()**
Start conversion.

Private Member Functions

- template<typename T > void **writeFile (shape::Shapefile &shp, std::string basePath, std::string extension)**
Save specific shapefile part.
- void **makeShp (ISosiElement *sosiTree)**
- std::string **makeBasePath (std::string objTypeName)**
Make base file path for destination files.

Private Attributes

- **CommandLine * mCmd**
Command line wrapper.
- std::string **mCurrentSourcefile**
Source file currently in process.

Detailed Description

SOSI to ESRI Shape converter.

If command-line parameter -2shp is specified, this converter will handle the output generation. Produces an ESRI Shape-file from SOSI source.

Definition at line 60 of file converter_sosi2shp.h.

Constructor & Destructor Documentation

sosicon::ConverterSosi2shp::ConverterSosi2shp ()`[inline]`

Constructor.

Definition at line 117 of file converter_sosi2shp.h.

virtual sosicon::ConverterSosi2shp::~~ConverterSosi2shp ()`[inline]`, `[virtual]`

Destructor.

Definition at line 120 of file converter_sosi2shp.h.

Member Function Documentation

virtual void sosicon::ConverterSosi2shp::init (CommandLine * *cmd*)`[inline]`, `[virtual]`

Initialize converter.

Implementation details in **sosicon::IConverter::init()**

See also:

sosicon::IConverter::init()

Implements **sosicon::IConverter** (p.76).

Definition at line 127 of file converter_sosi2shp.h.

std::string sosicon::ConverterSosi2shp::makeBasePath (std::string *objTypeName*)`[private]`

Make base file path for destination files.

If the user specified an output file name, it will be used as a candidate for a base name to create shp, shx and dbf files for the shape export. Otherwise, the name of the first source file will be used by default.

This function checks if there are any name collisions, incrementing a postfixed number to the base name until a unique name is found.

Returns:

Modified, unique destination base name with directory (if provided), without file name extension.

Definition at line 118 of file converter_sosi2shp.cpp.

void sosicon::ConverterSosi2shp::makeShp (ISosiElement * *sosiTree*)`[private]`

Definition at line 21 of file converter_sosi2shp.cpp.

void sosicon::ConverterSosi2shp::run ()`[virtual]`

Start conversion.

Implementation details in **sosicon::IConverter::run()**

See also:

sosicon::IConverter::run()

Implements **sosicon::IConverter** (p.77).

Definition at line 158 of file converter_sosi2shp.cpp.

template<typename T > void sosicon::ConverterSosi2shp::writeFile (shape::Shapefile & shp, std::string basePath, std::string extension)[inline], [private]

Save specific shapefile part.

The shapefile format consists of several files. Use corresponding interface to cast a instance of **IShapefile** to the correct file part for writing. The shapefile parts interfaces are:

- **IShapefileShpPart**
- **IShapefileShxPart**
- **IShapefileDbfPart**
- **IShapefilePrjPart**

Parameters:

<i>shp</i>	Reference to the source ShapeFile instance.
<i>basePath</i>	Path and file title for the file to be written, without extension.
<i>extension</i>	additional file extensions to be appended before the main extension, which is one of the following: <ul style="list-style-type: none">• shp (shapefile part)• shx (index part)• dbf (attributes part)• prj (projection part)

Definition at line 83 of file converter_sosi2shp.h.

Member Data Documentation

CommandLine* sosicon::ConverterSosi2shp::mCmd [private]

Command line wrapper.

Definition at line 93 of file converter_sosi2shp.h.

std::string sosicon::ConverterSosi2shp::mCurrentSourcefile [private]

Souce file currently in process.

Definition at line 96 of file converter_sosi2shp.h.

The documentation for this class was generated from the following files:


- /prosjekter/sosicon/sosicon/src/**converter_sosi2shp.h**
- /prosjekter/sosicon/sosicon/src/**converter_sosi2shp.cpp**

sosicon::ConverterSosi2tsv Class Reference

SOSI to TSV converter.

```
#include <converter_sosi2tsv.h>
```

Inheritance diagram for sosicon::ConverterSosi2tsv:

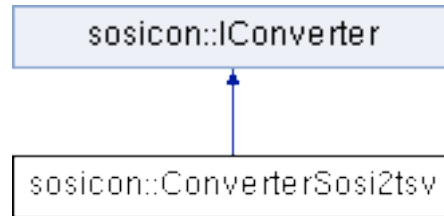

Public Member Functions

- **ConverterSosi2tsv ()**
Constructor.
- virtual void **init** (CommandLine *cmd)
Initialize converter.
- virtual void **run** ()
Start conversion.

Private Member Functions

- virtual ~**ConverterSosi2tsv** ()
Destructor.

Private Attributes

- **CommandLine * mCmd**
Command line wrapper.

Detailed Description

SOSI to TSV converter.

If command-line parameter -2tsv is specified, this converter will handle the output generation. Produces a TSV file (tab separated values) SOSI source.

Definition at line 39 of file converter_sosi2tsv.h.

Constructor & Destructor Documentation

virtual sosicon::ConverterSosi2tsv::~~ConverterSosi2tsv ()[inline], [private], [virtual]

Destructor.

Definition at line 45 of file converter_sosi2tsv.h.

sosicon::ConverterSosi2tsv::ConverterSosi2tsv () [inline]

Constructor.

Definition at line 49 of file converter_sosi2tsv.h.

Member Function Documentation

virtual void sosicon::ConverterSosi2tsv::init (CommandLine * *cmd*) [inline], [virtual]

Initialize converter.

Implementation details in **sosicon::IConverter::init()**

See also:

sosicon::IConverter::init()

Implements **sosicon::IConverter** (p.76).

Definition at line 56 of file converter_sosi2tsv.h.

void sosicon::ConverterSosi2tsv::run () [virtual]

Start conversion.

Implementation details in **sosicon::IConverter::run()**

See also:

sosicon::IConverter::run()

Implements **sosicon::IConverter** (p.77).

Definition at line 21 of file converter_sosi2tsv.cpp.

Member Data Documentation

CommandLine* sosicon::ConverterSosi2tsv::mCmd [private]

Command line wrapper.

Definition at line 42 of file converter_sosi2tsv.h.

The documentation for this class was generated from the following files:


- /prosjekter/sosicon/sosicon/src/converter_sosi2tsv.h
- /prosjekter/sosicon/sosicon/src/converter_sosi2tsv.cpp

sosicon::ConverterSosi2xml Class Reference

SOSI to ESRI Shape converter.

```
#include <converter_sosi2xml.h>
```

Inheritance diagram for sosicon::ConverterSosi2xml:

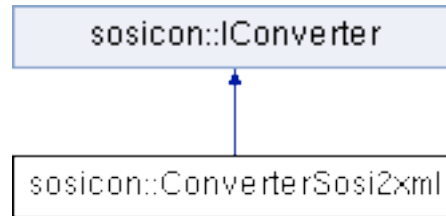

Public Member Functions

- **ConverterSosi2xml ()**
Constructor.
- **virtual ~ConverterSosi2xml ()**
Destructor.
- **virtual void init (CommandLine *cmd)**
Initialize converter.
- **virtual void run ()**
Start conversion.

Private Member Functions

- **void makeXML (ISosiElement *parent)**

Private Attributes

- **CommandLine * mCmd**
Command line wrapper.

Detailed Description

SOSI to ESRI Shape converter.

If command-line parameter -2xml is specified, this converter will handle the output generation. Produces an ESRI Shape-file from SOSI source.

Definition at line 41 of file converter_sosi2xml.h.

Constructor & Destructor Documentation

sosicon::ConverterSosi2xml::ConverterSosi2xml ()[\[inline\]](#)

Constructor.

Definition at line 51 of file converter_sosi2xml.h.

virtual sosicon::ConverterSosi2xml::~~ConverterSosi2xml () [inline], [virtual]

Destructor.

Definition at line 54 of file converter_sosi2xml.h.

Member Function Documentation

virtual void sosicon::ConverterSosi2xml::init (CommandLine * *cmd*) [inline], [virtual]

Initialize converter.

Implementation details in **sosicon::IConverter::init()**

See also:

sosicon::IConverter::init()

Implements **sosicon::IConverter** (p.76).

Definition at line 61 of file converter_sosi2xml.h.

void sosicon::ConverterSosi2xml::makeXML (ISosiElement * *parent*) [private]

Definition at line 21 of file converter_sosi2xml.cpp.

void sosicon::ConverterSosi2xml::run () [virtual]

Start conversion.

Implementation details in **sosicon::IConverter::run()**

See also:

sosicon::IConverter::run()

Implements **sosicon::IConverter** (p.77).

Definition at line 26 of file converter_sosi2xml.cpp.

Member Data Documentation

CommandLine* sosicon::ConverterSosi2xml::mCmd [private]

Command line wrapper.

Definition at line 44 of file converter_sosi2xml.h.

The documentation for this class was generated from the following files:


- /prosjekter/sosicon/sosicon/src/converter_sosi2xml.h
- /prosjekter/sosicon/sosicon/src/converter_sosi2xml.cpp

sosicon::ConverterSosiStat Class Reference

SOSI to ESRI Shape converter.

```
#include <converter_sosi_stat.h>
```

Inheritance diagram for sosicon::ConverterSosiStat:

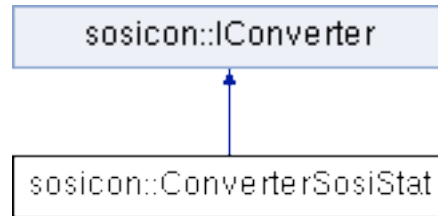

Public Member Functions

- **ConverterSosiStat ()**
Constructor.
- **virtual ~ConverterSosiStat ()**
Destructor.
- **virtual void init (CommandLine *cmd)**
Initialize converter.
- **virtual void run ()**
Start conversion.

Private Member Functions

- **void printElementData (ISosiElement *e, sosi::SosiElementSearch src, int padding)**
Output simple element attributes.
- **void printListContent (std::map< std::string, int > list, int padding)**
Output content of map<string,int>
- **void printTableHeader (std::string col1, std::string col2, int padding)**
Output simple element attributes.
- **void makeStat (ISosiElement *parent)**
Output table header with column titles.

Private Attributes

- **CommandLine * mCmd**
Command line wrapper.
- **std::map< std::string, int > mObjTypes**
Map keeping count of objtypes.
- **std::map< std::string, int > mGeoTypes**
Map keeping count of geometry.

Detailed Description

SOSI to ESRI Shape converter.

If command-line parameter -stat is specified, this converter will handle the output generation. Produces an ESRI Shape-file from SOSI source.

Definition at line 52 of file converter_sosi_stat.h.

Constructor & Destructor Documentation

sosicon::ConverterSosiStat::ConverterSosiStat () *[inline]*

Constructor.

Definition at line 78 of file converter_sosi_stat.h.

virtual sosicon::ConverterSosiStat::~~ConverterSosiStat () *[inline]*, *[virtual]*

Destructor.

Definition at line 81 of file converter_sosi_stat.h.

Member Function Documentation

virtual void sosicon::ConverterSosiStat::init (CommandLine * *cmd*) *[inline]*, *[virtual]*

Initialize converter.

Implementation details in **sosicon::IConverter::init()**

See also:

sosicon::IConverter::init()

Implements **sosicon::IConverter** (p.76).

Definition at line 88 of file converter_sosi_stat.h.

void sosicon::ConverterSosiStat::makeStat (ISosiElement * *parent*) *[private]*

Output table header with column titles.

Definition at line 21 of file converter_sosi_stat.cpp.

void sosicon::ConverterSosiStat::printElementData (ISosiElement * *e*, sosi::SosiElementSearch *src*, int *padding*) *[private]*

Output simple element attributes.

Definition at line 46 of file converter_sosi_stat.cpp.

void sosicon::ConverterSosiStat::printListContent (std::map< std::string, int > *list*, int *padding*) *[private]*

Output content of map<string,int>

Definition at line 58 of file converter_sosi_stat.cpp.

void sosicon::ConverterSosiStat::printTableHeader (std::string col1, std::string col2, int padding) [private]

Output simple element attributes.

Definition at line 70 of file converter_sosi_stat.cpp.

void sosicon::ConverterSosiStat::run () [virtual]

Start conversion.

Implementation details in **sosicon::IConverter::run()**

See also:

sosicon::IConverter::run()

Implements **sosicon::IConverter** (p.77).

Definition at line 77 of file converter_sosi_stat.cpp.

Member Data Documentation

CommandLine* sosicon::ConverterSosiStat::mCmd [private]

Command line wrapper.

Definition at line 55 of file converter_sosi_stat.h.

std::map<std::string, int> sosicon::ConverterSosiStat::mGeoTypes [private]

Map keeping count of geometry.

Definition at line 61 of file converter_sosi_stat.h.

std::map<std::string, int> sosicon::ConverterSosiStat::mObjTypes [private]

Map keeping count of objtypes.

Definition at line 58 of file converter_sosi_stat.h.

The documentation for this class was generated from the following files:


- /prosjekter/sosicon/sosicon/src/converter_sosi_stat.h
- /prosjekter/sosicon/sosicon/src/converter_sosi_stat.cpp

sosicon::Coordinate Class Reference

Coordinate container.

```
#include <coordinate.h>
```

Inheritance diagram for sosicon::Coordinate:



Public Member Functions

- virtual `~Coordinate ()`
- **Coordinate ()**
- virtual double **getE ()**
Get east coordinate.
- virtual double **getN ()**
Get north coordinate.
- virtual bool **leftOf (ICoordinate *c)**
Test if this coordinate is to the left of another.
- virtual bool **rightOf (ICoordinate *c)**
Test if this coordinate is to the right of another.
- virtual void **setE** (double coordEast)
Set east coordinate.
- virtual void **setN** (double coordNorth)
Set north coordinate.
- virtual void **setH** (double altitude)
Set altitude.
- virtual void **shift** (int offsetN, int offsetE)
Shift coordinate by specified offset.
- virtual void **divide** (int divisor)
Divide coordinate by specified divisor.
- virtual bool **equals (ICoordinate *c)**
Check if two points match.
- virtual std::string **toString ()**
Make string representation.

Private Attributes

- double **mEast**
- double **mNorth**
- double **mAltitude**

Detailed Description

Coordinate container.

Author:

Espen Andersen

Copyright:

GNU General Public License

Stores a geographical position with some additional information.

Definition at line 36 of file coordinate.h.

Constructor & Destructor Documentation

virtual sosicon::Coordinate::~~Coordinate () [inline], [virtual]

Definition at line 44 of file coordinate.h.

sosicon::Coordinate::Coordinate () [inline]

Definition at line 45 of file coordinate.h.

Member Function Documentation

virtual void sosicon::Coordinate::divide (int *divisor*) [inline], [virtual]

Divide coordinate by specified divisor.

Implements **sosicon::ICoordinate** (p. 79).

Definition at line 54 of file coordinate.h.

virtual bool sosicon::Coordinate::equals (ICoordinate * c) [inline], [virtual]

Check if two points match.

Implements **sosicon::ICoordinate** (p. 79).

Definition at line 55 of file coordinate.h.

virtual double sosicon::Coordinate::getE () [inline], [virtual]

Get east coordinate.

Implements **sosicon::ICoordinate** (p. 79).

Definition at line 46 of file coordinate.h.

virtual double sosicon::Coordinate::getN () [inline], [virtual]

Get north coordinate.

Implements **sosicon::ICoordinate** (p.79).

Definition at line 47 of file coordinate.h.

virtual bool sosicon::Coordinate::leftOf (ICoordinate * c) [inline], [virtual]

Test if this coordinate is to the left of another.

Implements **sosicon::ICoordinate** (p.79).

Definition at line 48 of file coordinate.h.

virtual bool sosicon::Coordinate::rightOf (ICoordinate * c) [inline], [virtual]

Test if this coordinate is to the right of another.

Implements **sosicon::ICoordinate** (p.79).

Definition at line 49 of file coordinate.h.

virtual void sosicon::Coordinate::setE (double coordEast) [inline], [virtual]

Set east coordinate.

Implements **sosicon::ICoordinate** (p.80).

Definition at line 50 of file coordinate.h.

virtual void sosicon::Coordinate::setH (double altitude) [inline], [virtual]

Set altitude.

Implements **sosicon::ICoordinate** (p.80).

Definition at line 52 of file coordinate.h.

virtual void sosicon::Coordinate::setN (double coordNorth) [inline], [virtual]

Set north coordinate.

Implements **sosicon::ICoordinate** (p.80).

Definition at line 51 of file coordinate.h.

virtual void sosicon::Coordinate::shift (int offsetN, int offsetE) [inline], [virtual]

Shift coordinate by specified offset.

Implements **sosicon::ICoordinate** (p.80).

Definition at line 53 of file coordinate.h.

virtual std::string sosicon::Coordinate::toString () [inline], [virtual]

Make string representation.

Implements **sosicon::ICoordinate** (*p.80*).

Definition at line 56 of file coordinate.h.

Member Data Documentation

double sosicon::Coordinate::mAltitude [private]

Definition at line 40 of file coordinate.h.

double sosicon::Coordinate::mEast [private]

Definition at line 38 of file coordinate.h.

double sosicon::Coordinate::mNorth [private]

Definition at line 39 of file coordinate.h.

The documentation for this class was generated from the following file:

- /prosjekter/sosicon/sosicon/src/coordinate.h

sosicon::CoordinateCollection Class Reference

Coordinate container.

```
#include <coordinate_collection.h>
```

Public Member Functions

- **virtual ~CoordinateCollection ()**
Destructor.
- **CoordinateCollection ()**
Constructor.
- **void free ()**
Free allocated memory.
- **void discoverCoords (ISosiElement *sosi)**
Extracts coordinates from SOSI element.
- **bool getNextInGeom (ICoordinate *&coord)**
Retrieve next coordinate in collection.
- **std::vector< ICoordinate * > & getGeom ()**
- **std::vector< int > & getGeomSizes ()**
- **int getNumPointsGeom ()**
- **int getNumPartsGeom ()**
- **std::vector< ICoordinate * > & getHoles ()**
- **std::vector< int > & getHoleSizes ()**
- **int getNumPointsHoles ()**
- **int getNumPartsHoles ()**
- **double getXmin ()**
- **double getYmin ()**
- **double getXmax ()**
- **double getYmax ()**

Private Member Functions

- **void extractPath (ISosiElement *referencedElement, bool reverse, int &numPoints, sosi::NorthEastList &target)**
Get coordinate values from SOSI element.

Private Attributes

- **sosi::NorthEastList mGeom**
Stores collection of pointers to coordinates for geometries.
- **std::vector< ICoordinate * > mGeomNormalized**
- **sosi::NorthEastList mHoles**
- **std::vector< ICoordinate * > mHolesNormalized**
- **int mNumPartsGeom**
- **int mNumPartsHoles**
- **int mNumPointsGeom**
- **int mNumPointsHoles**
- **std::vector< int > mGeomSizes**
- **std::vector< int > mHoleSizes**
- **sosi::NorthEastList::iterator mGeomIndex**
- **double mXmin**

- double **mYmin**
- double **mXmax**
- double **mYmax**

Detailed Description

Coordinate container.

Author:

Espen Andersen

Copyright:

GNU General Public License

Stores a collection of geographical positions.

Definition at line 77 of file `coordinate_collection.h`.

Constructor & Destructor Documentation

sosicon::CoordinateCollection::~~CoordinateCollection () `[virtual]`

Destructor.

Definition at line 83 of file `coordinate_collection.cpp`.

sosicon::CoordinateCollection::CoordinateCollection () `[inline]`

Constructor.

Definition at line 114 of file `coordinate_collection.h`.

Member Function Documentation

void sosicon::CoordinateCollection::discoverCoords (ISosiElement * *sosi*)

Extracts coordinates from SOSI element.

This method retrieves the physical coordinates for a SOSI geometry, if applicable, and populates the coordinate collection.

This algorithm resolves referenced objects for polygons and presents the coordinates in correct order.

Parameters:

<i>sosi</i>	SOSI element from which to extract coordinates.
-------------	---

Definition at line 94 of file `coordinate_collection.cpp`.

void sosicon::CoordinateCollection::extractPath (ISosiElement * *referencedElement*, bool *reverse*, int & *numPoints*, sosicon::NorthEastList & *target*) `[private]`

Get coordinate values from SOSI element.

Definition at line 160 of file coordinate_collection.cpp.

void sosicon::CoordinateCollection::free ()

Free allocated memory.

Definition at line 88 of file coordinate_collection.cpp.

std::vector< sosicon::ICoordinate * > & sosicon::CoordinateCollection::getGeom ()

Definition at line 191 of file coordinate_collection.cpp.

std::vector<int>& sosicon::CoordinateCollection::getGeomSizes () [inline]

Definition at line 151 of file coordinate_collection.h.

std::vector< sosicon::ICoordinate * > & sosicon::CoordinateCollection::getHoles ()

Definition at line 205 of file coordinate_collection.cpp.

std::vector<int>& sosicon::CoordinateCollection::getHoleSizes () [inline]

Definition at line 156 of file coordinate_collection.h.

bool sosicon::CoordinateCollection::getNextInGeom (ICoordinate *& coord)

Retrieve next coordinate in collection.

Iterates through the coordinate list until it reaches the end, passing a pointer to the next element to the coord reference. The value of coord must be zero on the first pass in order to start the iteration on the first **ISosiElement**.

Returns:

The function returns true if there are more coordinates in the collection, or false if the last coordinate is encountered.

Definition at line 228 of file coordinate_collection.cpp.

int sosicon::CoordinateCollection::getNumPartsGeom () [inline]

Definition at line 153 of file coordinate_collection.h.

int sosicon::CoordinateCollection::getNumPartsHoles () [inline]

Definition at line 158 of file coordinate_collection.h.

int sosicon::CoordinateCollection::getNumPointsGeom () [inline]

Definition at line 152 of file coordinate_collection.h.

int sosicon::CoordinateCollection::getNumPointsHoles () [inline]

Definition at line 157 of file coordinate_collection.h.

double sosicon::CoordinateCollection::getXmax () [inline]

Definition at line 164 of file coordinate_collection.h.

double sosicon::CoordinateCollection::getXmin () [inline]

Definition at line 160 of file coordinate_collection.h.

double sosicon::CoordinateCollection::getYmax () [inline]

Definition at line 166 of file coordinate_collection.h.

double sosicon::CoordinateCollection::getYmin () [inline]

Definition at line 162 of file coordinate_collection.h.

Member Data Documentation

sosi::NorthEastList sosicon::CoordinateCollection::mGeom [private]

Stores collection of pointers to coordinates for geometries.

Definition at line 80 of file coordinate_collection.h.

sosi::NorthEastList::iterator sosicon::CoordinateCollection::mGeomIndex [private]

Definition at line 95 of file coordinate_collection.h.

std::vector<ICoordinate*> sosicon::CoordinateCollection::mGeomNormalized [private]

Definition at line 81 of file coordinate_collection.h.

std::vector<int> sosicon::CoordinateCollection::mGeomSizes [private]

Definition at line 92 of file coordinate_collection.h.

sosi::NorthEastList sosicon::CoordinateCollection::mHoles [private]

Definition at line 83 of file coordinate_collection.h.

std::vector<int> sosicon::CoordinateCollection::mHoleSizes [private]

Definition at line 93 of file coordinate_collection.h.

std::vector<ICoordinate*> sosicon::CoordinateCollection::mHolesNormalized [private]

Definition at line 84 of file coordinate_collection.h.

int sosicon::CoordinateCollection::mNumPartsGeom [private]

Definition at line 86 of file coordinate_collection.h.

int sosicon::CoordinateCollection::mNumPartsHoles [private]

Definition at line 87 of file coordinate_collection.h.

int sosicon::CoordinateCollection::mNumPointsGeom [private]

Definition at line 89 of file coordinate_collection.h.

int sosicon::CoordinateCollection::mNumPointsHoles [private]

Definition at line 90 of file coordinate_collection.h.

double sosicon::CoordinateCollection::mXmax [private]

Definition at line 99 of file coordinate_collection.h.

double sosicon::CoordinateCollection::mXmin [private]

Definition at line 97 of file coordinate_collection.h.

double sosicon::CoordinateCollection::mYmax [private]

Definition at line 100 of file coordinate_collection.h.

double sosicon::CoordinateCollection::mYmin [private]

Definition at line 98 of file coordinate_collection.h.

The documentation for this class was generated from the following files:

- `/prosjekter/sosicon/sosicon/src/coordinate_collection.h`
- `/prosjekter/sosicon/sosicon/src/coordinate_collection.cpp`

sosicon::sosi::CoordSys Class Reference

SOSI coordinate system.

```
#include <sosi_types.h>
```

Public Member Functions

- **CoordSys** ()
- **CoordSys** (int sysCode, std::string **srid**, std::string **displayString**, std::string **prjString**)
- std::string **displayString** ()
- std::string **prjString** ()
- std::string **srid** ()
- bool **valid** ()

Private Attributes

- int **mSysCode**
SOSI SYSKODE.
- std::string **mSrid**
EPSG SRID.
- std::string **mPrjString**
Projection string.
- std::string **mDisplayString**
Display string.

Detailed Description

SOSI coordinate system.

Definition at line 138 of file `sosi_types.h`.

Constructor & Destructor Documentation

sosicon::sosi::CoordSys::CoordSys () [inline]

Definition at line 147 of file `sosi_types.h`.

sosicon::sosi::CoordSys::CoordSys (int sysCode, std::string *srid*, std::string *displayString*, std::string *prjString*) [inline]

Definition at line 149 of file `sosi_types.h`.

Member Function Documentation

std::string **sosicon::sosi::CoordSys::displayString** () [inline]

Definition at line 157 of file sosi_types.h.

std::string sosicon::sosi::CoordSys::prjString () [inline]

Definition at line 159 of file sosi_types.h.

std::string sosicon::sosi::CoordSys::srid () [inline]

Definition at line 161 of file sosi_types.h.

bool sosicon::sosi::CoordSys::valid () [inline]

Definition at line 163 of file sosi_types.h.

Member Data Documentation

std::string sosicon::sosi::CoordSys::mDisplayString [private]

Display string.

Definition at line 143 of file sosi_types.h.

std::string sosicon::sosi::CoordSys::mPrjString [private]

Projection string.

Definition at line 142 of file sosi_types.h.

std::string sosicon::sosi::CoordSys::mSrid [private]

EPSG SRID.

Definition at line 141 of file sosi_types.h.

int sosicon::sosi::CoordSys::mSysCode [private]

SOSI SYSKODE.

Definition at line 140 of file sosi_types.h.

The documentation for this class was generated from the following file:

- /prosjekter/sosicon/sosicon/src/sosi/sosi_types.h

sosicon::shape::DoubleField Union Reference

32 bit double / byte field

```
#include <shapefile_types.h>
```

Public Attributes

- double **d**
 - char **b** [sizeof(double)]
-

Detailed Description

32 bit double / byte field

Definition at line 78 of file shapefile_types.h.

Member Data Documentation

char sosicon::shape::DoubleField::b[sizeof(double)]

Definition at line 80 of file shapefile_types.h.

double sosicon::shape::DoubleField::d

Definition at line 79 of file shapefile_types.h.

The documentation for this union was generated from the following file:

- /projekter/sosicon/sosicon/src/shape/shapefile_types.h

sosicon::Factory Class Reference

Factory class.

```
#include <factory.h>
```

Static Public Member Functions

- static void **get** (**IConverter** *&converter, **CommandLine** *cmd)
Retrieve converter.
- static void **release** (**IConverter** *&converter)
Releases converter.

Detailed Description

Factory class.

Author:

Espen Andersen

Copyright:

GNU General Public License

Responsible for creating an appropriate **IConverter** implementation instance. Uses the command-line arguments to decide what type of converter is required.

Definition at line 38 of file factory.h.

Member Function Documentation

void sosicon::Factory::get (sosicon::IConverter *& *converter*, sosicon::CommandLine * *cmd*)**[static]**

Retrieve converter.

Selects an **IConverter** implementation and creates an object of that class based on the user's command-line arguments.

Note:

Any object delivered with **Factory::get()** must be freed by calling **Factory::release()**

See also:

Factory::release()

Parameters:

<i>converter</i>	Reference to the pointer to receive the new IConverter .
<i>cmd</i>	CommandLine object with current command-line arguments.

Definition at line 21 of file factory.cpp.

void sosicon::Factory::release (sosicon::IConverter *& *converter*)**[static]**

Releases converter.

Frees allocated resources and releases **IConverter** object. Any object retrieved from **Factory::get()** must be disposed of through this function.

Parameters:

<i>converter</i>	Reference to a pointer containing the IConverter instance to be released. The pointer will be reset to 0 after object deletion.
------------------	--

Definition at line 45 of file factory.cpp.

The documentation for this class was generated from the following files:


- /prosjekter/sosicon/sosicon/src/**factory.h**
- /prosjekter/sosicon/sosicon/src/**factory.cpp**

sosicon::IBinaryStreamable Class Reference

Interface: Binary streamable object.

```
#include <i_binary_streamable.h>
```

Inheritance diagram for sosicon::IBinaryStreamable:

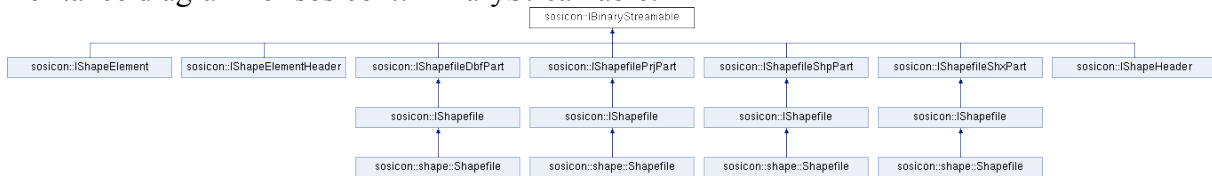

Public Member Functions

- virtual **~IBinaryStreamable** ()
Destructor.
- virtual void **writeBinary** (std::ostream &os)=0
Writes binary data to output stream.

Detailed Description

Interface: Binary streamable object.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 34 of file i_binary_streamable.h.

Constructor & Destructor Documentation

virtual sosicon::IBinaryStreamable::~~IBinaryStreamable ()[**inline**], [**virtual**]

Destructor.

Definition at line 38 of file i_binary_streamable.h.

Member Function Documentation

virtual void sosicon::IBinaryStreamable::writeBinary (std::ostream &os)[**pure virtual**]

Writes binary data to output stream.

Invoked when the operator<< is used to stream to an std::ostream object. Binary write operation is performed for current implementation here.

Parameters:

<i>os</i>	Target stream object.
-----------	-----------------------

Implemented in **sosicon::IShapefileDbfPart** (p.97), **sosicon::IShapefilePrjPart** (p.99), **sosicon::IShapefileShpPart** (p.101), and **sosicon::IShapefileShxPart** (p.103).

The documentation for this class was generated from the following file:

- /prosjekter/sosicon/sosicon/src/interface/**i_binary_streamable.h**

sosicon::IConverter Class Reference

Interface: Converter.

```
#include <i_converter.h>
```

Inheritance diagram for sosicon::IConverter:



Public Member Functions

- virtual **~IConverter** ()
Destructor.
- virtual void **init** (CommandLine *cmd)=0
Initialize converter.
- virtual void **run** ()=0
Start conversion.

Detailed Description

Interface: Converter.

Author:

Espen Andersen

Copyright:

GNU General Public License

Represents the generic form of a converter. The factory class is responsible for creating a converter based upon input parameters. The returned object is then interacted on through this interface.

Definition at line 38 of file i_converter.h.

Constructor & Destructor Documentation

virtual sosicon::IConverter::~~IConverter () [inline], [virtual]

Destructor.

Definition at line 43 of file i_converter.h.

Member Function Documentation

virtual void sosicon::IConverter::init (CommandLine * cmd) [pure virtual]

Initialize converter.

Conversion setup. Uses the **CommandLine** to determine what operations to perform.

Parameters:

<i>cmd</i>	Arguments from the command-line parsed and ready within a sosicon::CommandLine object.
------------	---

Implemented in **sosicon::ConverterSosi2psql** (p.44), **sosicon::ConverterSosi2shp** (p.49), **sosicon::ConverterSosiStat** (p.57), **sosicon::ConverterSosi2xml** (p.55), and **sosicon::ConverterSosi2tsv** (p.53).

virtual void sosicon::IConverter::run () [pure virtual]

Start conversion.

Run the conversion routine. Outputs the destination file according to the preferences given from the command-line.

Implemented in **sosicon::ConverterSosi2psql** (p.46), **sosicon::ConverterSosi2shp** (p.49), **sosicon::ConverterSosiStat** (p.58), **sosicon::ConverterSosi2xml** (p.55), and **sosicon::ConverterSosi2tsv** (p.53).

The documentation for this class was generated from the following file:


- /projekter/sosicon/sosicon/src/interface/i_converter.h

sosicon::ICoordinate Class Reference

Interface: **Coordinate**.

```
#include <i_coordinate.h>
```

Inheritance diagram for sosicon::ICoordinate:



Public Member Functions

- virtual **~ICoordinate** ()
Destructor.
- virtual double **getE** ()=0
Get east coordinate.
- virtual double **getN** ()=0
Get north coordinate.
- virtual bool **leftOf** (**ICoordinate** *c)=0
Test if this coordinate is to the left of another.
- virtual bool **rightOf** (**ICoordinate** *c)=0
Test if this coordinate is to the right of another.
- virtual void **setE** (double coordEast)=0
Set east coordinate.
- virtual void **setN** (double coordNorth)=0
Set north coordinate.
- virtual void **setH** (double altitude)=0
Set altitude.
- virtual void **shift** (int offsetN, int offsetE)=0
Shift coordinate by specified offset.
- virtual void **divide** (int divisor)=0
Divide coordinate by specified divisor.
- virtual bool **equals** (**ICoordinate** *c)=0
Check if two points match.
- virtual std::string **toString** ()=0
Make string representation.

Detailed Description

Interface: **Coordinate**.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 35 of file i_coordinate.h.

Constructor & Destructor Documentation

virtual sosicon::ICoordinate::~~ICoordinate () [inline], [virtual]

Destructor.

Definition at line 39 of file i_coordinate.h.

Member Function Documentation

virtual void sosicon::ICoordinate::divide (int *divisor*) [pure virtual]

Divide coordinate by specified divisor.

Implemented in **sosicon::Coordinate** (p.60).

virtual bool sosicon::ICoordinate::equals (ICoordinate * c) [pure virtual]

Check if two points match.

Implemented in **sosicon::Coordinate** (p.60).

virtual double sosicon::ICoordinate::getE () [pure virtual]

Get east coordinate.

Implemented in **sosicon::Coordinate** (p.60).

virtual double sosicon::ICoordinate::getN () [pure virtual]

Get north coordinate.

Implemented in **sosicon::Coordinate** (p.61).

virtual bool sosicon::ICoordinate::leftOf (ICoordinate * c) [pure virtual]

Test if this coordinate is to the left of another.

Implemented in **sosicon::Coordinate** (p.61).

virtual bool sosicon::ICoordinate::rightOf (ICoordinate * c) [pure virtual]

Test if this coordinate is to the right of another.

Implemented in `sosicon::Coordinate` (p.61).

virtual void sosicon::ICoordinate::setE (double *coordEast*) [pure virtual]

Set east coordinate.

Implemented in `sosicon::Coordinate` (p.61).

virtual void sosicon::ICoordinate::setH (double *altitude*) [pure virtual]

Set altitude.

Implemented in `sosicon::Coordinate` (p.61).

virtual void sosicon::ICoordinate::setN (double *coordNorth*) [pure virtual]

Set north coordinate.

Implemented in `sosicon::Coordinate` (p.61).

virtual void sosicon::ICoordinate::shift (int *offsetN*, int *offsetE*) [pure virtual]

Shift coordinate by specified offset.

Implemented in `sosicon::Coordinate` (p.61).

virtual std::string sosicon::ICoordinate::toString () [pure virtual]

Make string representation.

Implemented in `sosicon::Coordinate` (p.62).

The documentation for this class was generated from the following file:

- `/prosjekter/sosicon/sosicon/src/interface/i_coordinate.h`

sosicon::ILookupTable Class Reference

Interface: Lookup table.

```
#include <i_lookup_table.h>
```

Public Member Functions

- virtual **~ILookupTable** ()
Destructor.
 - virtual std::string **toString** ()=0
Print string representation of current table.
 - virtual **ISosiElement** * **get** (std::string key)=0
Get SOSI element by ref ID.
-

Detailed Description

Interface: Lookup table.

Author:

Espen Andersen

Copyright:

GNU General Public License

Interface to a lookup table, implemented by ReferenceLookup class.

Definition at line 40 of file i_lookup_table.h.

Constructor & Destructor Documentation

virtual sosicon::ILookupTable::~~ILookupTable ()[inline], [virtual]

Destructor.

Definition at line 44 of file i_lookup_table.h.

Member Function Documentation

virtual ISosiElement* sosicon::ILookupTable::get (std::string key)[pure virtual]

Get SOSI element by ref ID.

virtual std::string sosicon::ILookupTable::toString ()[pure virtual]

Print string representation of current table.

The documentation for this class was generated from the following file:

- `/prosjekter/sosicon/sosicon/src/interface/i_lookup_table.h`

imaxdiv_t Struct Reference

```
#include <inttypes.h>
```

Public Attributes

- `intmax_t quot`
 - `intmax_t rem`
-

Detailed Description

Definition at line 47 of file `inttypes.h`.

Member Data Documentation

`intmax_t imaxdiv_t::quot`

Definition at line 48 of file `inttypes.h`.

`intmax_t imaxdiv_t::rem`

Definition at line 49 of file `inttypes.h`.

The documentation for this struct was generated from the following file:

- `/projekter/sosicon/sosicon/src/inttypes.h`

sosicon::shape::Int16Field Union Reference

16 bit integer / byte field

```
#include <shapefile_types.h>
```

Public Attributes

- `uint16_t i`
 - `char b [sizeof(uint16_t)]`
-

Detailed Description

16 bit integer / byte field

Definition at line 59 of file shapefile_types.h.

Member Data Documentation

char sosicon::shape::Int16Field::b[sizeof(uint16_t)]

Definition at line 61 of file shapefile_types.h.

uint16_t sosicon::shape::Int16Field::i

Definition at line 60 of file shapefile_types.h.

The documentation for this union was generated from the following file:

- `/projekter/sosicon/sosicon/src/shape/shapefile_types.h`

sosicon::shape::Int32Field Union Reference

32 bit integer / byte field

```
#include <shapefile_types.h>
```

Public Attributes

- `uint32_t i`
 - `char b [sizeof(uint32_t)]`
-

Detailed Description

32 bit integer / byte field

Definition at line 65 of file `shapefile_types.h`.

Member Data Documentation

char sosicon::shape::Int32Field::b[sizeof(uint32_t)]

Definition at line 67 of file `shapefile_types.h`.

uint32_t sosicon::shape::Int32Field::i

Definition at line 66 of file `shapefile_types.h`.

The documentation for this union was generated from the following file:

- `/projekter/sosicon/sosicon/src/shape/shapefile_types.h`

sosicon::shape::Int32TField Union Reference

32 bit integer / byte / geom::ShapeType field
#include <shapefile_types.h>

Public Attributes

- uint32_t **i**
 - char **b** [sizeof(uint32_t)]
 - ShapeType **t**
-

Detailed Description

32 bit integer / byte / geom::ShapeType field
Definition at line 71 of file shapefile_types.h.

Member Data Documentation

char sosicon::shape::Int32TField::b[sizeof(uint32_t)]

Definition at line 73 of file shapefile_types.h.

uint32_t sosicon::shape::Int32TField::i

Definition at line 72 of file shapefile_types.h.

ShapeType sosicon::shape::Int32TField::t

Definition at line 74 of file shapefile_types.h.

The documentation for this union was generated from the following file:

- /projekter/sosicon/sosicon/src/shape/shapefile_types.h

sosicon::shape::Int8Field Union Reference

8 bit integer / byte field

```
#include <shapefile_types.h>
```

Public Attributes

- `uint8_t i`
 - `char b [sizeof(uint8_t)]`
-

Detailed Description

8 bit integer / byte field

Definition at line 53 of file shapefile_types.h.

Member Data Documentation

char sosicon::shape::Int8Field::b[sizeof(uint8_t)]

Definition at line 55 of file shapefile_types.h.

uint8_t sosicon::shape::Int8Field::i

Definition at line 54 of file shapefile_types.h.

The documentation for this union was generated from the following file:

- `/projekter/sosicon/sosicon/src/shape/shapefile_types.h`

sosicon::IRectangle Class Reference

Interface: Rectangle.

```
#include <i_rectangle.h>
```

Public Member Functions

- virtual **~IRectangle** ()
Destructor.
 - virtual double **left** ()=0
Get left position.
 - virtual void **left** (double val)=0
Set left position.
 - virtual double **top** ()=0
Get top position.
 - virtual void **top** (double val)=0
Set top position.
 - virtual double **right** ()=0
Get right position.
 - virtual void **right** (double val)=0
Set right position.
 - virtual double **bottom** ()=0
Get bottom position.
 - virtual void **bottom** (double val)=0
Set bottom position.
-

Detailed Description

Interface: Rectangle.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 33 of file i_rectangle.h.

Constructor & Destructor Documentation

virtual sosicon::IRectangle::~~IRectangle ()[inline], [virtual]

Destructor.

Definition at line 37 of file i_rectangle.h.

Member Function Documentation

virtual double sosicon::IRectangle::bottom () [pure virtual]

Get bottom position.

Returns the bottom (y1) coordinate of current rectangle.

Returns:

Bottom/y1 position.

virtual void sosicon::IRectangle::bottom (double *val*) [pure virtual]

Set bottom position.

Sets the bottom (y1) coordinate of current rectangle.

Parameters:

<i>val</i>	The new bottom/y1 position.
------------	-----------------------------

virtual double sosicon::IRectangle::left () [pure virtual]

Get left position.

Returns the left (x0) coordinate of current rectangle.

Returns:

Left/x0 position.

virtual void sosicon::IRectangle::left (double *val*) [pure virtual]

Set left position.

Sets the left (x0) coordinate of current rectangle.

Parameters:

<i>val</i>	The new left/x0 position.
------------	---------------------------

virtual double sosicon::IRectangle::right () [pure virtual]

Get right position.

Returns the right (x1) coordinate of current rectangle.

Returns:

Right/x1 position.

virtual void sosicon::IRectangle::right (double *val*) [pure virtual]

Set right position.

Sets the right (x1) coordinate of current rectangle.

Parameters:

<i>val</i>	The new right/x1 position.
------------	----------------------------

virtual double sosicon::IRectangle::top () [pure virtual]

Get top position.

Returns the top (y0) coordinate of current rectangle.

Returns:

Top/y0 position.

virtual void sosicon::IRectangle::top (double *val*) [pure virtual]

Set top position.

Sets the top (y0) coordinate of current rectangle.

Parameters:

<i>val</i>	The new top/y0 position.
------------	--------------------------

The documentation for this class was generated from the following file:

- /projekter/sosicon/sosicon/src/interface/**i_rectangle.h**

sosicon::IShapeElement Class Reference

Interface: Shape element.

```
#include <i_shape_element.h>
```

Inheritance diagram for sosicon::IShapeElement:



Public Member Functions

- virtual `~IShapeElement ()`
Destructor.
- virtual bool `populate (ISosiElement *sosiElement)=0`
Create from SOSI element.
- virtual `ISosiElement * getSosiElement ()=0`
Get original SOSI element.
- virtual void `getMBR (IRectangle &rect)=0`
Get minimum bounding rectangle.
- virtual int `getWordSize ()=0`
Get element size in 16-bit words.
- virtual int `getByteSize ()=0`
Get element size in bytes.

Detailed Description

Interface: Shape element.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 37 of file `i_shape_element.h`.

Constructor & Destructor Documentation

virtual sosicon::IShapeElement::~IShapeElement () [inline], [virtual]

Destructor.

Definition at line 41 of file `i_shape_element.h`.

Member Function Documentation

virtual int sosicon::IShapeElement::getByteSize ()[pure virtual]

Get element size in bytes.

Size of current element, in bytes.

See also:

IShapeElement::getWordSize()

Returns:

The vinary size of current element in bytes.

virtual void sosicon::IShapeElement::getMBR (IRectangle & rect)[pure virtual]

Get minimum bounding rectangle.

Populates the referenced **IRectangle** implementation with the coordinates for the minimum bounding rectangle (MBR) of current element.

Parameters:

<i>Reference</i>	to the IRectangle implementation to receive the coordinates of the minium bounding rectangle.
------------------	--

virtual ISosiElement* sosicon::IShapeElement::getSosiElement ()[pure virtual]

Get original SOSI element.

Delivers a pointer to the original SOSI element populating current **IShapeElement**. The pointer is usually stored with current object when **IShapeElement::populate()** is called.

See also:

IShapeElement::populate()

Returns:

Pointer to the source SOSI element.

virtual int sosicon::IShapeElement::getWordSize ()[pure virtual]

Get element size in 16-bit words.

Size of current element, in 16-bit words. Some parts of the SOSI standard requires size notation on 16-bit words. This is the byte size divided by two.

See also:

IShapeElement::getByteSize()

Returns:

The binary size of current element in 16-bit words. Equals its byte size divided by two.

virtual bool sosicon::IShapeElement::populate (ISosiElement * sosiElement)[pure virtual]

Create from SOSI element.

Takes a SOSI element and creates a shape element from it.

Parameters:

<i>sosiElement</i>	Pointer to the SOSI element to be converted to a shape element.
--------------------	---

Returns:

The result of the operation.

Return values:

<i>true</i>	on success.
<i>false</i>	on failure.

The documentation for this class was generated from the following file:


- `/prosjekter/sosicon/sosicon/src/interface/i_shape_element.h`

sosicon::IShapeElementHeader Class Reference

Interface: Shape element header.

```
#include <i_shape_element_header.h>
```

Inheritance diagram for sosicon::IShapeElementHeader:

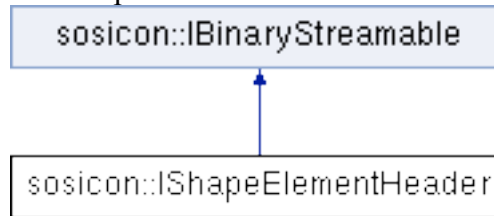

Public Member Functions

- `virtual ~IShapeElementHeader ()`
Destructor.

Detailed Description

Interface: Shape element header.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 35 of file `i_shape_element_header.h`.

Constructor & Destructor Documentation

virtual sosicon::IShapeElementHeader::~IShapeElementHeader ()`[inline]`, `[virtual]`

Destructor.

Definition at line 39 of file `i_shape_element_header.h`.

The documentation for this class was generated from the following file:


- `/prosjekter/sosicon/sosicon/src/interface/i_shape_element_header.h`

sosicon::IShapefile Class Reference

Interface: Shapefile.

```
#include <i_shapefile.h>
```

Inheritance diagram for sosicon::IShapefile:

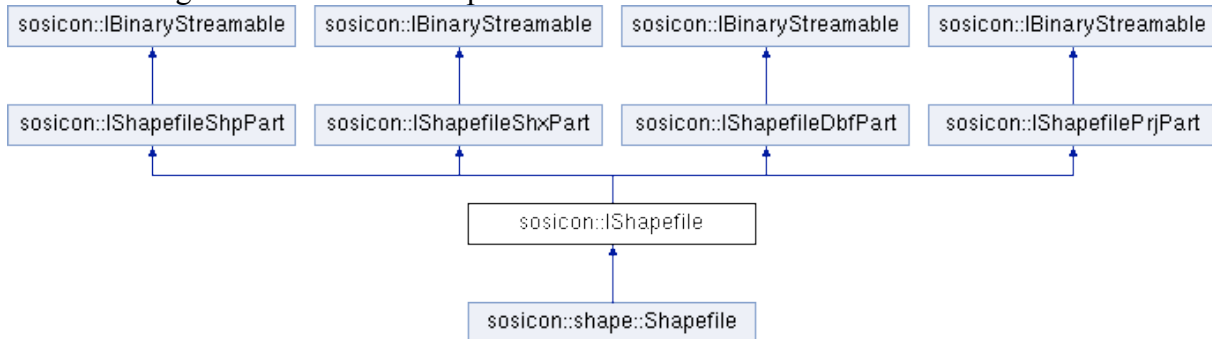

Public Member Functions

- virtual `~IShapefile ()`
- virtual int **build** (`ISosiElement` *sosiTree, std::string selection, `sosi::ElementType` geomType)=0
Build shapefile from SOSI data.
- virtual void **filterSosiId** (std::vector< std::string > sosiId)=0
Set IDs for selected element export.

Detailed Description

Interface: Shapefile.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 39 of file `i_shapefile.h`.

Constructor & Destructor Documentation

virtual sosicon::IShapefile::~IShapefile () `[inline]`, `[virtual]`

Definition at line 46 of file `i_shapefile.h`.

Member Function Documentation

virtual int sosicon::IShapefile::build (ISosiElement * *sosiTree*, std::string *selection*, sosi::ElementType *geomType*) [pure virtual]

Build shapefile from SOSI data.

Parameters:

<i>sosiTree</i>	Root SOSI element. The first-level children of this element will be examined and exported if they are compatible.
<i>selection</i>	SOSI OBJTYPE scheduled for shapefile conversion.
<i>geomType</i>	SOSI element type scheduled for shapefile conversion. Since a shapefile may contain only one geometry type at a time, one must select what element type to extract from the SOSI file.

Returns:

Number of elements exported.

Implemented in **sosicon::shape::Shapefile** (*p.120*).

virtual void sosicon::IShapefile::filterSosild (std::vector< std::string > *sosild*) [pure virtual]

Set IDs for selected element export.

Sets a list of ID flags for elements to be included in the export. All other objects in the source file are ignored.

Parameters:

<i>sosild</i>	List of the SOSI serials (IDs) of the element(s) to be included in the export.
---------------	--

Implemented in **sosicon::shape::Shapefile** (*p.125*).

The documentation for this class was generated from the following file:


- /prosjekter/sosicon/sosicon/src/interface/i_shapefile.h

sosicon::IShapefileDbfPart Class Reference

Interface: ShapefileDbfPart.

```
#include <i_shapefile_dbf_part.h>
```

Inheritance diagram for sosicon::IShapefileDbfPart:

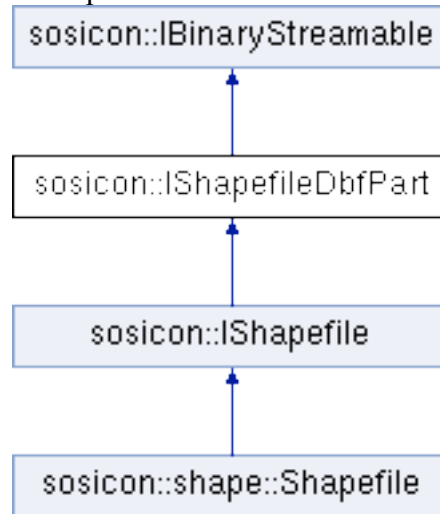

Public Member Functions

- virtual void **writeBinary** (std::ostream &os)
Writes binary data to output stream.
- virtual void **writeDbf** (std::ostream &os)=0

Detailed Description

Interface: ShapefileDbfPart.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 35 of file i_shapefile_dbf_part.h.

Member Function Documentation

virtual void sosicon::IShapefileDbfPart::writeBinary (std::ostream & os) [inline], [virtual]

Writes binary data to output stream.

Invoked when the operator<< is used to stream to an std::ostream object. Binary write operation is performed for current implementation here.

Parameters:

<i>os</i>	Target stream object.
-----------	-----------------------

Implements **sosicon::IBinaryStreamable** (*p.74*).

Definition at line 39 of file `i_shapefile_dbf_part.h`.

virtual void sosicon::IShapefileDbfPart::writeDbf (std::ostream & os)[pure virtual]

Implemented in **sosicon::shape::Shapefile** (*p.126*).

The documentation for this class was generated from the following file:


- `/prosjekter/sosicon/sosicon/src/interface/i_shapefile_dbf_part.h`

sosicon::IShapefilePrjPart Class Reference

Interface: ShapefilePrjPart.

```
#include <i_shapefile_prj_part.h>
```

Inheritance diagram for sosicon::IShapefilePrjPart:

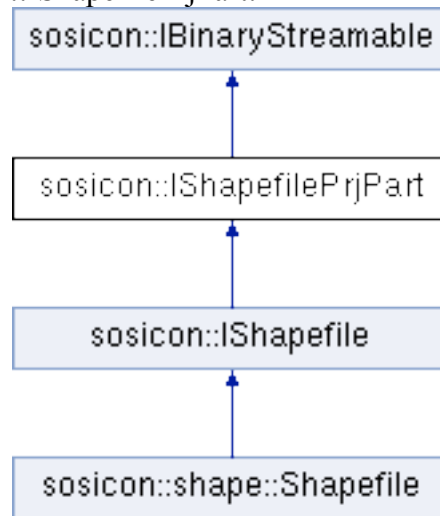

Public Member Functions

- virtual void **writeBinary** (std::ostream &os)
Writes binary data to output stream.
- virtual void **writePrj** (std::ostream &os)=0

Detailed Description

Interface: ShapefilePrjPart.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 35 of file `i_shapefile_prj_part.h`.

Member Function Documentation

virtual void sosicon::IShapefilePrjPart::writeBinary (std::ostream & os)[inline], [virtual]

Writes binary data to output stream.

Invoked when the operator<< is used to stream to an std::ostream object. Binary write operation is performed for current implementation here.

Parameters:

<i>os</i>	Target stream object.
-----------	-----------------------

Implements **sosicon::IBinaryStreamable** (*p.74*).

Definition at line 39 of file `i_shapefile_prj_part.h`.

virtual void sosicon::IShapefilePrjPart::writePrj (std::ostream & os)[pure virtual]

Implemented in **sosicon::shape::Shapefile** (*p.127*).

The documentation for this class was generated from the following file:


- `/prosjekter/sosicon/sosicon/src/interface/i_shapefile_prj_part.h`

sosicon::IShapefileShpPart Class Reference

Interface: ShapefileShpPart.

```
#include <i_shapefile_shp_part.h>
```

Inheritance diagram for sosicon::IShapefileShpPart:

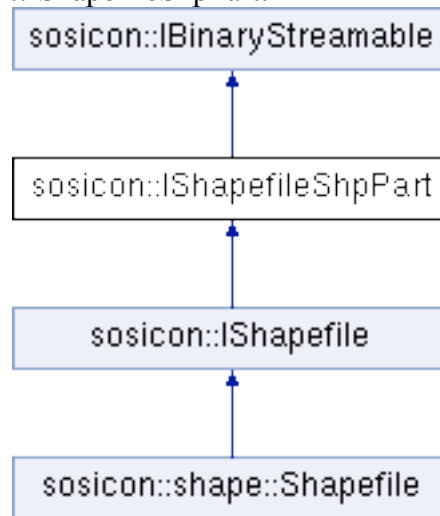

Public Member Functions

- virtual void **writeBinary** (std::ostream &os)
Writes binary data to output stream.
- virtual void **writeShp** (std::ostream &os)=0

Detailed Description

Interface: ShapefileShpPart.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 35 of file i_shapefile_shp_part.h.

Member Function Documentation

virtual void sosicon::IShapefileShpPart::writeBinary (std::ostream & os)[inline], [virtual]

Writes binary data to output stream.

Invoked when the operator<< is used to stream to an std::ostream object. Binary write operation is performed for current implementation here.

Parameters:

<i>os</i>	Target stream object.
-----------	-----------------------

Implements **sosicon::IBinaryStreamable** (*p.74*).

Definition at line 39 of file `i_shapefile_shp_part.h`.

virtual void sosicon::IShapefileShpPart::writeShp (std::ostream & os)[pure virtual]

Implemented in **sosicon::shape::Shapefile** (*p.127*).

The documentation for this class was generated from the following file:


- `/prosjekter/sosicon/sosicon/src/interface/i_shapefile_shp_part.h`

sosicon::IShapefileShxPart Class Reference

Interface: ShapefileShxPart.

```
#include <i_shapefile_shx_part.h>
```

Inheritance diagram for sosicon::IShapefileShxPart:

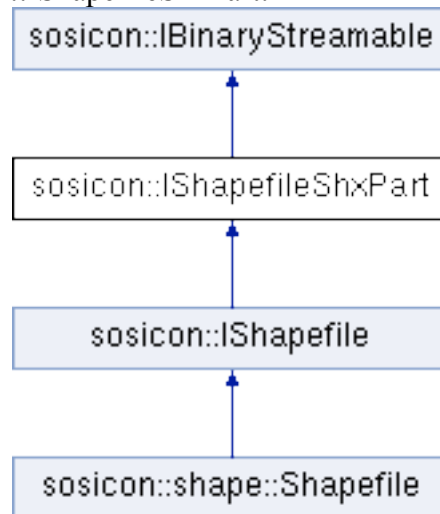

Public Member Functions

- virtual void **writeBinary** (std::ostream &os)
Writes binary data to output stream.
- virtual void **writeShx** (std::ostream &os)=0

Detailed Description

Interface: ShapefileShxPart.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 35 of file i_shapefile_shx_part.h.

Member Function Documentation

virtual void sosicon::IShapefileShxPart::writeBinary (std::ostream & os)[inline], [virtual]

Writes binary data to output stream.

Invoked when the operator<< is used to stream to an std::ostream object. Binary write operation is performed for current implementation here.

Parameters:

<i>os</i>	Target stream object.
-----------	-----------------------

Implements **sosicon::IBinaryStreamable** (*p.74*).

Definition at line 39 of file `i_shapefile_shx_part.h`.

virtual void sosicon::IShapefileShxPart::writeShx (std::ostream & os) [pure virtual]

Implemented in **sosicon::shape::Shapefile** (*p.127*).

The documentation for this class was generated from the following file:

- `/prosjekter/sosicon/sosicon/src/interface/i_shapefile_shx_part.h`

sosicon::IShapeHeader Class Reference

Interface: Shape element.

```
#include <i_shape_header.h>
```

Inheritance diagram for sosicon::IShapeHeader:



Public Member Functions

- virtual **~IShapeHeader** ()
Destructor.
- virtual shape::geom::ShapeType **getShapeType** ()=0
Return mShapeType.
- virtual void **setShapeType** (shape::geom::ShapeType shapeType)=0
Set mShapeType.
- virtual void **setFileLength** (int fileLength)=0
- virtual int **getFileLength** ()=0
- virtual void **setBoundingBox** (shape::BoundingBox boundingBox)=0
- virtual shape::BoundingBox **getBoundingBox** ()=0
- virtual int **getByteSize** ()=0
Size of header in bytes.
- virtual int **getWordSize** ()=0
Size of header in 16-bit words.

Detailed Description

Interface: Shape element.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 37 of file i_shape_header.h.

Constructor & Destructor Documentation

virtual sosicon::IShapeHeader::~IShapeHeader ()[inline], [virtual]

Destructor.

Definition at line 41 of file i_shape_header.h.

Member Function Documentation

virtual shape::BoundingBox sosicon::IShapeHeader::getBoundingBox ()[pure virtual]

virtual int sosicon::IShapeHeader::getByteSize ()[pure virtual]

Size of header in bytes.

virtual int sosicon::IShapeHeader::getFileLength ()[pure virtual]

virtual shape::geom::ShapeType sosicon::IShapeHeader::getShapeType ()[pure virtual]

Return mShapeType.

See also:

ShapeHeader::mShapeType

Returns:

The shape type in current file.

virtual int sosicon::IShapeHeader::getWordSize ()[pure virtual]

Size of header in 16-bit words.

virtual void sosicon::IShapeHeader::setBoundingBox (shape::BoundingBox *boundingBox*)[pure virtual]

virtual void sosicon::IShapeHeader::setFileLength (int *fileLength*)[pure virtual]

virtual void sosicon::IShapeHeader::setShapeType (shape::geom::ShapeType *shapeType*)[pure virtual]

Set mShapeType.

See also:

ShapeHeader::mShapeType

The documentation for this class was generated from the following file:


- /prosjekter/sosicon/sosicon/src/interface/i_shape_header.h

sosicon::ISosiElement Class Reference

Interface: SOSI element.

```
#include <i_sosi_element.h>
```

Inheritance diagram for sosicon::ISosiElement:



Public Member Functions

- virtual `~ISosiElement ()`
Destructor.
- virtual `std::vector`
- `< ISosiElement * > & children ()=0`
- virtual void `addChild (ISosiElement *child)=0`
- virtual `std::string getName ()=0`
- virtual bool `getChild (sosi::SosiElementSearch &src)=0`
- virtual `std::string getData ()=0`
- virtual int `getLevel ()=0`
- virtual `sosi::ElementType getType ()=0`
- virtual `std::string getObjType ()=0`
- virtual `ISosiElement * getRoot ()=0`
- virtual `std::string getSerial ()=0`
- virtual void `deleteChildren ()=0`
- virtual void `dump (int indent=0)=0`
- virtual `ISosiElement * find (std::string ref)=0`

Detailed Description

Interface: SOSI element.

Author:

Espen Andersen

Copyright:

GNU General Public License

Represents the generic form of a SOSI element. All SOSI elements must implement this interface. It provides functionality for setting and retrieving field values. The parser writes field values to current SOSI element through this interface.

See also:

`sosicon::Parser::parseSosiLine()`

Data retrieval is provided by one of the `getData()` overloads. Single string data fields are associated with their unique keys, while collections of other data objects, such as address units and cadastral units, are retrieved one-by-one by sequential calls to `getData()`.

Definition at line 51 of file i_sosi_element.h.

Constructor & Destructor Documentation

virtual sosicon::ISosiElement::~~ISosiElement () [inline], [virtual]

Destructor.

Definition at line 55 of file i_sosi_element.h.

Member Function Documentation

virtual void sosicon::ISosiElement::addChild (ISosiElement * *child*) [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (p.133).

virtual std::vector<ISosiElement*>& sosicon::ISosiElement::children () [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (p.134).

virtual void sosicon::ISosiElement::deleteChildren () [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (p.134).

virtual void sosicon::ISosiElement::dump (int *indent* = 0) [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (p.134).

virtual ISosiElement* sosicon::ISosiElement::find (std::string *ref*) [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (p.134).

virtual bool sosicon::ISosiElement::getChild (sosi::SosiElementSearch & *src*) [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (p.134).

virtual std::string sosicon::ISosiElement::getData () [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (p.134).

virtual int sosicon::ISosiElement::getLevel () [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (p.134).

virtual std::string sosicon::ISosiElement::getName () [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (*p. 135*).

virtual std::string sosicon::ISosiElement::getObjType () [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (*p. 135*).

virtual ISosiElement* sosicon::ISosiElement::getRoot () [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (*p. 135*).

virtual std::string sosicon::ISosiElement::getSerial () [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (*p. 135*).

virtual sosi::ElementType sosicon::ISosiElement::getType () [pure virtual]

Implemented in `sosicon::sosi::SosiElement` (*p. 135*).

The documentation for this class was generated from the following file:

- `/prosjekter/sosicon/sosicon/src/interface/i_sosi_element.h`

sosicon::ISosiHeadMember Class Reference

Interface: SOSI header element.

```
#include <i_sosi_head_member.h>
```

Inheritance diagram for sosicon::ISosiHeadMember:



Public Member Functions

- virtual `~ISosiHeadMember ()`
Destructor.
- virtual void `init (ISosiElement *e)=0`
- virtual bool `initialized ()=0`

Detailed Description

Interface: SOSI header element.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 36 of file `i_sosi_head_member.h`.

Constructor & Destructor Documentation

virtual sosicon::ISosiHeadMember::~~ISosiHeadMember () `[inline]`, `[virtual]`

Destructor.

Definition at line 40 of file `i_sosi_head_member.h`.

Member Function Documentation

virtual void sosicon::ISosiHeadMember::init (ISosiElement * e) `[pure virtual]`

Implemented in `sosicon::sosi::SosiOrigONE` (*p.149*), and `sosicon::sosi::SosiUnit` (*p.157*).

virtual bool sosicon::ISosiHeadMember::initialized () [pure virtual]

Implemented in **sosicon::sosi::SosiOrigoNE** (*p.149*), and **sosicon::sosi::SosiUnit** (*p.157*).

The documentation for this class was generated from the following file:

- `/prosjekter/sosicon/sosicon/src/interface/i_sosi_head_member.h`

sosicon::Parser Class Reference

SOSI file parser.

```
#include <parser.h>
```

Public Member Functions

- **Parser ()**
Constructor.
- **~Parser ()**
Destructor.
- **void complete ()**
Flush parsed data.
- **void dump ()**
Debug output.
- **ISosiElement * getRootElement ()**
Retrieve pointer to root element.
- **void ragelParseSosiLine (std::string sosiLine)**
Main parser routine.

Private Member Functions

- **void digestPendingElement ()**
Save current SOSI element.

Private Attributes

- **std::vector< ISosiElement * > mElementStack**
Working stack.
- **sosi::SosiElementMap mElementIndex**
Index.
- **int mPendingElementLevel**
SOSI level of element currently in parser.
- **std::string mPendingElementName**
Name of element currently in parser.
- **std::string mPendingElementSerial**
Serial number of element currently in parser.
- **std::string mPendingElementAttributes**
Attribute data of element currently in parser.

Detailed Description

SOSI file parser.

Author:

Espen Andersen

Copyright:

GNU General Public License

The file `parser`. Reads and organizes SOSI file input, preparing the data for conversion and output. This class wraps a Ragel-generated state machine set up to parse SOSI content line-by-line. For more information about the Ragel state machine compiler, visit <http://www.complang.org/ragel/>

Specifically, the function `parseSosiLine()` is implemented in Ragel. The implementation script is located in `parser/parser_sosi_line.rl`. The file **`parser_ragel.cpp`** is generated on the basis of `parser/parser.rl` during pre-build processing.

Note:

Since **`parser_ragel.cpp`** is automatically re-generated before each compile, no redacting may take place here.

Any changes will be lost upon compile. Instead, its source script `parser/parser_rl` has to be edited.

Definition at line 52 of file `parser.h`.

Constructor & Destructor Documentation

`sosicon::Parser::Parser ()`

Constructor.

Initializes internal iterators and pointers.

Definition at line 21 of file `parser.cpp`.

`sosicon::Parser::~~Parser ()`

Destructor.

Calls `Parser::reset()` for final clean-up.

Definition at line 27 of file `parser.cpp`.

Member Function Documentation

`void sosicon::Parser::complete () [inline]`

Flush parsed data.

Definition at line 115 of file `parser.h`.

`void sosicon::Parser::digestPendingElement () [private]`

Save current SOSI element.

The parser stores intermediate data in the `mPendingElementXXX` member variables. When a SOSI element had been fully parsed, this function is called to move the data into the element tree structure before carrying on.

Definition at line 33 of file `parser.cpp`.

void sosicon::Parser::dump ()

Debug output.

Definition at line 62 of file parser.cpp.

sosicon::ISosiElement * sosicon::Parser::getRootElement ()

Retrieve pointer to root element.

Definition at line 67 of file parser.cpp.

void sosicon::Parser::ragelParseSosiLine (std::string *sosiLine*)

Main parser routine.

Processes one line from the SOSI file. This function is called repeatedly, consuming the input file line-by-line until EOF.

Note:

This function is implemented in the ragel script at parser/parser_sosi_line.rl, the c++ file parser_sosi_line.cpp is merely generated from the ragel script. Thus, any changes to the implementation must be done in the ragel script, since the c++ file will be automatically overwritten during the pre-build process.

Parameters:

<i>sosiLine</i>	Current line from the SOSI input file.
-----------------	--

Definition at line 139 of file parser_ragel.cpp.

Member Data Documentation

sosi::SosiElementMap sosicon::Parser::mElementIndex[private]

Index.

Index elements by serial number. Lookup table to resolve SOSI references (REF element).

Definition at line 66 of file parser.h.

std::vector<ISosiElement*> sosicon::Parser::mElementStack[private]

Working stack.

Keeps track of element relationship while parsing the SOSI file. The root element is inserted at the front of the stack. When the parser has completed, the stack should contain the root element only.

Definition at line 60 of file parser.h.

std::string sosicon::Parser::mPendingElementAttributes[private]

Attribute data of element currently in parser.

Intermediate storage member.

Definition at line 90 of file parser.h.

int sosicon::Parser::mPendingElementLevel[private]

SOSI level of element currently in parser.

Intermediate storage member.

Definition at line 72 of file parser.h.

std::string sosicon::Parser::mPendingElementName[private]

Name of element currently in parser.

Intermediate storage member.

Definition at line 78 of file parser.h.

std::string sosicon::Parser::mPendingElementSerial[private]

Serial number of element currently in parser.

Intermediate storage member.

Definition at line 84 of file parser.h.

The documentation for this class was generated from the following files:

- /prosjekter/sosicon/sosicon/src/**parser.h**
- /prosjekter/sosicon/sosicon/src/**parser.cpp**
- /prosjekter/sosicon/sosicon/src/**parser_ragel.cpp**
- /prosjekter/sosicon/sosicon/src/ragel/**parser.rl**

sosicon::sosi::ReferenceData Struct Reference

SOSI reference number.

```
#include <sosi_types.h>
```

Public Attributes

- `std::string serial`
The element ID.
 - `bool reverse`
Minus sign = reverse coordinate sequence.
 - `bool subtract`
Parenthesis = subtract shape.
-

Detailed Description

SOSI reference number.

Definition at line 131 of file `sosi_types.h`.

Member Data Documentation

bool sosicon::sosi::ReferenceData::reverse

Minus sign = reverse coordinate sequence.

Definition at line 133 of file `sosi_types.h`.

std::string sosicon::sosi::ReferenceData::serial

The element ID.

Definition at line 132 of file `sosi_types.h`.

bool sosicon::sosi::ReferenceData::subtract

Parenthesis = subtract shape.

Definition at line 134 of file `sosi_types.h`.

The documentation for this struct was generated from the following file:


- `/projekter/sosicon/sosicon/src/sosi/sosi_types.h`

sosicon::shape::Shapefile Class Reference

Shapefile implementation.

```
#include <shapefile.h>
```

Inheritance diagram for sosicon::shape::Shapefile:

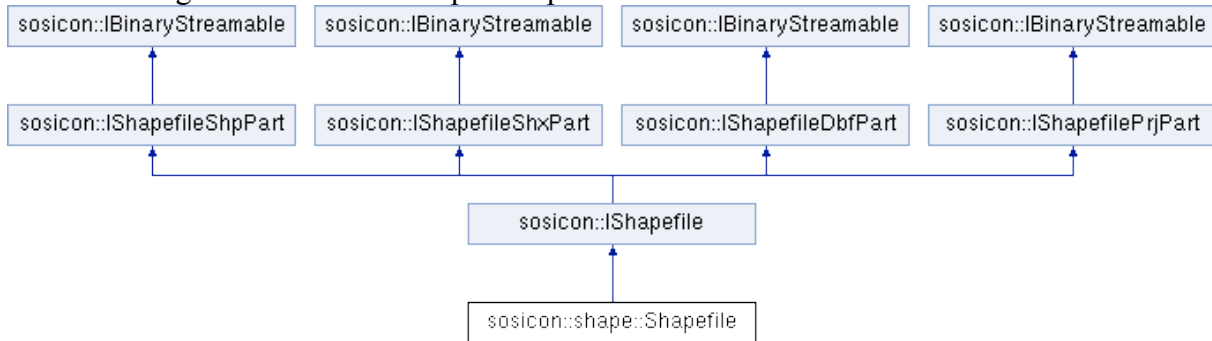

Public Member Functions

- **Shapefile ()**
Constructor.
- **virtual ~Shapefile ()**
Destructor.
- **virtual int build (ISosiElement *sosiTree, std::string objType, sosi::ElementType geomType)**
Described in IShapefile.
- **virtual void filterSosiId (std::vector< std::string > sosiId)**
Described in IShapefile.
- **virtual void writeDbf (std::ostream &os)**
Described in IShapefileDbfPart.
- **virtual void writeShp (std::ostream &os)**
Described in IShapefileShpPart.
- **virtual void writeShx (std::ostream &os)**
Described in IShapefileShxPart.
- **virtual void writePrj (std::ostream &os)**
Described in IShapefilePrjPart.

Private Member Functions

- **void adjustMasterMbr (double xmin, double ymin, double xmax, double ymax)**
*Expand MBR to contain **Coordinate** collection.*
- **void buildShpElement (ISosiElement *sosi, ShapeType type)**
Create SHP element.
- **void buildShpHeader (ShapeType type)**
Populate shape header struct.
- **void buildShpPoint (CoordinateCollection &cc)**
Build shape element: Point.
- **void buildShpPolygon (CoordinateCollection &cc)**
Build shape element: Polygon.
- **void buildShpPolyLine (CoordinateCollection &cc)**

Build shape element: PolyLine.

- void **buildShpRecCoordinate** (int &pos, **CoordinateCollection** &cc)
Write first coordinate pair in collection to shapefile buffer.
- void **buildShpRecCoordinate** (int &pos, **ICoordinate** *c)
Write coordinate pair to shapefile buffer.
- void **buildShpRecCoordinates** (int &pos, **CoordinateCollection** &cc)
Write multiple coordinate pairs to shapefile buffer.
- void **buildShpRecHeaderCommonPart** (int &pos, int contentLength, **ShapeType** type)
Create shapefile record header, common part.
- void **buildShpRecHeaderExtended** (int &pos, **CoordinateCollection** &cc)
Create shapefile record header, extended part.
- void **buildShpRecHeaderOffsets** (int &pos, **CoordinateCollection** &cc)
Create shapefile record header, offsets.
- void **buildDbf** ()
Create DBF file content.
- void **buildDbfFieldDescriptor** (int &pos)
Create DBF field descriptor.
- void **buildDbfHeader** (int recLen)
Create DBF header.
- void **buildDbfRecordSection** (int &pos, int recLen)
Create DBF records.
- void **buildShx** ()
Create SHX file content.
- void **insertShxOffset** (int contentLen)
Append offset value to SHX (index)
- int **expandShpBuffer** (int byteLen)
Expand shp payload buffer.
- void **extractDbfFields** (**ISosiElement** *sosi, **DbfRecord** &rec)
Recursive func to extract SOSI field data.
- void **insertDbfRecord** (**ISosiElement** *sosi)
Create and insert DBF record.
- std::vector< **ICoordinate** * > **getNormalized** (**sosi::NorthEastList** &neLst)
Shapefile polys must have clockwise-ordered vertices.
- void **saveToDbf** (**DbfRecord** &rec, std::string field, std::string data)
Update or insert new DBF field.

Private Attributes

- **ISosiElement** * **mSosiTree**
SOSI source.
- std::vector< std::string > **mFilterSosiId**
List of IDs of SOSI elements to be exported, if specified.
- std::vector< std::string > **mFilterSosiObjTypes**
Objtypes of selected elements to be exported, if specified.
- char **mShpHeader** [100]
Main SHP file header.
- char * **mShpBuffer**

SHP file payload.

- **int mShpSize**
Data length of SHP file buffer.
- **int mShpBufferSize**
Allocated buffer length.
- **char mShxHeader [100]**
Index file header.
- **char * mShxBuffer**
Index file payload.
- **int mShxBufferSize**
Length of SHX file buffer.
- **char mDbfHeader [32]**
dBase file header
- **char * mDbfBuffer**
dBase file payload
- **int mDbfBufferSize**
Length of dBase file buffer.
- **int mRecordNumber**
Number of current record in process.
- **double mXmin**
Minimum bounding rectangle, min X.
- **double mYmin**
Minimum bounding rectangle, min Y.
- **double mXmax**
Minimum bounding rectangle, max X.
- **double mYmax**
Minimum bounding rectangle, max Y.
- **DbfFieldLengths mDbfFieldLengths**
Accumulation of DBF fields and their lengths.
- **DbfRecordSet mDbfRecordSet**
All DBF records.
- **ShxOffsets mShxOffsets**
Index file offsets.

Static Private Attributes

- **static const int MAX_BUFFER_CHUNK_SIZE**
Buffer allocation size.

Detailed Description

Shapefile implementation.

Wraps all ESRI Shape output files (shp, shx, dbf, prj...) in one class.

Author:

Espen Andersen

Copyright:

GNU General Public License

Definition at line 56 of file shapefile.h.

Constructor & Destructor Documentation

sosicon::shape::Shapefile::Shapefile () [*inline*]

Constructor.

Inlined, initializes native members.

Definition at line 369 of file shapefile.h.

sosicon::shape::Shapefile::~~Shapefile () [*virtual*]

Destructor.

Definition at line 40 of file shapefile.cpp.

Member Function Documentation

void sosicon::shape::Shapefile::adjustMasterMbr (double *xMin*, double *yMin*, double *xMax*, double *yMax*) [*private*]

Expand MBR to contain **Coordinate** collection.

The minimum bounding rectangle (MBR) for all geometries in current file is stored in members **Shapefile::mXmin**, **Shapefile::mYmin**, **Shapefile::mXmax** and **Shapefile::mYmax**. This method expands the MBR to fit provided coordinates.

Parameters:

<i>xMin</i>	Minimum X coordinate of geometry to be included i MBR.
<i>yMin</i>	Minimum Y coordinate of geometry to be included i MBR.
<i>xMax</i>	Maximum X coordinate of geometry to be included i MBR.
<i>yMax</i>	Maximum Y coordinate of geometry to be included i MBR.

Definition at line 47 of file shapefile.cpp.

int sosicon::shape::Shapefile::build (ISosiElement * *sosiTree*, std::string *objType*, sosi::ElementType *geomType*) [*virtual*]

Described in **IShapefile**.

Implements **sosicon::IShapefile** (*p.96*).

Definition at line 55 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildDbf () [*private*]

Create DBF file content.

Part of DBF creation. Creates the dBase file content for current shapefile. Populates

See also:

Shapefile::buildDbfHeader

Shapefile::buildDbfFieldDescriptor

Shapefile::buildDbfRecordSection **Shapefile::mDbfBuffer**.

Definition at line 286 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildDbfFieldDescriptor (int & pos) [private]

Create DBF field descriptor.

Part of DBF creation. Iterates through individual fields found in current dataset and creates a field descriptor header for the following dBase records.

See also:

Shapefile::buildDbf

Shapefile::buildDbfHeader

Shapefile::buildDbfRecordSection

Parameters:

<i>pos</i>	Reference to an integer holding current position within the shapefile buffer Shapefile::mShpBuffer . The position is updated to reflect the first "free" position after writing to the buffer.
------------	---

Definition at line 320 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildDbfHeader (int *recLen*) [private]

Create DBF header.

Part of DBF creation. Creates dBase file header and writes it to **Shapefile::mDbfHeader**.

See also:

Shapefile::buildDbf

Shapefile::buildDbfFieldDescriptor

Shapefile::buildDbfRecordSection

Parameters:

<i>recLen</i>	Length of a single record, in bytes.
---------------	--------------------------------------

Definition at line 351 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildDbfRecordSection (int & pos, int *recLen*) [private]

Create DBF records.

Part of DBF creation. Iterates through all records and writes each one to the DBF buffer **Shapefile::mDbfBuffer**.

See also:

Shapefile::buildDbf

Shapefile::buildDbfFieldDescriptor

Shapefile::buildDbfHeader

Parameters:

<i>pos</i>	Reference to an integer holding current position within the shapefile buffer
------------	--

	Shapefile::mShpBuffer . The position is updated to reflect the first "free" position after writing to the buffer.
<i>recLen</i>	Length of a single record, in bytes.

Definition at line 383 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShpElement (ISosiElement * *sosi*, ShapeType *type*)[private]

Create SHP element.

If a shapefile equivalent to current SOSI element exists, this method creates the low-level shape data structure and writes it to the output buffer **Shapefile::mShpBuffer**.

Parameters:

<i>sosi</i>	Pointer to SOSI element to be converted to shape.
<i>type</i>	Type of Shapefile geometry equivalent to the SOSI element to be converted.

Definition at line 132 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShpHeader (ShapeType *type*)[private]

Populate shape header struct.

Creates master file header for SHP and SHX file parts and writes it to the DBF header buffer **Shapefile::mDbfHeader**.

Parameters:

<i>type</i>	The shape type for current file.
-------------	----------------------------------

Definition at line 97 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShpPoint (CoordinateCollection & *cc*)[private]

Build shape element: Point.

Inserts a single point into the shapefile buffer.

Parameters:

<i>cc</i>	CoordinateCollection containing one or more points. Only the first point in the collection will be handled.
-----------	--

Definition at line 157 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShpPolygon (CoordinateCollection & *cc*)[private]

Build shape element: Polygon.

Inserts a polygon into the shapefile buffer.

Parameters:

<i>cc</i>	CoordinateCollection containing three or more points, defining the polygon and holes.
-----------	--

Definition at line 179 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShpPolyLine (CoordinateCollection & cc)[private]

Build shape element: PolyLine.

Inserts a polyLine into the shapefile buffer.

Parameters:

<i>cc</i>	CoordinateCollection containing two or more points, defining the polyLine.
-----------	---

Definition at line 167 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShpRecCoordinate (int & pos, CoordinateCollection & cc)[private]

Write first coordinate pair in collection to shapefile buffer.

Build shapefile coordinate from the first coordinate pair in the provided **CoordinateCollection** and update buffer position.

Parameters:

<i>pos</i>	Reference to an integer holding current position within the shapefile buffer Shapefile::mShpBuffer . The position is updated to reflect the first "free" position after writing to the buffer.
<i>cc</i>	The coordinate collection from which the first coordinate pair is to be extracted.

Definition at line 191 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShpRecCoordinate (int & pos, ICoordinate * c)[private]

Write coordinate pair to shapefile buffer.

Build shapefile coordinate from the provided coordinate pair and update buffer position.

Parameters:

<i>pos</i>	Reference to an integer holding current position within the shapefile buffer Shapefile::mShpBuffer . The position is updated to reflect the first "free" position after writing to the buffer.
<i>c</i>	The coordinate to be written to the buffer.

Definition at line 200 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShpRecCoordinates (int & pos, CoordinateCollection & cc)[private]

Write multiple coordinate pairs to shapefile buffer.

Build shapefile coordinate from a collection of coordinate pairs and update buffer position.

Parameters:

<i>pos</i>	Reference to an integer holding current position within the shapefile buffer Shapefile::mShpBuffer . The position is updated to reflect the first "free" position after writing to the buffer.
<i>cc</i>	The coordinate collection to be written to the buffer.

Definition at line 208 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShpRecHeaderCommonPart (int & *pos*, int *contentLength*, ShapeType *type*)[private]

Create shapefile record header, common part.

The first part of the shapefile record header are common for all geometry types. This method writes the common part to the buffer.

See also:

Shapefile::buildShpRecHeaderExtended

Parameters:

<i>pos</i>	Reference to an integer holding current position within the shapefile buffer Shapefile::mShpBuffer . The position is updated to reflect the first "free" position after writing to the buffer.
<i>contentLength</i>	Length of the record in 16-bit words, record header not included.
<i>type</i>	The shape type for current file.

Definition at line 267 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShpRecHeaderExtended (int & *pos*, CoordinateCollection & *cc*)[private]

Create shapefile record header, extended part.

For multipoint, polyLine and polygon. This is the second part of the shapefile record header.

See also:

Shapefile::buildShpRecHeaderCommonPart

Parameters:

<i>pos</i>	Reference to an integer holding current position within the shapefile buffer Shapefile::mShpBuffer . The position is updated to reflect the first "free" position after writing to the buffer.
<i>cc</i>	The coordinate collection containing the points for the geometry in current record.

Definition at line 220 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShpRecHeaderOffsets (int & *pos*, CoordinateCollection & *cc*)[private]

Create shapefile record header, offsets.

The shapefile record header includes a list of offsets to the various parts of the geometry. Applicable to polygons where the main outline is the first part and subsequent parts denotes holes or islands. This method constructs the list of offset values for the multipart geometry and writes it to the shapefile buffer.

Parameters:

<i>pos</i>	Reference to an integer holding current position within the shapefile buffer Shapefile::mShpBuffer . The position is updated to reflect the first "free" position after writing to the buffer.
<i>cc</i>	The coordinate collection containing the points for the multi-part geometry in current record.

Definition at line 246 of file shapefile.cpp.

void sosicon::shape::Shapefile::buildShx () [private]

Create SHX file content.

Part of SHX index creation. Builds the shapefile index from the **Shapefile::mShxOffsets** entries and writes it to the SHX buffer **Shapefile::mShxBuffer** and the SHX header **Shapefile::mShxHeader**.

See also:

Shapefile::insertShxOffset

Definition at line 418 of file shapefile.cpp.

int sosicon::shape::Shapefile::expandShpBuffer (int *byteLen*) [private]

Expand shp payload buffer.

The shape buffer grows by larger chunks as it is gradually filled up with smaller blocks. For each expansion, the allocation size is doubled, until it reaches MAX_BUFFER_CHUNK_SIZE bytes. This is a tradeoff between execution time and memory consumption. For larger files, there will be relatively few buffer re-allocations and block transfers, in order to save time. For smaller files there will be more frequent re-allocations to save memory.

Parameters:

<i>byteLen</i>	The exact length in bytes of the amount of data about to be written to the shapefile buffer. If the current buffer is too small to hold the new block, it will be expanded.
----------------	---

Definition at line 443 of file shapefile.cpp.

void sosicon::shape::Shapefile::extractDbfFields (ISosiElement * *sosi*, DbfRecord & *rec*) [private]

Recursive func to extract SOSI field data.

Traverses the SOSI element, mining the data fields and stores them in the provided record set container.

See also:

Shapefile::insertDbfRecord

Parameters:

<i>sosi</i>	The SOSI element (sub tree) to extract data fields from.
<i>rec</i>	The recordset container to populate with data.

Definition at line 494 of file shapefile.cpp.

virtual void sosicon::shape::Shapefile::filterSosild (std::vector< std::string > *sosild*) [inline], [virtual]

Described in **IShapefile**.

Implements **sosicon::IShapefile** (p.96).

Definition at line 391 of file shapefile.h.

std::vector<ICoordinate*> sosicon::shape::Shapefile::getNormalized (sosi::NorthEastList & neLst) [private]

Shapefile polys must have clockwise-ordered vertices.

This is one of the core functions for handling polygons. Tests the direction for SOSI coordinates, and reverses them if they are in the wrong order with respect to the **Shapefile** format epscification.

Note:

The direction of the vertices in a SOSI polygon is not significant, whist in a **Shapefile** polygon, it is crucial. The vertices in the outer polygon should always be ordered in a clockwise direction, while the holes or islands must be ordered in a counter-clockwise direction.

Parameters:

<i>neLst</i>	List of SOSI NorthEast elements describing current multipart gemoetry (polygon with holes/islands).
--------------	---

void sosicon::shape::Shapefile::insertDbfRecord (ISosiElement * sosi) [private]

Create and insert DBF record.

Prepares dBase record for current SOSI element. Creates the two mandatory fields "SOSI_ID" and "TYPE", before it calls Shapefil::extractDbfFields to retrieve the other data fields. The record is then inserted into the **Shapefile::mDbfRecordSet** member.

See also:

Shapefil::extractDbfFields

Parameters:

<i>sosi</i>	The SOSI element (sub tree) to extract data fields from.
-------------	--

Definition at line 513 of file shapefile.cpp.

void sosicon::shape::Shapefile::insertShxOffset (int contentLen) [private]

Append offset value to SHX (index)

For each shapefile record, it's offset within the main file is pushed to the **Shapefile::mShxOffsets** vector.

Parameters:

<i>contentLen</i>	Length of the shapefile record content, in 16-bit words, record header not included.
-------------------	--

Definition at line 522 of file shapefile.cpp.

void sosicon::shape::Shapefile::saveToDbf (DbfRecord & rec, std::string field, std::string data) [private]

Update or insert new DBF field.

Appends or updates data for the DFB record, updating list of field names and lengths.

Definition at line 530 of file shapefile.cpp.

void sosicon::shape::Shapefile::writeDbf (std::ostream & os) [virtual]

Described in **IShapefileDbfPart**.

Implements **sosicon::IShapefileDbfPart** (*p.98*).

Definition at line 556 of file shapefile.cpp.

void sosicon::shape::Shapefile::writePrj (std::ostream & os) [virtual]

Described in **IShapefilePrjPart**.

Implements **sosicon::IShapefilePrjPart** (*p.100*).

Definition at line 562 of file shapefile.cpp.

void sosicon::shape::Shapefile::writeShp (std::ostream & os) [virtual]

Described in **IShapefileShpPart**.

Implements **sosicon::IShapefileShpPart** (*p.102*).

Definition at line 544 of file shapefile.cpp.

void sosicon::shape::Shapefile::writeShx (std::ostream & os) [virtual]

Described in **IShapefileShxPart**.

Implements **sosicon::IShapefileShxPart** (*p.104*).

Definition at line 550 of file shapefile.cpp.

Member Data Documentation

const int sosicon::shape::Shapefile::MAX_BUFFER_CHUNK_SIZE [static], [private]

Buffer allocation size.

To speed things up, heap allocations are done in increasingly large chunks. This parameters defines how many bytes to request for the largest buffer expansion.

Definition at line 64 of file shapefile.h.

char* sosicon::shape::Shapefile::mDbfBuffer [private]

dBase file payload

Definition at line 81 of file shapefile.h.

int sosicon::shape::Shapefile::mDbfBufferSize [private]

Length of dBase file buffer.

Definition at line 82 of file shapefile.h.

DbfFieldLengths **sosicon::shape::Shapefile::mDbfFieldLengths** [private]

Accumulation of DBF fields and their lengths.

Definition at line 91 of file shapefile.h.

char **sosicon::shape::Shapefile::mDbfHeader**[32] [private]

dBase file header

Definition at line 80 of file shapefile.h.

DbfRecordSet **sosicon::shape::Shapefile::mDbfRecordSet** [private]

All DBF records.

Definition at line 92 of file shapefile.h.

std::vector<std::string> **sosicon::shape::Shapefile::mFilterSosild** [private]

List of IDs of SOSI elements to be exported, if specified.

Definition at line 68 of file shapefile.h.

std::vector<std::string> **sosicon::shape::Shapefile::mFilterSosiObjTypes** [private]

Objtypes of selected elements to be exported, if specified.

Definition at line 69 of file shapefile.h.

int **sosicon::shape::Shapefile::mRecordNumber** [private]

Number of current record in process.

Definition at line 84 of file shapefile.h.

char* **sosicon::shape::Shapefile::mShpBuffer** [private]

SHP file payload.

Definition at line 72 of file shapefile.h.

int **sosicon::shape::Shapefile::mShpBufferSize** [private]

Allocated buffer length.

Definition at line 74 of file shapefile.h.

char **sosicon::shape::Shapefile::mShpHeader**[100] [private]

Main SHP file header.

Definition at line 71 of file shapefile.h.

int sosicon::shape::Shapefile::mShpSize [private]

Data length of SHP file buffer.

Definition at line 73 of file shapefile.h.

char* sosicon::shape::Shapefile::mShxBuffer [private]

Index file payload.

Definition at line 77 of file shapefile.h.

int sosicon::shape::Shapefile::mShxBufferSize [private]

Length of SHX file buffer.

Definition at line 78 of file shapefile.h.

char sosicon::shape::Shapefile::mShxHeader[100] [private]

Index file header.

Definition at line 76 of file shapefile.h.

ShxOffsets sosicon::shape::Shapefile::mShxOffsets [private]

Index file offsets.

Definition at line 93 of file shapefile.h.

ISosiElement* sosicon::shape::Shapefile::mSosiTree [private]

SOSI source.

Definition at line 66 of file shapefile.h.

double sosicon::shape::Shapefile::mXmax [private]

Minimum bounding rectangle, max X.

Definition at line 88 of file shapefile.h.

double sosicon::shape::Shapefile::mXmin [private]

Minimum bounding rectangle, min X.

Definition at line 86 of file shapefile.h.

double sosicon::shape::Shapefile::mYmax [private]

Minimum bounding rectangle, max Y.

Definition at line 89 of file shapefile.h.

double sosicon::shape::Shapefile::mYmin [private]

Minimum bounding rectangle, min Y.

Definition at line 87 of file shapefile.h.

The documentation for this class was generated from the following files:

- /prosjekter/sosicon/sosicon/src/shape/**shapefile.h**
- /prosjekter/sosicon/sosicon/src/shape/**shapefile.cpp**

sosicon::shape::ShxIndex Struct Reference

```
#include <shapefile_types.h>
```

Public Attributes

- **Int32Field** offset
 - **Int32Field** length
-

Detailed Description

Definition at line 83 of file shapefile_types.h.

Member Data Documentation

Int32Field sosicon::shape::ShxIndex::length

Definition at line 85 of file shapefile_types.h.

Int32Field sosicon::shape::ShxIndex::offset

Definition at line 84 of file shapefile_types.h.

The documentation for this struct was generated from the following file:


- /projekter/sosicon/sosicon/src/shape/shapefile_types.h

sosicon::sosi::SosiElement Class Reference

Basic SOSI element.

```
#include <sosi_element.h>
```

Inheritance diagram for sosicon::sosi::SosiElement:



Public Member Functions

- **SosiElement** (std::string name, std::string serial, std::string data, int level, **ISosiElement** *root, **SosiElementMap** &index)
Construct new SOSI element.
- virtual void **addChild** (**ISosiElement** *child)
Insert children element.
- virtual void **deleteChildren** ()
Recursively deletes all children.
- virtual void **dump** (int indent=0)
Debug function.
- virtual **ISosiElement** * **find** (std::string ref)
Find element by reference.
- std::vector< **ISosiElement** * > & **children** ()
- virtual bool **getChild** (**SosiElementSearch** &src)
Get next child in list.
- virtual std::string **getData** ()
Get unparsed element data.
- virtual int **getLevel** ()
Get nesting level of current element.
- virtual std::string **getObjType** ()
Get ObjType of current element.
- virtual std::string **getName** ()
Get name of current element.
- virtual **ISosiElement** * **getRoot** ()
Get root element.
- virtual std::string **getSerial** ()
Get serial number (ID) of current element.
- virtual **ElementType** **getType** ()
Get ElementType of current element.

Private Member Functions

- virtual bool **nextChild** (**SosiElementSearch** &src)
Increment to next child in list.

Private Attributes

- **SosiTranslationTable mTranslation**
SOSI string translations.
 - **std::string mData**
Current element's data content.
 - **SosiChildrenList mChildren**
List of children elements.
 - **int mLevel**
Current element's nesting level.
 - **std::string mName**
Current element's name.
 - **ElementType mType**
Current element's geometric type.
 - **ObjType mObjType**
Current element's objtype.
 - **std::string mObjTypeStr**
Current element's objtype.
 - **std::string mSerial**
Current element's serial number if provided.
 - **ISosiElement * mRoot**
Pointer to root element.
 - **SosiElementMap & mIndex**
Reference to parser's lookup table.
-

Detailed Description

Basic SOSI element.

Implements basic characteristics of a SOSI element.

Definition at line 71 of file `sosi_element.h`.

Constructor & Destructor Documentation

sosicon::sosi::SosiElement::SosiElement (std::string *name*, std::string *serial*, std::string *data*, int *level*, ISosiElement * *root*, SosiElementMap & *index*)

Construct new SOSI element.

Definition at line 21 of file `sosi_element.cpp`.

Member Function Documentation

void sosicon::sosi::SosiElement::addChild (ISosiElement * *child*) [virtual]

Insert children element.

Implements **sosicon::ISosiElement** (*p.108*).

Definition at line 35 of file `sosi_element.cpp`.

std::vector<ISosiElement*>& sosicon::sosi::SosiElement::children () [*inline*], [*virtual*]

Implements **sosicon::ISosiElement** (*p.108*).

Definition at line 126 of file `sosi_element.h`.

void sosicon::sosi::SosiElement::deleteChildren () [*virtual*]

Recursively deletes all children.

Implements **sosicon::ISosiElement** (*p.108*).

Definition at line 44 of file `sosi_element.cpp`.

void sosicon::sosi::SosiElement::dump (int *indent* = 0) [*virtual*]

Debug function.

Implements **sosicon::ISosiElement** (*p.108*).

Definition at line 52 of file `sosi_element.cpp`.

sosicon::ISosiElement * sosicon::sosi::SosiElement::find (std::string *ref*) [*virtual*]

Find element by reference.

Implements **sosicon::ISosiElement** (*p.108*).

Definition at line 62 of file `sosi_element.cpp`.

bool sosicon::sosi::SosiElement::getChild (SosiElementSearch & *src*) [*virtual*]

Get next child in list.

Always pass a null pointer to start iterating through the children list. The referenced pointer will point to the next child in list when the function returns. If the end of the list is reached, the function returns false.

Implements **sosicon::ISosiElement** (*p.108*).

Definition at line 94 of file `sosi_element.cpp`.

virtual std::string sosicon::sosi::SosiElement::getData () [*inline*], [*virtual*]

Get unparsed element data.

Implements **sosicon::ISosiElement** (*p.108*).

Definition at line 137 of file `sosi_element.h`.

virtual int sosicon::sosi::SosiElement::getLevel () [*inline*], [*virtual*]

Get nesting level of current element.

Implements **sosicon::ISosiElement** (p.108).

Definition at line 140 of file `sosi_element.h`.

virtual std::string sosicon::sosi::SosiElement::getName () [inline], [virtual]

Get name of current element.

Implements **sosicon::ISosiElement** (p.109).

Definition at line 146 of file `sosi_element.h`.

virtual std::string sosicon::sosi::SosiElement::getObjType () [inline], [virtual]

Get ObjType of current element.

Implements **sosicon::ISosiElement** (p.109).

Definition at line 143 of file `sosi_element.h`.

virtual ISosiElement* sosicon::sosi::SosiElement::getRoot () [inline], [virtual]

Get root element.

Implements **sosicon::ISosiElement** (p.109).

Definition at line 149 of file `sosi_element.h`.

virtual std::string sosicon::sosi::SosiElement::getSerial () [inline], [virtual]

Get serial number (ID) of current element.

Implements **sosicon::ISosiElement** (p.109).

Definition at line 152 of file `sosi_element.h`.

virtual ElementType sosicon::sosi::SosiElement::getType () [inline], [virtual]

Get ElementType of current element.

Implements **sosicon::ISosiElement** (p.109).

Definition at line 155 of file `sosi_element.h`.

bool sosicon::sosi::SosiElement::nextChild (SosiElementSearch & src) [private], [virtual]

Increment to next child in list.

Definition at line 74 of file `sosi_element.cpp`.

Member Data Documentation

SosiChildrenList `sosicon::sosi::SosiElement::mChildren` `[private]`

List of children elements.

Definition at line 80 of file `sosi_element.h`.

std::string `sosicon::sosi::SosiElement::mData` `[private]`

Current element's data content.

Definition at line 77 of file `sosi_element.h`.

SosiElementMap& `sosicon::sosi::SosiElement::mIndex` `[private]`

Reference to parser's lookup table.

Definition at line 104 of file `sosi_element.h`.

int `sosicon::sosi::SosiElement::mLevel` `[private]`

Current element's nesting level.

Definition at line 83 of file `sosi_element.h`.

std::string `sosicon::sosi::SosiElement::mName` `[private]`

Current element's name.

Definition at line 86 of file `sosi_element.h`.

ObjType `sosicon::sosi::SosiElement::mObjType` `[private]`

Current element's objtype.

Definition at line 92 of file `sosi_element.h`.

std::string `sosicon::sosi::SosiElement::mObjTypeStr` `[private]`

Current element's objtype.

Definition at line 95 of file `sosi_element.h`.

ISosiElement* `sosicon::sosi::SosiElement::mRoot` `[private]`

Pointer to root element.

Definition at line 101 of file `sosi_element.h`.

std::string sosicon::sosi::SosiElement::mSerial [private]

Current element's serial number if provided.

Definition at line 98 of file sosi_element.h.

SosiTranslationTable sosicon::sosi::SosiElement::mTranslation [private]

SOSI string translations.

Definition at line 74 of file sosi_element.h.

ElementType sosicon::sosi::SosiElement::mType [private]

Current element's geometric type.

Definition at line 89 of file sosi_element.h.

The documentation for this class was generated from the following files:

- /prosjekter/sosicon/sosicon/src/sosi/sosi_element.h
- /prosjekter/sosicon/sosicon/src/sosi/sosi_element.cpp

sosicon::sosi::SosiElementSearch Class Reference

```
#include <sosi_element_search.h>
```

Public Member Functions

- **SosiElementSearch** ()
- **SosiElementSearch** (sosi::ElementType filter)
- **SosiElementSearch** (std::vector< sosi::ElementType > &filterList)
- SosiChildrenList::size_type **index** ()
- SosiChildrenList::size_type **index** (SosiChildrenList::size_type i)
- **ISosiElement** * **element** ()
- **ISosiElement** * **element** (ISosiElement *e)
- sosi::ElementType **type** ()
- sosi::ElementType **type** (sosi::ElementType t)
- std::vector< sosi::ElementType > & **types** ()
- std::vector< sosi::ElementType > & **types** (std::vector< sosi::ElementType > &t)
- bool **matchTypes** ()
- void **next** ()

Private Attributes

- SosiChildrenList::size_type **mIndex**
- **ISosiElement** * **mSosiElement**
- std::vector< sosi::ElementType > **mElementTypes**

Detailed Description

Definition at line 46 of file sosi_element_search.h.

Constructor & Destructor Documentation

sosicon::sosi::SosiElementSearch::SosiElementSearch () [*inline*]

Definition at line 51 of file sosi_element_search.h.

sosicon::sosi::SosiElementSearch::SosiElementSearch (sosi::ElementType *filter*) [*inline*]

Definition at line 52 of file sosi_element_search.h.

sosicon::sosi::SosiElementSearch::SosiElementSearch (std::vector< sosi::ElementType > & *filterList*) [*inline*]

Definition at line 53 of file sosi_element_search.h.

Member Function Documentation

ISosiElement* sosicon::sosi::SosiElementSearch::element () [inline]

Definition at line 56 of file sosi_element_search.h.

ISosiElement* sosicon::sosi::SosiElementSearch::element (ISosiElement * e) [inline]

Definition at line 57 of file sosi_element_search.h.

SosiChildrenList::size_type sosicon::sosi::SosiElementSearch::index () [inline]

Definition at line 54 of file sosi_element_search.h.

SosiChildrenList::size_type sosicon::sosi::SosiElementSearch::index (SosiChildrenList::size_type i) [inline]

Definition at line 55 of file sosi_element_search.h.

bool sosicon::sosi::SosiElementSearch::matchTypes ()

Definition at line 22 of file sosi_element_search.cpp.

void sosicon::sosi::SosiElementSearch::next () [inline]

Definition at line 63 of file sosi_element_search.h.

sosi::ElementType sosicon::sosi::SosiElementSearch::type () [inline]

Definition at line 58 of file sosi_element_search.h.

sosi::ElementType sosicon::sosi::SosiElementSearch::type (sosi::ElementType t) [inline]

Definition at line 59 of file sosi_element_search.h.

std::vector<sosi::ElementType>& sosicon::sosi::SosiElementSearch::types () [inline]

Definition at line 60 of file sosi_element_search.h.

std::vector<sosi::ElementType>& sosicon::sosi::SosiElementSearch::types (std::vector<sosi::ElementType > & t) [inline]

Definition at line 61 of file sosi_element_search.h.

Member Data Documentation

std::vector<sosi::ElementType> sosicon::sosi::SosiElementSearch::mElementTypes [private]

Definition at line 49 of file `sosi_element_search.h`.

SosiChildrenList::size_type sosicon::sosi::SosiElementSearch::mIndex [private]

Definition at line 47 of file `sosi_element_search.h`.

ISosiElement* sosicon::sosi::SosiElementSearch::mSosiElement [private]

Definition at line 48 of file `sosi_element_search.h`.

The documentation for this class was generated from the following files:

- `/projekter/sosicon/sosicon/src/sosi/sosi_element_search.h`
- `/projekter/sosicon/sosicon/src/sosi/sosi_element_search.cpp`

sosicon::sosi::SosiJunctionPoint Class Reference

SOSI Junction point.

```
#include <sosi_junction_point.h>
```

Public Member Functions

- **SosiJunctionPoint (ISosiElement *e)**
Construct new SOSI junction point element.
- **~SosiJunctionPoint ()**
Destructor.

Private Attributes

- **ISosiElement * mSosiElement**

Detailed Description

SOSI Junction point.

Implements SOSI junction point layer specification, as given via the KP element. Norwegian: Knutepunktslag.

Definition at line 43 of file `sosi_junction_point.h`.

Constructor & Destructor Documentation

sosicon::sosi::SosiJunctionPoint::SosiJunctionPoint (ISosiElement * e)[`inline`]

Construct new SOSI junction point element.

Definition at line 50 of file `sosi_junction_point.h`.

sosicon::sosi::SosiJunctionPoint::~~SosiJunctionPoint ()

Destructor.

Member Data Documentation

ISosiElement* sosicon::sosi::SosiJunctionPoint::mSosiElement[`private`]

Definition at line 45 of file `sosi_junction_point.h`.

The documentation for this class was generated from the following file:

- `/prosjekter/sosicon/sosicon/src/sosi/sosi_junction_point.h`

sosicon::sosi::SosiNorthEast Class Reference

SOSI North-east element.

```
#include <sosi_north_east.h>
```

Public Member Functions

- void **append** (double n, double e)
- void **append** (double n, double e, double h)
- void **append** (std::string n, std::string e)
- void **append** (std::string n, std::string e, std::string h)
Frees allocated memory.
- void **free** ()
- **SosiNorthEast** (**ISosiElement** *e)
Construct new SOSI north-east element.
- virtual ~**SosiNorthEast** ()
Destructor.
- void **dump** ()
Debug.
- void **expandBoundingBox** (double &minX, double &minY, double &maxX, double &maxY)
- **ICoordinate** * **front** ()
- **ICoordinate** * **back** ()
- bool **getNext** (**ICoordinate** *&coord)
- int **getNumPoints** ()
- void **reverse** ()
Reverse polygon (point order)
- **SosiNorthEast** & **operator+=** (**SosiOrigoNE** &origo)
- **SosiNorthEast** & **operator/=** (**SosiUnit** &unit)

Private Member Functions

- void **ragelParseCoordinatesNe** (std::string data)
Populate mCoordinates.
- void **ragelParseCoordinatesNeh** (std::string data)
- void **initHeadMember** (**ISosiHeadMember** &headMember, **ElementType** type)

Private Attributes

- **ISosiElement** * **mSosiElement**
- **CoordinateList** **mCoordinates**
- **CoordinateList::iterator** **mCoordinatesIterator**
- double **mMinX**
- double **mMinY**
- double **mMaxX**
- double **mMaxY**

Static Private Attributes

- static **SosiOrigoNE** **mOrigo**
- static **SosiUnit** **mUnit**

Detailed Description

SOSI North-east element.

Implements SOSI north east element, as given via the NØ element.

Definition at line 50 of file `sosi_north_east.h`.

Constructor & Destructor Documentation

`sosicon::sosi::SosiNorthEast::SosiNorthEast (ISosiElement * e)`

Construct new SOSI north-east element.

Definition at line 34 of file `sosi_north_east.cpp`.

`sosicon::sosi::SosiNorthEast::~~SosiNorthEast () [virtual]`

Destructor.

Definition at line 53 of file `sosi_north_east.cpp`.

Member Function Documentation

`void sosicon::sosi::SosiNorthEast::append (double n, double e)`

Definition at line 88 of file `sosi_north_east.cpp`.

`void sosicon::sosi::SosiNorthEast::append (double n, double e, double h)`

Definition at line 93 of file `sosi_north_east.cpp`.

`void sosicon::sosi::SosiNorthEast::append (std::string n, std::string e)`

Definition at line 56 of file `sosi_north_east.cpp`.

`void sosicon::sosi::SosiNorthEast::append (std::string n, std::string e, std::string h)`

Frees allocated memory.

Definition at line 67 of file `sosi_north_east.cpp`.

`ICoordinate* sosicon::sosi::SosiNorthEast::back () [inline]`

Definition at line 96 of file `sosi_north_east.h`.

void sosicon::sosi::SosiNorthEast::dump ()

Debug.

Definition at line 131 of file sosi_north_east.cpp.

void sosicon::sosi::SosiNorthEast::expandBoundingBox (double & *minX*, double & *minY*, double & *maxX*, double & *maxY*)

Definition at line 138 of file sosi_north_east.cpp.

void sosicon::sosi::SosiNorthEast::free ()

Definition at line 80 of file sosi_north_east.cpp.

ICoordinate* sosicon::sosi::SosiNorthEast::front () [inline]

Definition at line 94 of file sosi_north_east.h.

bool sosicon::sosi::SosiNorthEast::getNext (ICoordinate *& *coord*)

Definition at line 146 of file sosi_north_east.cpp.

int sosicon::sosi::SosiNorthEast::getNumPoints () [inline]

Definition at line 102 of file sosi_north_east.h.

void sosicon::sosi::SosiNorthEast::initHeadMember (ISosiHeadMember & *headMember*, ElementType *type*) [private]

Definition at line 115 of file sosi_north_east.cpp.

sosicon::sosi::SosiNorthEast & sosicon::sosi::SosiNorthEast::operator+= (SosiOrigoNE & *origo*)

Definition at line 162 of file sosi_north_east.cpp.

sosicon::sosi::SosiNorthEast & sosicon::sosi::SosiNorthEast::operator/= (SosiUnit & *unit*)

Definition at line 178 of file sosi_north_east.cpp.

void sosicon::sosi::SosiNorthEast::ragelParseCoordinatesNe (std::string *data*) [private]

Populate mCoordinates.

Definition at line 33 of file sosi_north_east.rl.

void sosicon::sosi::SosiNorthEast::ragelParseCoordinatesNeh (std::string *data*) [private]

Definition at line 33 of file sosi_north_east_height.rl.

void sosicon::sosi::SosiNorthEast::reverse () [inline]

Reverse polygon (point order)

Definition at line 105 of file sosi_north_east.h.

Member Data Documentation

CoordinateList sosicon::sosi::SosiNorthEast::mCoordinates [private]

Definition at line 54 of file sosi_north_east.h.

CoordinateList::iterator sosicon::sosi::SosiNorthEast::mCoordinatesIterator [private]

Definition at line 56 of file sosi_north_east.h.

double sosicon::sosi::SosiNorthEast::mMaxX [private]

Definition at line 64 of file sosi_north_east.h.

double sosicon::sosi::SosiNorthEast::mMaxY [private]

Definition at line 65 of file sosi_north_east.h.

double sosicon::sosi::SosiNorthEast::mMinX [private]

Definition at line 62 of file sosi_north_east.h.

double sosicon::sosi::SosiNorthEast::mMinY [private]

Definition at line 63 of file sosi_north_east.h.

sosicon::sosi::SosiOrigoNE sosicon::sosi::SosiNorthEast::mOrigo [static], [private]

Definition at line 58 of file sosi_north_east.h.

ISosiElement* sosicon::sosi::SosiNorthEast::mSosiElement [private]

Definition at line 52 of file sosi_north_east.h.

sosicon::sosi::SosiUnit sosicon::sosi::SosiNorthEast::mUnit[static], [private]

Definition at line 60 of file sosi_north_east.h.

The documentation for this class was generated from the following files:


- /prosjekter/sosicon/sosicon/src/sosi/sosi_north_east.h
- /prosjekter/sosicon/sosicon/src/ragel/sosi_north_east.rl
- /prosjekter/sosicon/sosicon/src/ragel/sosi_north_east_height.rl
- /prosjekter/sosicon/sosicon/src/sosi/sosi_north_east.cpp
- /prosjekter/sosicon/sosicon/src/sosi_north_east_height_ragel.cpp
- /prosjekter/sosicon/sosicon/src/sosi_north_east_ragel.cpp

sosicon::sosi::SosiOrigoNE Class Reference

SOSI Junction point.

```
#include <sosi_origo_ne.h>
```

Inheritance diagram for sosicon::sosi::SosiOrigoNE:

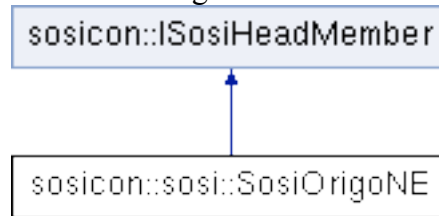

Public Member Functions

- **SosiOrigoNE ()**
Construct new SOSI origo element.
- **SosiOrigoNE (ISosiElement *e)**
Construct new SOSI junction point element.
- virtual **~SosiOrigoNE ()**
Destructor.
- int **getN ()**
- int **getE ()**
- virtual void **init (ISosiElement *e)**
- virtual bool **initialized ()**
- void **ragelParseSosiOrigoNE** (std::string data)
Ragel parse element data.

Private Attributes

- **ISosiElement * mSosiElement**
- bool **mInitialized**
- int **mOrigoN**
- int **mOrigoE**

Detailed Description

SOSI Junction point.

Implements SOSI junction point layer specification, as given via the KP element. Norwegian: Knutepunktslag.

Definition at line 44 of file `sosi_origo_ne.h`.

Constructor & Destructor Documentation

sosicon::sosi::SosiOrigoNE::SosiOrigoNE ()

Construct new SOSI origo element.

Definition at line 21 of file sosi_origo_ne.cpp.

sosicon::sosi::SosiOrigoNE::SosiOrigoNE (ISosiElement * e)[inline]

Construct new SOSI junction point element.

Definition at line 60 of file sosi_origo_ne.h.

virtual sosicon::sosi::SosiOrigoNE::~~SosiOrigoNE ()[inline], [virtual]

Destructor.

Definition at line 63 of file sosi_origo_ne.h.

Member Function Documentation

int sosicon::sosi::SosiOrigoNE::getE ()[inline]

Definition at line 67 of file sosi_origo_ne.h.

int sosicon::sosi::SosiOrigoNE::getN ()[inline]

Definition at line 65 of file sosi_origo_ne.h.

void sosicon::sosi::SosiOrigoNE::init (ISosiElement * e)[virtual]

Implements **sosicon::ISosiHeadMember** (*p.110*).

Definition at line 28 of file sosi_origo_ne.cpp.

virtual bool sosicon::sosi::SosiOrigoNE::initialized ()[inline], [virtual]

Implements **sosicon::ISosiHeadMember** (*p.111*).

Definition at line 71 of file sosi_origo_ne.h.

void sosicon::sosi::SosiOrigoNE::ragelParseSosiOrigoNE (std::string data)

Ragel parse element data.

Definition at line 33 of file sosi_origo_ne.rl.

Member Data Documentation

bool sosicon::sosi::SosiOrigoNE::mInitialized [private]

Definition at line 48 of file sosi_origo_ne.h.

int sosicon::sosi::SosiOrigoNE::mOrigoE [private]

Definition at line 52 of file sosi_origo_ne.h.

int sosicon::sosi::SosiOrigoNE::mOrigoN [private]

Definition at line 50 of file sosi_origo_ne.h.

ISosiElement* sosicon::sosi::SosiOrigoNE::mSosiElement [private]

Definition at line 46 of file sosi_origo_ne.h.

The documentation for this class was generated from the following files:

- /prosjekter/sosicon/sosicon/src/sosi/sosi_origo_ne.h
- /prosjekter/sosicon/sosicon/src/ragel/sosi_origo_ne.rl
- /prosjekter/sosicon/sosicon/src/sosi/sosi_origo_ne.cpp
- /prosjekter/sosicon/sosicon/src/sosi_origo_ne_ragel.cpp

sosicon::sosi::SosiRefList Class Reference

SOSI REF list.

```
#include <sosi_ref_list.h>
```

Public Member Functions

- **SosiRefList ()**
Construct new SOSI REF element.
- **SosiRefList (ISosiElement *e)**
Construct new SOSI REF element.
- **~SosiRefList ()**
Destructor.
- **bool getNextGeometry (GeometryRef *&geometry)**
Next list of references.

Private Member Functions

- **void ragelParseSosiRef (std::string data)**

Private Attributes

- **ISosiElement * mSosiElement**
- **GeometryCollection mRefListCollection**
- **GeometryCollection::size_type mRefListCollectionIndex**
- **GeometryRef::size_type mRefListIndex**

Detailed Description

SOSI REF list.

Implements SOSI reference list, as given via the REF element.

Definition at line 42 of file `sosi_ref_list.h`.

Constructor & Destructor Documentation

sosicon::sosi::SosiRefList::SosiRefList () [inline]

Construct new SOSI REF element.

Definition at line 56 of file `sosi_ref_list.h`.

sosicon::sosi::SosiRefList::SosiRefList (ISosiElement * e)

Construct new SOSI REF element.

Definition at line 21 of file `sosi_ref_list.cpp`.

sosicon::sosi::SosiRefList::~~SosiRefList ()

Destructor.

Definition at line 28 of file sosi_ref_list.cpp.

Member Function Documentation

bool sosicon::sosi::SosiRefList::getNextGeometry (GeometryRef *& geometry)

Next list of references.

A reference list represents a geometry, i.e. a polygon or its holes.

Definition at line 40 of file sosi_ref_list.cpp.

void sosicon::sosi::SosiRefList::ragelParseSosiRef (std::string data) [private]

Definition at line 33 of file sosi_ref.rl.

Member Data Documentation

GeometryCollection sosicon::sosi::SosiRefList::mRefListCollection [private]

Definition at line 46 of file sosi_ref_list.h.

GeometryCollection::size_type sosicon::sosi::SosiRefList::mRefListCollectionIndex [private]

Definition at line 48 of file sosi_ref_list.h.

GeometryRef::size_type sosicon::sosi::SosiRefList::mRefListIndex [private]

Definition at line 49 of file sosi_ref_list.h.

ISosiElement* sosicon::sosi::SosiRefList::mSosiElement [private]

Definition at line 44 of file sosi_ref_list.h.

The documentation for this class was generated from the following files:

- /prosjekter/sosicon/sosicon/src/sosi/sosi_ref_list.h
- /prosjekter/sosicon/sosicon/src/ragel/sosi_ref.rl
- /prosjekter/sosicon/sosicon/src/sosi/sosi_ref_list.cpp
- /prosjekter/sosicon/sosicon/src/sosi_ref_ragel.cpp

sosicon::sosi::SosiTranslationTable Class Reference

```
#include <sosi_translation_table.h>
```

Public Member Functions

- **SosiTranslationTable** ()
- **CoordSys & sysCodeToCoordSys** (int sysCode)
- **ElementType sosiNameToType** (std::string typeName)
- std::string **sosiTypeToName** (**ElementType** elementType)
- **ObjType sosiObjNameToType** (std::string objTypeName)
- std::string **sosiTypeToObjName** (**ObjType** objType)

Private Member Functions

- template<typename Key , typename Val > Key **reverseLookup** (std::map< Key, Val > &c, Val v)
Scan container looking for value, returning key.

Static Private Attributes

- static const int **MAX_COORDSYS_TABLE**
Number of entries in KOORDSYS lookup table.
- static std::map< std::string,
- **ElementType > mTypeNameMap**
SOSI element name map.
- static std::map< std::string,
- **ObjType > mObjTypeNameMap**
OBJTYPE name lookup table.
- static **CoordSys mCoordSysTable** [**MAX_COORDSYS_TABLE**+1]
KOORDSYS code lookup table.

Detailed Description

Definition at line 36 of file sosi_translation_table.h.

Constructor & Destructor Documentation

sosicon::sosi::SosiTranslationTable::SosiTranslationTable ()

Definition at line 26 of file sosi_translation_table.cpp.

Member Function Documentation

**template<typename Key , typename Val > Key
sosicon::sosi::SosiTranslationTable::reverseLookup (std::map< Key, Val > & c, Val v) [inline],
[private]**

Scan container looking for value, returning key.

Definition at line 64 of file sosi_translation_table.h.

**ElementType sosicon::sosi::SosiTranslationTable::sosiNameToType (std::string
typeName) [inline]**

Definition at line 80 of file sosi_translation_table.h.

**ObjType sosicon::sosi::SosiTranslationTable::sosiObjNameToType (std::string
objTypeName) [inline]**

Definition at line 89 of file sosi_translation_table.h.

**std::string sosicon::sosi::SosiTranslationTable::sosiTypeToName (ElementType
elementType) [inline]**

Definition at line 85 of file sosi_translation_table.h.

std::string sosicon::sosi::SosiTranslationTable::sosiTypeToObjName (ObjType objType) [inline]

Definition at line 94 of file sosi_translation_table.h.

CoordSys& sosicon::sosi::SosiTranslationTable::sysCodeToCoordSys (int sysCode) [inline]

Definition at line 75 of file sosi_translation_table.h.

Member Data Documentation

const int sosicon::sosi::SosiTranslationTable::MAX_COORDSYS_TABLE [static], [private]

Number of entries in KOORDSYS lookup table.

Definition at line 39 of file sosi_translation_table.h.

**sosicon::sosi::CoordSys sosicon::sosi::SosiTranslationTable::mCoordSysTable [static],
[private]**

KOORDSYS code lookup table.

Primitive array, int key.

Definition at line 60 of file sosi_translation_table.h.

```
std::map< std::string, sosicon::sosi::ObjType >  
sosicon::sosi::SosiTranslationTable::mObjTypeNameMap[static], [private]
```

OBJTYPE name lookup table.

STL map with string key.

Definition at line 54 of file sosi_translation_table.h.

```
std::map< std::string, sosicon::sosi::ElementType >  
sosicon::sosi::SosiTranslationTable::mTypeNameMap[static], [private]
```

SOSI element name map.

STL map with string key.

Definition at line 48 of file sosi_translation_table.h.

The documentation for this class was generated from the following files:

- /prosjekter/sosicon/sosicon/src/sosi/sosi_translation_table.h
- /prosjekter/sosicon/sosicon/src/sosi/sosi_translation_table.cpp

sosicon::sosi::SosiUnit Class Reference

SOSI Unit.

```
#include <sosi_unit.h>
```

Inheritance diagram for sosicon::sosi::SosiUnit:



Public Member Functions

- **SosiUnit ()**
Construct new SOSI Unit element.
- **virtual ~SosiUnit ()**
Destructor.
- **SosiUnit (ISosiElement *e)**
Construct new SOSI Unit element.
- **int getDivisor ()**
- **virtual void init (ISosiElement *e)**
Initnialize SOSI Unit element.
- **virtual bool initialized ()**

Private Attributes

- **ISosiElement * mSosiElement**
- **bool mInitialized**
- **int mDivisor**

Detailed Description

SOSI Unit.

Implements SOSI unit (coordinate resolution), as given via the ENHET element.

Definition at line 44 of file sosi_unit.h.

Constructor & Destructor Documentation

sosicon::sosi::SosiUnit::SosiUnit ()

Construct new SOSI Unit element.

Definition at line 21 of file sosi_unit.cpp.

virtual sosicon::sosi::SosiUnit::~SosiUnit () [inline], [virtual]

Destructor.

Definition at line 58 of file sosi_unit.h.

sosicon::sosi::SosiUnit::SosiUnit (ISosiElement * e) [inline]

Construct new SOSI Unit element.

Definition at line 61 of file sosi_unit.h.

Member Function Documentation

int sosicon::sosi::SosiUnit::getDivisor () [inline]

Definition at line 63 of file sosi_unit.h.

void sosicon::sosi::SosiUnit::init (ISosiElement * e) [virtual]

Initnialize SOSI Unit element.

Implements **sosicon::ISosiHeadMember** (*p.110*).

Definition at line 28 of file sosi_unit.cpp.

virtual bool sosicon::sosi::SosiUnit::initialized () [inline], [virtual]

Implements **sosicon::ISosiHeadMember** (*p.111*).

Definition at line 68 of file sosi_unit.h.

Member Data Documentation

int sosicon::sosi::SosiUnit::mDivisor [private]

Definition at line 50 of file sosi_unit.h.

bool sosicon::sosi::SosiUnit::mIntialized [private]

Definition at line 48 of file sosi_unit.h.

ISosiElement* sosicon::sosi::SosiUnit::mSosiElement [private]

Definition at line 46 of file sosi_unit.h.

The documentation for this class was generated from the following files:

- /prosjekter/sosicon/sosicon/src/sosi/sosi_unit.h

- /prosjekter/sosicon/sosicon/src/sosi/**sosi_unit.cpp**

File Documentation

/prosjekter/sosicon/sosicon/src/byte_order.cpp File Reference

```
#include "byte_order.h"
```

/prosjekter/sosicon/sosicon/src/byte_order.h File Reference

```
#include <inttypes.h>
#include <algorithm>
#include <cmath>
#include <iostream>
```

Namespaces

- **sosicon**
- *Application root.* **sosicon::byteOrder**

Big/low-endian conversions. Enumerations

- enum **sosicon::byteOrder::Endianness** { **sosicon::byteOrder::not_set**, **sosicon::byteOrder::big**, **sosicon::byteOrder::little** }

Big/little flag. Functions

- Endianness **sosicon::byteOrder::determine** ()
Determines system endianness.
- void **sosicon::byteOrder::doubleToLittleEndian** (double from, char *to)
Writes little endian representation of double.
- void **sosicon::byteOrder::toBigEndian** (const char *from, char *to, size_t bufSize)
Reverses buffer to big endian if required.
- void **sosicon::byteOrder::toLittleEndian** (const char *from, char *to, size_t bufSize)
Reverses buffer to little endian if required.

Variables

- enum **sosicon::byteOrder::Endianness** **sosicon::byteOrder::endianness**
Stores system endianness.

/prosjekter/sosicon/sosicon/src/command_line.cpp File Reference

```
#include "command_line.h"
```

/prosjekter/sosicon/sosicon/src/command_line.h File Reference

```
#include <stdio.h>
#include <iostream>
#include <vector>
#include <string>
#include <unistd.h>
#include "utils.h"
```

Classes

- class **sosicon::CommandLine**

***Command-line parser.* Namespaces**

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/common_types.h File Reference

```
#include <vector>
#include "interface/i_coordinate.h"
```

Namespaces

- **sosicon**

Application root. Typedefs

- typedef std::vector
- < ICoordinate * > **sosicon::CoordinateList**
List of coordinate pairs.

Enumerations

- enum **sosicon::Wkt** { **sosicon::wkt_unknown**, **sosicon::wkt_point**, **sosicon::wkt_linestring**, **sosicon::wkt_polygon** }
List of applied, well-known text geometries.

/prosjekter/sosicon/sosicon/src/converter_sosi2psql.cpp File Reference

```
#include "converter_sosi2psql.h"
```

/prosjekter/sosicon/sosicon/src/converter_sosi2psql.h File Reference

```
#include <iostream>
#include <fstream>
#include <sstream>
#include <vector>
#include <cmath>
#include <map>
#include "utils.h"
#include "interface/i_converter.h"
#include "interface/i_sosi_element.h"
#include "sosi/sosi_types.h"
#include "sosi/sosi_translation_table.h"
#include "coordinate_collection.h"
#include "sosi/sosi_north_east.h"
#include "command_line.h"
#include "common_types.h"
#include "parser.h"
```

Classes

- class **sosicon::ConverterSosi2psql**

SOSI to PostgreSQL/PostGIS converter. Namespaces

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/converter_sosi2shp.cpp File Reference

```
#include "converter_sosi2shp.h"
```

/prosjekter/sosicon/sosicon/src/converter_sosi2shp.h File Reference

```
#include <iostream>
#include <iomanip>
#include <fstream>
#include <vector>
#include <sstream>
#include <string>
#include "interface/i_converter.h"
#include "interface/i_sosi_element.h"
#include "command_line.h"
#include "parser.h"
#include "utils.h"
#include "shape/shapefile.h"
#include <sys/stat.h>
#include <sys/types.h>
```

Classes

- class **sosicon::ConverterSosi2shp**

***SOSI to ESRI Shape converter.* Namespaces**

- **sosicon**
Application root.

/prosjekter/sosicon/sosicon/src/converter_sosi2tsv.cpp File Reference

```
#include "converter_sosi2tsv.h"
```

/prosjekter/sosicon/sosicon/src/converter_sosi2tsv.h File Reference

```
#include <iostream>
#include <fstream>
#include <vector>
#include "interface/i_converter.h"
#include "command_line.h"
#include "parser.h"
```

Classes

- class **sosicon::ConverterSosi2tsv**

***SOSI to TSV converter.* Namespaces**

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/converter_sosi2xml.cpp File Reference

```
#include "converter_sosi2xml.h"
```

/prosjekter/sosicon/sosicon/src/converter_sosi2xml.h File Reference

```
#include <iostream>
#include <fstream>
#include <vector>
#include "interface/i_converter.h"
#include "interface/i_sosi_element.h"
#include "command_line.h"
#include "utils.h"
#include "parser.h"
```

Classes

- class **sosicon::ConverterSosi2xml**

***SOSI to ESRI Shape converter.* Namespaces**

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/converter_sosi_stat.cpp File Reference

```
#include "converter_sosi_stat.h"
```

/prosjekter/sosicon/sosicon/src/converter_sosi_stat.h File Reference

```
#include <iostream>
#include <fstream>
#include <map>
#include "interface/i_converter.h"
#include "interface/i_sosi_element.h"
#include "sosi/sosi_types.h"
#include "sosi/sosi_element_search.h"
#include "command_line.h"
#include "utils.h"
#include "parser.h"
```

Classes

- class **sosicon::ConverterSosiStat**

***SOSI to ESRI Shape converter.* Namespaces**

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/coordinate.h File Reference

```
#include <string>
#include <iostream>
#include <sstream>
#include <ios>
#include "interface/i_coordinate.h"
```

Classes

- class **sosicon::Coordinate**

***Coordinate container.* Namespaces**

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/coordinate_collection.cpp File Reference

```
#include "coordinate_collection.h"
```

/prosjekter/sosicon/sosicon/src/coordinate_collection.h File Reference

```
#include <algorithm>
#include <limits>
#include <vector>
#include <iostream>
#include "common_types.h"
#include "sosi/sosi_types.h"
#include "sosi/sosi_element_search.h"
#include "sosi/sosi_ref_list.h"
#include "sosi/sosi_north_east.h"
#include "interface/i_coordinate.h"
#include "interface/i_sosi_element.h"
```

Classes

- class **sosicon::CoordinateCollection**

Coordinate container. Namespaces

- **sosicon**

Application root. Functions

- bool **sosicon::getNext** (ICoordinate *&coord, sosi::NorthEastList &list, sosi::NorthEastList::iterator &i)
Get next coordinate in list.
- bool **sosicon::getNextOffset** (int &offset, std::vector< int > &offsets, std::vector< int >::iterator &iterator)
Get next offset in part offsets list.
- bool **sosicon::isClockwise** (std::vector< ICoordinate * >::iterator &begin, std::vector< ICoordinate * >::iterator &end)
Analyzes polygon direction.
- bool **sosicon::isCounterClockwise** (std::vector< ICoordinate * >::iterator &begin, std::vector< ICoordinate * >::iterator &end)
Analyzes polygon direction.
- void **sosicon::neListToCoordList** (sosi::NorthEastList &neList, std::vector< ICoordinate * > &coordList)
Extracts single coordinates from list of North-East elements.

/prosjekter/sosicon/sosicon/src/factory.cpp File Reference

```
#include "factory.h"
```

/prosjekter/sosicon/sosicon/src/factory.h File Reference

```
#include "interface/i_converter.h"
#include "converter_sosi2shp.h"
#include "converter_sosi2xml.h"
#include "converter_sosi2tsv.h"
#include "converter_sosi2psql.h"
#include "converter_sosi_stat.h"
```

Classes

- class **sosicon::Factory**

Factory class. Namespaces

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_binary_streamable.h File Reference

```
#include <iostream>
```

Classes

- class `sosicon::IBinaryStreamable`

***Interface: Binary streamable object.* Namespaces**

- `sosicon`

***Application root.* Functions**

- `std::ostream & sosicon::operator<< (std::ostream &os, IBinaryStreamable &binaryStreamable)`
Stream output operator.

/prosjekter/sosicon/sosicon/src/interface/i_converter.h File Reference

```
#include "../command_line.h"
```

Classes

- class **sosicon::IConverter**

***Interface: Converter.* Namespaces**

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_coordinate.h File Reference

```
#include <string>
```

Classes

- class **sosicon::ICoordinate**

***Interface: Coordinate.* Namespaces**

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_lookup_table.h File Reference

```
#include <string>
```

Classes

- class `sosicon::ILookupTable`

***Interface: Lookup table.* Namespaces**

- `sosicon`

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_rectangle.h File Reference

Classes

- class **sosicon::IRectangle**

***Interface: Rectangle.* Namespaces**

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_shape_element.h File Reference

```
#include "i_binary_streamable.h"  
#include "i_sosi_element.h"  
#include "i_rectangle.h"
```

Classes

- class **sosicon::IShapeElement**

Interface: Shape element. Namespaces

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_shape_element_header.h

File Reference

```
#include "i_binary_streamable.h"
```

Classes

- class `sosicon::IShapeElementHeader`

***Interface: Shape element header.* Namespaces**

- `sosicon`

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_shape_header.h File Reference

```
#include "i_binary_streamable.h"
#include "../shape/shapefile_types.h"
#include "../shape/bounding_box.h"
```

Classes

- class **sosicon::IShapeHeader**

Interface: Shape element. Namespaces

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_shapefile.h File Reference

```
#include "i_shapefile_shp_part.h"
#include "i_shapefile_shx_part.h"
#include "i_shapefile_dbf_part.h"
#include "i_shapefile_prj_part.h"
#include "i_sosi_element.h"
#include "../sosi/sosi_types.h"
```

Classes

- class **sosicon::IShapefile**

Interface: Shapefile. Namespaces

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_shapefile_dbf_part.h File Reference

```
#include <iostream>
#include "i_binary_streamable.h"
```

Classes

- class **sosicon::IShapefileDbfPart**

Interface: ShapefileDbfPart. Namespaces

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_shapefile_prj_part.h File Reference

```
#include <iostream>
#include "i_binary_streamable.h"
```

Classes

- class **sosicon::IShapefilePrjPart**

Interface: ShapefilePrjPart. Namespaces

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_shapefile_shp_part.h File Reference

```
#include <iostream>
#include "i_binary_streamable.h"
```

Classes

- class **sosicon::IShapefileShpPart**

Interface: ShapefileShpPart. Namespaces

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_shapefile_shx_part.h File Reference

```
#include <iostream>
#include "i_binary_streamable.h"
```

Classes

- class **sosicon::IShapefileShxPart**

Interface: ShapefileShxPart. Namespaces

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_sosi_element.h File Reference

```
#include <string>
#include <vector>
#include <map>
#include "../sosi/sosi_types.h"
#include "../sosi/sosi_element_search.h"
```

Classes

- class **sosicon::ISosiElement**

Interface: SOSI element. Namespaces

- **sosicon**

Application root.

/prosjekter/sosicon/sosicon/src/interface/i_sosi_head_member.h File Reference

```
#include "i_sosi_element.h"
```

Classes

- class **sosicon::ISosiHeadMember**

***Interface: SOSI header element.* Namespaces**

- **sosicon**

Application root.

../prosjekter/sosicon/sosicon/src/inttypes.h File Reference

```
#include "stdint.h"
```

Classes

- struct **imaxdiv** t

Macros

- ```

• #define PRId8
• #define PRIi8
• #define PRIdLEAST8
• #define PRIiLEAST8
• #define PRIdFAST8
• #define PRIiFAST8
• #define PRId16
• #define PRIi16
• #define PRIdLEAST16
• #define PRIiLEAST16
• #define PRIdFAST16
• #define PRIiFAST16
• #define PRId32
• #define PRIi32
• #define PRIdLEAST32
• #define PRIiLEAST32
• #define PRIdFAST32
• #define PRIiFAST32
• #define PRId64
• #define PRIi64
• #define PRIdLEAST64
• #define PRIiLEAST64
• #define PRIdFAST64
• #define PRIiFAST64
• #define PRIdMAX
• #define PRIiMAX
• #define PRIdPTR
• #define PRIiPTR
• #define PRIdo8
• #define PRIiu8
• #define PRIdx8
• #define PRIx8
• #define PRIdoLEAST8
• #define PRIiuLEAST8
• #define PRIdxLEAST8
• #define PRIxLEAST8
• #define PRIdoFAST8
• #define PRIiuFAST8
• #define PRIdxFAST8
• #define PRIxFAST8
• #define PRIdo16
• #define PRIiu16
• #define PRIdx16

```

- **#define PRIX16**
- **#define PRIoLEAST16**
- **#define PRIuLEAST16**
- **#define PRIxLEAST16**
- **#define PRIXLEAST16**
- **#define PRIoFAST16**
- **#define PRIuFAST16**
- **#define PRIxFAST16**
- **#define PRIXFAST16**
- **#define PRIo32**
- **#define PRIu32**
- **#define PRIx32**
- **#define PRIX32**
- **#define PRIoLEAST32**
- **#define PRIuLEAST32**
- **#define PRIxLEAST32**
- **#define PRIXLEAST32**
- **#define PRIoFAST32**
- **#define PRIuFAST32**
- **#define PRIxFAST32**
- **#define PRIXFAST32**
- **#define PRIo64**
- **#define PRIu64**
- **#define PRIx64**
- **#define PRIX64**
- **#define PRIoLEAST64**
- **#define PRIuLEAST64**
- **#define PRIxLEAST64**
- **#define PRIXLEAST64**
- **#define PRIoFAST64**
- **#define PRIuFAST64**
- **#define PRIxFAST64**
- **#define PRIXFAST64**
- **#define PRIoMAX**
- **#define PRIuMAX**
- **#define PRIxMAX**
- **#define PRIXMAX**
- **#define PRIoPTR**
- **#define PRIuPTR**
- **#define PRIxPTR**
- **#define PRIXPTR**
- **#define SCNd8**
- **#define SCNi8**
- **#define SCNdLEAST8**
- **#define SCNiLEAST8**
- **#define SCNdFAST8**
- **#define SCNiFAST8**
- **#define SCNd16**
- **#define SCNi16**
- **#define SCNdLEAST16**
- **#define SCNiLEAST16**
- **#define SCNdFAST16**
- **#define SCNiFAST16**



- **#define SCNd32**
- **#define SCNi32**
- **#define SCNdLEAST32**
- **#define SCNiLEAST32**
- **#define SCNdFAST32**
- **#define SCNiFAST32**
- **#define SCNd64**
- **#define SCNi64**
- **#define SCNdLEAST64**
- **#define SCNiLEAST64**
- **#define SCNdFAST64**
- **#define SCNiFAST64**
- **#define SCNdMAX**
- **#define SCNiMAX**
- **#define SCNdPTR**
- **#define SCNiPTR**
- **#define SCNo8**
- **#define SCNu8**
- **#define SCNx8**
- **#define SCNX8**
- **#define SCNoLEAST8**
- **#define SCNuLEAST8**
- **#define SCNxLEAST8**
- **#define SCNXLEAST8**
- **#define SCNoFAST8**
- **#define SCNuFAST8**
- **#define SCNxFAST8**
- **#define SCNXFAST8**
- **#define SCNo16**
- **#define SCNu16**
- **#define SCNx16**
- **#define SCNX16**
- **#define SCNoLEAST16**
- **#define SCNuLEAST16**
- **#define SCNxLEAST16**
- **#define SCNXLEAST16**
- **#define SCNoFAST16**
- **#define SCNuFAST16**
- **#define SCNxFAST16**
- **#define SCNXFAST16**
- **#define SCNo32**
- **#define SCNu32**
- **#define SCNx32**
- **#define SCNX32**
- **#define SCNoLEAST32**
- **#define SCNuLEAST32**
- **#define SCNxLEAST32**
- **#define SCNXLEAST32**
- **#define SCNoFAST32**
- **#define SCNuFAST32**
- **#define SCNxFAST32**
- **#define SCNXFAST32**
- **#define SCNo64**

- `#define SCNu64`
- `#define SCNx64`
- `#define SCNX64`
- `#define SCNoLEAST64`
- `#define SCNuLEAST64`
- `#define SCNxLEAST64`
- `#define SCNXLEAST64`
- `#define SCNoFAST64`
- `#define SCNuFAST64`
- `#define SCNxFAST64`
- `#define SCNXFAST64`
- `#define SCNoMAX`
- `#define SCNuMAX`
- `#define SCNxMAX`
- `#define SCNXMAX`
- `#define SCNoPTR`
- `#define SCNuPTR`
- `#define SCNxPTR`
- `#define SCNXPTR`
- `#define imaxabs`
- `#define strtoumax`
- `#define wctoumax`

## Functions

- `imaxdiv_t __cdecl imaxdiv (intmax_t numer, intmax_t denom)`

---

## Macro Definition Documentation

### **#define imaxabs**

Definition at line 269 of file inttypes.h.

### **#define PRId16**

Definition at line 64 of file inttypes.h.

### **#define PRId32**

Definition at line 71 of file inttypes.h.

### **#define PRId64**

Definition at line 78 of file inttypes.h.

**#define PRId8**

Definition at line 57 of file inttypes.h.

**#define PRIdFAST16**

Definition at line 68 of file inttypes.h.

**#define PRIdFAST32**

Definition at line 75 of file inttypes.h.

**#define PRIdFAST64**

Definition at line 82 of file inttypes.h.

**#define PRIdFAST8**

Definition at line 61 of file inttypes.h.

**#define PRIdLEAST16**

Definition at line 66 of file inttypes.h.

**#define PRIdLEAST32**

Definition at line 73 of file inttypes.h.

**#define PRIdLEAST64**

Definition at line 80 of file inttypes.h.

**#define PRIdLEAST8**

Definition at line 59 of file inttypes.h.

**#define PRIdMAX**

Definition at line 85 of file inttypes.h.

**#define PRIdPTR**

Definition at line 88 of file inttypes.h.

**#define PRIi16**

Definition at line 65 of file inttypes.h.

**#define PRIi32**

Definition at line 72 of file inttypes.h.

**#define PRIi64**

Definition at line 79 of file inttypes.h.

**#define PRIi8**

Definition at line 58 of file inttypes.h.

**#define PRIiFAST16**

Definition at line 69 of file inttypes.h.

**#define PRIiFAST32**

Definition at line 76 of file inttypes.h.

**#define PRIiFAST64**

Definition at line 83 of file inttypes.h.

**#define PRIiFAST8**

Definition at line 62 of file inttypes.h.

**#define PRIiLEAST16**

Definition at line 67 of file inttypes.h.

**#define PRIiLEAST32**

Definition at line 74 of file inttypes.h.

**#define PRIiLEAST64**

Definition at line 81 of file inttypes.h.

**#define PRIiLEAST8**

Definition at line 60 of file inttypes.h.

**#define PRIiMAX**

Definition at line 86 of file inttypes.h.

**#define PRIiPTR**

Definition at line 89 of file inttypes.h.

**#define PRIo16**

Definition at line 105 of file inttypes.h.

**#define PRIo32**

Definition at line 118 of file inttypes.h.

**#define PRIo64**

Definition at line 131 of file inttypes.h.

**#define PRIo8**

Definition at line 92 of file inttypes.h.

**#define PRIoFAST16**

Definition at line 113 of file inttypes.h.

**#define PRIoFAST32**

Definition at line 126 of file inttypes.h.

**#define PRIoFAST64**

Definition at line 139 of file inttypes.h.

**#define PRIoFAST8**

Definition at line 100 of file inttypes.h.

**#define PRIoLEAST16**

Definition at line 109 of file inttypes.h.

**#define PRIoLEAST32**

Definition at line 122 of file inttypes.h.

**#define PRIoLEAST64**

Definition at line 135 of file inttypes.h.

**#define PRIoLEAST8**

Definition at line 96 of file inttypes.h.

**#define PRIoMAX**

Definition at line 144 of file inttypes.h.

**#define PRIoPTR**

Definition at line 149 of file inttypes.h.

**#define PRIu16**

Definition at line 106 of file inttypes.h.

**#define PRIu32**

Definition at line 119 of file inttypes.h.

**#define PRIu64**

Definition at line 132 of file inttypes.h.

**#define PRIu8**

Definition at line 93 of file inttypes.h.

**#define PRIuFAST16**

Definition at line 114 of file inttypes.h.

**#define PRIuFAST32**

Definition at line 127 of file inttypes.h.

**#define PRIuFAST64**

Definition at line 140 of file inttypes.h.

**#define PRIuFAST8**

Definition at line 101 of file inttypes.h.

**#define PRIuLEAST16**

Definition at line 110 of file inttypes.h.

**#define PRIuLEAST32**

Definition at line 123 of file inttypes.h.

**#define PRIuLEAST64**

Definition at line 136 of file inttypes.h.

**#define PRIuLEAST8**

Definition at line 97 of file inttypes.h.

**#define PRIuMAX**

Definition at line 145 of file inttypes.h.

**#define PRIuPTR**

Definition at line 150 of file inttypes.h.

**#define PRIx16**

Definition at line 107 of file inttypes.h.

**#define PRIx16**

Definition at line 108 of file inttypes.h.

**#define PRlx32**

Definition at line 120 of file inttypes.h.

**#define PRlX32**

Definition at line 121 of file inttypes.h.

**#define PRlx64**

Definition at line 133 of file inttypes.h.

**#define PRlX64**

Definition at line 134 of file inttypes.h.

**#define PRlx8**

Definition at line 94 of file inttypes.h.

**#define PRlX8**

Definition at line 95 of file inttypes.h.

**#define PRlxFast16**

Definition at line 115 of file inttypes.h.

**#define PRlXFast16**

Definition at line 116 of file inttypes.h.

**#define PRlxFast32**

Definition at line 128 of file inttypes.h.

**#define PRlXFast32**

Definition at line 129 of file inttypes.h.

**#define PRlxFast64**

Definition at line 141 of file inttypes.h.



**#define PRIXFAST64**

Definition at line 142 of file inttypes.h.

**#define PRiXFAST8**

Definition at line 102 of file inttypes.h.

**#define PRIXFAST8**

Definition at line 103 of file inttypes.h.

**#define PRiXLEAST16**

Definition at line 111 of file inttypes.h.

**#define PRIXLEAST16**

Definition at line 112 of file inttypes.h.

**#define PRiXLEAST32**

Definition at line 124 of file inttypes.h.

**#define PRIXLEAST32**

Definition at line 125 of file inttypes.h.

**#define PRiXLEAST64**

Definition at line 137 of file inttypes.h.

**#define PRIXLEAST64**

Definition at line 138 of file inttypes.h.

**#define PRiXLEAST8**

Definition at line 98 of file inttypes.h.

**#define PRIXLEAST8**

Definition at line 99 of file inttypes.h.

**#define PRiMAX**

Definition at line 146 of file inttypes.h.

**#define PRiMAX**

Definition at line 147 of file inttypes.h.

**#define PRiPTR**

Definition at line 151 of file inttypes.h.

**#define PRiPTR**

Definition at line 152 of file inttypes.h.

**#define SCNd16**

Definition at line 162 of file inttypes.h.

**#define SCNd32**

Definition at line 169 of file inttypes.h.

**#define SCNd64**

Definition at line 176 of file inttypes.h.

**#define SCNd8**

Definition at line 155 of file inttypes.h.

**#define SCNdFAST16**

Definition at line 166 of file inttypes.h.

**#define SCNdFAST32**

Definition at line 173 of file inttypes.h.

**#define SCNdFAST64**

Definition at line 180 of file inttypes.h.

**#define SCNdFAST8**

Definition at line 159 of file inttypes.h.

**#define SCNdLEAST16**

Definition at line 164 of file inttypes.h.

**#define SCNdLEAST32**

Definition at line 171 of file inttypes.h.

**#define SCNdLEAST64**

Definition at line 178 of file inttypes.h.

**#define SCNdLEAST8**

Definition at line 157 of file inttypes.h.

**#define SCNdMAX**

Definition at line 183 of file inttypes.h.

**#define SCNdPTR**

Definition at line 190 of file inttypes.h.

**#define SCNi16**

Definition at line 163 of file inttypes.h.

**#define SCNi32**

Definition at line 170 of file inttypes.h.

**#define SCNi64**

Definition at line 177 of file inttypes.h.

**#define SCNi8**

Definition at line 156 of file inttypes.h.

**#define SCNiFAST16**

Definition at line 167 of file inttypes.h.

**#define SCNiFAST32**

Definition at line 174 of file inttypes.h.

**#define SCNiFAST64**

Definition at line 181 of file inttypes.h.

**#define SCNiFAST8**

Definition at line 160 of file inttypes.h.

**#define SCNiLEAST16**

Definition at line 165 of file inttypes.h.

**#define SCNiLEAST32**

Definition at line 172 of file inttypes.h.

**#define SCNiLEAST64**

Definition at line 179 of file inttypes.h.

**#define SCNiLEAST8**

Definition at line 158 of file inttypes.h.

**#define SCNiMAX**

Definition at line 184 of file inttypes.h.

**#define SCNiPTR**

Definition at line 191 of file inttypes.h.

**#define SCNo16**

Definition at line 208 of file inttypes.h.

**#define SCNo32**

Definition at line 221 of file inttypes.h.

**#define SCNo64**

Definition at line 234 of file inttypes.h.

**#define SCNo8**

Definition at line 195 of file inttypes.h.

**#define SCNoFAST16**

Definition at line 216 of file inttypes.h.

**#define SCNoFAST32**

Definition at line 229 of file inttypes.h.

**#define SCNoFAST64**

Definition at line 242 of file inttypes.h.

**#define SCNoFAST8**

Definition at line 203 of file inttypes.h.

**#define SCNoLEAST16**

Definition at line 212 of file inttypes.h.

**#define SCNoLEAST32**

Definition at line 225 of file inttypes.h.

**#define SCNoLEAST64**

Definition at line 238 of file inttypes.h.

**#define SCNoLEAST8**

Definition at line 199 of file inttypes.h.

**#define SCNoMAX**

Definition at line 247 of file inttypes.h.

**#define SCNoPTR**

Definition at line 258 of file inttypes.h.

**#define SCNu16**

Definition at line 209 of file inttypes.h.

**#define SCNu32**

Definition at line 222 of file inttypes.h.

**#define SCNu64**

Definition at line 235 of file inttypes.h.

**#define SCNu8**

Definition at line 196 of file inttypes.h.

**#define SCNuFAST16**

Definition at line 217 of file inttypes.h.

**#define SCNuFAST32**

Definition at line 230 of file inttypes.h.

**#define SCNuFAST64**

Definition at line 243 of file inttypes.h.

**#define SCNuFAST8**

Definition at line 204 of file inttypes.h.

**#define SCNuLEAST16**

Definition at line 213 of file inttypes.h.

**#define SCNuLEAST32**

Definition at line 226 of file inttypes.h.

**#define SCNuLEAST64**

Definition at line 239 of file inttypes.h.

**#define SCNuLEAST8**

Definition at line 200 of file inttypes.h.

**#define SCNuMAX**

Definition at line 248 of file inttypes.h.

**#define SCNuPTR**

Definition at line 259 of file inttypes.h.

**#define SCNx16**

Definition at line 210 of file inttypes.h.

**#define SCNX16**

Definition at line 211 of file inttypes.h.

**#define SCNx32**

Definition at line 223 of file inttypes.h.

**#define SCNX32**

Definition at line 224 of file inttypes.h.

**#define SCNx64**

Definition at line 236 of file inttypes.h.

**#define SCNX64**

Definition at line 237 of file inttypes.h.

**#define SCNx8**

Definition at line 197 of file inttypes.h.

**#define SCNX8**

Definition at line 198 of file inttypes.h.

**#define SCNxFAST16**

Definition at line 218 of file inttypes.h.

**#define SCNXFAST16**

Definition at line 219 of file inttypes.h.

**#define SCNxFAST32**

Definition at line 231 of file inttypes.h.

**#define SCNXFAST32**

Definition at line 232 of file inttypes.h.

**#define SCNxFAST64**

Definition at line 244 of file inttypes.h.

**#define SCNXFAST64**

Definition at line 245 of file inttypes.h.

**#define SCNxFAST8**

Definition at line 205 of file inttypes.h.

**#define SCNXFAST8**

Definition at line 206 of file inttypes.h.

**#define SCNxLEAST16**

Definition at line 214 of file inttypes.h.



**#define SCNXLEAST16**

Definition at line 215 of file inttypes.h.

**#define SCNxLEAST32**

Definition at line 227 of file inttypes.h.

**#define SCNXLEAST32**

Definition at line 228 of file inttypes.h.

**#define SCNxLEAST64**

Definition at line 240 of file inttypes.h.

**#define SCNXLEAST64**

Definition at line 241 of file inttypes.h.

**#define SCNxLEAST8**

Definition at line 201 of file inttypes.h.

**#define SCNXLEAST8**

Definition at line 202 of file inttypes.h.

**#define SCNxMAX**

Definition at line 249 of file inttypes.h.

**#define SCNXMAX**

Definition at line 250 of file inttypes.h.

**#define SCNxPTR**

Definition at line 260 of file inttypes.h.

**#define SCNXPTR**

Definition at line 261 of file inttypes.h.

### **#define strtoumax**

Definition at line 297 of file inttypes.h.

### **#define strtoumax**

Definition at line 298 of file inttypes.h.

### **#define wcstoumax**

Definition at line 301 of file inttypes.h.

### **#define wcstoumax**

Definition at line 302 of file inttypes.h.

---

## **Function Documentation**

**imaxdiv\_t \_\_cdecl imaxdiv (intmax\_t *numer*, intmax\_t *denom*) [inline]**

Definition at line 280 of file inttypes.h.

## /prosjekter/sosicon/sosicon/src/main.cpp File Reference

```
#include "main.h"
```

### Functions

- `int main (int argc, char *argv[])`

---

### Function Documentation

`int main (int argc, char * argv[])`

Definition at line 20 of file main.cpp.

## **/prosjekter/sosicon/sosicon/src/main.h File Reference**

```
#include <exception>
#include <ios>
#include <iostream>
#include <locale>
#include "command_line.h"
#include "factory.h"
#include "interface/i_converter.h"
```

### **Namespaces**

- **sosicon**

*Application root.*

## **/prosjekter/sosicon/sosicon/src/parser.cpp File Reference**

```
#include "parser.h"
```

## **/prosjekter/sosicon/sosicon/src/parser.h File Reference**

```
#include <iostream>
#include <algorithm>
#include <string>
#include <sstream>
#include <vector>
#include <map>
#include "utils.h"
#include "command_line.h"
#include "sosi/sosi_element.h"
#include "interface/i_sosi_element.h"
```

### **Classes**

- class **sosicon::Parser**

### ***SOSI file parser.* Namespaces**

- **sosicon**  
*Application root.*

## **/prosjekter/sosicon/sosicon/src/parser\_ragel.cpp File Reference**

```
#include "parser.h"
```

### **Namespaces**

- **sosicon**

*Application root.*

## **/prosjekter/sosicon/sosicon/src/ragel/parser.rl File Reference**

```
#include "parser.h"
```

### **Namespaces**

- **sosicon**

*Application root.*



## **/prosjekter/sosicon/sosicon/src/ragel/sosi\_north\_east.rl File Reference**

```
#include "sosi/sosi_north_east.h"
```

### **Namespaces**

- **sosicon**

*Application root.*

## **/prosjekter/sosicon/sosicon/src/ragel/sosi\_north\_east\_height.rl File Reference**

```
#include "sosi/sosi_north_east.h"
```

### **Namespaces**

- **sosicon**

*Application root.*

## **/prosjekter/sosicon/sosicon/src/ragel/sosi\_origo\_ne.rl File Reference**

```
#include "sosi/sosi_origo_ne.h"
```

### **Namespaces**

- **sosicon**

*Application root.*

## **/prosjekter/sosicon/sosicon/src/ragel/sosi\_ref.rl File Reference**

```
#include "sosi/sosi_ref_list.h"
```

### **Namespaces**

- **sosicon**

*Application root.*

## **/prosjekter/sosicon/sosicon/src/shape/shapefile.cpp File Reference**

```
#include "shapefile.h"
```

## **/prosjekter/sosicon/sosicon/src/shape/shapefile.h File Reference**

```
#include <algorithm>
#include <ctime>
#include <string>
#include <vector>
#include <iostream>
#include "shapefile_types.h"
#include "../byte_order.h"
#include "../utils.h"
#include "../coordinate_collection.h"
#include "../sosi/sosi_types.h"
#include "../sosi/sosi_element.h"
#include "../sosi/sosi_element_search.h"
#include "../interface/i_shapefile.h"
#include "../interface/i_coordinate.h"
```

### **Classes**

- class **sosicon::shape::Shapefile**

### **Shapefile *implementation*. Namespaces**

- **sosicon**
- *Application root.* **sosicon::shape**

### **ESRI Shape. Functions**

- ShapeType **sosicon::shape::getShapeEquivalent** (sosi::ElementType sosiType)  
*Resolve geometry type.*

## /prosjekter/sosicon/sosicon/src/shape/shapefile\_types.h File Reference

```
#include <stdint.h>
#include <map>
#include <algorithm>
#include <limits>
```

### Classes

- union **sosicon::shape::Int8Field**
- *8 bit integer / byte field* union **sosicon::shape::Int16Field**
- *16 bit integer / byte field* union **sosicon::shape::Int32Field**
- *32 bit integer / byte field* union **sosicon::shape::Int32TField**
- *32 bit integer / byte / geom::ShapeType field* union **sosicon::shape::DoubleField**
- *32 bit double / byte field* struct **sosicon::shape::ShxIndex**

### Namespaces

- **sosicon**
- *Application root.* **sosicon::shape**

### ESRI Shape. Typedefs

- typedef std::map< std::string,
- std::string > **sosicon::shape::DbfRecord**
- typedef std::vector< DbfRecord > **sosicon::shape::DbfRecordSet**
- typedef std::map< std::string,
- int > **sosicon::shape::DbfFieldLengths**
- typedef std::vector< ShxIndex > **sosicon::shape::ShxOffsets**

### Enumerations

- enum **sosicon::shape::ShapeType** { **sosicon::shape::shape\_type\_none**,  
**sosicon::shape::shape\_type\_nullShape**, **sosicon::shape::shape\_type\_point**,  
**sosicon::shape::shape\_type\_polyLine**, **sosicon::shape::shape\_type\_polygon**,  
**sosicon::shape::shape\_type\_multipoint**, **sosicon::shape::shape\_type\_pointZ**,  
**sosicon::shape::shape\_type\_polyLineZ**, **sosicon::shape::shape\_type\_polygonZ**,  
**sosicon::shape::shape\_type\_multipointZ**, **sosicon::shape::shape\_type\_pointM**,  
**sosicon::shape::shape\_type\_polyLineM**, **sosicon::shape::shape\_type\_polygonM**,  
**sosicon::shape::shape\_type\_multiPointM**, **sosicon::shape::shape\_type\_multiPatch** }

*Geometry types.*

## **/prosjekter/sosicon/sosicon/src/sosi/sosi\_element.cpp File Reference**

```
#include "sosi_element.h"
```



## /prosjekter/sosicon/sosicon/src/sosi/sosi\_element.h File Reference

```
#include <iostream>
#include <vector>
#include <string>
#include "sosi_element_search.h"
#include "sosi_translation_table.h"
#include "sosi_types.h"
#include "../interface/i_sosi_element.h"
```

### Classes

- class **sosicon::sosi::SosiElement**

### Basic SOSI element. Namespaces

- **sosicon**
- *Application root.* **sosicon::sosi**

### SOSI. Functions

- CoordSys **sosicon::sosi::sysCodeToCoordSys** (int sysCode)  
*Convert SOSI SYSKODE value to coordinate system data.*
- ElementType **sosicon::sosi::sosiNameToType** (std::string sosiElementName)  
*Convert SOSI element names to ElementType enum value.*
- ObjType **sosicon::sosi::sosiObjNameToType** (std::string sosiObjTypeName)  
*Convert SOSI objtype names to ObjType enum value.*

## **/prosjekter/sosicon/sosicon/src/sosi/sosi\_element\_search.cpp File Reference**

```
#include "sosi_element_search.h"
#include "../interface/i_sosi_element.h"
```

## /prosjekter/sosicon/sosicon/src/sosi/sosi\_element\_search.h File Reference

```
#include <map>
#include <vector>
#include "sosi_types.h"
```

### Classes

- class **sosicon::sosi::SosiElementSearch**

### Namespaces

- **sosicon**
- *Application root.* **sosicon::sosi**

### SOSI. Typedefs

- typedef std::map< std::string,
- ISosiElement \* > **sosicon::sosi::SosiElementMap**  
*Element index type.*
- typedef std::vector
- < ISosiElement \* > **sosicon::sosi::SosiChildrenList**
- typedef SosiChildrenList::iterator **sosicon::sosi::SosiChildrenIterator**

## **/prosjekter/sosicon/sosicon/src/sosi/sosi\_junction\_point.h File Reference**

```
#include "../interface/i_sosi_element.h"
#include "sosi_types.h"
#include <iostream>
#include <string>
#include <vector>
```

### **Classes**

- class **sosicon::sosi::SosiJunctionPoint**

### ***SOSI Junction point.* Namespaces**

- **sosicon**
- *Application root.* **sosicon::sosi**  
*SOSI.*

## **/prosjekter/sosicon/sosicon/src/sosi/sosi\_north\_east.cpp File Reference**

```
#include "sosi_north_east.h"
```

## /prosjekter/sosicon/sosicon/src/sosi/sosi\_north\_east.h File Reference

```
#include "../interface/i_sosi_element.h"
#include "../interface/i_coordinate.h"
#include "../common_types.h"
#include "../coordinate.h"
#include "sosi_types.h"
#include "sosi_origo_ne.h"
#include "sosi_unit.h"
#include <algorithm>
#include <limits>
#include <iostream>
#include <string>
#include <sstream>
#include <vector>
```

### Classes

- class **sosicon::sosi::SosiNorthEast**

### *SOSI North-east element.* Namespaces

- **sosicon**
- *Application root.* **sosicon::sosi**

### *SOSI.* Typedefs

- typedef std::vector
- < SosiNorthEast \* > **sosicon::sosi::NorthEastList**  
*List of SosiNorthEast elements.*

### Functions

- void **sosicon::sosi::deleteNorthEast** (NorthEastList &lst)  
*Deletes **SosiNorthEast** elements of NorthEastList.*

## **/prosjekter/sosicon/sosicon/src/sosi/sosi\_origo\_ne.cpp File Reference**

```
#include "sosi_origo_ne.h"
```

## **/prosjekter/sosicon/sosicon/src/sosi/sosi\_origo\_ne.h File Reference**

```
#include "../interface/i_sosi_element.h"
#include "../interface/i_sosi_head_member.h"
#include "sosi_types.h"
#include <iostream>
#include <sstream>
#include <string>
```

### **Classes**

- class **sosicon::sosi::SosiOrigoNE**

### ***SOSI Junction point.* Namespaces**

- **sosicon**
- *Application root.* **sosicon::sosi**  
*SOSI.*



## **/prosjekter/sosicon/sosicon/src/sosi/sosi\_ref\_list.cpp File Reference**

```
#include "sosi_ref_list.h"
```

## /prosjekter/sosicon/sosicon/src/sosi/sosi\_ref\_list.h File Reference

```
#include "../interface/i_sosi_element.h"
#include "sosi_types.h"
#include <iostream>
#include <string>
#include <vector>
```

### Classes

- class **sosicon::sosi::SosiRefList**

### *SOSI REF list.* Namespaces

- **sosicon**
- *Application root.* **sosicon::sosi**  
*SOSI.*

## **/prosjekter/sosicon/sosicon/src/sosi/sosi\_translation\_table.cpp File Reference**

```
#include "sosi_translation_table.h"
```

## **/prosjekter/sosicon/sosicon/src/sosi/sosi\_translation\_table.h File Reference**

```
#include <map>
#include <vector>
#include "sosi_types.h"
```

### **Classes**

- class **sosicon::sosi::SosiTranslationTable**

### **Namespaces**

- **sosicon**
- *Application root.* **sosicon::sosi**  
*SOSI.*

## /prosjekter/sosicon/sosicon/src/sosi/sosi\_types.h File Reference

```
#include "../interface/i_coordinate.h"
#include <string>
#include <vector>
#include <map>
```

### Classes

- struct **sosicon::sosi::ReferenceData**
- *SOSI reference number.* class **sosicon::sosi::CoordSys**

### SOSI coordinate system. Namespaces

- **sosicon**
- *Application root.* **sosicon::sosi**

### SOSI. Typedefs

- typedef std::vector
- < ReferenceData \* > **sosicon::sosi::GeometryRef**  
*List of SOSI references.*
- typedef std::vector
- < GeometryRef \* > **sosicon::sosi::GeometryCollection**  
*Collection of SOSI reference lists.*

### Enumerations

- enum **sosicon::sosi::ElementType** { **sosicon::sosi::sosi\_element\_unknown**,  
**sosicon::sosi::sosi\_element\_address\_identifier**, **sosicon::sosi::sosi\_element\_airport\_roads**,  
**sosicon::sosi::sosi\_element\_airport\_type**, **sosicon::sosi::sosi\_element\_area**,  
**sosicon::sosi::sosi\_element\_charset**, **sosicon::sosi::sosi\_element\_coordsys**,  
**sosicon::sosi::sosi\_element\_curve**, **sosicon::sosi::sosi\_element\_eof**, **sosicon::sosi::sosi\_element\_head**,  
**sosicon::sosi::sosi\_element\_height**, **sosicon::sosi::sosi\_element\_iata\_code**,  
**sosicon::sosi::sosi\_element\_icao\_code**, **sosicon::sosi::sosi\_element\_kp**, **sosicon::sosi::sosi\_element\_level**,  
**sosicon::sosi::sosi\_element\_max\_ne**, **sosicon::sosi::sosi\_element\_min\_ne**,  
**sosicon::sosi::sosi\_element\_municipality**, **sosicon::sosi::sosi\_element\_name**,  
**sosicon::sosi::sosi\_element\_ne**, **sosicon::sosi::sosi\_element\_neh**, **sosicon::sosi::sosi\_element\_objtype**,  
**sosicon::sosi::sosi\_element\_origo\_ne**, **sosicon::sosi::sosi\_element\_owner**,  
**sosicon::sosi::sosi\_element\_point**, **sosicon::sosi::sosi\_element\_quality**, **sosicon::sosi::sosi\_element\_ref**,  
**sosicon::sosi::sosi\_element\_surface**, **sosicon::sosi::sosi\_element\_text**,  
**sosicon::sosi::sosi\_element\_traffic\_type**, **sosicon::sosi::sosi\_element\_transpar**,  
**sosicon::sosi::sosi\_element\_unit**, **sosicon::sosi::sosi\_element\_updatedate**,  
**sosicon::sosi::sosi\_element\_water\_width**, **sosicon::sosi::sosi\_element\_vendor**,  
**sosicon::sosi::sosi\_element\_version** }
- *List of SOSI element types.* enum **sosicon::sosi::ObjType** { **sosicon::sosi::sosi\_objtype\_unknown**,  
**sosicon::sosi::sosi\_objtype\_airport**, **sosicon::sosi::sosi\_objtype\_airport\_type**,  
**sosicon::sosi::sosi\_objtype\_baseline**, **sosicon::sosi::sosi\_objtype\_carriageway**,  
**sosicon::sosi::sosi\_objtype\_cadastral\_address**, **sosicon::sosi::sosi\_objtype\_coastline**,  
**sosicon::sosi::sosi\_objtype\_county\_boundary**, **sosicon::sosi::sosi\_objtype\_data\_delineation**,  
**sosicon::sosi::sosi\_objtype\_edge\_view**, **sosicon::sosi::sosi\_objtype\_fictitious\_dividing\_line**,  
**sosicon::sosi::sosi\_objtype\_forest**, **sosicon::sosi::sosi\_objtype\_developed\_area**,  
**sosicon::sosi::sosi\_objtype\_golf\_course**, **sosicon::sosi::sosi\_objtype\_industrial\_area**,  
**sosicon::sosi::sosi\_objtype\_lake**, **sosicon::sosi::sosi\_objtype\_lane**, **sosicon::sosi::sosi\_objtype\_lake\_edge**,  
**sosicon::sosi::sosi\_objtype\_lake\_river\_barrier**, **sosicon::sosi::sosi\_objtype\_land\_use\_boundary**,  
**sosicon::sosi::sosi\_objtype\_level\_crossing**, **sosicon::sosi::sosi\_objtype\_municipal\_divide**,

sosicon::sosi::sosi\_objtype\_municipality, sosicon::sosi::sosi\_objtype\_municipality\_boundary,  
 sosicon::sosi::sosi\_objtype\_marsh, sosicon::sosi::sosi\_objtype\_national\_border,  
 sosicon::sosi::sosi\_objtype\_pedestrian\_bicycle\_road\_centre\_line,  
 sosicon::sosi::sosi\_objtype\_sea\_river\_delineation, sosicon::sosi::sosi\_objtype\_snow\_field,  
 sosicon::sosi::sosi\_objtype\_open\_land, sosicon::sosi::sosi\_objtype\_river\_brook,  
 sosicon::sosi::sosi\_objtype\_river\_brook\_edge, sosicon::sosi::sosi\_objtype\_road\_block,  
 sosicon::sosi::sosi\_objtype\_road\_centre\_line, sosicon::sosi::sosi\_objtype\_road\_under\_railway,  
 sosicon::sosi::sosi\_objtype\_sea\_surface, sosicon::sosi::sosi\_objtype\_sidewalk,  
 sosicon::sosi::sosi\_objtype\_spelling, sosicon::sosi::sosi\_objtype\_stone\_quarry,  
 sosicon::sosi::sosi\_objtype\_street\_address, sosicon::sosi::sosi\_objtype\_territorial\_boundary,  
 sosicon::sosi::sosi\_objtype\_turn\_connecting\_segment }

- *List of SOSI OBJTYPES.* enum sosicon::sosi::JunctionPoint { sosicon::sosi::sosi\_junction\_node,  
 sosicon::sosi::sosi\_junction\_connection, sosicon::sosi::sosi\_junction\_open\_end }

*Default SOSI junction point layer types.*

## **/prosjekter/sosicon/sosicon/src/sosi/sosi\_unit.cpp File Reference**

```
#include "sosi_unit.h"
```

## /prosjekter/sosicon/sosicon/src/sosi/sosi\_unit.h File Reference

```
#include "../interface/i_sosi_element.h"
#include "../interface/i_sosi_head_member.h"
#include "sosi_types.h"
#include <iostream>
#include <string>
#include <sstream>
#include <vector>
```

### Classes

- class **sosicon::sosi::SosiUnit**

### *SOSI Unit.* Namespaces

- **sosicon**
- *Application root.* **sosicon::sosi**  
*SOSI.*



## **/prosjekter/sosicon/sosicon/src/sosi\_north\_east\_height\_ragel.cpp File Reference**

```
#include "sosi/sosi_north_east.h"
```

### **Namespaces**

- **sosicon**

*Application root.*

## **/prosjekter/sosicon/sosicon/src/sosi\_north\_east\_ragel.cpp File Reference**

```
#include "sosi/sosi_north_east.h"
```

### **Namespaces**

- **sosicon**

*Application root.*

## **/prosjekter/sosicon/sosicon/src/sosi\_origo\_ne\_ragel.cpp File Reference**

```
#include "sosi/sosi_origo_ne.h"
```

### **Namespaces**

- **sosicon**

*Application root.*

## **/prosjekter/sosicon/sosicon/src/sosi\_ref\_ragel.cpp File Reference**

```
#include "sosi/sosi_ref_list.h"
```

### **Namespaces**

- **sosicon**

*Application root.*

## **/prosjekter/sosicon/sosicon/src/utils.cpp File Reference**

```
#include "utils.h"
```

## /prosjekter/sosicon/sosicon/src/utils.h File Reference

```
#include "memory.h"
#include "common_types.h"
#include <sys/stat.h>
#include <locale>
#include <iomanip>
#include <iostream>
#include <sstream>
#include <string>
#include <vector>
#include <ctype.h>
```

### Namespaces

- **sosicon**
- *Application root.* **sosicon::utils**

### String manipulation routines. Functions

- `std::string sosicon::utils::className2FileName` (const std::string &className)  
*Converts Class name to file name string.*
- `std::vector< std::string > sosicon::utils::explode` (char delimiter, std::string str)  
*Split a string by a character.*
- `bool sosicon::utils::fileExists` (const std::string &name)  
*Test if file exists.*
- `std::string sosicon::utils::nonExistingFilename` (std::string defaultName)  
*Asserts output file name to be non-existing.*
- `std::string sosicon::utils::normalizeAppClassName` (const std::string &className)  
*Asserts correct name of application classes.*
- `std::string sosicon::utils::repeat` (const std::string &seq, unsigned int count)  
*Repeat string N times.*
- `std::string sosicon::utils::replaceAll` (const std::string &from, const std::string &to, const std::string &subject)  
*Replace all occurrences of one string with another.*
- `std::string sosicon::utils::sqlNormalize` (const std::string &str)  
*Sanitizes SQL data string.*
- `std::string sosicon::utils::trim` (const std::string &str)  
*Removes leading and trailing space characters.*
- `std::string sosicon::utils::trimLeft` (const std::string &str)
- `std::string sosicon::utils::trimRight` (const std::string &str)
- `std::string sosicon::utils::toFieldname` (const std::string &from)  
*Substitutes Norwegian characters.*
- `std::string sosicon::utils::toLower` (const std::string &from)
- `std::string sosicon::utils::ucFirst` (const std::string &str)
- `void sosicon::utils::getPathInfo` (std::string path, std::string &dir, std::string &tit, std::string &ext)
- `std::string sosicon::utils::wktToStr` (Wkt wktGeom)  
*Get Well Known Text from Wkt enum.*

# Index

/projekter/sosicon/sosicon/src/byte\_order.cpp, 159  
/projekter/sosicon/sosicon/src/byte\_order.h, 160  
/projekter/sosicon/sosicon/src/command\_line.cpp, 161  
/projekter/sosicon/sosicon/src/command\_line.h, 162  
/projekter/sosicon/sosicon/src/common\_types.h, 163  
/projekter/sosicon/sosicon/src/converter\_sosi\_stat.cpp, 172  
/projekter/sosicon/sosicon/src/converter\_sosi\_stat.h, 173  
/projekter/sosicon/sosicon/src/converter\_sosi2psql.cpp, 164  
/projekter/sosicon/sosicon/src/converter\_sosi2psql.h, 165  
/projekter/sosicon/sosicon/src/converter\_sosi2shp.cpp, 166  
/projekter/sosicon/sosicon/src/converter\_sosi2shp.h, 167  
/projekter/sosicon/sosicon/src/converter\_sosi2tsv.cpp, 168  
/projekter/sosicon/sosicon/src/converter\_sosi2tsv.h, 169  
/projekter/sosicon/sosicon/src/converter\_sosi2xml.cpp, 170  
/projekter/sosicon/sosicon/src/converter\_sosi2xml.h, 171  
/projekter/sosicon/sosicon/src/coordinate\_collection.cpp, 175  
/projekter/sosicon/sosicon/src/coordinate\_collection.h, 176  
/projekter/sosicon/sosicon/src/coordinate.h, 174  
/projekter/sosicon/sosicon/src/factory.cpp, 177  
/projekter/sosicon/sosicon/src/factory.h, 178  
/projekter/sosicon/sosicon/src/interface/i\_binary\_streamable.h, 179  
/projekter/sosicon/sosicon/src/interface/i\_converter.h, 180  
/projekter/sosicon/sosicon/src/interface/i\_coordinate.h, 181  
/projekter/sosicon/sosicon/src/interface/i\_lookup\_table.h, 182  
/projekter/sosicon/sosicon/src/interface/i\_rectangle.h, 183  
/projekter/sosicon/sosicon/src/interface/i\_shape\_element\_header.h, 185  
/projekter/sosicon/sosicon/src/interface/i\_shape\_element.h, 184  
/projekter/sosicon/sosicon/src/interface/i\_shape\_header.h, 186  
/projekter/sosicon/sosicon/src/interface/i\_shapefile\_dbf\_part.h, 188  
/projekter/sosicon/sosicon/src/interface/i\_shapefile\_ptr\_part.h, 189  
/projekter/sosicon/sosicon/src/interface/i\_shapefile\_shp\_part.h, 190  
/projekter/sosicon/sosicon/src/interface/i\_shapefile\_shx\_part.h, 191  
/projekter/sosicon/sosicon/src/interface/i\_shapefile.h, 187  
/projekter/sosicon/sosicon/src/interface/i\_sosi\_element.h, 192  
/projekter/sosicon/sosicon/src/interface/i\_sosi\_head\_member.h, 193  
/projekter/sosicon/sosicon/src/inttypes.h, 194  
/projekter/sosicon/sosicon/src/main.cpp, 214  
/projekter/sosicon/sosicon/src/main.h, 215  
/projekter/sosicon/sosicon/src/parser\_ragel.cpp, 218  
/projekter/sosicon/sosicon/src/parser.cpp, 216  
/projekter/sosicon/sosicon/src/parser.h, 217  
/projekter/sosicon/sosicon/src/ragel/parser.rl, 219  
/projekter/sosicon/sosicon/src/ragel/sosi\_north\_east\_height.rl, 221  
/projekter/sosicon/sosicon/src/ragel/sosi\_north\_east.rl, 220  
/projekter/sosicon/sosicon/src/ragel/sosi\_origo\_ne.rl, 222  
/projekter/sosicon/sosicon/src/ragel/sosi\_ref.rl, 223  
/projekter/sosicon/sosicon/src/shape/shapefile\_types.h, 226  
/projekter/sosicon/sosicon/src/shape/shapefile.cpp, 224  
/projekter/sosicon/sosicon/src/shape/shapefile.h, 225  
/projekter/sosicon/sosicon/src/sosi\_north\_east\_height\_ragel.cpp, 244  
/projekter/sosicon/sosicon/src/sosi\_north\_east\_ragel.cpp, 245  
/projekter/sosicon/sosicon/src/sosi\_origo\_ne\_ragel.cpp, 246  
/projekter/sosicon/sosicon/src/sosi\_ref\_ragel.cpp, 247  
/projekter/sosicon/sosicon/src/sosi/sosi\_element\_search.cpp, 229  
/projekter/sosicon/sosicon/src/sosi/sosi\_element\_search.h, 230  
/projekter/sosicon/sosicon/src/sosi/sosi\_element.cpp, 227  
/projekter/sosicon/sosicon/src/sosi/sosi\_element.h, 228  
/projekter/sosicon/sosicon/src/sosi/sosi\_junction\_point.h, 231  
/projekter/sosicon/sosicon/src/sosi/sosi\_north\_east.cpp, 232

- /prosjekter/sosicon/sosicon/src/sosi/sosi\_north\_east.h, 233
- /prosjekter/sosicon/sosicon/src/sosi/sosi\_origo\_ne.cpp, 234
- /prosjekter/sosicon/sosicon/src/sosi/sosi\_origo\_ne.h, 235
- /prosjekter/sosicon/sosicon/src/sosi/sosi\_ref\_list.cpp, 236
- /prosjekter/sosicon/sosicon/src/sosi/sosi\_ref\_list.h, 237
- /prosjekter/sosicon/sosicon/src/sosi/sosi\_translation\_table.cpp, 238
- /prosjekter/sosicon/sosicon/src/sosi/sosi\_translation\_table.h, 239
- /prosjekter/sosicon/sosicon/src/sosi/sosi\_types.h, 240
- /prosjekter/sosicon/sosicon/src/sosi/sosi\_unit.cpp, 242
- /prosjekter/sosicon/sosicon/src/sosi/sosi\_unit.h, 243
- /prosjekter/sosicon/sosicon/src/utils.cpp, 248
- /prosjekter/sosicon/sosicon/src/utils.h, 249
- ~CommandLine
  - sosicon::CommandLine, 34
- ~ConverterSosi2psql
  - sosicon::ConverterSosi2psql, 42
- ~ConverterSosi2shp
  - sosicon::ConverterSosi2shp, 49
- ~ConverterSosi2tsv
  - sosicon::ConverterSosi2tsv, 52
- ~ConverterSosi2xml
  - sosicon::ConverterSosi2xml, 55
- ~ConverterSosiStat
  - sosicon::ConverterSosiStat, 57
- ~Coordinate
  - sosicon::Coordinate, 60
- ~CoordinateCollection
  - sosicon::CoordinateCollection, 64
- ~IBinaryStreamable
  - sosicon::IBinaryStreamable, 74
- ~IConverter
  - sosicon::IConverter, 76
- ~ICoordinate
  - sosicon::ICoordinate, 79
- ~ILookupTable
  - sosicon::ILookupTable, 81
- ~IRectangle
  - sosicon::IRectangle, 88
- ~IShapeElement
  - sosicon::IShapeElement, 91
- ~IShapeElementHeader
  - sosicon::IShapeElementHeader, 94
- ~IShapefile
  - sosicon::IShapefile, 95
- ~IShapeHeader
  - sosicon::IShapeHeader, 105
- ~ISosiElement
  - sosicon::ISosiElement, 108
- ~ISosiHeadMember
  - sosicon::ISosiHeadMember, 110
- ~Parser
  - sosicon::Parser, 113
- ~Shapefile
  - sosicon::shape::Shapefile, 120
- ~SosiJunctionPoint
  - sosicon::sosi::SosiJunctionPoint, 141
- ~SosiNorthEast
  - sosicon::sosi::SosiNorthEast, 144
- ~SosiOrigoNE
  - sosicon::sosi::SosiOrigoNE, 149
- ~SosiRefList
  - sosicon::sosi::SosiRefList, 152
- ~SosiUnit
  - sosicon::sosi::SosiUnit, 156
- addChild
  - sosicon::ISosiElement, 108
  - sosicon::sosi::SosiElement, 133
- adjustMasterMbr
  - sosicon::shape::Shapefile, 120
- append
  - sosicon::sosi::SosiNorthEast, 144
- b
  - sosicon::shape::DoubleField, 71
  - sosicon::shape::Int16Field, 84
  - sosicon::shape::Int32Field, 85
  - sosicon::shape::Int32TField, 86
  - sosicon::shape::Int8Field, 87
- back
  - sosicon::sosi::SosiNorthEast, 144
- big
  - sosicon::byteOrder, 22
- bottom
  - sosicon::IRectangle, 89
- build
  - sosicon::IShapefile, 96
  - sosicon::shape::Shapefile, 120
- buildCreateStatement
  - sosicon::ConverterSosi2psql, 42
- buildCreateStatements
  - sosicon::ConverterSosi2psql, 42
- buildDbf
  - sosicon::shape::Shapefile, 120
- buildDbfFieldDescriptor
  - sosicon::shape::Shapefile, 121
- buildDbfHeader
  - sosicon::shape::Shapefile, 121
- buildDbfRecordSection
  - sosicon::shape::Shapefile, 121
- buildInsertStatement
  - sosicon::ConverterSosi2psql, 43
- buildInsertStatements
  - sosicon::ConverterSosi2psql, 43
- buildShpElement
  - sosicon::shape::Shapefile, 122
- buildShpHeader



- sosicon::shape::Shapefile, 122
- buildShpPoint
  - sosicon::shape::Shapefile, 122
- buildShpPolygon
  - sosicon::shape::Shapefile, 122
- buildShpPolyLine
  - sosicon::shape::Shapefile, 123
- buildShpRecCoordinate
  - sosicon::shape::Shapefile, 123
- buildShpRecCoordinates
  - sosicon::shape::Shapefile, 123
- buildShpRecHeaderCommonPart
  - sosicon::shape::Shapefile, 124
- buildShpRecHeaderExtended
  - sosicon::shape::Shapefile, 124
- buildShpRecHeaderOffsets
  - sosicon::shape::Shapefile, 124
- buildShx
  - sosicon::shape::Shapefile, 125
- children
  - sosicon::ISosiElement, 108
  - sosicon::sosi::SosiElement, 134
- className2FileName
  - sosicon::utils, 29
- cleanup
  - sosicon::ConverterSosi2psql, 44
- CommandLine
  - sosicon::CommandLine, 34
- complete
  - sosicon::Parser, 113
- Converters, 10
- ConverterSosi2psql
  - sosicon::ConverterSosi2psql, 42
- ConverterSosi2shp
  - sosicon::ConverterSosi2shp, 49
- ConverterSosi2tsv
  - sosicon::ConverterSosi2tsv, 53
- ConverterSosi2xml
  - sosicon::ConverterSosi2xml, 54
- ConverterSosiStat
  - sosicon::ConverterSosiStat, 57
- Coordinate
  - sosicon::Coordinate, 60
- CoordinateCollection
  - sosicon::CoordinateCollection, 64
- CoordinateList
  - sosicon, 19
- CoordSys
  - sosicon::sosi::CoordSys, 69
- d
  - sosicon::shape::DoubleField, 71
- DbfFieldLengths
  - sosicon::shape, 25
- DbfRecord
  - sosicon::shape, 25
- DbfRecordSet

- sosicon::shape, 26
- deleteChildren
  - sosicon::ISosiElement, 108
  - sosicon::sosi::SosiElement, 134
- deleteNorthEast
  - sosicon::sosi, 28
- determine
  - sosicon::byteOrder, 22
- digestPendingElement
  - sosicon::Parser, 113
- discoverCoords
  - sosicon::CoordinateCollection, 64
- displayString
  - sosicon::sosi::CoordSys, 69
- divide
  - sosicon::Coordinate, 60
  - sosicon::ICoordinate, 79
- doubleToLittleEndian
  - sosicon::byteOrder, 23
- dump
  - sosicon::ISosiElement, 108
  - sosicon::Parser, 114
  - sosicon::sosi::SosiElement, 134
  - sosicon::sosi::SosiNorthEast, 145
- element
  - sosicon::sosi::SosiElementSearch, 139
- ElementType
  - SOSI Elements, 13
- Endianness
  - sosicon::byteOrder, 22, 24
- equals
  - sosicon::Coordinate, 60
  - sosicon::ICoordinate, 79
- expandBoundingBox
  - sosicon::sosi::SosiNorthEast, 145
- expandShpBuffer
  - sosicon::shape::Shapefile, 125
- explode
  - sosicon::utils, 30
- extractData
  - sosicon::ConverterSosi2psql, 44
- extractDbfFields
  - sosicon::shape::Shapefile, 125
- extractPath
  - sosicon::CoordinateCollection, 64
- FieldsList
  - sosicon::ConverterSosi2psql, 41
- FieldsListCollection
  - sosicon::ConverterSosi2psql, 41
- fileExists
  - sosicon::utils, 30
- filterSosiId
  - sosicon::IShapefile, 96
  - sosicon::shape::Shapefile, 125
- find
  - sosicon::ISosiElement, 108

- sosicon::SosiElement, 134
- free
  - sosicon::CoordinateCollection, 65
  - sosicon::SosiNorthEast, 145
- front
  - sosicon::SosiNorthEast, 145
- GeometryCollection
  - SOSI Elements, 13
- GeometryRef
  - SOSI Elements, 13
- get
  - sosicon::Factory, 72
  - sosicon::ILookupTable, 81
- getBoundingBox
  - sosicon::IShapeHeader, 106
- getByteSize
  - sosicon::IShapeElement, 92
  - sosicon::IShapeHeader, 106
- getChild
  - sosicon::ISosiElement, 108
  - sosicon::SosiElement, 134
- getData
  - sosicon::ISosiElement, 108
  - sosicon::SosiElement, 134
- getDivisor
  - sosicon::SosiUnit, 157
- getE
  - sosicon::Coordinate, 60
  - sosicon::ICoordinate, 79
  - sosicon::SosiOrigoNE, 149
- getFileLength
  - sosicon::IShapeHeader, 106
- getGeom
  - sosicon::CoordinateCollection, 65
- getGeomSizes
  - sosicon::CoordinateCollection, 65
- getHoles
  - sosicon::CoordinateCollection, 65
- getHoleSizes
  - sosicon::CoordinateCollection, 65
- getLevel
  - sosicon::ISosiElement, 108
  - sosicon::SosiElement, 134
- getMBR
  - sosicon::IShapeElement, 92
- getN
  - sosicon::Coordinate, 61
  - sosicon::ICoordinate, 79
  - sosicon::SosiOrigoNE, 149
- getName
  - sosicon::ISosiElement, 109
  - sosicon::SosiElement, 135
- getNext
  - sosicon, 20
  - sosicon::SosiNorthEast, 145
- getNextGeometry

- sosicon::shape::Int8Field, 87
- imaxabs
  - inttypes.h, 197
- imaxdiv
  - inttypes.h, 213
- imaxdiv\_t, 83
  - quot, 83
  - rem, 83
- index
  - sosicon::sosi::SosiElementSearch, 139
- init
  - sosicon::ConverterSosi2psql, 44
  - sosicon::ConverterSosi2shp, 49
  - sosicon::ConverterSosi2tsv, 53
  - sosicon::ConverterSosi2xml, 55
  - sosicon::ConverterSosiStat, 57
  - sosicon::IConverter, 76
  - sosicon::ISosiHeadMember, 110
  - sosicon::sosi::SosiOrigoNE, 149
  - sosicon::sosi::SosiUnit, 157
- initHeadMember
  - sosicon::sosi::SosiNorthEast, 145
- initialized
  - sosicon::ISosiHeadMember, 111
  - sosicon::sosi::SosiOrigoNE, 149
  - sosicon::sosi::SosiUnit, 157
- insertDbfRecord
  - sosicon::shape::Shapefile, 126
- insertLineString
  - sosicon::ConverterSosi2psql, 45
- insertPoint
  - sosicon::ConverterSosi2psql, 45
- insertPolygon
  - sosicon::ConverterSosi2psql, 45
- insertShxOffset
  - sosicon::shape::Shapefile, 126
- Interfaces, 10
  - operator<<, 11
- inttypes.h
  - imaxabs, 197
  - imaxdiv, 213
  - PRId16, 197
  - PRId32, 197
  - PRId64, 197
  - PRId8, 198
  - PRIdFAST16, 198
  - PRIdFAST32, 198
  - PRIdFAST64, 198
  - PRIdFAST8, 198
  - PRIdLEAST16, 198
  - PRIdLEAST32, 198
  - PRIdLEAST64, 198
  - PRIdLEAST8, 198
  - PRIdMAX, 198
  - PRIdPTR, 198
  - PRId16, 199
  - PRId32, 199
  - PRId64, 199
  - PRId8, 199
  - PRIdFAST16, 199
  - PRIdFAST32, 199
  - PRIdFAST64, 199
  - PRIdFAST8, 199
  - PRIdLEAST16, 199
  - PRIdLEAST32, 199
  - PRIdLEAST64, 199
  - PRIdLEAST8, 200
  - PRIdMAX, 200
  - PRIdPTR, 200
  - PRId16, 200
  - PRId32, 200
  - PRId64, 200
  - PRId8, 200
  - PRIdFAST16, 200
  - PRIdFAST32, 200
  - PRIdFAST64, 200
  - PRIdFAST8, 200
  - PRIdLEAST16, 201
  - PRIdLEAST32, 201
  - PRIdLEAST64, 201
  - PRIdLEAST8, 201
  - PRIdMAX, 201
  - PRIdPTR, 201
  - PRId16, 201
  - PRId32, 201
  - PRId64, 201
  - PRId8, 201
  - PRIdFAST16, 201
  - PRIdFAST32, 202
  - PRIdFAST64, 202
  - PRIdFAST8, 202
  - PRIdLEAST16, 202
  - PRIdLEAST32, 202
  - PRIdLEAST64, 202
  - PRIdLEAST8, 202
  - PRIdMAX, 202
  - PRIdPTR, 202
  - PRId16, 202
  - PRId32, 203
  - PRId64, 203
  - PRId8, 203
  - PRIdFAST16, 203
  - PRIdFAST32, 203
  - PRIdFAST64, 203, 204
  - PRIdFAST8, 204
  - PRIdLEAST16, 204
  - PRIdLEAST32, 204
  - PRIdLEAST64, 204
  - PRIdLEAST8, 204
  - PRIdMAX, 205
  - PRIdPTR, 205
  - SCNd16, 205

SCNd32, 205  
 SCNd64, 205  
 SCNd8, 205  
 SCNdFAST16, 205  
 SCNdFAST32, 205  
 SCNdFAST64, 205  
 SCNdFAST8, 206  
 SCNdLEAST16, 206  
 SCNdLEAST32, 206  
 SCNdLEAST64, 206  
 SCNdLEAST8, 206  
 SCNdMAX, 206  
 SCNdPTR, 206  
 SCNi16, 206  
 SCNi32, 206  
 SCNi64, 206  
 SCNi8, 206  
 SCNiFAST16, 207  
 SCNiFAST32, 207  
 SCNiFAST64, 207  
 SCNiFAST8, 207  
 SCNiLEAST16, 207  
 SCNiLEAST32, 207  
 SCNiLEAST64, 207  
 SCNiLEAST8, 207  
 SCNiMAX, 207  
 SCNiPTR, 207  
 SCNo16, 207  
 SCNo32, 208  
 SCNo64, 208  
 SCNo8, 208  
 SCNoFAST16, 208  
 SCNoFAST32, 208  
 SCNoFAST64, 208  
 SCNoFAST8, 208  
 SCNoLEAST16, 208  
 SCNoLEAST32, 208  
 SCNoLEAST64, 208  
 SCNoLEAST8, 208  
 SCNoMAX, 209  
 SCNoPTR, 209  
 SCNu16, 209  
 SCNu32, 209  
 SCNu64, 209  
 SCNu8, 209  
 SCNuFAST16, 209  
 SCNuFAST32, 209  
 SCNuFAST64, 209  
 SCNuFAST8, 209  
 SCNuLEAST16, 209  
 SCNuLEAST32, 210  
 SCNuLEAST64, 210  
 SCNuLEAST8, 210  
 SCNuMAX, 210  
 SCNuPTR, 210  
 SCNx16, 210  
 SCNx32, 210  
 SCNx64, 210  
 SCNx8, 211  
 SCNxFAST16, 211  
 SCNxFAST32, 211  
 SCNxFAST64, 211  
 SCNxFAST8, 211  
 SCNxLEAST16, 211, 212  
 SCNxLEAST32, 212  
 SCNxLEAST64, 212  
 SCNxLEAST8, 212  
 SCNxMAX, 212  
 SCNxPTR, 212  
 strtoumax, 213  
 strtoumax, 213  
 wstoumax, 213  
 wstoumax, 213  
 isClockwise  
     sosicon, 20  
 isCounterClockwise  
     sosicon, 20  
 JunctionPoint  
     SOSI Elements, 14  
 left  
     sosicon::IRectangle, 89  
 leftOf  
     sosicon::Coordinate, 61  
     sosicon::ICoordinate, 79  
 length  
     sosicon::shape::ShxIndex, 131  
 little  
     sosicon::byteOrder, 22  
 main  
     main.cpp, 214  
 main.cpp  
     main, 214  
 makeBasePath  
     sosicon::ConverterSosi2shp, 49  
 makePsql  
     sosicon::ConverterSosi2psql, 46  
 makeShp  
     sosicon::ConverterSosi2shp, 49  
 makeStat  
     sosicon::ConverterSosiStat, 57  
 makeXML  
     sosicon::ConverterSosi2xml, 55  
 mAltitude  
     sosicon::Coordinate, 62  
 mAppend  
     sosicon::CommandLine, 35  
 matchTypes  
     sosicon::sosi::SosiElementSearch, 139  
 MAX\_BUFFER\_CHUNK\_SIZE  
     sosicon::shape::Shapefile, 127  
 MAX\_COORDSYS\_TABLE  
     sosicon::sosi::SosiTranslationTable, 154

- mChildren
  - sosicon::Sosi::SosiElement, 136
- mCmd
  - sosicon::ConverterSosi2psql, 47
  - sosicon::ConverterSosi2shp, 50
  - sosicon::ConverterSosi2tsv, 53
  - sosicon::ConverterSosi2xml, 55
  - sosicon::ConverterSosiStat, 58
- mCommand
  - sosicon::CommandLine, 36
- mCoordinates
  - sosicon::Sosi::SosiNorthEast, 146
- mCoordinatesIterator
  - sosicon::Sosi::SosiNorthEast, 146
- mCoordSysTable
  - sosicon::Sosi::SosiTranslationTable, 154
- mCreateStatements
  - sosicon::CommandLine, 36
- mCurrentSourcefile
  - sosicon::ConverterSosi2psql, 47
  - sosicon::ConverterSosi2shp, 50
- mData
  - sosicon::Sosi::SosiElement, 136
- mDbfBuffer
  - sosicon::shape::Shapefile, 127
- mDbfBufferSize
  - sosicon::shape::Shapefile, 127
- mDbfFieldLengths
  - sosicon::shape::Shapefile, 128
- mDbfHeader
  - sosicon::shape::Shapefile, 128
- mDbfRecordSet
  - sosicon::shape::Shapefile, 128
- mDbSchema
  - sosicon::CommandLine, 36
- mDbTable
  - sosicon::CommandLine, 36
- mDestinationDirectory
  - sosicon::CommandLine, 36
- mDisplayString
  - sosicon::Sosi::CoordSys, 70
- mDivisor
  - sosicon::Sosi::SosiUnit, 157
- mEast
  - sosicon::Coordinate, 62
- mElementIndex
  - sosicon::Parser, 114
- mElementStack
  - sosicon::Parser, 114
- mElementTypes
  - sosicon::Sosi::SosiElementSearch, 140
- mFieldSelection
  - sosicon::CommandLine, 36
- mFieldsListCollection
  - sosicon::ConverterSosi2psql, 47
- mFilterSosiId
  - sosicon::CommandLine, 37
- mFilterSosiObjTypes
  - sosicon::shape::Shapefile, 128
- mGeom
  - sosicon::CoordinateCollection, 66
- mGeomIndex
  - sosicon::CoordinateCollection, 66
- mGeomNormalized
  - sosicon::CoordinateCollection, 66
- mGeomSizes
  - sosicon::CoordinateCollection, 66
- mGeomTypes
  - sosicon::CommandLine, 37
- mGeoTypes
  - sosicon::ConverterSosiStat, 58
- mHoles
  - sosicon::CoordinateCollection, 67
- mHoleSizes
  - sosicon::CoordinateCollection, 67
- mHolesNormalized
  - sosicon::CoordinateCollection, 67
- mIncludeHeader
  - sosicon::CommandLine, 37
- mIndex
  - sosicon::Sosi::SosiElement, 136
  - sosicon::Sosi::SosiElementSearch, 140
- mInitialized
  - sosicon::Sosi::SosiOrigoNE, 149
  - sosicon::Sosi::SosiUnit, 157
- mInsertStatements
  - sosicon::CommandLine, 37
- mIsTtyIn
  - sosicon::CommandLine, 37
- mIsTtyOut
  - sosicon::CommandLine, 37
- mLevel
  - sosicon::Sosi::SosiElement, 136
- mMakeSubDir
  - sosicon::CommandLine, 38
- mMaxX
  - sosicon::Sosi::SosiNorthEast, 146
- mMaxY
  - sosicon::Sosi::SosiNorthEast, 146
- mMinX
  - sosicon::Sosi::SosiNorthEast, 146
- mMinY
  - sosicon::Sosi::SosiNorthEast, 146
- mName
  - sosicon::Sosi::SosiElement, 136
- mNorth
  - sosicon::Coordinate, 62
- mNumPartsGeom
  - sosicon::CoordinateCollection, 67
- mNumPartsHoles
  - sosicon::CoordinateCollection, 67

- mNumPointsGeom
  - sosicon::CoordinateCollection, 67
- mNumPointsHoles
  - sosicon::CoordinateCollection, 67
- mObjType
  - sosicon::sosi::SosiElement, 136
- mObjTypeNameMap
  - sosicon::sosi::SosiTranslationTable, 155
- mObjTypes
  - sosicon::CommandLine, 38
  - sosicon::ConverterSosiStat, 58
- mObjTypeStr
  - sosicon::sosi::SosiElement, 136
- mOrigo
  - sosicon::sosi::SosiNorthEast, 146
- mOrigoE
  - sosicon::sosi::SosiOrigoNE, 150
- mOrigoN
  - sosicon::sosi::SosiOrigoNE, 150
- mOutputFile
  - sosicon::CommandLine, 38
- mPendingElementAttributes
  - sosicon::Parser, 114
- mPendingElementLevel
  - sosicon::Parser, 115
- mPendingElementName
  - sosicon::Parser, 115
- mPendingElementSerial
  - sosicon::Parser, 115
- mPrjString
  - sosicon::sosi::CoordSys, 70
- mRecordNumber
  - sosicon::shape::Shapefile, 128
- mRefListCollection
  - sosicon::sosi::SosiRefList, 152
- mRefListCollectionIndex
  - sosicon::sosi::SosiRefList, 152
- mRefListIndex
  - sosicon::sosi::SosiRefList, 152
- mRoot
  - sosicon::sosi::SosiElement, 136
- mRowsListCollection
  - sosicon::ConverterSosi2psql, 47
- mSerial
  - sosicon::sosi::SosiElement, 137
- mShpBuffer
  - sosicon::shape::Shapefile, 128
- mShpBufferSize
  - sosicon::shape::Shapefile, 128
- mShpHeader
  - sosicon::shape::Shapefile, 128
- mShpSize
  - sosicon::shape::Shapefile, 129
- mShxBuffer
  - sosicon::shape::Shapefile, 129
- mShxBufferSize
  - sosicon::shape::Shapefile, 129
- mShxHeader
  - sosicon::shape::Shapefile, 129
- mShxOffsets
  - sosicon::shape::Shapefile, 129
- mSosiElement
  - sosicon::sosi::SosiElementSearch, 140
  - sosicon::sosi::SosiJunctionPoint, 141
  - sosicon::sosi::SosiNorthEast, 146
  - sosicon::sosi::SosiOrigoNE, 150
  - sosicon::sosi::SosiRefList, 152
  - sosicon::sosi::SosiUnit, 157
- mSosiTree
  - sosicon::shape::Shapefile, 129
- mSourceFiles
  - sosicon::CommandLine, 38
- mSrid
  - sosicon::CommandLine, 38
  - sosicon::sosi::CoordSys, 70
- mSysCode
  - sosicon::sosi::CoordSys, 70
- mTranslation
  - sosicon::sosi::SosiElement, 137
- mType
  - sosicon::sosi::SosiElement, 137
- mTypeNameMap
  - sosicon::sosi::SosiTranslationTable, 155
- mUnit
  - sosicon::sosi::SosiNorthEast, 147
- mVerbose
  - sosicon::CommandLine, 38
- mXmax
  - sosicon::CoordinateCollection, 67
  - sosicon::shape::Shapefile, 129
- mXmin
  - sosicon::CoordinateCollection, 67
  - sosicon::shape::Shapefile, 129
- mYmax
  - sosicon::CoordinateCollection, 67
  - sosicon::shape::Shapefile, 130
- mYmin
  - sosicon::CoordinateCollection, 67
  - sosicon::shape::Shapefile, 130
- neListToCoordList
  - sosicon, 20
- next
  - sosicon::sosi::SosiElementSearch, 139
- nextChild
  - sosicon::sosi::SosiElement, 135
- nonExistingFilename
  - sosicon::utils, 30
- normalizeAppClassName
  - sosicon::utils, 31
- NorthEastList
  - sosicon::sosi, 28
- not\_set

- sosicon::byteOrder, 22
- ObjType
  - SOSI Elements, 15
- objTypeExcluded
  - sosicon::ConverterSosi2psql, 46
- offset
  - sosicon::shape::ShxIndex, 131
- operator/=
  - sosicon::sosi::SosiNorthEast, 145
- operator+=
  - sosicon::sosi::SosiNorthEast, 145
- operator<<
  - Interfaces, 11
- outputDisclaimer
  - sosicon::CommandLine, 35
- outputHelpText
  - sosicon::CommandLine, 35
- outputLicense
  - sosicon::CommandLine, 35
- parse
  - sosicon::CommandLine, 35
- Parser
  - sosicon::Parser, 113
- populate
  - sosicon::IShapeElement, 92
- PRId16
  - inttypes.h, 197
- PRId32
  - inttypes.h, 197
- PRId64
  - inttypes.h, 197
- PRId8
  - inttypes.h, 198
- PRIdFAST16
  - inttypes.h, 198
- PRIdFAST32
  - inttypes.h, 198
- PRIdFAST64
  - inttypes.h, 198
- PRIdFAST8
  - inttypes.h, 198
- PRIdLEAST16
  - inttypes.h, 198
- PRIdLEAST32
  - inttypes.h, 198
- PRIdLEAST64
  - inttypes.h, 198
- PRIdLEAST8
  - inttypes.h, 198
- PRIdMAX
  - inttypes.h, 198
- PRIdPTR
  - inttypes.h, 198
- PRi16
  - inttypes.h, 199
- PRi32
  - inttypes.h, 199
- PRi64
  - inttypes.h, 199
- PRi8
  - inttypes.h, 199
- PRiFAST16
  - inttypes.h, 199
- PRiFAST32
  - inttypes.h, 199
- PRiFAST64
  - inttypes.h, 199
- PRiFAST8
  - inttypes.h, 199
- PRiLEAST16
  - inttypes.h, 199
- PRiLEAST32
  - inttypes.h, 199
- PRiLEAST64
  - inttypes.h, 199
- PRiLEAST8
  - inttypes.h, 200
- PRiMAX
  - inttypes.h, 200
- PRiPTR
  - inttypes.h, 200
- printElementData
  - sosicon::ConverterSosiStat, 57
- printListContent
  - sosicon::ConverterSosiStat, 57
- printTableHeader
  - sosicon::ConverterSosiStat, 58
- PRIo16
  - inttypes.h, 200
- PRIo32
  - inttypes.h, 200
- PRIo64
  - inttypes.h, 200
- PRIo8
  - inttypes.h, 200
- PRIoFAST16
  - inttypes.h, 200
- PRIoFAST32
  - inttypes.h, 200
- PRIoFAST64
  - inttypes.h, 200
- PRIoFAST8
  - inttypes.h, 200
- PRIoLEAST16
  - inttypes.h, 201
- PRIoLEAST32
  - inttypes.h, 201
- PRIoLEAST64
  - inttypes.h, 201
- PRIoLEAST8
  - inttypes.h, 201
- PRIoMAX
  - inttypes.h, 201

- inttypes.h, 201
- PRIoPTR
  - inttypes.h, 201
- PRlu16
  - inttypes.h, 201
- PRlu32
  - inttypes.h, 201
- PRlu64
  - inttypes.h, 201
- PRlu8
  - inttypes.h, 201
- PRluFAST16
  - inttypes.h, 201
- PRluFAST32
  - inttypes.h, 202
- PRluFAST64
  - inttypes.h, 202
- PRluFAST8
  - inttypes.h, 202
- PRluLEAST16
  - inttypes.h, 202
- PRluLEAST32
  - inttypes.h, 202
- PRluLEAST64
  - inttypes.h, 202
- PRluLEAST8
  - inttypes.h, 202
- PRluMAX
  - inttypes.h, 202
- PRluPTR
  - inttypes.h, 202
- PRlx16
  - inttypes.h, 202
- PRlx32
  - inttypes.h, 203
- PRlx64
  - inttypes.h, 203
- PRlx8
  - inttypes.h, 203
- PRlxFAST16
  - inttypes.h, 203
- PRlxFAST32
  - inttypes.h, 203
- PRlxFAST64
  - inttypes.h, 203, 204
- PRlxFAST8
  - inttypes.h, 204
- PRlxLEAST16
  - inttypes.h, 204
- PRlxLEAST32
  - inttypes.h, 204
- PRlxLEAST64
  - inttypes.h, 204
- PRlxLEAST8
  - inttypes.h, 204
- PRlxMAX
  - inttypes.h, 205
- PRlxPTR
  - inttypes.h, 205
- prjString
  - sosicon::sosi::CoordSys, 70
- quot
  - imaxdiv\_t, 83
- ragelParseCoordinatesNe
  - sosicon::sosi::SosiNorthEast, 145
- ragelParseCoordinatesNeh
  - sosicon::sosi::SosiNorthEast, 146
- ragelParseSosiLine
  - sosicon::Parser, 114
- ragelParseSosiOrigoNE
  - sosicon::sosi::SosiOrigoNE, 149
- ragelParseSosiRef
  - sosicon::sosi::SosiRefList, 152
- release
  - sosicon::Factory, 72
- rem
  - imaxdiv\_t, 83
- repeat
  - sosicon::utils, 31
- replaceAll
  - sosicon::utils, 31
- reverse
  - sosicon::sosi::ReferenceData, 116
  - sosicon::sosi::SosiNorthEast, 146
- reverseLookup
  - sosicon::sosi::SosiTranslationTable, 154
- right
  - sosicon::IRectangle, 89
- rightOf
  - sosicon::Coordinate, 61
  - sosicon::ICoordinate, 79
- RowsList
  - sosicon::ConverterSosi2psql, 42
- RowsListCollection
  - sosicon::ConverterSosi2psql, 42
- run
  - sosicon::ConverterSosi2psql, 46
  - sosicon::ConverterSosi2shp, 49
  - sosicon::ConverterSosi2tsv, 53
  - sosicon::ConverterSosi2xml, 55
  - sosicon::ConverterSosiStat, 58
  - sosicon::IConverter, 77
- saveToDbf
  - sosicon::shape::Shapefile, 126
- SCNd16
  - inttypes.h, 205
- SCNd32
  - inttypes.h, 205
- SCNd64
  - inttypes.h, 205
- SCNd8
  - inttypes.h, 205



SCNdFAST16  
     inttypes.h, 205  
 SCNdFAST32  
     inttypes.h, 205  
 SCNdFAST64  
     inttypes.h, 205  
 SCNdFAST8  
     inttypes.h, 206  
 SCNdLEAST16  
     inttypes.h, 206  
 SCNdLEAST32  
     inttypes.h, 206  
 SCNdLEAST64  
     inttypes.h, 206  
 SCNdLEAST8  
     inttypes.h, 206  
 SCNdMAX  
     inttypes.h, 206  
 SCNdPTR  
     inttypes.h, 206  
 SCNi16  
     inttypes.h, 206  
 SCNi32  
     inttypes.h, 206  
 SCNi64  
     inttypes.h, 206  
 SCNi8  
     inttypes.h, 206  
 SCNiFAST16  
     inttypes.h, 207  
 SCNiFAST32  
     inttypes.h, 207  
 SCNiFAST64  
     inttypes.h, 207  
 SCNiFAST8  
     inttypes.h, 207  
 SCNiLEAST16  
     inttypes.h, 207  
 SCNiLEAST32  
     inttypes.h, 207  
 SCNiLEAST64  
     inttypes.h, 207  
 SCNiLEAST8  
     inttypes.h, 207  
 SCNiMAX  
     inttypes.h, 207  
 SCNiPTR  
     inttypes.h, 207  
 SCNo16  
     inttypes.h, 207  
 SCNo32  
     inttypes.h, 208  
 SCNo64  
     inttypes.h, 208  
 SCNo8  
     inttypes.h, 208

SCNoFAST16  
     inttypes.h, 208  
 SCNoFAST32  
     inttypes.h, 208  
 SCNoFAST64  
     inttypes.h, 208  
 SCNoFAST8  
     inttypes.h, 208  
 SCNoLEAST16  
     inttypes.h, 208  
 SCNoLEAST32  
     inttypes.h, 208  
 SCNoLEAST64  
     inttypes.h, 208  
 SCNoLEAST8  
     inttypes.h, 208  
 SCNoMAX  
     inttypes.h, 209  
 SCNoPTR  
     inttypes.h, 209  
 SCNu16  
     inttypes.h, 209  
 SCNu32  
     inttypes.h, 209  
 SCNu64  
     inttypes.h, 209  
 SCNu8  
     inttypes.h, 209  
 SCNuFAST16  
     inttypes.h, 209  
 SCNuFAST32  
     inttypes.h, 209  
 SCNuFAST64  
     inttypes.h, 209  
 SCNuFAST8  
     inttypes.h, 209  
 SCNuLEAST16  
     inttypes.h, 209  
 SCNuLEAST32  
     inttypes.h, 210  
 SCNuLEAST64  
     inttypes.h, 210  
 SCNuLEAST8  
     inttypes.h, 210  
 SCNuMAX  
     inttypes.h, 210  
 SCNuPTR  
     inttypes.h, 210  
 SCNx16  
     inttypes.h, 210  
 SCNx32  
     inttypes.h, 210  
 SCNx64  
     inttypes.h, 210  
 SCNx8  
     inttypes.h, 211

SCNxFAST16  
     inttypes.h, 211  
 SCNxFAST32  
     inttypes.h, 211  
 SCNxFAST64  
     inttypes.h, 211  
 SCNxFAST8  
     inttypes.h, 211  
 SCNxLEAST16  
     inttypes.h, 211, 212  
 SCNxLEAST32  
     inttypes.h, 212  
 SCNxLEAST64  
     inttypes.h, 212  
 SCNxLEAST8  
     inttypes.h, 212  
 SCNxMAX  
     inttypes.h, 212  
 SCNxPTR  
     inttypes.h, 212  
 serial  
     sosicon::sosi::ReferenceData, 116  
 setBoundingBox  
     sosicon::IShapeHeader, 106  
 setE  
     sosicon::Coordinate, 61  
     sosicon::ICoordinate, 80  
 setFileLength  
     sosicon::IShapeHeader, 106  
 setH  
     sosicon::Coordinate, 61  
     sosicon::ICoordinate, 80  
 setN  
     sosicon::Coordinate, 61  
     sosicon::ICoordinate, 80  
 setShapeType  
     sosicon::IShapeHeader, 106  
 shape\_type\_multiPatch  
     sosicon::shape, 26  
 shape\_type\_multipoint  
     sosicon::shape, 26  
 shape\_type\_multiPointM  
     sosicon::shape, 26  
 shape\_type\_multipointZ  
     sosicon::shape, 26  
 shape\_type\_none  
     sosicon::shape, 26  
 shape\_type\_nullShape  
     sosicon::shape, 26  
 shape\_type\_point  
     sosicon::shape, 26  
 shape\_type\_pointM  
     sosicon::shape, 26  
 shape\_type\_pointZ  
     sosicon::shape, 26  
 shape\_type\_polygon  
     sosicon::shape, 26  
 shape\_type\_polygonM  
     sosicon::shape, 26  
 shape\_type\_polygonZ  
     sosicon::shape, 26  
 shape\_type\_polyLine  
     sosicon::shape, 26  
 shape\_type\_polyLineM  
     sosicon::shape, 26  
 shape\_type\_polyLineZ  
     sosicon::shape, 26  
 Shapefile  
     sosicon::shape::Shapefile, 120  
 ShapeType  
     sosicon::shape, 26  
 shift  
     sosicon::Coordinate, 61  
     sosicon::ICoordinate, 80  
 ShxOffsets  
     sosicon::shape, 26  
 SOSI Elements, 11  
     ElementType, 13  
     GeometryCollection, 13  
     GeometryRef, 13  
     JunctionPoint, 14  
     ObjType, 15  
     sosi\_element\_address\_identifer, 13  
     sosi\_element\_airport\_roads, 14  
     sosi\_element\_airport\_type, 14  
     sosi\_element\_area, 14  
     sosi\_element\_charset, 14  
     sosi\_element\_coordsys, 14  
     sosi\_element\_curve, 14  
     sosi\_element\_eof, 14  
     sosi\_element\_head, 14  
     sosi\_element\_height, 14  
     sosi\_element\_iaata\_code, 14  
     sosi\_element\_icao\_code, 14  
     sosi\_element\_kp, 14  
     sosi\_element\_level, 14  
     sosi\_element\_max\_ne, 14  
     sosi\_element\_min\_ne, 14  
     sosi\_element\_municipality, 14  
     sosi\_element\_name, 14  
     sosi\_element\_ne, 14  
     sosi\_element\_neh, 14  
     sosi\_element\_obtype, 14  
     sosi\_element\_origo\_ne, 14  
     sosi\_element\_owner, 14  
     sosi\_element\_point, 14  
     sosi\_element\_quality, 14  
     sosi\_element\_ref, 14  
     sosi\_element\_surface, 14  
     sosi\_element\_text, 14  
     sosi\_element\_traffic\_type, 14  
     sosi\_element\_transpar, 14

- sosi\_element\_unit, 14
- sosi\_element\_unknown, 13
- sosi\_element\_updatedate, 14
- sosi\_element\_vendor, 14
- sosi\_element\_version, 14
- sosi\_element\_water\_width, 14
- sosi\_junction\_connection, 15
- sosi\_junction\_node, 15
- sosi\_junction\_open\_end, 15
- sosi\_objtype\_airport, 15
- sosi\_objtype\_airport\_type, 15
- sosi\_objtype\_baseline, 15
- sosi\_objtype\_cadastral\_address, 15
- sosi\_objtype\_carriageway, 15
- sosi\_objtype\_coastline, 15
- sosi\_objtype\_county\_boundary, 15
- sosi\_objtype\_data\_delineation, 15
- sosi\_objtype\_developed\_area, 15
- sosi\_objtype\_edge\_view, 15
- sosi\_objtype\_fictitious\_dividing\_line, 15
- sosi\_objtype\_forest, 15
- sosi\_objtype\_golf\_course, 15
- sosi\_objtype\_industrial\_area, 15
- sosi\_objtype\_lake, 15
- sosi\_objtype\_lake\_edge, 15
- sosi\_objtype\_lake\_river\_barrier, 15
- sosi\_objtype\_land\_use\_boundary, 15
- sosi\_objtype\_lane, 15
- sosi\_objtype\_level\_crossing, 15
- sosi\_objtype\_marsh, 15
- sosi\_objtype\_municipal\_divide, 15
- sosi\_objtype\_municipality, 15
- sosi\_objtype\_municipality\_boundary, 15
- sosi\_objtype\_national\_border, 15
- sosi\_objtype\_open\_land, 16
- sosi\_objtype\_pedestrian\_bicycle\_road\_centre\_line, 15
- sosi\_objtype\_river\_brook, 16
- sosi\_objtype\_river\_brook\_edge, 16
- sosi\_objtype\_road\_block, 16
- sosi\_objtype\_road\_centre\_line, 16
- sosi\_objtype\_road\_under\_railway, 16
- sosi\_objtype\_sea\_river\_delineation, 15
- sosi\_objtype\_sea\_surface, 16
- sosi\_objtype\_sidewalk, 16
- sosi\_objtype\_snow\_field, 16
- sosi\_objtype\_spelling, 16
- sosi\_objtype\_stone\_quarry, 16
- sosi\_objtype\_street\_address, 16
- sosi\_objtype\_territorial\_boundary, 16
- sosi\_objtype\_turn\_connecting\_segment, 16
- sosi\_objtype\_unknown, 15
- SosiChildrenIterator, 13
- SosiChildrenList, 13
- SosiElementMap, 13
- sosiNameToType, 16
- sosiObjNameToType, 16
- sysCodeToCoordSys, 16
- sosi\_element\_address\_identifier
  - SOSI Elements, 13
- sosi\_element\_airport\_roads
  - SOSI Elements, 14
- sosi\_element\_airport\_type
  - SOSI Elements, 14
- sosi\_element\_area
  - SOSI Elements, 14
- sosi\_element\_charset
  - SOSI Elements, 14
- sosi\_element\_coordsys
  - SOSI Elements, 14
- sosi\_element\_curve
  - SOSI Elements, 14
- sosi\_element\_eof
  - SOSI Elements, 14
- sosi\_element\_head
  - SOSI Elements, 14
- sosi\_element\_height
  - SOSI Elements, 14
- sosi\_element\_iata\_code
  - SOSI Elements, 14
- sosi\_element\_icao\_code
  - SOSI Elements, 14
- sosi\_element\_kp
  - SOSI Elements, 14
- sosi\_element\_level
  - SOSI Elements, 14
- sosi\_element\_max\_ne
  - SOSI Elements, 14
- sosi\_element\_min\_ne
  - SOSI Elements, 14
- sosi\_element\_municipality
  - SOSI Elements, 14
- sosi\_element\_name
  - SOSI Elements, 14
- sosi\_element\_ne
  - SOSI Elements, 14
- sosi\_element\_neh
  - SOSI Elements, 14
- sosi\_element\_objtype
  - SOSI Elements, 14
- sosi\_element\_origo\_ne
  - SOSI Elements, 14
- sosi\_element\_owner
  - SOSI Elements, 14
- sosi\_element\_point
  - SOSI Elements, 14
- sosi\_element\_quality
  - SOSI Elements, 14
- sosi\_element\_ref
  - SOSI Elements, 14
- sosi\_element\_surface
  - SOSI Elements, 14

|                                       |                   |                                                  |                   |
|---------------------------------------|-------------------|--------------------------------------------------|-------------------|
| sosi_element_text                     | SOSI Elements, 14 | sosi_objtype_lake_river_barrier                  | SOSI Elements, 15 |
| sosi_element_traffic_type             | SOSI Elements, 14 | sosi_objtype_land_use_boundary                   | SOSI Elements, 15 |
| sosi_element_transpar                 | SOSI Elements, 14 | sosi_objtype_lane                                | SOSI Elements, 15 |
| sosi_element_unit                     | SOSI Elements, 14 | sosi_objtype_level_crossing                      | SOSI Elements, 15 |
| sosi_element_unknown                  | SOSI Elements, 13 | sosi_objtype_marsh                               | SOSI Elements, 15 |
| sosi_element_updatedate               | SOSI Elements, 14 | sosi_objtype_municipal_divide                    | SOSI Elements, 15 |
| sosi_element_vendor                   | SOSI Elements, 14 | sosi_objtype_municipality                        | SOSI Elements, 15 |
| sosi_element_version                  | SOSI Elements, 14 | sosi_objtype_municipality_boundary               | SOSI Elements, 15 |
| sosi_element_water_width              | SOSI Elements, 14 | sosi_objtype_national_border                     | SOSI Elements, 15 |
| sosi_junction_connection              | SOSI Elements, 15 | sosi_objtype_open_land                           | SOSI Elements, 16 |
| sosi_junction_node                    | SOSI Elements, 15 | sosi_objtype_pedestrian_bicycle_road_centre_line | SOSI Elements, 15 |
| sosi_junction_open_end                | SOSI Elements, 15 | sosi_objtype_river_brook                         | SOSI Elements, 16 |
| sosi_objtype_airport                  | SOSI Elements, 15 | sosi_objtype_river_brook_edge                    | SOSI Elements, 16 |
| sosi_objtype_airport_type             | SOSI Elements, 15 | sosi_objtype_road_block                          | SOSI Elements, 16 |
| sosi_objtype_baseline                 | SOSI Elements, 15 | sosi_objtype_road_centre_line                    | SOSI Elements, 16 |
| sosi_objtype_cadastral_address        | SOSI Elements, 15 | sosi_objtype_road_under_railway                  | SOSI Elements, 16 |
| sosi_objtype_carriageway              | SOSI Elements, 15 | sosi_objtype_sea_river_delineation               | SOSI Elements, 15 |
| sosi_objtype_coastline                | SOSI Elements, 15 | sosi_objtype_sea_surface                         | SOSI Elements, 16 |
| sosi_objtype_county_boundary          | SOSI Elements, 15 | sosi_objtype_sidewalk                            | SOSI Elements, 16 |
| sosi_objtype_data_delineation         | SOSI Elements, 15 | sosi_objtype_snow_field                          | SOSI Elements, 16 |
| sosi_objtype_developed_area           | SOSI Elements, 15 | sosi_objtype_spelling                            | SOSI Elements, 16 |
| sosi_objtype_edge_view                | SOSI Elements, 15 | sosi_objtype_stone_quarry                        | SOSI Elements, 16 |
| sosi_objtype_fictitious_dividing_line | SOSI Elements, 15 | sosi_objtype_street_address                      | SOSI Elements, 16 |
| sosi_objtype_forest                   | SOSI Elements, 15 | sosi_objtype_territorial_boundary                | SOSI Elements, 16 |
| sosi_objtype_golf_course              | SOSI Elements, 15 | sosi_objtype_turn_connecting_segment             | SOSI Elements, 16 |
| sosi_objtype_industrial_area          | SOSI Elements, 15 | sosi_objtype_unknown                             | SOSI Elements, 15 |
| sosi_objtype_lake                     | SOSI Elements, 15 | SosiChildrenIterator                             | SOSI Elements, 13 |
| sosi_objtype_lake_edge                | SOSI Elements, 15 | SosiChildrenList                                 | SOSI Elements, 13 |

- sosicon, 18
  - CoordinateList, 19
  - getNext, 20
  - getNextOffset, 20
  - isClockwise, 20
  - isCounterClockwise, 20
  - neListToCoordList, 20
  - Wkt, 19
  - wkt\_linestring, 19
  - wkt\_point, 19
  - wkt\_polygon, 19
  - wkt\_unknown, 19
- sosicon::byteOrder, 22
  - big, 22
  - determine, 22
  - doubleToLittleEndian, 23
  - Endianness, 22, 24
  - little, 22
  - not\_set, 22
  - toBigEndian, 23
  - toLittleEndian, 23
- sosicon::CommandLine, 33
  - ~CommandLine, 34
  - CommandLine, 34
  - mAppend, 35
  - mCommand, 36
  - mCreateStatements, 36
  - mDbSchema, 36
  - mDbTable, 36
  - mDestinationDirectory, 36
  - mFieldSelection, 36
  - mFilterSosiId, 37
  - mGeomTypes, 37
  - mIncludeHeader, 37
  - mInsertStatements, 37
  - mIsTtyIn, 37
  - mIsTtyOut, 37
  - mMakeSubDir, 38
  - mObjTypes, 38
  - mOutputFile, 38
  - mSourceFiles, 38
  - mSrid, 38
  - mVerbose, 38
  - outputDisclaimer, 35
  - outputHelpText, 35
  - outputLicense, 35
  - parse, 35
- sosicon::ConverterSosi2psql, 40
  - ~ConverterSosi2psql, 42
  - buildCreateStatement, 42
  - buildCreateStatements, 42
  - buildInsertStatement, 43
  - buildInsertStatements, 43
  - cleanup, 44
  - ConverterSosi2psql, 42
  - extractData, 44
  - FieldsList, 41
  - FieldsListCollection, 41
  - getSrid, 44
  - init, 44
  - insertLineString, 45
  - insertPoint, 45
  - insertPolygon, 45
  - makePsql, 46
  - mCmd, 47
  - mCurrentSourcefile, 47
  - mFieldsListCollection, 47
  - mRowsListCollection, 47
  - objTypeExcluded, 46
  - RowsList, 42
  - RowsListCollection, 42
  - run, 46
  - writePsql, 47
- sosicon::ConverterSosi2shp, 48
  - ~ConverterSosi2shp, 49
  - ConverterSosi2shp, 49
  - init, 49
  - makeBasePath, 49
  - makeShp, 49
  - mCmd, 50
  - mCurrentSourcefile, 50
  - run, 49
  - writeFile, 50
- sosicon::ConverterSosi2tsv, 52
  - ~ConverterSosi2tsv, 52
  - ConverterSosi2tsv, 53
  - init, 53
  - mCmd, 53
  - run, 53
- sosicon::ConverterSosi2xml, 54
  - ~ConverterSosi2xml, 55
  - ConverterSosi2xml, 54
  - init, 55
  - makeXML, 55
  - mCmd, 55
  - run, 55
- sosicon::ConverterSosiStat, 56
  - ~ConverterSosiStat, 57
  - ConverterSosiStat, 57
  - init, 57
  - makeStat, 57
  - mCmd, 58
  - mGeoTypes, 58
  - mObjTypes, 58
  - printElementData, 57
  - printListContent, 57
  - printTableHeader, 58
  - run, 58
- sosicon::Coordinate, 59
  - ~Coordinate, 60
  - Coordinate, 60
  - divide, 60

- equals, 60
- getE, 60
- getN, 61
- leftOf, 61
- mAltitude, 62
- mEast, 62
- mNorth, 62
- rightOf, 61
- setE, 61
- setH, 61
- setN, 61
- shift, 61
- toString, 62
- sosicon::CoordinateCollection, 63
  - ~CoordinateCollection, 64
  - CoordinateCollection, 64
  - discoverCoords, 64
  - extractPath, 64
  - free, 65
  - getGeom, 65
  - getGeomSizes, 65
  - getHoles, 65
  - getHoleSizes, 65
  - getNextInGeom, 65
  - getNumPartsGeom, 65
  - getNumPartsHoles, 65
  - getNumPointsGeom, 66
  - getNumPointsHoles, 66
  - getXmax, 66
  - getXmin, 66
  - getYmax, 66
  - getYmin, 66
  - mGeom, 66
  - mGeomIndex, 66
  - mGeomNormalized, 66
  - mGeomSizes, 66
  - mHoles, 67
  - mHoleSizes, 67
  - mHolesNormalized, 67
  - mNumPartsGeom, 67
  - mNumPartsHoles, 67
  - mNumPointsGeom, 67
  - mNumPointsHoles, 67
  - mXmax, 67
  - mXmin, 67
  - mYmax, 67
  - mYmin, 67
- sosicon::Factory, 72
  - get, 72
  - release, 72
- sosicon::IBinaryStreamable, 74
  - ~IBinaryStreamable, 74
  - writeBinary, 74
- sosicon::IConverter, 76
  - ~IConverter, 76
  - init, 76
  - run, 77
- sosicon::ICoordinate, 78
  - ~ICoordinate, 79
  - divide, 79
  - equals, 79
  - getE, 79
  - getN, 79
  - leftOf, 79
  - rightOf, 79
  - setE, 80
  - setH, 80
  - setN, 80
  - shift, 80
  - toString, 80
- sosicon::ILookupTable, 81
  - ~ILookupTable, 81
  - get, 81
  - toString, 81
- sosicon::IRectangle, 88
  - ~IRectangle, 88
  - bottom, 89
  - left, 89
  - right, 89
  - top, 90
- sosicon::IShapeElement, 91
  - ~IShapeElement, 91
  - getByteSize, 92
  - getMBR, 92
  - getSosiElement, 92
  - getWordSize, 92
  - populate, 92
- sosicon::IShapeElementHeader, 94
  - ~IShapeElementHeader, 94
- sosicon::IShapefile, 95
  - ~IShapefile, 95
  - build, 96
  - filterSosiId, 96
- sosicon::IShapefileDbfPart, 97
  - writeBinary, 97
  - writeDbf, 98
- sosicon::IShapefilePrjPart, 99
  - writeBinary, 99
  - writePrj, 100
- sosicon::IShapefileShpPart, 101
  - writeBinary, 101
  - writeShp, 102
- sosicon::IShapefileShxPart, 103
  - writeBinary, 103
  - writeShx, 104
- sosicon::IShapeHeader, 105
  - ~IShapeHeader, 105
  - getBoundingBox, 106
  - getByteSize, 106
  - getFileLength, 106
  - getShapeType, 106
  - getWordSize, 106

- setBoundingBox, 106
- setFileLength, 106
- setShapeType, 106
- sosicon::ISosiElement, 107
  - ~ISosiElement, 108
  - addChild, 108
  - children, 108
  - deleteChildren, 108
  - dump, 108
  - find, 108
  - getChild, 108
  - getData, 108
  - getLevel, 108
  - getName, 109
  - getObjType, 109
  - getRoot, 109
  - getSerial, 109
  - getType, 109
- sosicon::ISosiHeadMember, 110
  - ~ISosiHeadMember, 110
  - init, 110
  - initialized, 111
- sosicon::Parser, 112
  - ~Parser, 113
  - complete, 113
  - digestPendingElement, 113
  - dump, 114
  - getRootElement, 114
  - mElementIndex, 114
  - mElementStack, 114
  - mPendingElementAttributes, 114
  - mPendingElementLevel, 115
  - mPendingElementName, 115
  - mPendingElementSerial, 115
  - Parser, 113
  - ragelParseSosiLine, 114
- sosicon::shape, 25
  - DbfFieldLengths, 25
  - DbfRecord, 25
  - DbfRecordSet, 26
  - getShapeEquivalent, 26
  - shape\_type\_multiPatch, 26
  - shape\_type\_multipoint, 26
  - shape\_type\_multiPointM, 26
  - shape\_type\_multipointZ, 26
  - shape\_type\_none, 26
  - shape\_type\_nullShape, 26
  - shape\_type\_point, 26
  - shape\_type\_pointM, 26
  - shape\_type\_pointZ, 26
  - shape\_type\_polygon, 26
  - shape\_type\_polygonM, 26
  - shape\_type\_polygonZ, 26
  - shape\_type\_polyLine, 26
  - shape\_type\_polyLineM, 26
  - shape\_type\_polyLineZ, 26

- ShapeType, 26
- ShxOffsets, 26
- sosicon::shape::DoubleField, 71
  - b, 71
  - d, 71
- sosicon::shape::Int16Field, 84
  - b, 84
  - i, 84
- sosicon::shape::Int32Field, 85
  - b, 85
  - i, 85
- sosicon::shape::Int32TField, 86
  - b, 86
  - i, 86
  - t, 86
- sosicon::shape::Int8Field, 87
  - b, 87
  - i, 87
- sosicon::shape::Shapefile, 117
  - ~Shapefile, 120
  - adjustMasterMbr, 120
  - build, 120
  - buildDbf, 120
  - buildDbfFieldDescriptor, 121
  - buildDbfHeader, 121
  - buildDbfRecordSection, 121
  - buildShpElement, 122
  - buildShpHeader, 122
  - buildShpPoint, 122
  - buildShpPolygon, 122
  - buildShpPolyLine, 123
  - buildShpRecCoordinate, 123
  - buildShpRecCoordinates, 123
  - buildShpRecHeaderCommonPart, 124
  - buildShpRecHeaderExtended, 124
  - buildShpRecHeaderOffsets, 124
  - buildShx, 125
  - expandShpBuffer, 125
  - extractDbfFields, 125
  - filterSosiId, 125
  - getNormalized, 126
  - insertDbfRecord, 126
  - insertShxOffset, 126
  - MAX\_BUFFER\_CHUNK\_SIZE, 127
  - mDbfBuffer, 127
  - mDbfBufferSize, 127
  - mDbfFieldLengths, 128
  - mDbfHeader, 128
  - mDbfRecordSet, 128
  - mFilterSosiId, 128
  - mFilterSosiObjTypes, 128
  - mRecordNumber, 128
  - mShpBuffer, 128
  - mShpBufferSize, 128
  - mShpHeader, 128
  - mShpSize, 129

- mShxBuffer, 129
- mShxBufferSize, 129
- mShxHeader, 129
- mShxOffsets, 129
- mSosiTree, 129
- mXmax, 129
- mXmin, 129
- mYmax, 130
- mYmin, 130
- saveToDbf, 126
- Shapefile, 120
- writeDbf, 126
- writePrj, 127
- writeShp, 127
- writeShx, 127
- sosicon::shape::ShxIndex, 131
  - length, 131
  - offset, 131
- sosicon::sosi, 27
  - deleteNorthEast, 28
  - NorthEastList, 28
- sosicon::sosi::CoordSys, 69
  - CoordSys, 69
  - displayString, 69
  - mDisplayString, 70
  - mPrjString, 70
  - mSrid, 70
  - mSysCode, 70
  - prjString, 70
  - srid, 70
  - valid, 70
- sosicon::sosi::ReferenceData, 116
  - reverse, 116
  - serial, 116
  - subtract, 116
- sosicon::sosi::SosiElement, 132
  - addChild, 133
  - children, 134
  - deleteChildren, 134
  - dump, 134
  - find, 134
  - getChild, 134
  - getData, 134
  - getLevel, 134
  - getName, 135
  - getObjType, 135
  - getRoot, 135
  - getSerial, 135
  - getType, 135
  - mChildren, 136
  - mData, 136
  - mIndex, 136
  - mLevel, 136
  - mName, 136
  - mObjType, 136
  - mObjTypeStr, 136
  - mRoot, 136
  - mSerial, 137
  - mTranslation, 137
  - mType, 137
  - nextChild, 135
  - SosiElement, 133
- sosicon::sosi::SosiElementSearch, 138
  - element, 139
  - index, 139
  - matchTypes, 139
  - mElementTypes, 140
  - mIndex, 140
  - mSosiElement, 140
  - next, 139
  - SosiElementSearch, 138
  - type, 139
  - types, 139
- sosicon::sosi::SosiJunctionPoint, 141
  - ~SosiJunctionPoint, 141
  - mSosiElement, 141
  - SosiJunctionPoint, 141
- sosicon::sosi::SosiNorthEast, 143
  - ~SosiNorthEast, 144
  - append, 144
  - back, 144
  - dump, 145
  - expandBoundingBox, 145
  - free, 145
  - front, 145
  - getNext, 145
  - getNumPoints, 145
  - initHeadMember, 145
  - mCoordinates, 146
  - mCoordinatesIterator, 146
  - mMaxX, 146
  - mMaxY, 146
  - mMinX, 146
  - mMinY, 146
  - mOrigo, 146
  - mSosiElement, 146
  - mUnit, 147
  - operator/=: 145
  - operator+=, 145
  - ragelParseCoordinatesNe, 145
  - ragelParseCoordinatesNeh, 146
  - reverse, 146
  - SosiNorthEast, 144
- sosicon::sosi::SosiOrigoNE, 148
  - ~SosiOrigoNE, 149
  - getE, 149
  - getN, 149
  - init, 149
  - initialized, 149
  - mInitialized, 149
  - mOrigoE, 150
  - mOrigoN, 150



- mSosiElement, 150
- ragelParseSosiOrigoNE, 149
- SosiOrigoNE, 148, 149
- sosicon::sosi::SosiRefList, 151
  - ~SosiRefList, 152
  - getNextGeometry, 152
  - mRefListCollection, 152
  - mRefListCollectionIndex, 152
  - mRefListIndex, 152
  - mSosiElement, 152
  - ragelParseSosiRef, 152
  - SosiRefList, 151
- sosicon::sosi::SosiTranslationTable, 153
  - MAX\_COORDSYS\_TABLE, 154
  - mCoordSysTable, 154
  - mObjTypeNameMap, 155
  - mTypeNameMap, 155
  - reverseLookup, 154
  - sosiNameToType, 154
  - sosiObjNameToType, 154
  - SosiTranslationTable, 153
  - sosiTypeToName, 154
  - sosiTypeToObjName, 154
  - sysCodeToCoordSys, 154
- sosicon::sosi::SosiUnit, 156
  - ~SosiUnit, 156
  - getDivisor, 157
  - init, 157
  - initialized, 157
  - mDivisor, 157
  - mInitialized, 157
  - mSosiElement, 157
  - SosiUnit, 156, 157
- sosicon::utils, 29
  - className2FileName, 29
  - explode, 30
  - fileExists, 30
  - getPathInfo, 30
  - nonExistingFilename, 30
  - normalizeAppClassName, 31
  - repeat, 31
  - replaceAll, 31
  - sqlNormalize, 31
  - toFieldname, 32
  - toLower, 32
  - trim, 32
  - trimLeft, 32
  - trimRight, 32
  - ucFirst, 32
  - wktToStr, 32
- SosiElement
  - sosicon::sosi::SosiElement, 133
- SosiElementMap
  - SOSI Elements, 13
- SosiElementSearch
  - sosicon::sosi::SosiElementSearch, 138
- SosiJunctionPoint
  - sosicon::sosi::SosiJunctionPoint, 141
- sosiNameToType
  - SOSI Elements, 16
  - sosicon::sosi::SosiTranslationTable, 154
- SosiNorthEast
  - sosicon::sosi::SosiNorthEast, 144
- sosiObjNameToType
  - SOSI Elements, 16
  - sosicon::sosi::SosiTranslationTable, 154
- SosiOrigoNE
  - sosicon::sosi::SosiOrigoNE, 148, 149
- SosiRefList
  - sosicon::sosi::SosiRefList, 151
- SosiTranslationTable
  - sosicon::sosi::SosiTranslationTable, 153
- sosiTypeToName
  - sosicon::sosi::SosiTranslationTable, 154
- sosiTypeToObjName
  - sosicon::sosi::SosiTranslationTable, 154
- SosiUnit
  - sosicon::sosi::SosiUnit, 156, 157
- sqlNormalize
  - sosicon::utils, 31
- srid
  - sosicon::sosi::CoordSys, 70
- strtoimax
  - inttypes.h, 213
- strtoumax
  - inttypes.h, 213
- subtract
  - sosicon::sosi::ReferenceData, 116
- sysCodeToCoordSys
  - SOSI Elements, 16
  - sosicon::sosi::SosiTranslationTable, 154
- t
  - sosicon::shape::Int32TField, 86
- toBigEndian
  - sosicon::byteOrder, 23
- toFieldname
  - sosicon::utils, 32
- toLittleEndian
  - sosicon::byteOrder, 23
- toLower
  - sosicon::utils, 32
- top
  - sosicon::IRectangle, 90
- toString
  - sosicon::Coordinate, 62
  - sosicon::ICoordinate, 80
  - sosicon::ILookupTable, 81
- trim
  - sosicon::utils, 32
- trimLeft
  - sosicon::utils, 32
- trimRight

- sosicon::utils, 32
- type
  - sosicon::sosi::SosiElementSearch, 139
- types
  - sosicon::sosi::SosiElementSearch, 139
- ucFirst
  - sosicon::utils, 32
- valid
  - sosicon::sosi::CoordSys, 70
- westoimax
  - inttypes.h, 213
- westoumax
  - inttypes.h, 213
- Wkt
  - sosicon, 19
- wkt\_linestring
  - sosicon, 19
- wkt\_point
  - sosicon, 19
- wkt\_polygon
  - sosicon, 19
- wkt\_unknown
  - sosicon, 19
- wktToStr

- sosicon::utils, 32
- writeBinary
  - sosicon::IBinaryStreamable, 74
  - sosicon::IShapefileDbfPart, 97
  - sosicon::IShapefilePrjPart, 99
  - sosicon::IShapefileShpPart, 101
  - sosicon::IShapefileShxPart, 103
- writeDbf
  - sosicon::IShapefileDbfPart, 98
  - sosicon::shape::Shapefile, 126
- writeFile
  - sosicon::ConverterSosi2shp, 50
- writePrj
  - sosicon::IShapefilePrjPart, 100
  - sosicon::shape::Shapefile, 127
- writePsql
  - sosicon::ConverterSosi2psql, 47
- writeShp
  - sosicon::IShapefileShpPart, 102
  - sosicon::shape::Shapefile, 127
- writeShx
  - sosicon::IShapefileShxPart, 104
  - sosicon::shape::Shapefile, 127