

The University of Nottingham Ningbo China

SCHOOL OF COMPUTER SCIENCE

A LEVEL 1 MODULE, AUTUMN SEMESTER 2023-2024

PROGRAMMING AND ALGORITHMS (COMP1038)

Time allowed: 1.0 hour (60 minutes)

Candidates may complete the front cover of their answer book and sign their desk card but must NOT write anything else until the start of the examination period is announced.

Answer ALL questions. (There are 9 questions, 25 marks in total)

No calculators are permitted in this examination.

Dictionaries are not allowed with one exception. Those whose first language is not English may use a standard translation dictionary to translate between that language and English provided that neither language is the subject of this examination. Subject specific translation dictionaries are not permitted.

No electronic devices capable of storing and retrieving text, including electronic dictionaries, may be used.

DO NOT turn examination paper over until instructed to do so.

ADDITIONAL MATERIAL: None.

INFORMATION FOR INVIGILATORS: Collect both the exam papers and the answer booklets at the end of exam.

Turn Over

Question 1: What is the difference between call by value and call by reference in C programming? (2 marks)

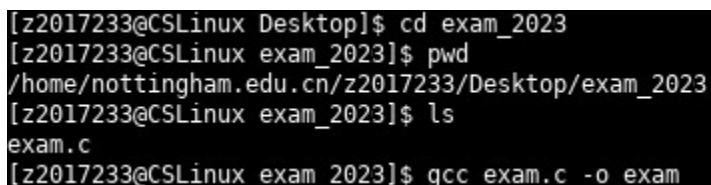
Question 2: What does dynamic memory allocation mean? What are the functions in the C Standard Library that deal with dynamic memory allocation of variables? Write two simple C statements that allocate and release memory for an integer array that contains 1000 elements. (2 marks)

Question 3: Explain what would happen when the program exam.c, as shown in Figure 1, is compiled using the command as shown in Figure 2 on cslinux. (2 marks)

The image shows a code editor window with a title bar that includes an 'Open' button and a file icon, and a tab labeled 'exam.c'. The code is as follows:

```
1 #include <stdio.h>
2
3 int main(void)
4 {
5     double a = 5.0;
6
7     printf("%lf\n", sqrt(a));
8
9     return 0;
10 }
```

Figure 1: exam.c

The image shows a terminal window with the following commands and output:

```
[z2017233@CSLinux Desktop]$ cd exam_2023
[z2017233@CSLinux exam_2023]$ pwd
/home/nottingham.edu.cn/z2017233/Desktop/exam_2023
[z2017233@CSLinux exam_2023]$ ls
exam.c
[z2017233@CSLinux exam_2023]$ gcc exam.c -o exam
```

Figure 2: Compiling on cslinux

Question 4: Use a while loop to implement the same output as the following code. (2 marks)

```
for(a=1; a<=100; a++)
    printf("%d\n", a*a);
```

Question 5: There are several mistakes contained in the following C program. Identify and correct them in order to compile and run without error. (4 marks).

```
#include <stdio.h>

struct emp
{
    char n[20];
    int age;
};

int main(void)
{
    struct emp e1 = {"David", 23};
    struct emp e2;
    scanf("%s %d", e2.n, e2.age);
    if(structcmp(e1, e2) == 0)
        printf("Equal structs.");
    else
        printf("Unequal structs.");
}

structcmp (struct emp x, struct emp y)
{
    if(x.n == y.n)
        if(x.age == y.age)
            return 0;
    return 1;
}
```

Question 6: Complete the function body of *check* in the program below. This function should take two arguments, a variable of type integer called *input* and a pointer called *ptr* that points to an integer. A calculation to determine whether the *input* is odd, even or zero must be done within this function. If *input* is zero, the program should print 0. If *input* is odd, the program prints -1. If *input* is even, the program should print 1. You may assume that the user will only enter a single whole number in each prompt (i.e., no text, no floating-point numbers, no empty input, etc.) (3 marks)

```

#include <stdio.h>

void check(int input, int *ptr);

int main(void)
{
    int in = 0;
    int out = 0;

    while(in != -9999)
    {
        scanf("%d", &in);
        check(in, &out);
        printf("%d\n", out);
    }
    return 0;
}

```

Question 7: An incomplete C program that employs a singly linked list is given below. Complete the printList function which prints out all values in the linked list. Each value should be printed on a different line. (3 marks)

```

struct node{
    int data;
    struct node *next;
};
typedef struct node Node;

Node *head;

void InsertNodeAtFront(int data);
void printList();

void InsertNodeAtFront(int data)
{
    Node *temp = new Node;
    temp->data = data;
    temp->next = head;
    head = temp;
}

```

Question 8: Identify potential mistakes contained in the function ‘func’ and suggest how to correct them. (3 marks)

```
#include <stdio.h>
#include <stdlib.h>
struct ex
{
    int i;
    float j;
    char *s;
};

void func (void)
{
    struct ex *p = malloc(sizeof(struct ex));
    p->s = malloc(20 * sizeof(char));
    scanf("%s", &p->s);
    printf("%s", p->s)
    free(p);
}
```

Question 9: What is the output of the following program? (4 marks)

```
#include <stdio.h>

int f1( int x, int y)
{
    x=x+2;
    y=y+3;
    return x+y;
}

int f2( int *x, int y)
{
    *x=*x+2;
    y=y+3;
    return *x+y;
}

int f3 ( int *x, int *y)
{
    *x=*x+2;
    *y=*y+3;
    return *x+*y;
}
```

```
int f4( int x,  int *y, int *z)
{
    x=x+*y;
    *y=*z+3;
    z=&x;
    *z=*y*2;
    return *z;
}

int main(int argc, char *argv[])
{
    int k=1, m=3, r=2;
    printf("1) %d %d %d \n", k, m, r);
    r=f1(k, m);
    printf("2) %d %d %d \n", k, m, r);
    r=f2(&k, m);
    printf("3) %d %d %d \n", k, m, r);
    r=f3(&k, &m);
    printf("4) %d %d %d \n", k, m, r);
    r=f4(k, &m, &r);
    printf("5) %d %d %d \n", k, m, r);
    return 0;
}
```