*Pina Kolling*
*piko0011*

# Summary: Lecture 2

Summary for the chapters *7.1 Complexity classes* and *7.2 Hierarchy problem.* [3]

## Complexity classes

### Background knowledge:

A complexity class is a set which contains problems with similar complexities. The complexities are examined in regards of a specific ressource, for example time or space. For the problems the most efficient solution/algorithm is analysed.

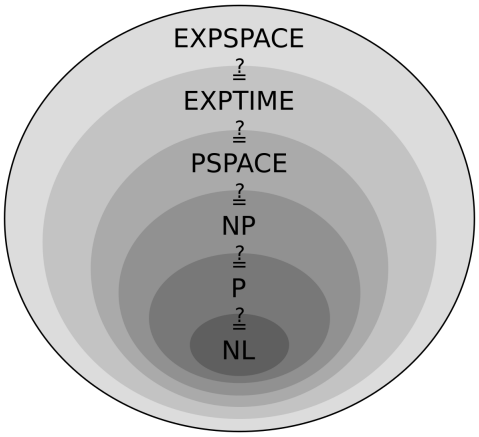


Figure 1: Complexity classes [2]

Usually the complexity depends on the input size. With the asymptotic complexity, classes are build, which are the complexity classes. [4]

### Summary:

**Parameters of complexity classes:** [1, 3]

- **Model of computation:**
  here: multistring Turing Machine
- **Mode of computation:**
  for example: deterministic or non-deterministic (deterministic: the computer will always produce the same output for a given input while going through the same states, non-deterministic: can show different behaviors for the same input)
- **Resources:**
  something *expensive* that the machine uses up, for example: time or space
- **Restrictions/Bound:**
  for example: upper bound, lower bound as a function $f : \mathbb{N} \to \mathbb{N}$

**Definition of complexity classes:** [3]
The complexity class is the set of all languages which are decided by a Turing Mashine $M$ that is operating in the defined mode and for any input $x$, $M$ uses at most $f(|x|)$ units of the defined resource.

*Pina Kolling*
*piko0011*

**Definition proper complexity function:** [3, 1, 4]

- $f : \mathbb{N} \to \mathbb{N}$
- $\forall n \in \mathbb{N}\ f(n+1) >= f(n)$ ($f$ is non-decreasing)
- It exists a multistring Turing Machine $M$ that fullfills the following conditions with an input of size $n$:
  - $M$ halts after $O(n + f(n))$ steps (runs in time $O(n + f(n))$)
  - $M$ uses $O(f(n))$ space
  - $M$ maps $1^n$ to $1^{f(n)}$

Examples of proper functions: [3]

$$f(x) = \log n^2$$
$$f(x) = n \log n$$
$$f(x) = n^2$$
$$f(x) = n^3 + 3n$$
$$f(x) = 2^n$$
$$f(x) = \sqrt{n}$$
$$f(x) = n!$$

If the function $f$ and $g$ are proper, $f + g$, $f \cdot g$ and $2^g$ are proper, too.

## Hierarchy problem

## References

[1] Martin Berglund. *Lecture notes in Computational Complexity.*

[2] *Complexity classes diagram image source.* `https://en.wikipedia.org/wiki/Complexity_class`.

[3] Christos H. Papadimitriou. *Computational Complexity.* Addison-Wesley Publishing Company, 1994.

[4] Prof. Dr. Thomas Schwentick. *Lecture notes in Grundbegriffe der theoretischen Informatik.* `https://www.cs.tu-dortmund.de/nps/de/Studium/Ordnungen_Handbuecher_Beschluesse/Modulhandbuecher/Archiv/Bachelor_LA_GyGe_Inf_Modellv/_Module/INF-BfP-GTI/index.html`.