
Example of how to maintain Shipment in TM to maintain these identifiers:

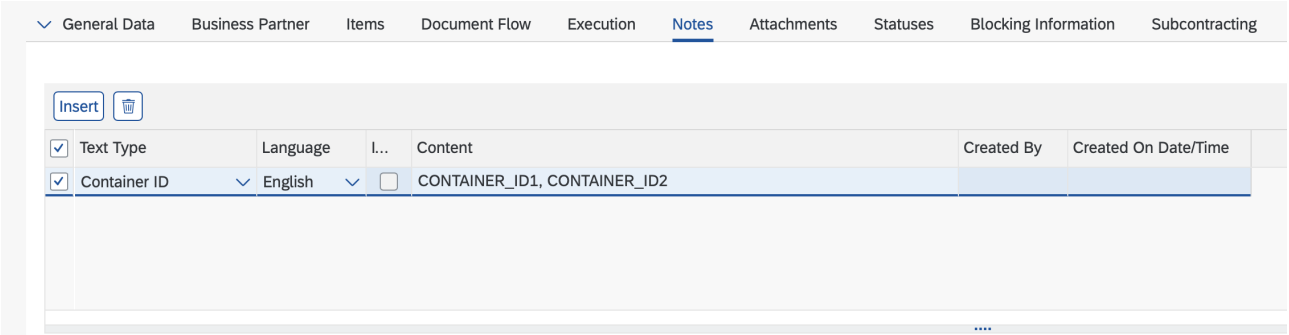


Air:
You must obtain the real (not test) Master Airway waybill (T55) from project44 and maintain it in global track and trace. This must be sent during track initialization. Based on the real ocean events, the events will be reported from project44. To monitor if the messages are being processed from SAP Business Network for Logistics as expected, you may view them in the *Manage Integration Logs* app (freight collaboration) or in the *Track Freight Movement* app (freight collaboration).

7. :Configuration and Testing for SAP Business Network Global Track and Trace

7.1 General Configuration for SAP Business Network Global Track and Trace

In the *Manage Models* app of SAP Business Network Global Track and Trace, the visibility provider integration information is already maintained for you in the GTT standard model “gttft1”.

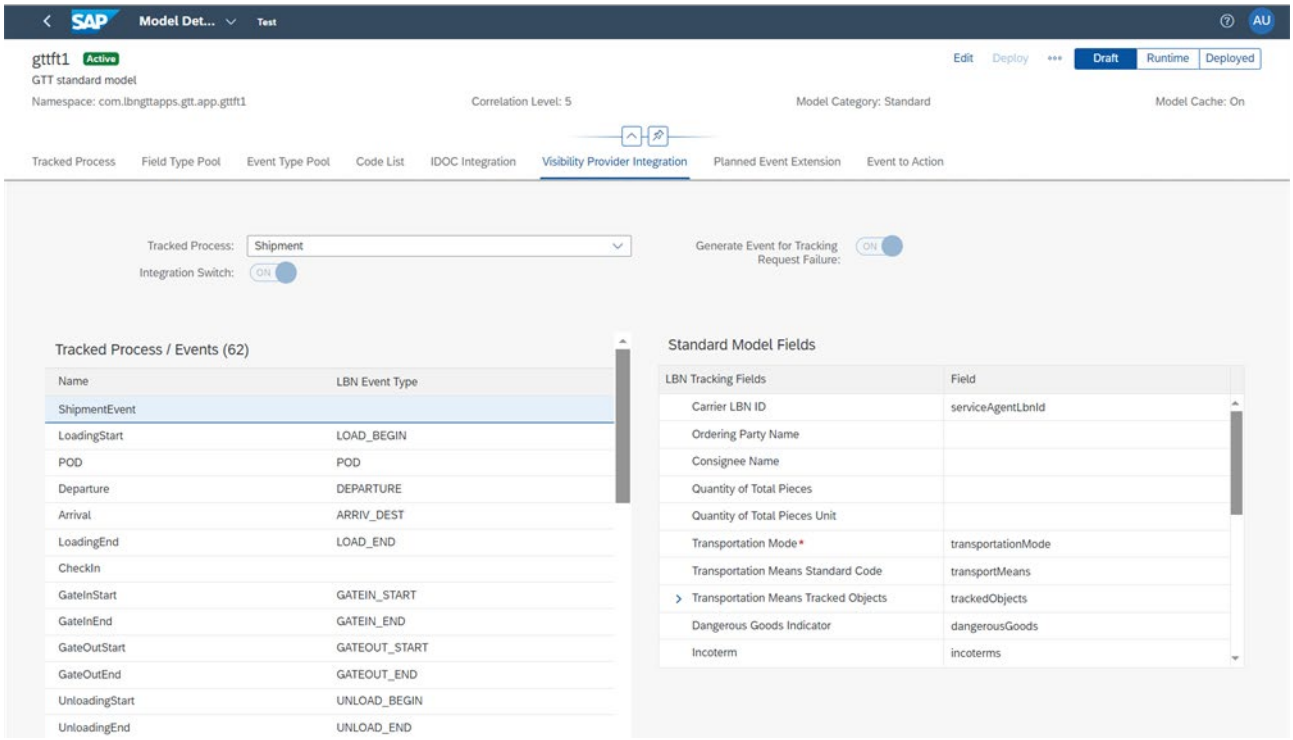

But if you want to integrate with your visibility provider in a user model or map user-defined fields in the standard model, do the following:

1. Launch the *Manage Models* app. Select a model.
2. Go to the *Visibility Provider Integration* tab and open the edit mode.
3. Select a tracked process. Turn on the *Integration Switch*.
4. In the *Tracked Process / Events* list on the left, you can see the tracked process event and event types. Use the value help to fill in the SAP Business Network for Logistics event type for actual events.
5. Select an event in the list, then use the value help to fill in the fields or SAP Business Network for Logistics tracking fields on the right.
6. Save and deploy the model.

7.2 Testing in SAP Business Network Global Track and Trace

To test the project44 integration in SAP Business Network Global Track and Trace, carry out the following steps:

1. Launch the *Manage Models* app. Select the GTT standard model “gttft1”.
2. Switch to the *Runtime* view on the top right.
3. In the *Write Service* tab, find the *ShipmentEvent*. Click the green section of this API endpoint.
4. Click *Try it out* to test the API.
5. In the *Request Body* text box, clear the existing request payload. Copy and paste the sample payload we provided below and customize it to fit your needs.
6. Execute the request.
7. In the *Responses* section, it shows the response with the endpoint.

Sample Payload:

Prerequisite:
In the *Configure Partner Connections* app, choose a partner connection that is active and connected with project44.

- If the business partner (data contributor) that you choose is onboarded onto SAP Business Network for Logistics (see section 4), note down its LBN ID with an “LBN#” prefix, such as “LBN#1234567”.
- If the business partner is not onboarded but connected with onboarded visibility providers, note down its *Business Partner ID Type* and *Business Partner ID Value,* with a hash “#” in between, such as “SCAC#MAEU”.


You can refer to the table below for reference:

Business Partner ID Type	Correct Form
LBN ID	`LBN#`
SCAC	`SCAC#`
P44_EU	`P44_EU#`

You can refer to the screenshot below for different scenarios:

- Connection 1 is for any partner who is not onboarded.
- Connection 2 is for a partner with a specific carrier identifier who is not onboarded.
- Connection 3 is for any partner who is onboarded.
- Connection 4 is for a partner with a specific carrier identifier who is onboarded.

For more, see the corresponding section in the guide *Application Help*.

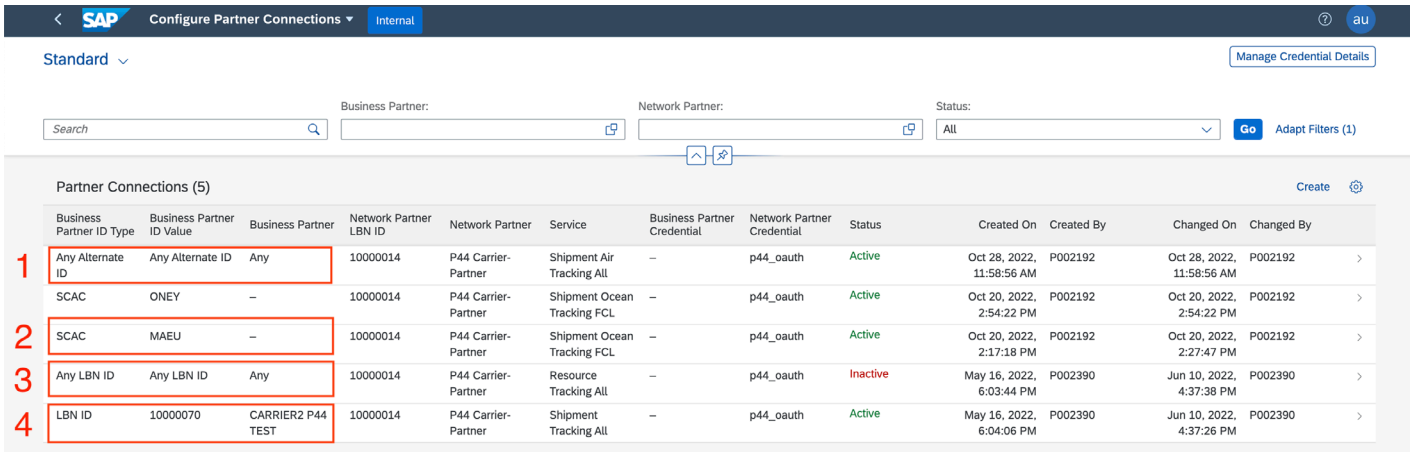

	Business Partner ID Type	Business Partner ID Value	Business Partner	Network Partner LBN ID	Network Partner	Service	Business Partner Credential	Network Partner Credential	Status	Created On	Created By	Changed On	Changed By
1	Any Alternate ID	Any Alternate ID	Any	10000014	P44 Carrier-Partner	Shipment Air Tracking All	–	p44_oauth	Active	Oct 28, 2022, 11:58:56 AM	P002192	Oct 28, 2022, 11:58:56 AM	P002192
	SCAC	ONEY	–	10000014	P44 Carrier-Partner	Shipment Ocean Tracking FCL	–	p44_oauth	Active	Oct 20, 2022, 2:54:22 PM	P002192	Oct 20, 2022, 2:54:22 PM	P002192
2	SCAC	MAEU	–	10000014	P44 Carrier-Partner	Shipment Ocean Tracking FCL	–	p44_oauth	Active	Oct 20, 2022, 2:17:18 PM	P002192	Oct 20, 2022, 2:27:47 PM	P002192
3	Any LBN ID	Any LBN ID	Any	10000014	P44 Carrier-Partner	Resource Tracking All	–	p44_oauth	Inactive	May 16, 2022, 6:03:44 PM	P002390	Jun 10, 2022, 4:37:38 PM	P002390
4	LBN ID	10000070	CARRIER2 P44 TEST	10000014	P44 Carrier-Partner	Shipment Tracking All	–	p44_oauth	Active	May 16, 2022, 6:04:06 PM	P002390	Jun 10, 2022, 4:37:26 PM	P002390

Sample Payload for Road LTL Tracking

{	
"altKey":	**[Action Required]** Fill the alternative key in the following pattern: <scheme>:<party>:<system>:<type>:<id>. For example, "xri://sap.com/id:LBN#10000000001:QX8CLNT912:FT1_SHIPMENT:6100079522".
"actualBusinessTimestamp":	**[Action Required]** Fill in the current timestamp in UTC time format, for example, "2022-07-01T00:00:00Z".
“shippingType_code”: “17”,	Note: “17” is the code for “LTL (Less Than Truck Load)”.
“serviceAgentLbnId”:	**[Action Required]** Fill in the data contributor’s identifier that you noted down in the prerequisite.
"transportationMode_code": "03",	Note: “03” is the code for “Road Transport”.
“plannedEvents”: { “eventType”: “eventMatchKey”: “locationAltKey”: }, ……],	**[Action Required]** Fill in planned events. Provide at least one planned Departure event and one planned Arrival event, with their location alternative keys maintained in the location master data. The planned business timestamp of all events should be later than the current timestamp.
“stops”: { “stopId”: “locationId”: “locationType_code”: “ordinalNo”: }, ……],	**[Action Required]** Fill in stops. Provide at least two stops: one for the point of departure and the other for the destination. Make sure all the locations mentioned in planned events are described here.

“shipperRefDocument”: [
{
"idType_code":
"value":
},
“carrierRefDocument”: [
{
"idType_code":
"value":
}
	[Action Optional] Fill in the shipper reference document only when there is no carrier reference document provided. For example, use the code “001” for “Purchase Order”.
	[Action Optional] Fill in a valid purchase order number.
	
	[Action Required] Fill in “T50”, “T52”, “PRO”, “T67”, or “L033”. “T50” is the code for “Bill of Lading”. “T52” is the code for “Master Bill of Lading”. “PRO” and “T67” are the codes for “Progressive Rotating Order”. “L033” is the code for “Pickup Reference”.
	[Action Required] Contact your carrier for a valid number.

]	

Sample Payload for Road FTL Tracking

{	
"altKey":	**[Action Required]** Fill the alternative key in the following pattern: <scheme>:<party>:<system>:<type>:<id>. For example, "xri://sap.com/id:LBN#10000000001:QX8CLNT912:FT1_SHIPMENT:6100079522".
"actualBusinessTimestamp":	**[Action Required]** Fill in the current timestamp in UTC time format, for example, "2022-07-01T00:00:00Z".
"shippingType_code": "18",	Note: "18" is the code for "FTL (Full Truck Load)".
"serviceAgentLbnId":	**[Action Required]** Fill in the data contributor's identifier that you noted down in the prerequisite.
"transportationMode_code": "03",	Note: "03" is the code for "Road Transport".
"plannedEvents":	**[Action Required]** Fill in planned events. Provide at least one planned Departure event and one planned Arrival event, with their location alternative keys maintained in the location master data.
{	
"eventType":	
"eventMatchKey":	
"locationAltKey":	
},	
……	
],	
"stops":	**[Action Required]** Fill in stops. Make sure all the locations mentioned in planned events are described here.
{	
"stopId":	
"locationId":	
"locationType_code":	
"ordinalNo":	
},	
……	
],	
"trackedObjects": [	
{	
"idType_code":	**[Action Required]** Fill in "LICENSE_PLATE", "MOBILE_NUMBER" or "TRUCK_ID".
"value":	**[Action Required]** Contact your carrier for a valid license number, mobile number, or truck ID.
}	
],	
"carrierRefDocuments": [	
{	
"docType_code":	**[Action Required]** Fill in "T50"or "T52" for "Bill of Lading", T56 for "Reference Number of Ordering Party".
"value":	**[Action Required]** Contact your carrier for a valid Bill of Lading number or Reference Number of Ordering Party.
}	
]	
}	

Sample Payload for Ocean LCL Tracking

{	
"altKey":	**[Action Required]** Fill the alternative key in the following pattern: <scheme>:<party>:<system>:<type>:<id>. For example, "xri://sap.com/id:LBN#10000000001:QX8CLNT912:FT1_SHIPMENT:6100079522".
"actualBusinessTimestamp":	**[Action Required]** Fill in the current timestamp in UTC time format, for example, "2022-07-01T00:00:00Z".
“shippingType_code”: “2”,	Note: “2” is the code for “LCL (Less Than Container Load)”.
“serviceAgentLbnId”:	**[Action Required]** Fill in the data contributor’s identifier that you noted down in the prerequisite.
"transportationMode_code": "01",	Note: “01” is the code for “Maritime Transport”.
“plannedEvents”: { “eventType”: “eventMatchKey”: “locationAltKey”: }, ……],	**[Action Required]** Fill in planned events. Provide at least one planned Departure event and one planned Arrival event, with their location alternative keys maintained in the location master data. The planned business timestamp of all events must be later than the current timestamp.
“stops”: { “stopId”: “locationId”: “locationType_code”: “ordinalNo”: }, ……],	**[Action Required]** Fill in stops. Make sure all the locations mentioned in planned events are described here.
“trackedObjects”: [{ "idType_code": "CONTAINER_ID",	
"value":	**[Action Required]** Contact project44 for a valid container ID.
}],	
“carrierRefDocuments”: [{ "docType_code":	**[Action Required]** Fill in “T51”, “T52”, or “T67”. “T51” is the code for “House Bill of Lading”. “T52” is the code for “Master Bill of Lading”. “T67” is the code for “Booking Reference Number”.
"value":	**[Action Required]** Contact project44 for a valid House Bill of Lading number, Master Bill of Lading number, or Booking Reference Number.
}] }	

Sample Payload for Ocean FCL Tracking

{	
"altKey":	**[Action Required]** Fill the alternative key in the following pattern: <scheme>:<party>:<system>:<type>:<id>. For example, "xri://sap.com/id:LBN#10000000001:QX8CLNT912:FT1_SHIPMENT:6100079522".
"actualBusinessTimestamp":	**[Action Required]** Fill in the current timestamp in UTC time format, for example, "2022-07-01T00:00:00Z".
“shippingType_code”: “3”,	Note: “3” is the code for “LCL (Full Container Load)”.
“serviceAgentLbnId”:	**[Action Required]** Fill in the data contributor’s identifier that you noted down in the prerequisite.
"transportationMode_code": "01",	Note: “01” is the code for “Maritime Transport”.
“plannedEvents”:	**[Action Required]** Fill in planned events. Provide at least one planned Departure event and one planned Arrival event with their location alternative keys maintained in the location master data. The planned business timestamp of all events must be later than the current timestamp.
{	
“eventType”:	
“eventMatchKey”:	
“locationAltKey”:	
},	
……	
],	
“stops”:	**[Action Required]** Fill in stops. Make sure all the locations mentioned in planned events are described here.
{	
“stopId”:	
“locationId”:	
“locationType_code”:	
“ordinalNo”:	
},	
……	
],	
“trackedObjects”: [	
{	
"idType_code": "CONTAINER_ID",	
"value":	**[Action Required]** Contact project44 for a valid container ID.
}	
],	
“carrierRefDocuments”: [	
{	
"docType_code":	**[Action Required]** Fill in “T51”, “T52”, or “T67”. “T51” is the code for “House Bill of Lading”. “T52” is the code for “Master Bill of Lading”. “T67” is the code for “Booking Reference Number”.
"value":	**[Action Required]** Contact project44 for a valid House Bill of Lading number, Master Bill of Lading number, or Booking Reference Number.
}	
]	
}	

Sample Payload for Air Freight Booking

{	
"altKey":	**[Action Required]** Fill the alternative key in the following pattern: <scheme>:<party>:<system>:<type>:<id>. For example, "xri://sap.com/id:LBN#10000000001:QX8CLNT912:FT1_SHIPMENT:6100079522".
"actualBusinessTimestamp":	**[Action Required]** Fill in the current timestamp in UTC time format, for example, "2022-07-01T00:00:00Z".
“shippingType_code”:	**[Action Required]** Fill in “11” or “12”. “11” is the code for “ULD (Unit Load Device)”. “12” is the code for “Loose”.
“serviceAgentLbnId”:	Note: The data contributor’s identifier is not required for air tracking. You can fill in an empty string: “”.
"transportationMode_code": "04",	Note: “04” is the code for “Air Transport”.
“plannedEvents”: { “eventType”: “eventMatchKey”: “locationAltKey”: }, ……],	**[Action Required]** Fill in planned events. Provide at least one planned Departure event and one planned Arrival event, with their location alternative keys maintained in the location master data. The planned business timestamp of all events should be later than the current timestamp.
“stops”: { “stopId”: “locationId”: “locationType_code”: “ordinalNo”: }, ……],	**[Action Required]** Fill in stops. Make sure all the locations mentioned in planned events are described here.
“carrierRefDocuments”: [	
{	
"docType_code":	**[Action Required]** Fill in “T54” or “T55”. “T54” is the code for “House Air Waybill”. “T55” is the code for “Master Air Waybill”.
"value":	**[Action Required]** Contact project44 for a valid House Air Waybill number or Master Air Waybill number.
}	
]	
}	

Sample Payload for Parcel Tracking

{	
"altKey":	**[Action Required]** Fill the alternative key in the following pattern: <scheme>:<party>:<system>:<type>:<id>. For example, "xri://sap.com/id:LBN#10000000001:QX8CLNT912:FT1_SHIPMENT:6100079522".
"actualBusinessTimestamp":	**[Action Required]** Fill in the current timestamp in UTC time format, for example, "2022-07-01T00:00:00Z".
"serviceAgentLbnId":	**[Action Required]** Fill in the data contributor's identifier that you noted down in the prerequisite.
"transportationMode_code": "05",	Note: "05" is the code for "Parcel ".
"plannedEvents":	**Note:** Fill in planned events (optional).
{	
"eventType":	
"eventMatchKey":	
"locationAltKey":	
},	
……	
],	
"stops":	**[Action Required]** Fill in stops. Provide at least two stops: one for the point of departure and the other for the destination. Make sure all the locations mentioned in planned events are described here.
{	
"stopId":	
"locationId":	
"locationType_code":	
"ordinalNo":	
},	
……	
],	
"trackedObjects": [	
{	
"idType_code": "PACKAGE_EXT_ID",	
"value":	**[Action Required]** Use a real parcel tracking number.
}	
]	
}	