

[Full Article](#) [Figures & data](#) [References](#) [Citations](#) [Metrics](#)[Licensing](#) [PDF](#)

Journal

[Journal of Information and Telecommunication >](#)[Latest Articles](#)54 | 0 | 0
Views | CrossRef citations to date | Altmetric[Listen](#)

Articles

A Hounsfield value-based approach for automatic recognition of brain haemorrhage

[Anh-Cang Phan](#) , [Van-Quyen Vo](#) & [Thuong-Cang Phan](#)

Received 27 Jun 2018, Accepted 06 Nov 2018, Published online: 28 Nov 2018

[Download citation](#) <https://doi.org/10.1080/24751839.2018.1547951>

ABSTRACT


Brain haemorrhage is a critical problem with the high mortality rate that is typically diagnosed based on MRI/CT images. A lot of research is gaining attention recently for its high performance in image recognition of brain haemorrhage. In this paper, we propose a new approach, which can automatically detect, diagnose and classify of brain haemorrhages. Our proposed method focuses on analysing brain haemorrhage regions from images of brain haemorrhage. We rely on HU values to detect haemorrhage regions and determine the bleeding time of brain

In this article eful for supporting doctors in timely treatment. Our
now that the accuracy of detection of brain haemorrhages is

1. Introduction

In recent years, there are many researchers in Vietnam and other countries in the world related to the medical field, particularly in detecting, diagnosing and classifying disease in humans. During treatment, subclinical results outcome is very important for doctors to detect, diagnose and treat, especially related to the brain haemorrhage. The techniques of computed tomography (CT) (Mayo Clinic, [2016](#)), magnetic resonance imaging (MRI), and digital subtraction angiography (DSA) are very helpful in supporting to detect the brain haemorrhage regions. However, there are about some hundred slices (images) for each case of CT/MRI scan depending on the scan region and the thickness of the slices. Hence, the doctors spend a lot of time looking at all images and finding abnormalities in each CT/MRI image to provide the best diagnosis and treatment. To improve this problem, Bhavna Sharma and K. Venugopalan proposed an automatic segmentation of brain CT scan image to identify haemorrhages. Their method was comprised of three stages: pre-processing performed on the brain CT images, the histogram based centroids initialization, and finally the K-means clustering algorithm was applied on the resultant image to segment the image in different clusters based on the intensity values of pixels (shown in [Figure 1](#)).

Figure 1. Thresholds of histogram and segmented image (Sharma & Venugopalan, [2012](#)).

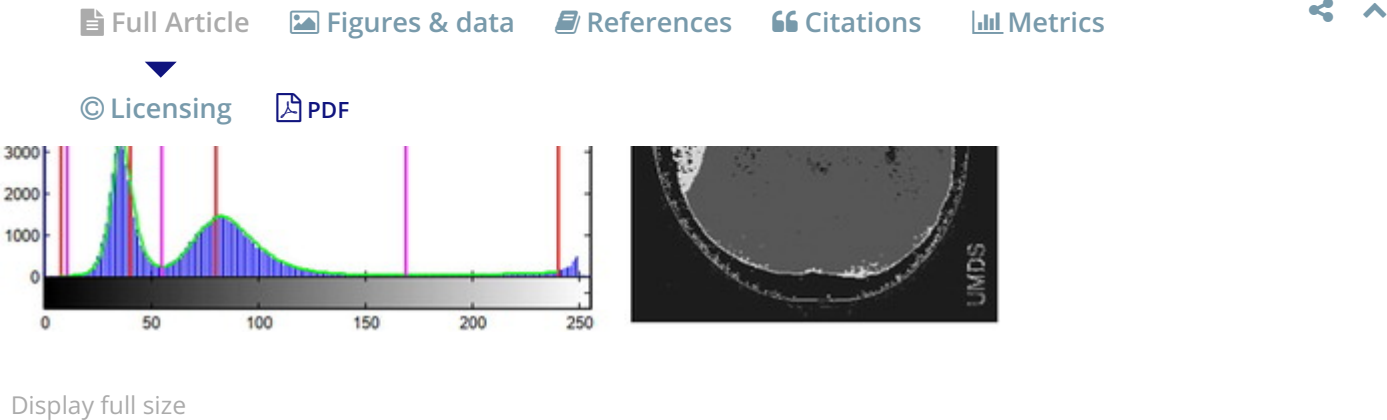


Another method is introduced by Sumijan, Harlan, and Wibowo (2017) using the Hybrids Otsu method for feature region and mathematical morphology to calculate volume Haemorrhage Brain on CT-scan image and 3D reconstruction. In this research, the authors extracted the bleeding areas of the brain based on a hybrid of the Otsu algorithm, morphological features algorithm. The 3D reconstruction of the bleeding area from a 2D slice is implemented by a linear interpolation approach (Figure 2).


Figure 2. Model of the hybrids Otsu method (Sumijan et al., 2017).



Display full size

Al-Ayyoub, Alawad, Al-Darabsah, and Aljarrah (2013) proposed another method of the classification of brain haemorrhages. The authors likewise succeeded with automatically detecting and classification of brain haemorrhages. The implemented system consists of several stages including image pre-processing, image segmentation, feature extraction, and classification. However, the authors used the Ostu method (Otsu, 1975) to detect brain haemorrhage regions. Besides, the classification of brain haemorrhages is based on a number of features such as the

In this article  on (in pixels), the focal point, the area and shape of the [figure 3](#)).

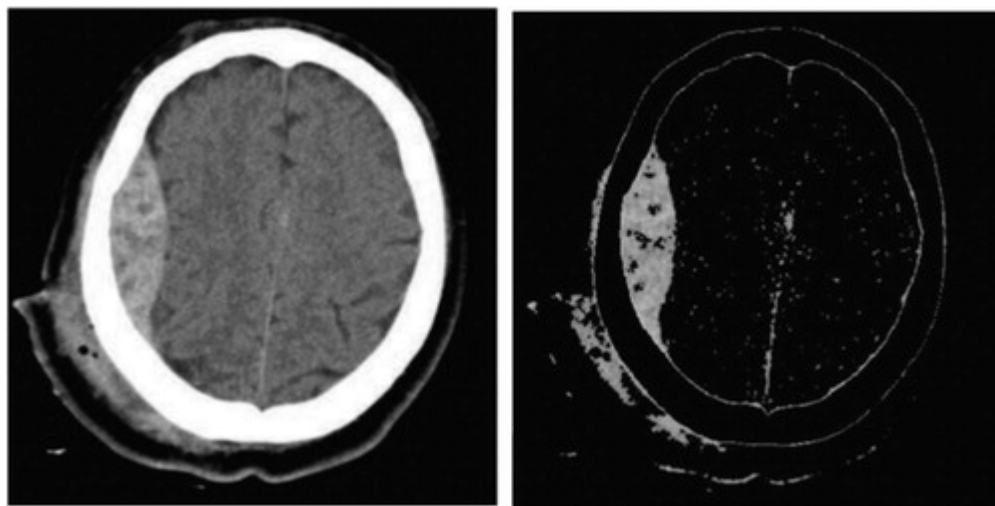[Full Article](#)[Figures & data](#)[References](#)[Citations](#)[Metrics](#)[© Licensing](#)[PDF](#)[Display full size](#)

From the above methods, we can see that their methods are still limited in the reference of the experienced doctors and medical imaging specialists to determine the duration of bleeding. In additions, their methods are used to the Otsu method, which is a well-known and widely method. However, this method depends on a threshold of the greyscale. To determine this threshold, the authors often convert the CT/MRI images to greyscale images leading to affect image quality and threshold value. Besides, the image is corrupted by additive noise or the sharp valley of the greyscale histogram is degraded leading to a segmentation error. Moreover, the limitation of the Otsu method is its assumption of binary classes. It partitions the greyscale histogram to two classes. If we consider images having more than two classes of segmentation, the Otsu method will not be appropriate.

In order to overcome these limitations, we propose a system that can automatically detect, diagnose and classify brain haemorrhages in patients from CT/MRI medical images. Our method implements a haemorrhaging segmentation based on Hounsfield Unit (HU) (Hounsfield, [1980](#)) without performing image pre-processing. HU is computed easily and quickly from the values of Rescale Intercept and Rescale Slope available in medical image files of DICOM format (Clunie, [2014](#); [2008](#)). This is also a new contribution to our research.

In this article



of HU values is well suited for medical professionals in

haemorrhage, which is critical to doctors' decision-making for a patient's treatment. This is a new idea of our approach compared to preceding research.

There are many types of brain haemorrhage such as epidural, subdural, subarachnoid, cerebral, and intraparenchymal haemorrhage ... In this work, due to limitations in dataset collection, we focus on the four types of brain haemorrhages namely epidural haematoma, subdural haematoma, subarachnoid haemorrhage and intracerebral haemorrhage (Johnson, [2006](#); Ngoc Hoa & Van Phuoc, [2010](#); Josephson, White, Krishan, & Al-Shahi Salman, [2014](#)) as shown in [Figure 4](#). These considered haemorrhage types have many differences in aspects of visual features such as the size of the haemorrhage region, its shape, and its location within the skull ... We also collect opinions from experienced doctors and specialists in the field of medical imaging in CanTho Medicine University Hospital to help us identify and distinguish the four popular types of brain haemorrhages from our data sets.

Figure 4. CT images of the four types of brain haemorrhages.

[Display full size](#)

2. Proposed methodology

We used the interactive learning machine to create a training dataset with the help of doctors in classifying of the brain haemorrhages from a set of MRI images with DICOM format. We collect a dataset consisting of MRI images of patients involved in one of the four types of brain haemorrhage. These images are classified and labeled as one of the different types of the brain haemorrhage by experts or specialist doctors from the Cantho Medicine University Hospital in CanTho, VietNam. The set of features extracted from these images together with the labels assigned to them

In this article



database. From experimental results with the testing in identify and classify the area of the brain haemorrhages. It

follows. We first compute HU values to have image segmentation and determine areas of brain haemorrhages. We then extract and save features in the training dataset. Our method was described in [Figure 5](#) including the following stages:

- *Stage 1:* The determination of the HU value: The most valuable feature of the DICOM image data is ability to store a lot of the necessary information for the computation of the HU values. The HU value is computed by Equation (1).
- *Stage 2:* Image segmentation: after computing the HU values of image points, we detect areas of brain haemorrhages by image segmentation based on HU values, which are in the range from 40 to 90 as shown in [Table 1](#).
- *Stage 3:* Determination of brain haemorrhage regions: we remove un-related regions and image regions due to some effects of CT technique such as the cortex.
- *Stage 4:* Feature extraction: we extract the important features from the areas of brain haemorrhages as shown in Section 2.4. These features consist of HU, the smallest, greatest and average of HU, the centre of the brain haemorrhage, and the size of the brain haemorrhage.
- *Stage 5:* Classification of brain haemorrhages: from the extracted features, we apply the KNN algorithm using the Euclidean distance to identify brain haemorrhages ([Figure 10](#)).
- *Stage 6:* Determination of timing of haemorrhage: the bleeding timing was considered to support doctors making timely treatment for patients. Based on the HU values, we estimate the bleeding timing as presented in Section 2.6.

Figure 5. Model of our proposed method of automatic detection and classification of brain haemorrhages.

The following is the related work used in our proposed method.

2.1. Determination of the Hounsfield values (HU)

Our method directly processes the source data on medical images formatted according to the Dicom standard (Mustra et al., [Mustra et al., 2008](#)) without transforming into JPG, BMP, PNG, etc. Therefore, we do not need to consider pre-processing these images. It aims at saving useful information from the DICOM images. Therefore, our method can save the useful information to determine the HU for the detection of the brain haemorrhage and bleeding timing. This is a new idea and a contribution to our approach. To compute the HU, we apply a linear transformation by the following equation (Fanning, [Fanning, 2006](#)):

(1)

where Pixel_value is the value of each image point, the Rescale_slope and Rescale_intercept are the parameter values provided in DICOM images. We used the dicominfo() function in MATLAB (Ferreira, [2009](#); Smith, [2009](#)) to access these values ([Figure 6](#)).

Figure 6. The information for the computation of HU in CT image by DICOM standard.

[Display full size](#)

2.2. The image segmentation for detecting a brain haemorrhage regions

In this article

e make an image segmentation based on Table 1. The result
tion based on HU to detect a brain haemorrhage region as



Figure 7. The HU-based segmentation from a DICOM image to detect a brain haemorrhages regions.

[Display full size](#)

2.3. Brain haemorrhage region extraction

After the image segmentation, some extracted features are close to the cortex since they are mapped by X-rays. Therefore, we removed these features such as the cortex and other features outside the brain haemorrhage area as shown in [Figure 8](#). The Hounsfield values are chosen in the range of 40–50 (Gong et al., [2007](#)) that coincide with HU of haemorrhages.

Figure 8. A brain haemorrhage region is determined applying HU-based segmentation.

[Display full size](#)

2.4. Feature extraction

In this Section, we extract the features for identification of brain haemorrhages. These features include:

- The image points with HU in the range of 40–90 as represented in [Table 1](#).
- The smallest, greatest and average of HU in the haemorrhage region. These values are very important for the determination of the bleeding timing. The

cortex. This makes the classification more accurate.

- The size of the brain haemorrhage (computed by pixel): the size of the brain haemorrhage region is also important since it helps to figure out the size and the seriousness of the brain haemorrhage.

We extract some important features from the regions of the brain haemorrhages and using the Regionprops tool in MATLAB as shown in [Figure 9](#).

Figure 9. Orientation parameters using the Regionprops tool in MATLAB.

[Display full size](#)

2.5. Detection and classification of the brain haemorrhages

After extracting and storing the features from medical images, we compared these features with the features in our training database set. We used KNN algorithm (Deza & Deza, [2009](#); Altman, [1992](#)) for the classification of brain haemorrhages since it is one of the most widely used classification algorithms. This algorithm is simple and easy to implement. Moreover, it is a supervised learning algorithm and perceived as a simple but powerful classification, even for complex applications, capable of yielding high-performance results (Dzuida, [2010](#)). In this research, the various k-values in KNN classifier are used and compared with each other. Experimental results of accuracy show that the value of $K = 3$ gives the best classification accuracy ([Figure 10](#)).

Figure 10. An Illustration of the KNN algorithm.

[Display full size](#)

measurement since it is based on measuring the distances between the test data and each of the training data to decide the final classification output. The distance between two data points is decided by a similarity measure (or distance function) where the Euclidean distance is the most widely used distance function. The Euclidean distance is computed by Equation (2) (Deza & Deza, [2009](#)):

$$(2)$$

where p and q are the two typical vectors; p_i and q_i are their elements ($i = 1, \dots, n$).

The results are represented as in [Figure 11](#).

Figure 11. The results of detection and classification of brain haemorrhages.

[Display full size](#)

2.6. Determination of timing of the brain haemorrhages

The determination of the bleeding timing plays a vital role in deciding the proper therapeutics for the treatment. In this research, we estimate the bleeding timing based on the average Hounsfield value of the brain haemorrhage region. The bleeding timing of the brain haemorrhage is divided into three levels (Brant & Helms, [2007](#); Thust, Burke, & Siddiqui, [2014](#)):

- Hyperacute: the most recognizable hyper attenuating phenomenon (within 3 days) with HU in the range of 50–70 compared to the normal brain's Hounsfield values (HU in the range of 18–30).
- Acute: the dark level is relatively reduced from day 3 to day 14 with HU less than 40.
- Chronic: homogeneity on the region of haemorrhage from the day of 14 to 21 makes the injured region of brain difficult to distinguish due to Hounsfield is a

In this article gion of the brain (HU from 18 to 30).

chronic stages as described above. This is a new idea of our approach compared to preceding research.

3. Experimental results

Our proposed method is experimented on a system that automatically detects, diagnoses, and classifies brain haemorrhages. We collected 500 CT scanner images by DICOM standard from the patients' skull in CanTho Medicine University Hospital. The training and testing data sets are selected at a 7:3 ratio (Al-Ayyoub et al., [2013](#)). It means that the training set of 350 CT images is classified into four types of brain haemorrhages based on the experience of doctors and specialists of CanTho Medicine University Hospital. This data set includes 95 CT images of Epidural Haematoma, 85 CT images of Subdural Haematoma, 80 CT images of Subarachnoid Haemorrhage, and 90 CT images of Intracerebral Haemorrhage. The files of the training set are 179 Mb. The testing set of 150 images is classified into types of brain haemorrhages and normal brain (no bleeding), which includes 45 normal brain images, 25 images of Epidural Haematoma, 20 images of Subdural Haematoma, 30 images of Subarachnoid Haemorrhage, and 30 images of Intracerebral Haemorrhage.

Our system was installed on MATLAB version R2015a using a computer with CPU i7, 16 Gb RAM, SSD 256 Gb, HDD 500 Gb, Windows 10 Pro 64 bit. The systematic interface for detecting and classifying brain haemorrhages automatically based on the HU is shown in [Figure 12](#).

Figure 12. Interfaces of the system 'Automatic detection and classification of brain haemorrhages'.

epidural haematoma, subdural haematoma, subarachnoid haemorrhage or intracranial haemorrhage as shown in [Figure 13](#).

Figure 13. The results of our proposed method in classification of brain haemorrhages based on HU.

Display full size

In order to evaluate the accuracy of our proposed method, we test on a data set of 150 images using the KNN algorithm with the parameter values of K in the range of 1–10. As a result, our method provides the best classification with $K = 3$. The results are presented in the confusion matrix in [Table 2](#). From the confusion matrix, we can see that in 25 testing images of the Epidural Haematoma, 24 images are correctly identified (96%) and one image is incorrectly identified as Subdural Haematoma (5%). Similarly, in the case of testing 30 images of Subarachnoid Haemorrhage, 27 images are correctly identified (90.00%), one image of the Subdural Haematoma (3.33%) and two images of Intracranial Haemorrhage (6.67%). From the confusion matrix shown in [Table 2](#), the average accuracy is computed


(3)

Table 2. Table of the confusion matrix.

CSV Display Table



The accuracy from our method achieves 100% based on HU in identifying the presence of brain haemorrhage regions and 93.33% in classifying four types of brain haemorrhages. It gives more accurate identification results than some other research as in (Al-Ayyoub et al., [2013](#)) with the accuracy of 92%. Their method performs well only on three of four types of lesions of brain haemorrhages.

In this article  and also determines the bleeding timing of brain doctors making timely treatment like surgery.

described in Section 2.6. This also helps doctors making decisions faster and easier. Moreover, in preceding research, the presence of brain haemorrhage is detected achieving 100% using the Otsu algorithm (Otsu, [1975](#)). Our method uses some available information stored in the DICOM images to determine the Hounsfield values which help us identify the brain haemorrhage regions quickly and accurately. They are our contributions to this research.

3.2. Determination of timing of the brain haemorrhages

After identification and classification of the brain haemorrhages, our proposed method determines the bleeding time of brain to support doctors finding timely and effective treatments. We make a comparison between our method and the Fast Bounding Box method (Fazli & Nadirkhanlou, [2013](#)). The results of this method are represented in [Figure 14](#).

Figure 14. The results of the segmentation of brain haemorrhages based on the Fast Bounding Box Algorithm (Fazli & Nadirkhanlou, [2013](#)).

[Display full size](#)

The Fast Bounding Box method applied the Deep Learning technology. The results of the segmentation of brain haemorrhages are not accurate compared to our method. In [Figure 14](#), the Fast Bounding Box method determines the haemorrhage regions by the box shapes while our method accurately determines the regions of brain haemorrhages as shown in [Figure 13](#). These regions have HU values of 40–90. Moreover, HU values are also used to determine the duration of haemorrhage in our proposed method. [Figure 15](#) shows the time of the brain haemorrhage in 1–3 days because HU values are from 50 to 60.

4. Conclusion

There were various techniques developed for effectively detecting the haemorrhage in the brain. A method of automatically classifying brain haemorrhages is proposed in our research based on the Hounsfield Unit. Our proposed method identifies areas of brain haemorrhage better than some well-known image segmentation methods. It also improves the classification accuracy compared to these methods. In this paper, we present a truly automatic image segmentation method because it does not require a user to determine image-specific parameters such as thresholds or regions of interest. The use of the HU analysis leads to an important improvement in the determination of the regions and the bleeding timing of brain haemorrhages to support doctors making timely treatment. Our system can assist doctors in detecting and classifying the brain haemorrhages through medical images (CT/MRI) with DICOM standard, especially the bleeding timing. The four types of brain haemorrhages namely epidural haematoma, subdural haematoma, subarachnoid haemorrhage and intracerebral haemorrhage are considered in this paper.

Disclosure statement

No potential conflict of interest was reported by the authors.

Notes on contributors

machine learning, (medical) image processing, wavelet, 3D modeling, recognition and Classification. Email: cangpa@vlute.edu.vn, Phone: +84918204917.

Van-Quyen Vo Lecturer of Can Tho University of medicine and pharmacy. 179 nguyen van cu street, An Khanh ward, Ninh Kieu district, Can Tho city. Email: vovanquyen@ctump.edu.vn, Phone number: +84918710280.

Thuong-Cang Phan lecturer in the Department of network and communication, College of information and communication technology at CanTho University. B.S. from CanTho University in 1998, and M.S. from the Asian Institute of Technology, Bangkok, Thailand in 2006. Ph.D. in Informatics in 2014 from Blaise Pascal University, Clermont-Ferrand, France. A postdoctoral fellowship at LARIDEPED, Université du Québec à Trois-Rivières, Canada in 2015. Research interests include Data science, Big data, Big data-based knowledge management systems, Big joins, Large-scale recursive queries, Cloud computing, SOA. Email: ptcang@cit.ctu.edu.vn, Phone: +84939003365.

ORCID

Anh-Cang Phan <http://orcid.org/0000-0002-1470-5496>

Van-Quyen Vo <http://orcid.org/0000-0002-2076-1697>

Thuong-Cang Phan <http://orcid.org/0000-0002-4807-2463>

References

1. Al-Ayyoub, M., Alawad, D., Al-Darabsah, K., & Aljarrah, I. (2013). Automatic detection and classification of brain hemorrhages. *WSEAS Transactions on Computers*, 12(10), 395–405. [\[Google Scholar\]](#)

3. DITALE, W. L., & HEINIS, C. A. (2007). *Fundamentals of diagnostic radiology*. Philadelphia, PA: Lippincott Williams & Wilkins. [\[Google Scholar\]](#)
4. Buzug, T. M. (2008). *Computed tomography from photon statistics to modern cone-beam CT*. New york, NY: Springer. [\[Google Scholar\]](#)
5. Clunie, D. Cordonnier. (2014). Digital Imaging and Communications in Medicine (DICOM). *Application/DICOM MIME Sub-type Registration*. [\[Google Scholar\]](#)
6. Deza, E., & Deza, M. M. (2009). *Encyclopedia of distances* (pp. 94–104). New York, NY: Springer. [\[Google Scholar\]](#)
7. Dzuida, D. M. (2010). *Data mining for genomics and proteomics: Analysis of gene and protein expression data*. New York, NY: Wiley. ISBN: 9780470593400, page 328. [\[Google Scholar\]](#)
8. Fanning, D. W. (2006). Converting CT Data to Hounsfield Units. *Guide to IDL Programming*. Retrieved from http://www.idlcoyote.com/fileio_tips/hounsfield.html [\[Google Scholar\]](#)
9. Fazli, S., & Nadirkhanlou, P. (2013). A novel method for automatic segmentation of brain tumors in MRI images. *Journal of CoRR, Computer Vision and Pattern Recognition*, 1312, 1–6. [\[Google Scholar\]](#)
10. Ferreira, A. J. M. (2009). *MATLAB codes for finite element analysis*. New York, NY: Springer. [\[Google Scholar\]](#)
11. Gong, T., Liu, R., Tan, C. L., Farzad, N., Lee, C. K., Pang, B. C., ... Zhang, Z. (2007). Classification of CT brain images of head trauma. *Proceedings of the 2nd IAPR*

13. Hounsfield, G.N. (1980). Computed medical imaging. *Medical Physics*, 7, 283–290. doi: 10.1118/1.594709 [\[Google Scholar\]](#)
14. Johnson, S. (2006). Stephen Johnson on digital photography, O'Reilly, O'Reilly Media, California, USA. ISBN 9780596523701. [\[Google Scholar\]](#)
15. Josephson, C. B., White, P. M., Krishan, A., & Al-Shahi Salman, R. (2014). Computed tomography angiography or magnetic resonance angiography for detection of intracranial vascular malformations in patients with intracerebral haemorrhage. *The Cochrane Library*, 10. doi: 10.1002/14651858.CD009372 [\[Google Scholar\]](#)
16. Mayo Clinic. (2016). CT scan. Retrieved from <http://mayoclinic.org> [\[Google Scholar\]](#)
17. Mustra, M., Delac, K., & Grgic, M. (2008). Overview of the DICOM Standard (PDF). ELMAR, 2008, 50th International Symposium. Zadar, Croatia, 39–44. [\[Google Scholar\]](#)
18. Ngoc Hoa, P., & Van Phuoc, L. (2010). *CT head injury*. Medical Publishing House, branch of Ho Chi Minh city. [\[Google Scholar\]](#)
19. Otsu, N. (1975). A threshold selection method from gray-level histograms. *Automatica*, 11(285–296), 23–27. [\[Google Scholar\]](#)
20. Prokop, M. (2003). Spiral and Multislice Computed Tomography of the Body. Thieme publisher, New York, USA. ISBN 9783131164810. [\[Google Scholar\]](#)

22. Smith, S. T. (2003). *MATLAB advanced GUI development*. Michigan: Dog Ear Publishing. [\[Google Scholar\]](#)

23. Sumijan, S. M., Harlan, J., & Wibowo, E. P. (2017). Hybrids Otsu method, feature region and mathematical morphology for calculating volume hemorrhage brain on CT-scan image and 3D reconstruction. *TELKOMNIKA*, 15(1), 283–291. ISSN: 1693-6930, accredited A by DIKTI doi: 10.12928/telkomnika.v15i1.3146 [\[Google Scholar\]](#)

24. Thust, S. C., Burke, C., & Siddiqui, A. (2014). Neuroimaging findings in sickle cell disease. *The British Journal of Radiology*, 87(1040), 1–8. doi: 10.1259/bjr.20130699 [\[Google Scholar\]](#)

25. Wolfgang, L. L. (2010). Retrieved from <http://radclass.mudr.org/content/hounsfield-units-scale-hu-ct-numbers> [\[Google Scholar\]](#)



Related articles

Tumor Classification using Automatic Multi-Thresholding

Li-Hong Juang et al., Intelligent Automation & Soft Computing

Novel Method For Lung Tumour Detection Using Wavelet Shrinkage-Based Double Classifier Analysis

K. Vijila Rani et al., IETE Journal of Research

Semi-automated algorithm for cortical and trabecular bone separation from CT scans

K. Janc et al., Computer Methods in Biomechanics and Biomedical Engineering

Application of automatic statistical post-processing method for analysis of ultrasonic and digital dermatoscopy images

Indre Drulyte et al., Libyan Journal of Medicine

on of high spatial resolution images based on Hölder exponents

In this article



Geo-spatial Information Science

 Full Article

 Figures & data

 References

 Citations

 Metrics



 Licensing

 PDF

Xian Wu et al., Geo-spatial Information Science

Machine vision based segmentation algorithm for rice seedling

YUAN Jia□hong1, ZHU De□quan1, 2, *, SUN Bing□yu3, SUN Lei1, WU Li□quan2, 4, SONG Yu1, JIANG Rui1 et al., Acta Agriculturae Zhejiangensis

Powered by 

Information for

Authors

Editors

Librarians

Societies

Open access

Overview

Open journals

Open Select

Cogent OA

Help and info

Help

FAQs

Newsroom

Contact us

Commercial services

Connect with Taylor & Francis

Get the latest news and offers tailored to you.

 Sign me up



Copyright © 2018 Informa UK Limited Privacy policy & cookies Terms & conditions Accessibility

Registered in England & Wales No. 3099067
5 Howick Place | London | SW1P 1WG



In this article 