

AGH UNIVERITY OF SCIENCE AND TECHNOLOGY FACULTY OF APPLIED MATHEMATICS

The Selection of a Model for Airlines Customer Satisfaction

Joanna Krężel, Anna Matysek, Piotr Mikler, Adam Szczerba 03 January, 2022

Abstract

The project aims to analyze the data about satisfaction of Investico Airlines passengers. Having customer-granular observations about the cruise and a reported satisfaction level for particular aspects of the flight we try to fit models which predict whether they are satisfied with the service or not. The binary classification models used during the project are {} {} {}, out of which our recommendation is {} based on {}. This document describes the process we undertook and presents the results of data preprocessing, model selection and model validation.

Contents

1	Intr	oducti	ion			3				
2	Dat	Data								
	2.1	Data 1	Preprocessing			4				
		2.1.1	Feature Encoding			5				
		2.1.2	Feature Selection			7				
		2.1.3								
	2.2	Explo	oratory Data Analysis			11				
	2.3		Binning							
			The Categorical Variables							
			The Continuous variables							
3	The	Logis	sic Regresssion			13				
4	The	perfo	ormance of the Model			13				
5	Validation of the Model									
J	5.1		e Carlo Cross Validation			13 13				
6	The	. Chall	lenger Models			14				
U	6.1	Neura	al Network			14				
	6.2		ner logistic regression: logistic 2							
	0.2	71110011	let logistic regression. logistic 2	• •	•	14				
7	Cor	clusio	on			14				
8	Bib	liograp	phy			15				

1 Introduction

Tbd...

2 Data

The data is downloaded from www.kaggle.com and delivered by an airline organization. The dataset consists of the details of customers who have already flown with them. The feedback of the customers on various context and their flight data has been consolidated. The main purpose of this dataset is to predict whether a future customer would be satisfied with their service given the details of the other parameters values. Also the airlines need to know on which aspect of the services offered by them have to be emphasized more to generate more satisfied customers. The data consists of 129880 rows and 23 columns.

Below we list all column names with explanations of the variables' meaning. For categorical variables describing satisfaction level, 0 means *Not Available* and reflects situation in which the passenger did not provide a rating.

Feature	Description	Values
Satisfaction	Airline satisfaction level	satisfied/dissatisfied
Gender	Gender of the passenger	male/female
Customer type	The customer type	loyal / disloyal
		customer
Age	The age of a passenger	[7; 85] years
Type of travel	Purpose of the flight	personal /
		business travel
Class	Travel class in the plane	business / eco /
		eco plus
Flight distance	The flight distance of the journey	[50; 6951] miles
Seat comfort	Satisfaction level of seat comfort	$\{0-5\}$
Departure/arrival	Satisfaction level of	$\{0-5\}$
	departure/arrival time	
Food and drink	Satisfaction level of food and	$\{0-5\}$
	drink	
Gate location	Satisfaction level of gate location	$\{0-5\}$

Feature	Description	Values
Inflight WiFi service	Satisfaction level of the inflight wifi service	{0-5}
Inflight entertainment	Satisfaction level of inflight entertainment	{0-5}
Online support	Satisfaction level of online support	{0-5}
Ease of online booking	Satisfaction level of online booking	{0-5}
On-board services	Satisfaction level of on-board service	{0-5}
Leg room service	Satisfaction level of leg room service	{0-5}
Baggage handling	Satisfaction level of baggage handling	{0-5}
Checkin service	Satisfaction level of check-in service	{0-5}
Cleanliness	Satisfaction level of cleanliness	{0-5}
Online boarding	Satisfaction level of online boarding	$\{0-5\}$
Departure delay in minutes	Delay upon departure	[0; 1592] minutes
Arrival delay in minutes	Delay upon arrival	[0; 1584] minutes

2.1 Data Preprocessing

As both academia and business point out, the data-related operations typically constitute about 80% of the whole effort of a modeling pipeline. The performance of any model is heavily driven by the quality of it's inputs. It can be easily proven in a simple trial by combat that even a suboptimal model running on high quality data can oftentimes bring a sophisticated one with poor inputs to it's knees. For that reason it is of utmost importance to pay extra care and attention to the data which is fed to the decision making models.

As the first step in our modeling pipeline we are going to look at the dataset

to gain insight about it's statistics and information it conveys. We'll refactor the feature names to something more manageable and represent accordingly different data types present in the dataset. Lastly we will perform quality checks on the data, such as outlier detection and treatment of not-available values (NAs).

2.1.1 Feature Encoding

Most machine learning algorithms require numerical inputs. Our data is mostly categorical and ordinal, hence we need to start with encoding those features.

- **2.1.1.1** Categorical features The dataset contains some binary categorical information such as *Male/Female*, *Loyal/Disloyal Customer*, etc. We are going to employ binary encoding for those features, that is: map values to 1 or 0 and rename the factors to IsSatisfied, IsFemale, IsLoyal for easier interpretation.
- **2.1.1.2** Ordinal features The main challenge of the data preparation in this dataset is the treatment of ordinal features. Take for example the SeatNote feature which is a customer note describing their satisfaction level with the seating arrangement. One could ask himself the following questions:
 - What did the passenger have in mind? Satisfaction with seat location? Seat comfort? Possibility of choosing the seat?
 - Does 'SeatNote' = 3 imply a negative attitude towards a service? Or it's a moderate 'OK'?
 - Is the satisfaction "difference" between notes 3 and 2 the same as between notes 5 and 4?
 - Is a note 'SeatNote' = 5 given 'Class' = 'Eco' the same as 'SeatNote' = 5 given 'Class' = 'Business'?

The point is valid for any note-type variable in the dataset. The issue boils down to the problem that there is **no universal "unit" of satisfaction**. It is just as non-trivial to measure it as to predict it - simply because everyone perceives it in a subjective way. Our problem has an additional layer of complexity since we don't have information how precisely the survey questions have been described to the customers - so even if we *did* have some carefully

designed satisfaction unit, we cannot be sure if all respondents referred to the same aspects of service when filling out the survey.

Before discussing this further let's take a short detour to the options we have when dealing with ordinal variables for Machine Learning. Two most common approaches emerge: **Dummy encoding** and **Ordinal encoding** - both are valid, depending on what we're trying to achieve.

We could use ordinal encoding and assign numbers to each vote. This is pretty much what we already have in our "note" features. We could encode Class this way and assign a mapping like: {'Eco': 1, 'EcoPlus': 2, 'Business': 3}. This type of representation ensures the quality of the service is properly represented in the numeric data, but the question is whether this translates the same to the overall satisfaction? Yes, the business class is clearly more comfortable to travel in, but the *expectations* (the baseline) of business-class passengers will also be quite higher than the expectations of say, passengers in the economic class. This may result in a counterintuitive drop in the satisfaction level, simply because the sub-populations across business classes will perceive the service differently.

The second possibility we have for encoding ordinal variables is the dummy encoding which will split the feature Class into features: Class.Eco, Class.EcoPlus and Class.Business assigning ones and zeros in appropriate places. One of those features will be dropped to avoid perfect linear relationship (otherwise the sum of the new features would always be 1), but we'll not lose information. We only need n-1 features to encode full information about a factor with n possible levels.

We chose to employ dummy encoding to encode Class - to avoid making assumptions about baseline satisfaction criteria across different passenger classes. For Note features however this problem is non-existent, since a higher note should correspond to higher satisfaction for any rational passenger. Here to avoid inflating the dataset with additional 4*14-14=42 sparse binary columns we will stick to the original ordinal encoding. This choice nonetheless should be revisited and controlled once we reach the stage of model choice and model fitting.

The resulting, encoded dataframe looks the following way:

Rows: 129,880 ## Columns: 24

```
## $ Class.Business
                       <fct> 0, 1, 0, 0, 0, 0, 0, 0, 1, 0, ...
## $ Class.EcoPlus
                       <fct> 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, ...
                       <dbl> 65, 47, 15, 60, 70, 30, 66, 10...
## $ Age
## $ FlightDistance
                       <dbl> 265, 2464, 2138, 623, 354, 189...
## $ SeatNote
                       <fct> NA, NA, NA, NA, NA, NA, NA, NA...
## $ ScheduleNote
                       <fct> NA, NA, NA, NA, NA, NA, NA, NA...
## $ FoodNote
                       <fct> NA, NA, NA, NA, NA, NA, NA, NA...
                       <fct> 2, 3, 3, 3, 3, 3, 3, 3, 3, 3, ...
## $ GateNote
## $ WifiNote
                       <fct> 2, NA, 2, 3, 4, 2, 2, 2, 5, 2,...
                       <fct> 4, 2, NA, 4, 3, NA, 5, NA, 3, ...
## $ EntertainmentNote
## $ eSupportNote
                       <fct> 2, 2, 2, 3, 4, 2, 5, 2, 5, 2, ...
## $ eBookingNote
                       <fct> 3, 3, 2, 1, 2, 2, 5, 2, 4, 2, ...
## $ ServiceNote
                       <fct> 3, 4, 3, 1, 2, 5, 5, 3, 4, 2, ...
## $ LegRoomNote
                       <fct> NA, 4, 3, NA, NA, 4, NA, 3, NA...
                       <fct> 3, 4, 4, 1, 2, 5, 5, 4, 1, 5, ...
## $ BaggageNote
                       <fct> 5, 2, 4, 4, 4, 5, 5, 5, 5, 3, ...
## $ CheckInNote
## $ CleanNote
                       <fct> 3, 3, 4, 1, 2, 4, 5, 4, 4, 4, ...
                       <fct> 2, 2, 2, 3, 5, 2, 3, 2, 4, 2, ...
## $ eBoardingNote
## $ DepartureDelay
                       <dbl> 0, 310, 0, 0, 0, 0, 17, 0, 0, ...
## $ ArrivalDelay
                       <dbl> 0, 305, 0, 0, 0, 0, 15, 0, 0, ...
## $ IsSatisfied
                       <fct> 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, ...
                       <fct> 1, 0, 1, 1, 1, 0, 1, 0, 1, 0, ...
## $ IsFemale
## $ IsLoyal
                       <fct> 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, ...
## $ IsPersonalTravel
                       <fct> 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, ...
```

2.1.2 Feature Selection

The more is not always the better. Every model has a certain computational complexity that increases with the number of additional explanatory variables. The feature selection in a pre-modeling environment serves identifying groups of variables which carry repeated or very similar informational value. Filtering feature selection methods allow one to discard redundant features in a model independent way. By reducing the number of variables they simplify the model and increase it's interpretability. It is also a step which tackles multicollinearity (high linear codependency of explanatory variables) which kills stability and predictive power of some models.

2.1.2.1 Categorical Features First we will use the chi-square test and information value to detect dependency between the response variable and passenger note variables and quantify the predictive power of the categorical variables. It is customary to take information value smaller 0.1 to mean "weak predictive power", so we will take that as our cut-off.

The Chi Square test rejected independency hypothesis of all categorical variables and the target variable. However, the table 2 presents that there are features with IV smaller than 0.1. That means even though they are co-dependent with satisfaction, their predictive power is not big. We are going to drop those from the dataset.

Lastly, a brief look at the spearman rank correlation matrix (fig. ??) shows that there are no highly correlated "note" features among ordinal variables in the dataset.

Table 2: Categorical features of low informational value

varName	IV	pvalChSq
ScheduleNote	0.0068857	0
IsPersonalTravel	0.0480765	0
GateNote	0.0831380	0

2.1.2.2 Continuous Features We have four continuous variables in our dataset: Age, DepartureDelay, ArrivalDelay and Distance. We start the analysis by noting high linear relationship between ArrivalDelay and DepartureDelay, visible on figure 2. We can safely drop ArrivalDelay, since it doesn't introduce new information and also conaminates dataset with NAs.

2.1.3 Missing data treatment

At this point, in the dataset we only have *NAs* corresponding to a missing customer note. Let's tackle that issue in this short section.

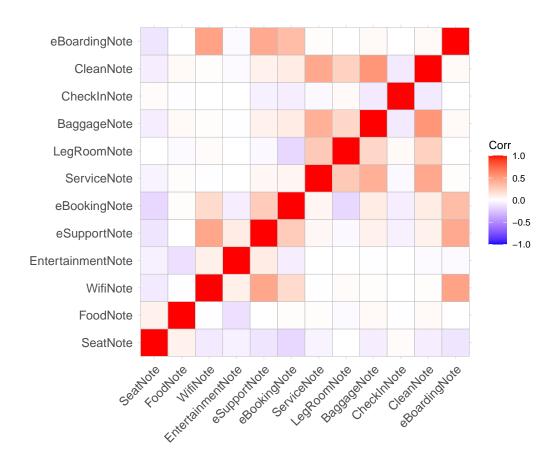


Figure 1: Spearman correlation shows no significant colinear relationships in ordinal variables

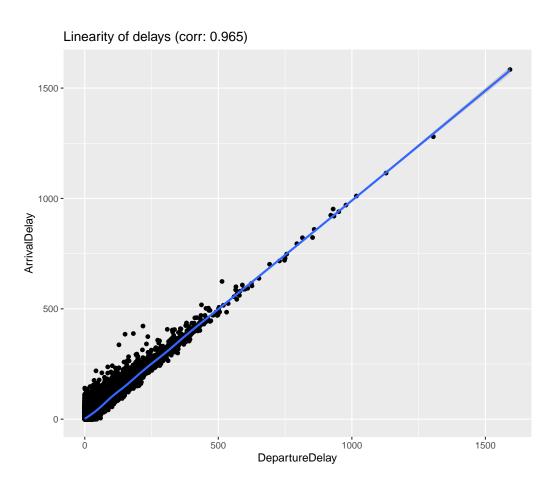


Figure 2: Strong linear relationship between departure delay and arrival delay allows to use one for imputing missing values in the other.

Table 3: NA breakdown per feature. NAs span a small portion of data

Feature	NA_count	pct_of_data
FoodNote	5945	4.58%
SeatNote	4797	3.69%
EntertainmentNote	2978	2.29%
LegRoomNote	444	0.34%
ArrivalDelay	393	0.3%
WifiNote	132	0.1%
eBookingNote	18	0.01%
eBoardingNote	14	0.01%
CleanNote	5	0%
ServiceNote	5	0%
CheckInNote	1	0%
eSupportNote	1	0%

Generally speaking we don't have any critical issue related to missing values in our data. Yes, there are *NAs* present in 12 variables, but they constitute a minuscule portion of a very large dataset (see fig. 3). We technically could employ an imputation strategy based on median, but given that NAs constitute roughly 0.05 of all observations, even if we drop them we would still have 123184 observations left to work with. We decided not to introduce imputed value to the dataset, but rather work with pure data.

2.2 Exploratory Data Analysis

Describe the ideas of this section. To be done, not urgent...

Data summary

##	${\tt Class.Business}$	Cla	ss.EcoPlus	Ag	ge	FlightD	istance	SeatNote
##	0:64070	0:1	14279	Min.	: 7.00	Min.	: 50	1:20126
##	1:59114	1:	8905	1st Qu.	:27.00	1st Qu.	:1368	4:28107
##				Median	:40.00	Median	:1930	5:17624
##				Mean	:39.52	Mean	:1988	2:28427
##				3rd Qu.	:51.00	3rd Qu.	:2549	3:28900
##				Max.	:85.00	Max.	:6951	

```
##
    FoodNote
               WifiNote
                          EntertainmentNote eSupportNote eBookingNote ServiceNote
    1:20697
##
               2:25609
                          4:40560
                                             2:16296
                                                            3:20989
                                                                          3:25419
##
    2:27076
               3:26123
                          2:18867
                                             3:20487
                                                            2:18621
                                                                          4:39007
##
    3:28062
               4:30158
                          3:23746
                                             4:39566
                                                            1:12387
                                                                          1:12360
##
    4:27126
               5:27369
                          5:28667
                                             5:33731
                                                            5:32734
                                                                          2:16145
##
    5:20223
               1:13925
                          1:11344
                                              1:13104
                                                            4:38453
                                                                          5:30253
##
##
    LegRoomNote BaggageNote CheckInNote CleanNote eBoardingNote DepartureDelay
##
    4:38338
                 3:23280
                              5:25381
                                           3:22739
                                                      2:17553
                                                                      Min.
                                                                                 0.00
    3:21158
                 4:46316
                                           4:46725
##
                              2:14779
                                                      3:29106
                                                                      1st Qu.:
                                                                                 0.00
    2:20437
##
                 1: 7145
                              4:34624
                                           1: 7043
                                                      5:28478
                                                                      Median:
                                                                                 0.00
    5:33013
                                           2:12488
##
                 2:12484
                              3:33734
                                                      4:33521
                                                                      Mean
                                                                                14.74
##
    1:10238
                 5:33959
                              1:14666
                                           5:34189
                                                      1:14526
                                                                      3rd Qu.:
                                                                                12.00
##
                                                                      Max.
                                                                             :1592.00
##
     ArrivalDelay
                      IsSatisfied IsFemale
                                               IsLoyal
                                               0: 22499
##
    Min.
                0.0
                      0:57280
                                    0:60846
                      1:65904
                                               1:100685
##
    1st Qu.:
                0.0
                                    1:62338
                0.0
##
    Median:
##
    Mean
               15.2
##
    3rd Qu.:
               13.0
##
            :1584.0
    Max.
```

2.3 Data Binning

2.3.1 The Categorical Variables

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

2.3.2 The Continuous variables

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.

Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3 The Logisic Regresssion

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

4 The performance of the Model

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

5 Validation of the Model

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

5.1 Monte Carlo Cross Validation

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.

Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

6 The Challenger Models

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

6.1 Neural Network

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

6.2 Another logistic regression: logistic 2

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

7 Conclusion

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu

fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

8 Bibliography