PIZZA SALES PROJECT

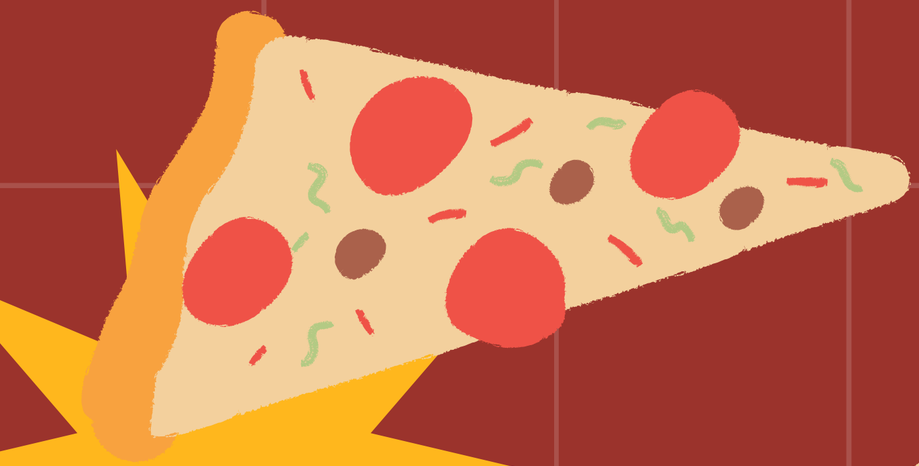

HELLO EVERYONE!!

MY NAME IS SAMRIDHI MAHAJAN, A 3RD-YEAR B.TECH STUDENT WORKING ON THE PIZZA SALES PROJECT. IN THIS PROJECT, I ANALYZE PIZZA SALES DATA USING SQL TO SOLVE VARIOUS SALES-RELATED QUESTIONS. THIS INCLUDES QUERIES TO DETERMINE TOP-SELLING PIZZAS, PEAK SALES TIMES, CUSTOMER PREFERENCES, AND REVENUE TRENDS.

PROBLEM STATEMENTS

BASIC

- Retrieve the total number of orders placed.
- Calculate the total revenue generated from pizza sales.
- Identify the highest-priced pizza.
- Identify the most common pizza size ordered.
- List the top 5 most ordered pizza types along with their quantities
-

INTERMEDIATE

these problem statements are given to have a better understanding of queries.

- Join the necessary tables to find the total quantity of each pizza category ordered.
- Determine the distribution of orders by hour of the day.
- Join relevant tables to find the category-wise distribution of pizzas.
- Group the orders by date and calculate the average number of pizzas ordered per day.
- Determine the top 3 most ordered pizza types based on revenue.

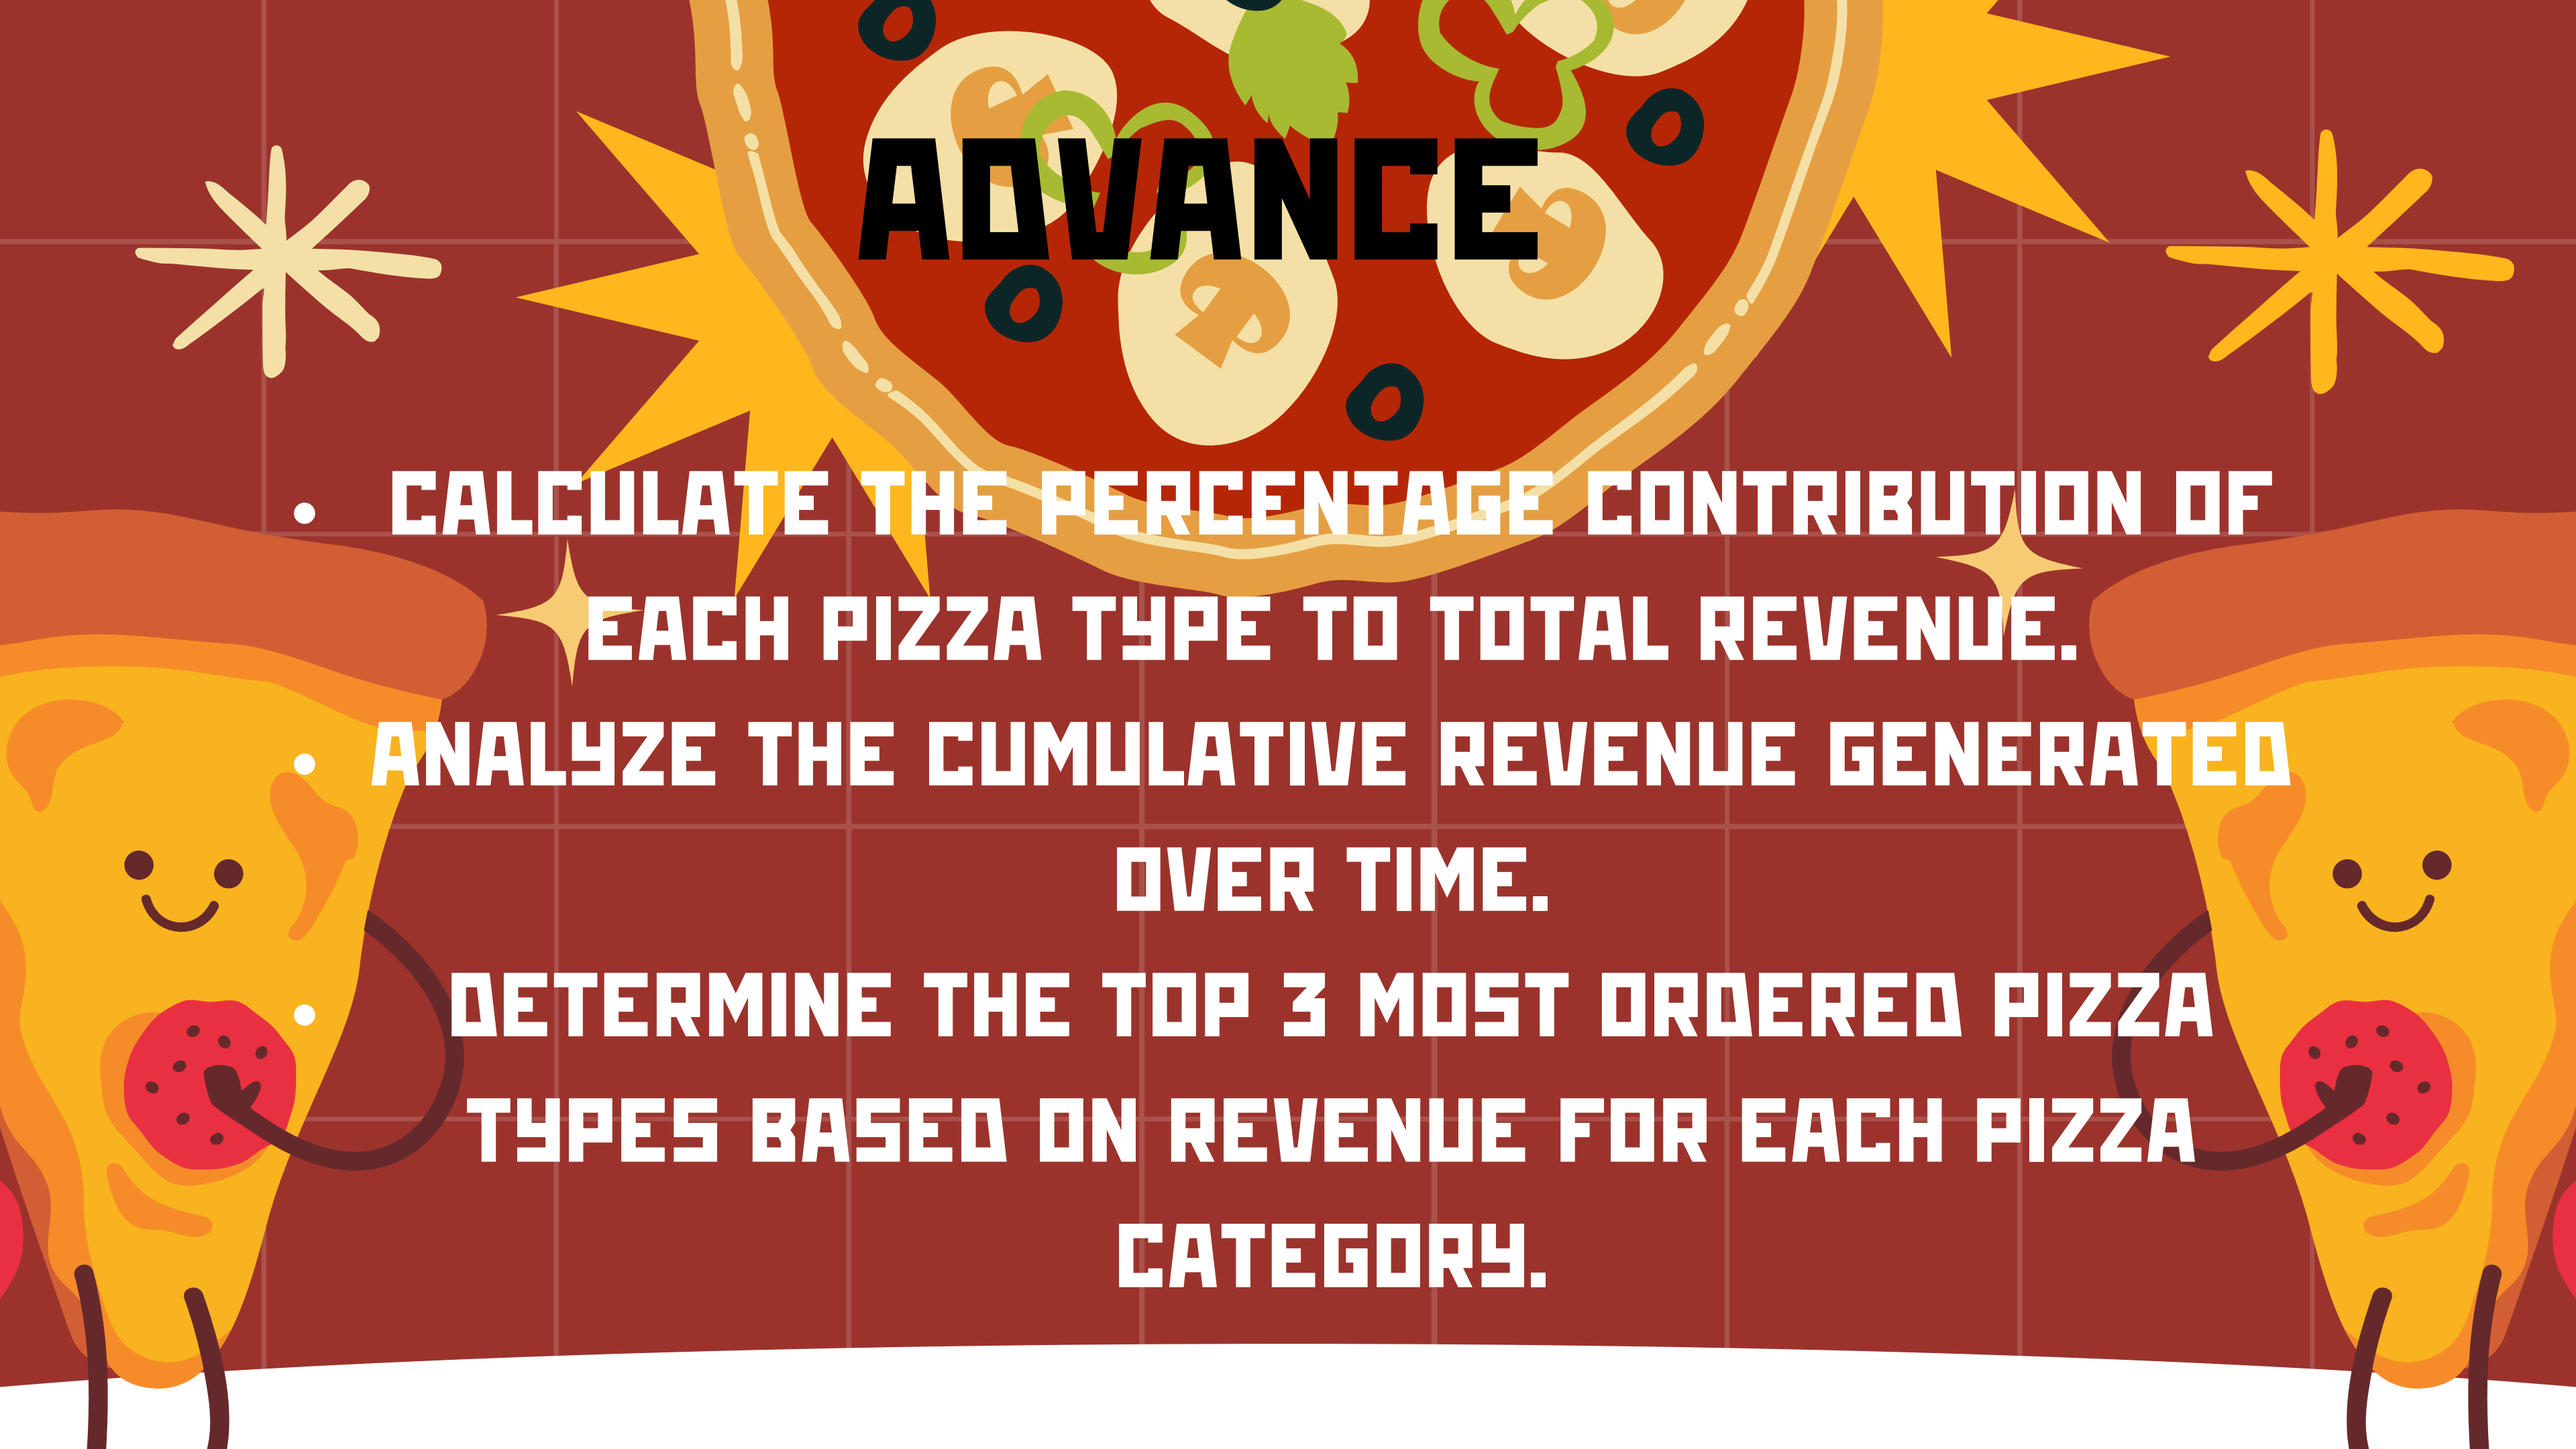

ADVANCE

- CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE.
- ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.
- DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY.

RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED.

```sql
-- Retrieve the total number of orders placed.

select count(order_id) as total_order from orders  ;
```

Result Grid

	total_order
▶	21350

CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES.

```
SELECT
    ROUND(SUM(order_details.quantity * pizzas.price),
            2) AS total_sales
FROM
    order_details
        JOIN
    pizzas ON order_details.pizza_id = pizzas.pizza_id
```

Result Grid

	total_sales
▶	817860.05

IDENTIFY THE HIGHEST-PRICED PIZZA.

```sql
SELECT
    pizza_types.name , pizzas.price
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1
```

Result Grid | Filter Row

name	price
The Greek Pizza	35.95

IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED.

```sql
SELECT
    pizzas.size,
    COUNT(order_details.order_detail_id)as order_count
FROM
    pizzas
        JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

Result Grid | Filt

size	order_count
L	18526
M	15385
S	14137
XL	544
XXL	28

LIST THE TOP 5 MOST ORDERED PIZZA TYPES ALONG WITH THEIR QUANTITIES.

```sql
SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5
```

name	quantity
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.

```sql
SELECT
    pizza_types.category, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity desc
```

category	quantity
Classic	14888
Supreme	11987
Veggie	11649
Chicken	11050

DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY.

hour	order_count
12	2520
13	2455
18	2399
17	2336
19	2009
16	1920
20	1642
14	1472
15	1468
11	1231
21	1198
22	663
23	28
10	8
9	1

```sql
SELECT
    HOUR(order_time) AS hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY HOUR(order_time) order by(order_count)desc;
```

JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS.

```
select category,count(name)from pizza_types
group by category;
```

category	count(name)
Chicken	6
Classic	8
Supreme	9
Veggie	9

GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY.

```sql
SELECT
    ROUND(AVG(quantity), 0)as avg_pizzas_ordered
FROM
    (SELECT
        orders.order_date, SUM(order_details.quantity) AS quantity
    FROM
        orders
    JOIN order_details ON orders.order_id = order_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```

avg_pizzas_ordered
138

DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE.

```sql
SELECT
    pizza_types.name,
    SUM(order_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5

CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE.

```sql
SELECT
    pizza_types.category,
    round(SUM(order_details.quantity * pizzas.price) / (SELECT
    ROUND(SUM(order_details.quantity * pizzas.price),
            2) AS total_sales
FROM
    order_details
        JOIN
    pizzas ON order_details.pizza_id = pizzas.pizza_id)*100,2) as revenue

FROM
    pizza_types
        JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC;
```

category	revenue
Classic	26.91
Supreme	25.46
Chicken	23.96
Veggie	23.68

ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.

```sql
select order_date,
sum(revenue)over( order by order_date)as cum_revenue
from
(select orders.order_date,sum(order_details.quantity*pizzas.price)as revenue
from order_details join pizzas
on order_details.pizza_id=pizzas.pizza_id
join orders
on orders.order_id=order_details.order_id
group by orders.order_date)as sales;
```

order_date	cum_revenue
2015-01-01	2713.850000000004
2015-01-02	5445.75
2015-01-03	8108.15
2015-01-04	9863.6
2015-01-05	11929.55
2015-01-06	14358.5
2015-01-07	16560.7

DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY.

```sql
select name,revenue from
(select category, name, revenue,
rank() over (partition by category order by revenue desc)as rn
from
(select pizza_types.category,pizza_types.name,
sum((order_details.quantity)*pizzas.price )as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id=pizzas.pizza_type_id
join order_details
on order_details.pizza_id=pizzas.pizza_id
group by pizza_types.category,pizza_types.name) as a)as b
where rn<=3;
```

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5
The Classic Deluxe Pizza	38180.5
The Hawaiian Pizza	32273.25
The Pepperoni Pizza	30161.75
The Spicy Italian Pizza	34831.25

REVENUE BY PIZZAS

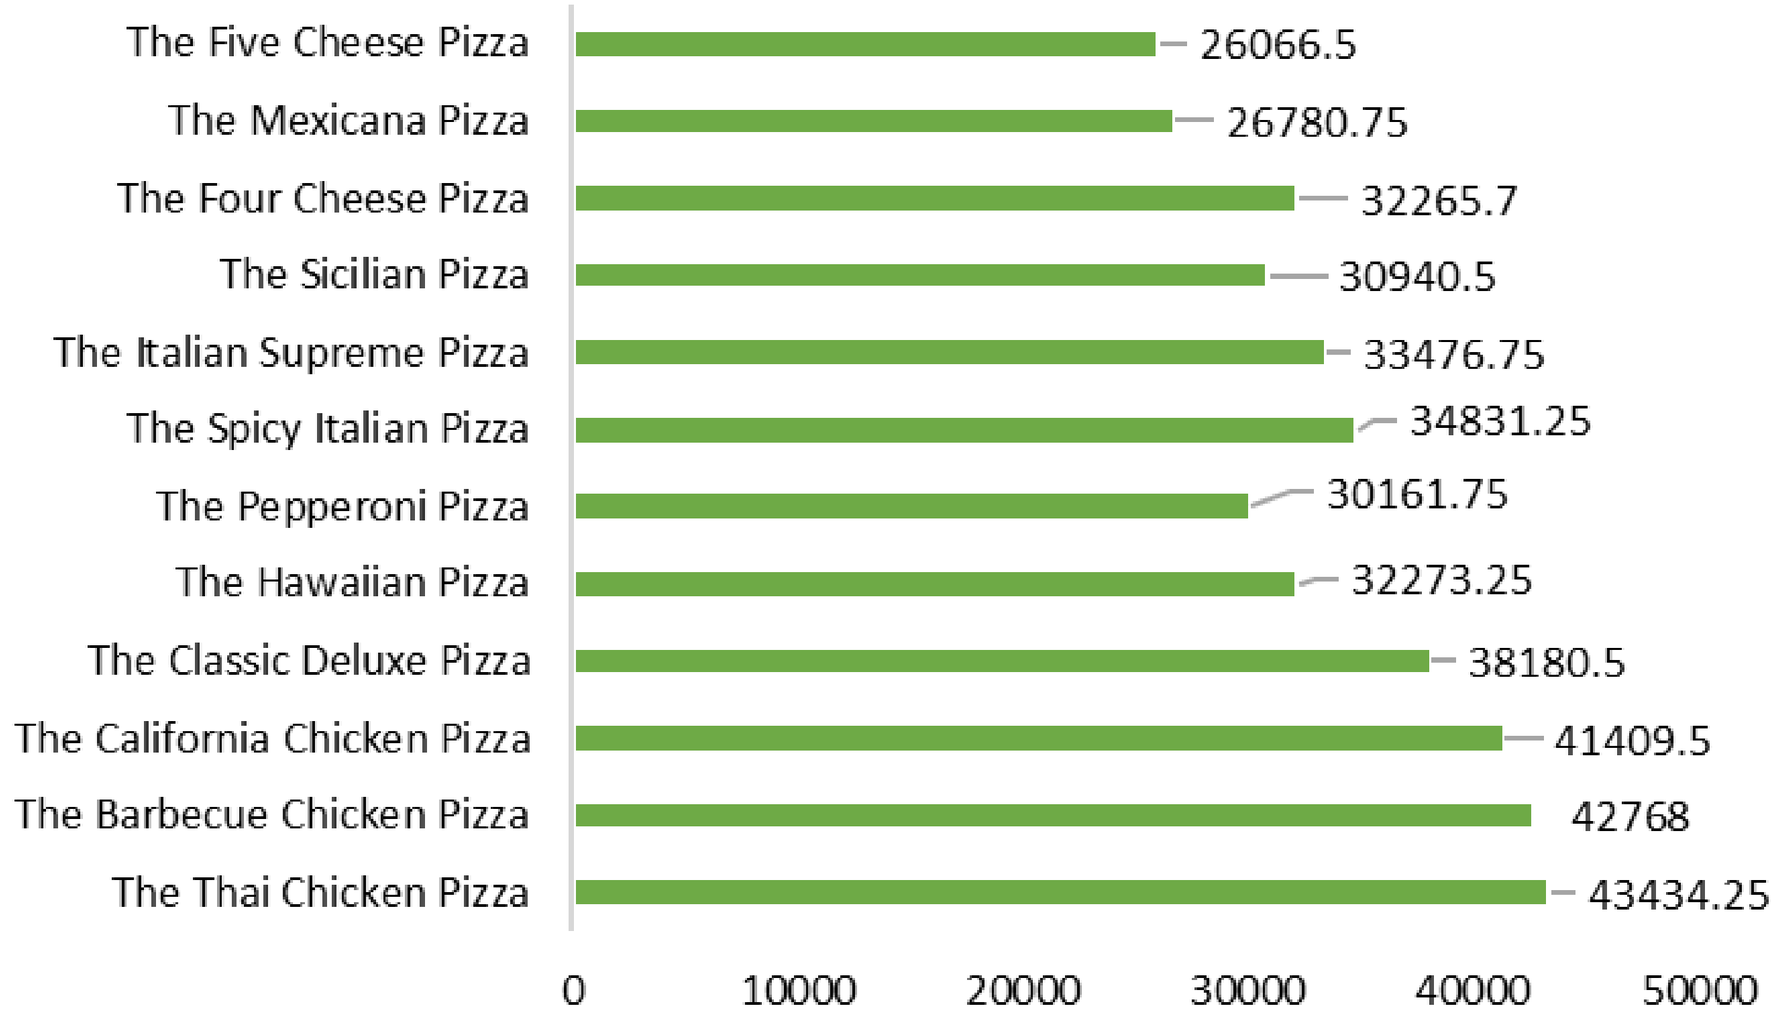

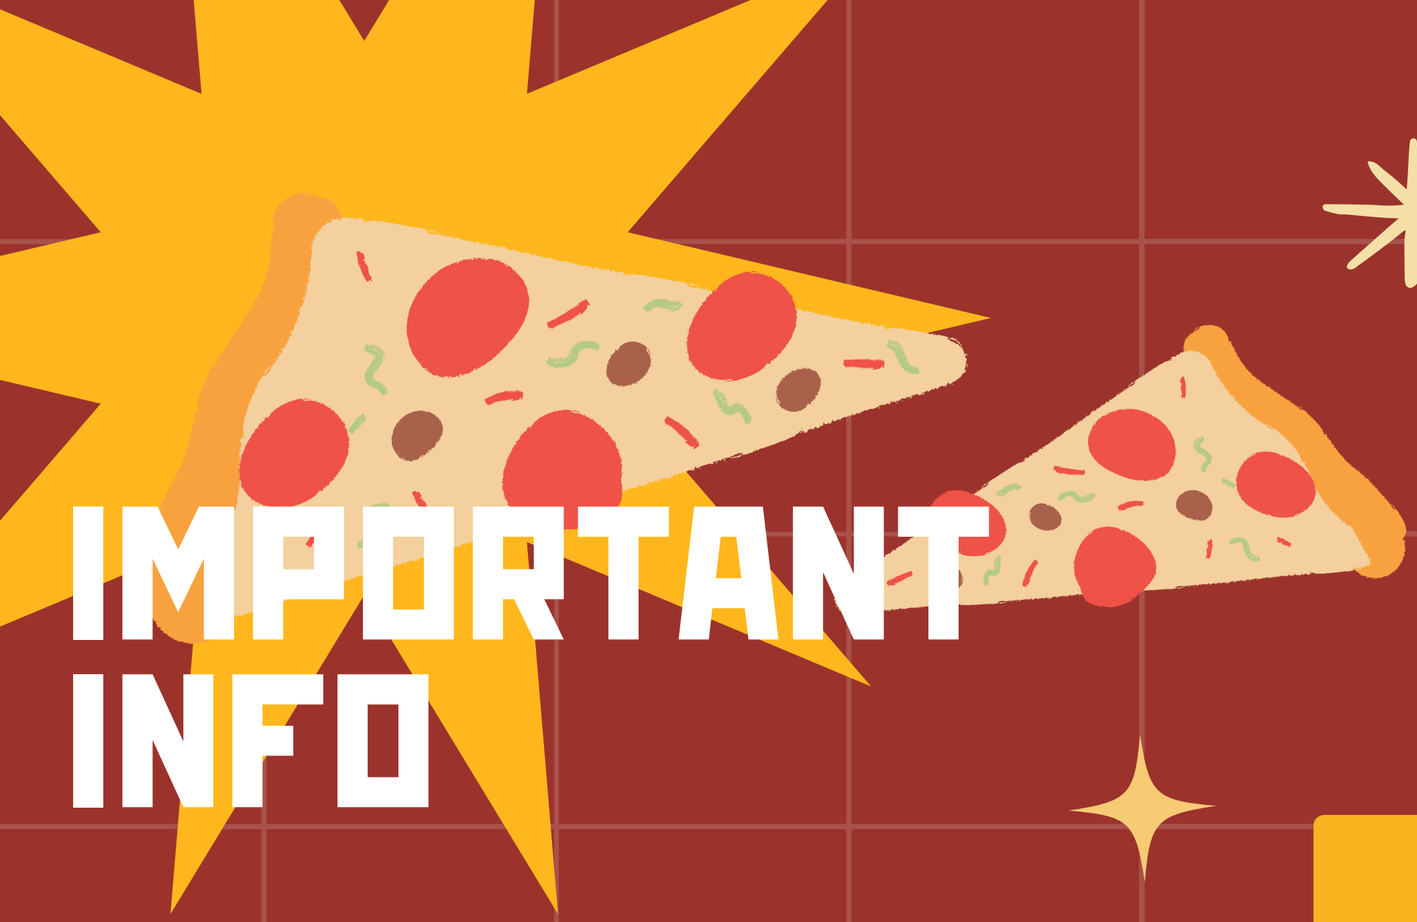

IMPORTANT INFO

so here our amazing pizza journey gets completed. Hope you gained a lot of insigts from this information.

GITHUB: :

HTTPS://GITHUB.COM/PISUKAE24

VARIATIONS

Pizza Margherita

Pepperoni Pizza

BBQ Chicken Pizza

Hawaiian Pizza


THANK YOU
“Have fun making your own pizza
and enjoy every bite”
And do like and comment this project