Lab Exercises 8 – JavaScript Part 2


Aims

- To practice how to create interactivity for HTML pages using JavaScript and CSS, while maintaining clear separation of HTML, CSS, and JS file.
- To review JavaScript variables and expression.
- To gain the skills and knowledge to complete Assignment 2.

Task 1: JavaScript for Interactivity


We are going to create a 'pop up modal window' that displays a help list of the password rules to be displayed when the user clicks on a "Password Rule" button, located beside the password input field.

Output should look as below:

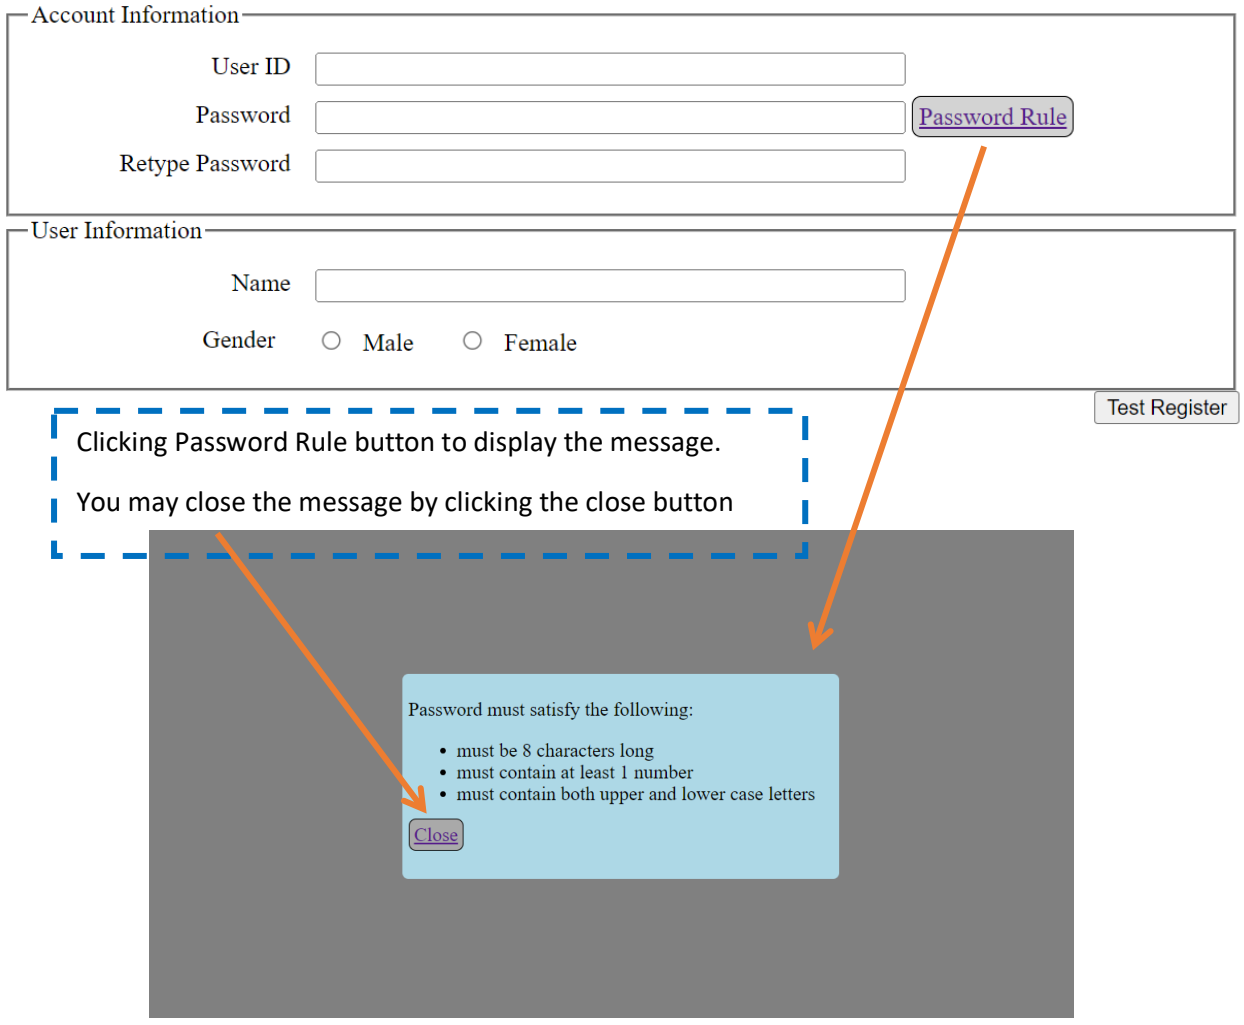

Step 1: Form Design (HTML and CSS)

- Use notepad++ to open and edit regform2.html. Review the HTML and locate the 'comments' where will add missing code.
- Format the regform2.html code based on the instructions below:

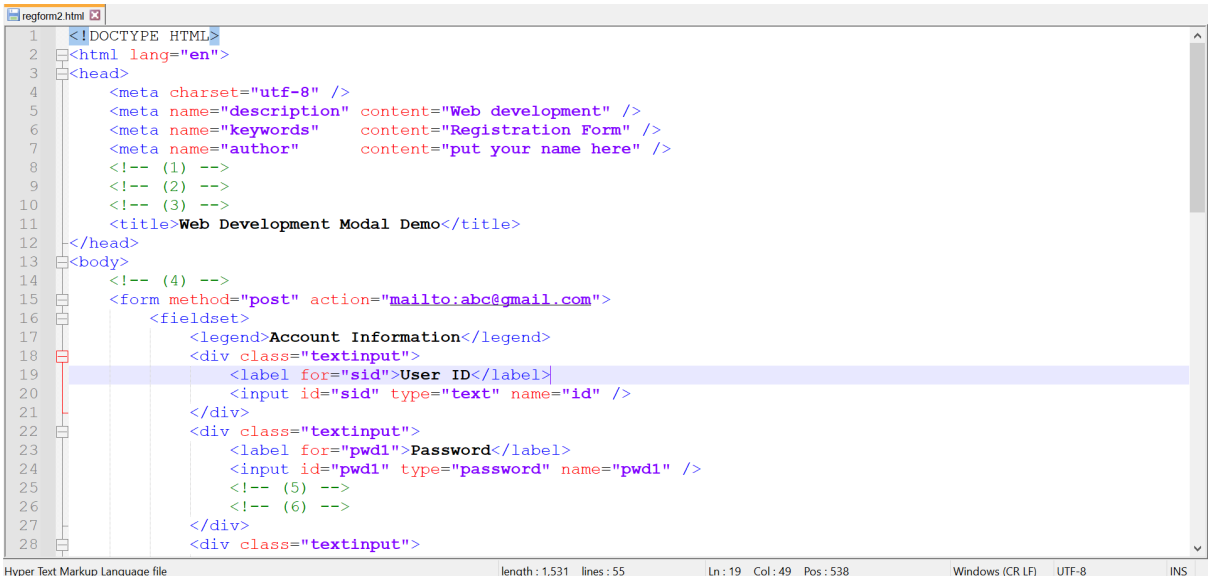

```
regform2.html
1  <!DOCTYPE HTML>
2  <html lang="en">
3  <head>
4      <meta charset="utf-8" />
5      <meta name="description" content="Web development" />
6      <meta name="keywords"    content="Registration Form" />
7      <meta name="author"      content="put your name here" />
8      <!-- (1) -->
9      <!-- (2) -->
10     <!-- (3) -->
11     <title>Web Development Modal Demo</title>
12 </head>
13 <body>
14     <!-- (4) -->
15     <form method="post" action="mailto:abc@gmail.com">
16         <fieldset>
17             <legend>Account Information</legend>
18             <div class="textinput">
19                 <label for="sid">User ID</label>
20                 <input id="sid" type="text" name="id" />
21             </div>
22             <div class="textinput">
23                 <label for="pwd1">Password</label>
24                 <input id="pwd1" type="password" name="pwd1" />
25                 <!-- (5) -->
26                 <!-- (6) -->
27             </div>
28             <div class="textinput">
Hyper Text Markup Language file   length : 1,531   lines : 55   Ln : 19   Col : 49   Pos : 538   Windows (CR LF)   UTF-8   INS
```

1) Link desktop.css to regform2.html using <link>. Certain attributes are needed for <link> to work properly. Don't forget to add media= "screen and (min-device-width:600px)" to it.
2) Link modal.css to regform2.html using <link>. Certain attributes are needed for <link> to work properly.
3) Link modal JavaScript to regform2.html using <script></script>.
4) Write the overlay HTML element, identify it as "scrnOverlay".
5) Write the HTML for the password rule button <a> element, identify it as "pwdHelpBtn", put it in a class name "button".

   We did not use a element as the mouse pointer would show as a text selector instead of a link selector. We did not use a <input type= "button">, because this "button" is not part of a form.

6) Create the password rule list to be displayed in the modal window HTML.

```
<div id="pwdHelpWin" class="window">
<p>Password must satisfy the following:</p>
      <ul>
            <li>must be 8 characters long</li>
            <li>must contain at least 1 number</li>
            <li>must contain both upper and lower case letters</li>
      </ul>
      <a href="#" id="pwdHelpClose" class="button">Close</a>
</div>
```

   A element is used, as the content is to be displayed in a window. As this element is to be displayed on another layer, it is not a requirement that it be placed after the password input field. We have chosen this placement to group the password list together with the "button". Again, we have used an <a> element styled as a "button" to allow user clicks.

Step 2: JavaScript Creation (for the Modal window)

- Use notepad++ to create modal.js. Add the following code into the js file.
- Create 3 functions:
    - Function showPwdWin()
    - Function hidePwdWin()
    - Function init()
- For function showPwdWin()
    - Get element from HTML
        - "pwdHelpWin"
        - "scrnOverlay"
    - Display element pwdHelpWin
        - Display element pwdHelpWin by setting the CSS property display as "block"
    - Hide element srcnOverlay
        - Display element srcnOverlay by setting the CSS property visibility as "visible"
- For function hidePwdWin()
    - Get element from HTML
        - "pwdHelpWin"
        - "scrnOverlay"
    - Display element pwdHelpWin
        - Display element pwdHelpWin by setting the CSS property display as "none"
    - Hide element srcnOverlay
        - Display element srcnOverlay by setting the CSS property visibility as "hidden"
- For function init()
    - Get element from HTML
        - "pwdHelpBtn"
        - "pwdHelpClose"
    - Link functions
        - Link function showPwdWin to the onclick event of button pwdHelpBtn
        - Link function hidePwdWin to the onclick event of button pwdHelpClose
- Execute the initialization function once the window loaded.

Step 3: Validate the page and fix any errors displayed and revalidate.

- Use the validator at http://validator.w3.org to validate your html file.
- Use the CSS validator at http://jigsaw.w3.org/css-validator/ .