

5 The Model View Controller architecture

Main concepts to be covered

- Design patterns
- The **Observer** design pattern
- The **Model View Controller** architecture

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 2

Using design patterns

- Inter-class relationships are important, and can be complex.
- Some relationship recur in different applications.
- Design patterns help clarify relationships, and promote reuse.

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 3

Pattern structure

- A pattern name.
- The problem addressed by it.
- How it provides a solution:
 - Structures, participants, collaborations.
- Its consequences.
 - Results, trade-offs.

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 4


Design pattern: Observer

- Supports separation of internal model from a view of that model.
- Observer defines a one-to-many relationship between objects
 - *publisher - subscriber*
- The object-observed notifies all Observers of any state change.
- Example SimulatorView in the *foxes-and-rabbits project*.

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 5

Observers

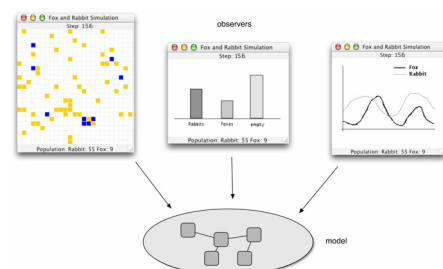

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 6

Main classes of interest

- **class Observable**
 - Subclasses inherit basic functionality for reporting state changes to observing objects.
 - Independent of the observer's logic
- **interface Observer**
 - Subclasses implement update functionality.
 - Many objects can connect to the same observable object.

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 7

Class relationships




- No particular owner-owned relationship
 - Observers do not own the observed objects.
 - Observed objects are **unaware** of observers.
 - The relation is **navigable** in both directions
 - *Observers know what they observe.*
 - *Observables must be able to update observers (weak dependency).*

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 8

Typical configuration

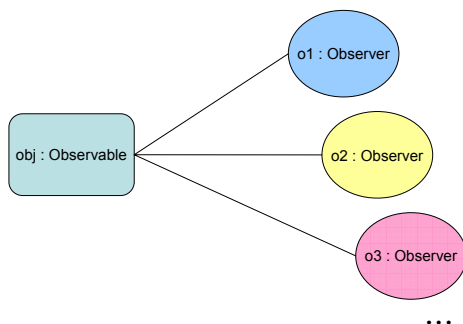

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 9

class Observable

```

public class Observable {

    - Add observer o to the set of observers for this object
    public void addObserver(Observer o)

    - Mark this object as changed
    public void setChanged()

    - If this object has changed, then notify all of it's observers
    public void notifyObservers()

}
    
```

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 10

Typical Observable class

```

public class Obsrvbl extends Observable {
    private SomeType x;

    public void someMutator() {
        ...
        x = ...; // x has changed, inform observers
        setChanged();
        notifyObservers(x.clone());
        ...
    }
}
    
```

Pass some information to the observers.
Maybe a copy of x, or something else.

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 11

interface Observer

```

public interface Observer {

    An observable object calls it's inherited notifyObservers method
    to have all the object's observers notified of a state change.
    notifyObservers then calls update for each observer.

    Parameters:
    o - the observable object who initiated the call.
    arg - the argument that was passed to the
        notifyObservers method by the observable object.
        notifyObservers forwards this argument to update.

    void update(Observable o, Object arg);

}
    
```

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 12

Typical Observer class

```
public class Obsrvr implements Observer {
    ...
    public void update(Observable o, Object arg) {
        if ( o instanceof Obsrvbl &&
            arg instanceof SomeType) {
            SomeType x = (SomeType) arg;
            // take some appropriate action
            // based on the value of x
        } else
            ...
    }
}
```

Several objects of different types may be observed by the same observer. Moreover, each observed object may, depending on the situation, pass arguments of different types to update. Hence a case analysis may be necessary.

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 13

Typical setup

```
Observable obj = new Obsrvbl();
```

```
Observer o1 = new Obsrvr();
Observer o2 = new Obsrvr();
Observer o3 = new Obsrvr();
```

```
obj.addObserver(o1);
obj.addObserver(o2);
obj.addObserver(o3);
```

Observer registration

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 14

Alternative Observer class

```
public class Obsrvr implements Observer {
    public Obsrvr(Observable x) {
        ...
        x.addObserver(this);
        ...
    }
    public void update(Observable o, Object arg) {
        ...
    }
}
```

Observer registration

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 15

Alternative setup

```
Observable obj = new Obsrvbl();
```


```
Observer o1 = new Obsrvr(obj);
Observer o2 = new Obsrvr(obj);
Observer o3 = new Obsrvr(obj);
```

Observer registration

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 16


A setup scenario

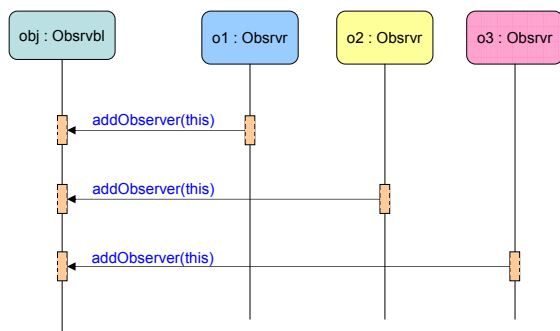

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 17

An update scenario

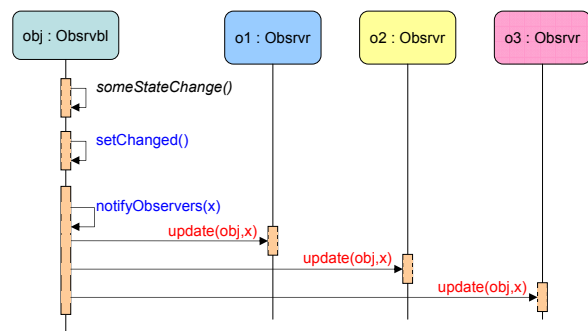

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 18

The MVC architecture

- *Reenskaug 1979 (Smalltalk-80)*
- **M**odel (content)
- **V**iew (appearance)
- **C**ontroller (user actions)

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 19

Model

- Model classes take care of data storing and processing
 - *business logic*
 - *domain logic*
 - *the "database"*

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 20

View

- View classes take care of visual aspects
 - *Visualization*
 - *User interface*
 - *"Model rendering"*
 - *A model can have many views*

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 21

Controller

- Controller classes take care of the control flow between model and view
 - *User actions*
 - *Event handling*
 - *Communication*

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 22

Model (2)

- Model objects are
 - observable
 - *unaware* of controller and view part
- The model is *decoupled* from the view

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 23

View (2)

- View objects are
 - observers of model objects
 - weakly dependent on model and controller

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 24


Controller (2)

- Controller objects
 - update the model with information from the view
- Example: Action control objects in a GUI

Objektorienterade applikationer, DAT055, DA12, 11/12, lp 3

Nr 8 25


MVC architecture

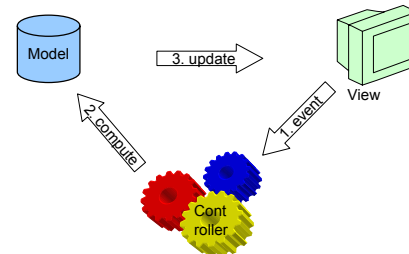

Objektorienterade applikationer, DAT055, DA12, 11/12, lp 3

Nr 8 26

MVC class diagram

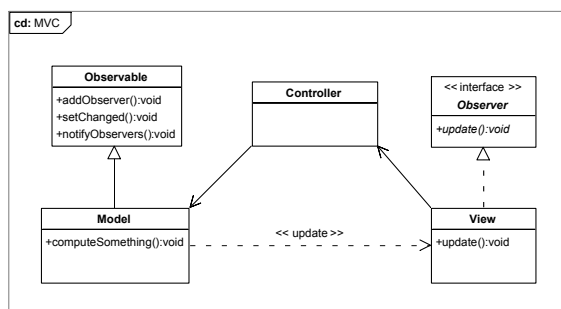

Objektorienterade applikationer, DAT055, DA12, 11/12, lp 3

Nr 8 27

Consequences

- + Model is completely independent of view.
- View is more or less dependent of model and controller
 - the view must often have some *domain knowledge*.
Eg. Syntax checking in forms.
- Controller is dependent of model.

Objektorienterade applikationer, DAT055, DA12, 11/12, lp 3

Nr 8 28

Variations


- Variations of the MVC pattern are possible.
- More or less coupling between model, view and controller:
 - View observes model directly.
 - or: Controller mediates all communication between model and view.

Objektorienterade applikationer, DAT055, DA12, 11/12, lp 3

Nr 8 29

Example: Number series calculator

- A (very) simple calculator for exploring the prime number and Fibonacci number series.

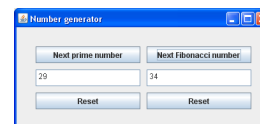


- Program design based on the MVC pattern.
- Explore the *mvc* project!

Objektorienterade applikationer, DAT055, DA12, 11/12, lp 3

Nr 8 30


The calculator GUI

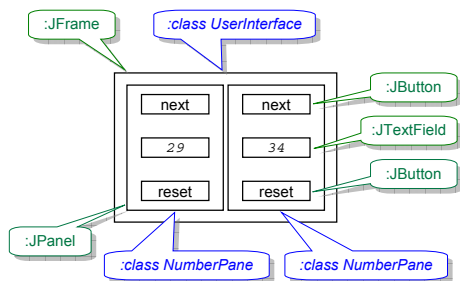

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 31


Control flow

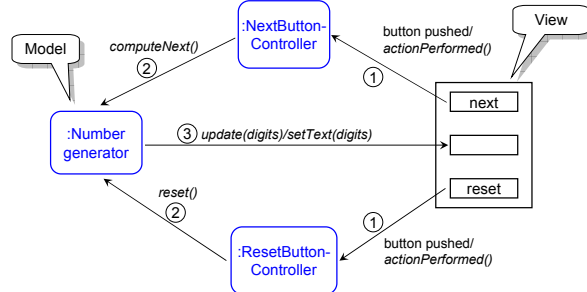

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 32


Class design

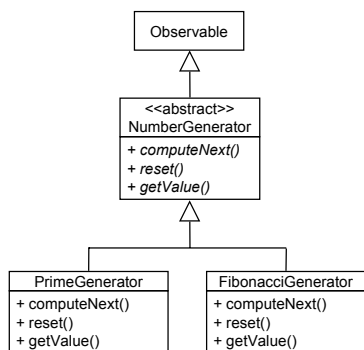

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 33


Class design (cont.)

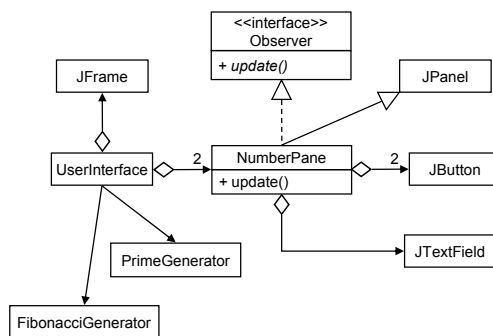

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 34

Class design (cont.)

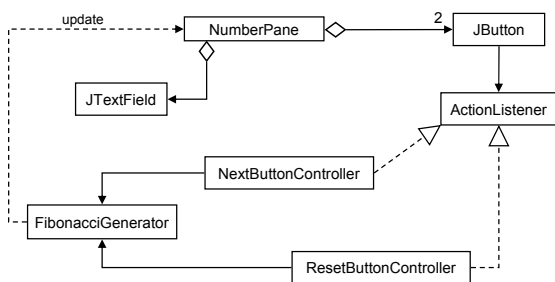

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 35

Review

- The degree of dependency between components is called *coupling*.
- Aim for less coupling!
- The *observer* design pattern decreases coupling.
- The MVC architectural pattern decouples the business logic from GUI issues
 - thus easy to modify or replace GUI!

Objektorienterade applikationer, DAT055, DAIZ, 11/12, lp 3

Nr 8 36