# HDOC - 76th day

# ENUMERATIONS IN C

**Name -** Piyush Negi **Sap_id -** 590042185

## Problem Statement

Program 1: Create an enumeration for user roles (ADMIN, USER, GUEST) and display messages based on role.

Input: GUEST Output: Welcome Guest

Program 2: Print all enum names and integer values of 12 colors using a loop.

Input: No Input Output: RED=0, BLUE=1, GREEN=2

## Algorithm

**Program 1:**

1) Start.
2) Define an enum Role containing ADMIN, USER and GUEST.
3) Read the role from the user as a string.
4) Compare the entered role with ADMIN, USER and GUEST and assign the corresponding enum value.
5) Use a switch statement to display the welcome message according to the selected role.
6) Display Invalid Role if the entered role is not valid.
7) Stop.


**Program 2:**

1) Start.
2) Define an enum Color containing 12 colors from RED to CYAN.
3) Store the color names in a string array in the same order as the enum values.
4) Use a loop from RED to CYAN.
5) Print each color name with its corresponding integer enum value.
6) Stop.


# Test Case Table

| S. No. | Input | Expected Output | Actual Output | Result |
|---|---|---|---|---|
| 1 | GUEST | Welcome Guest | Welcome Guest | Pass |
| 2 | ADMIN | Welcome Admin | Welcome Admin | Pass |
| 3 | No Input | RED=0, BLUE=1, GREEN=2, ... CYAN=11 | RED=0, BLUE=1, GREEN=2, ... CYAN=11 | Pass |

# C Program - Program 1

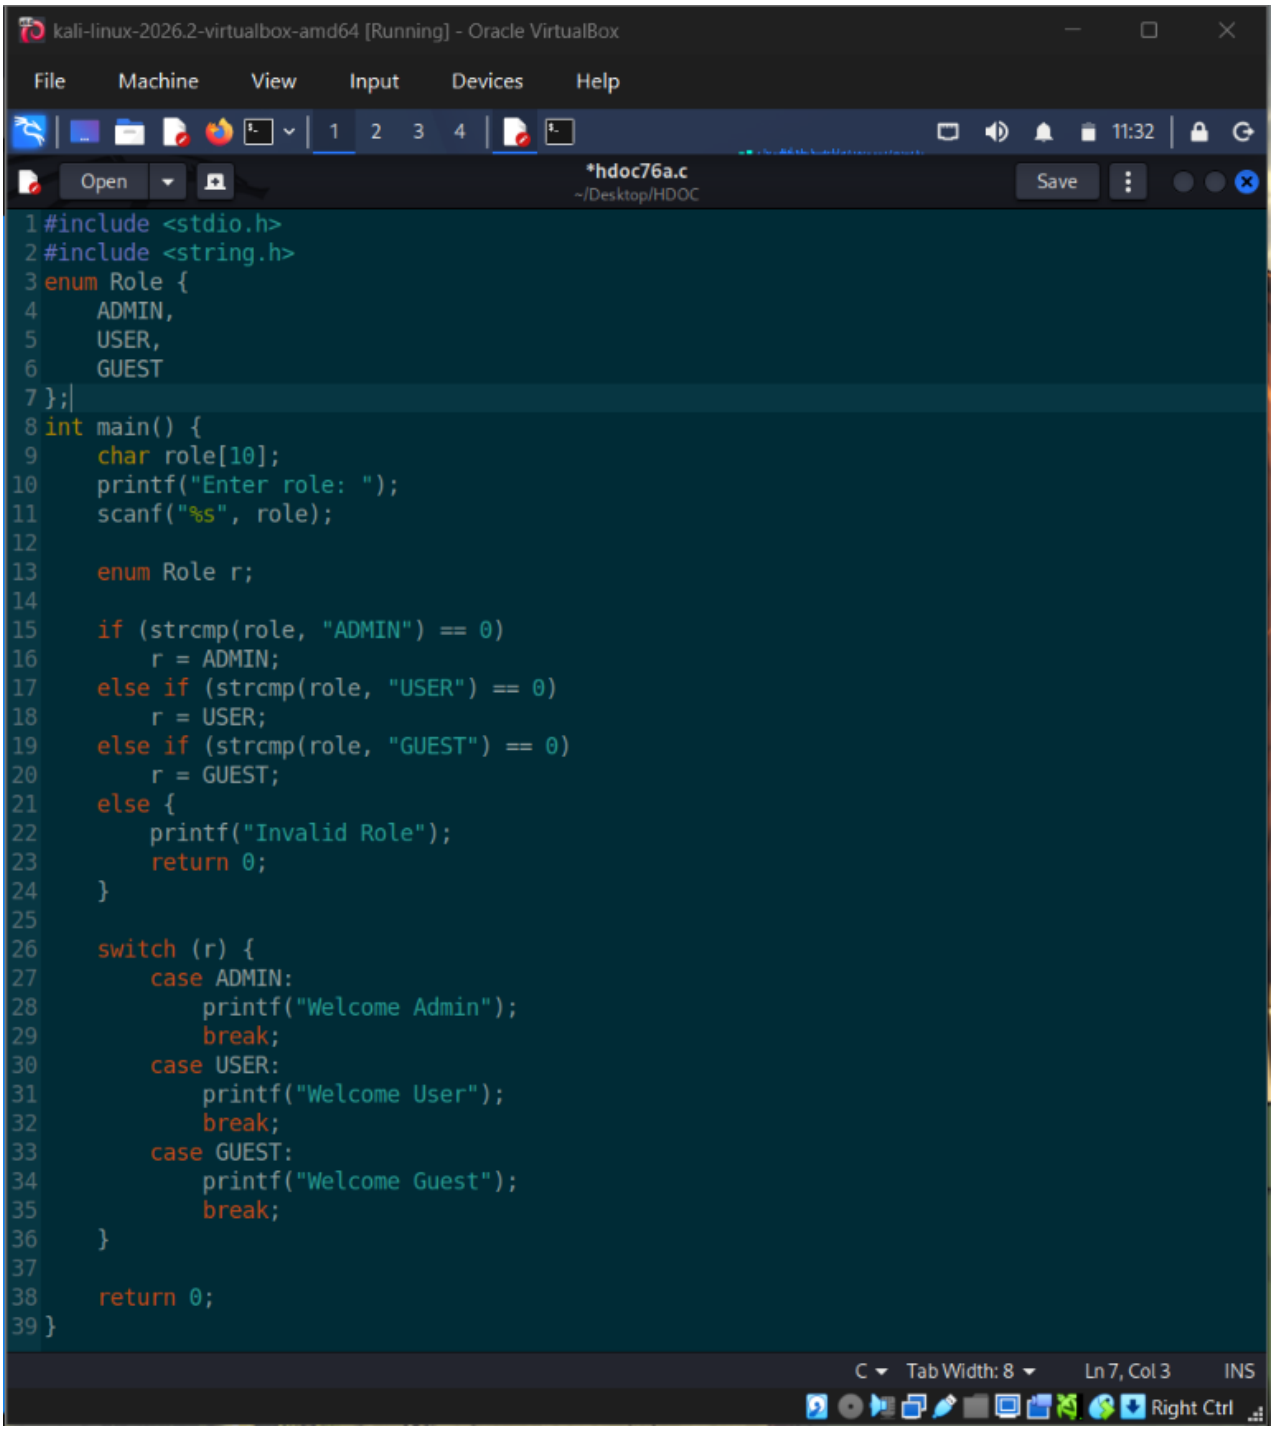

# C Program - Program 2

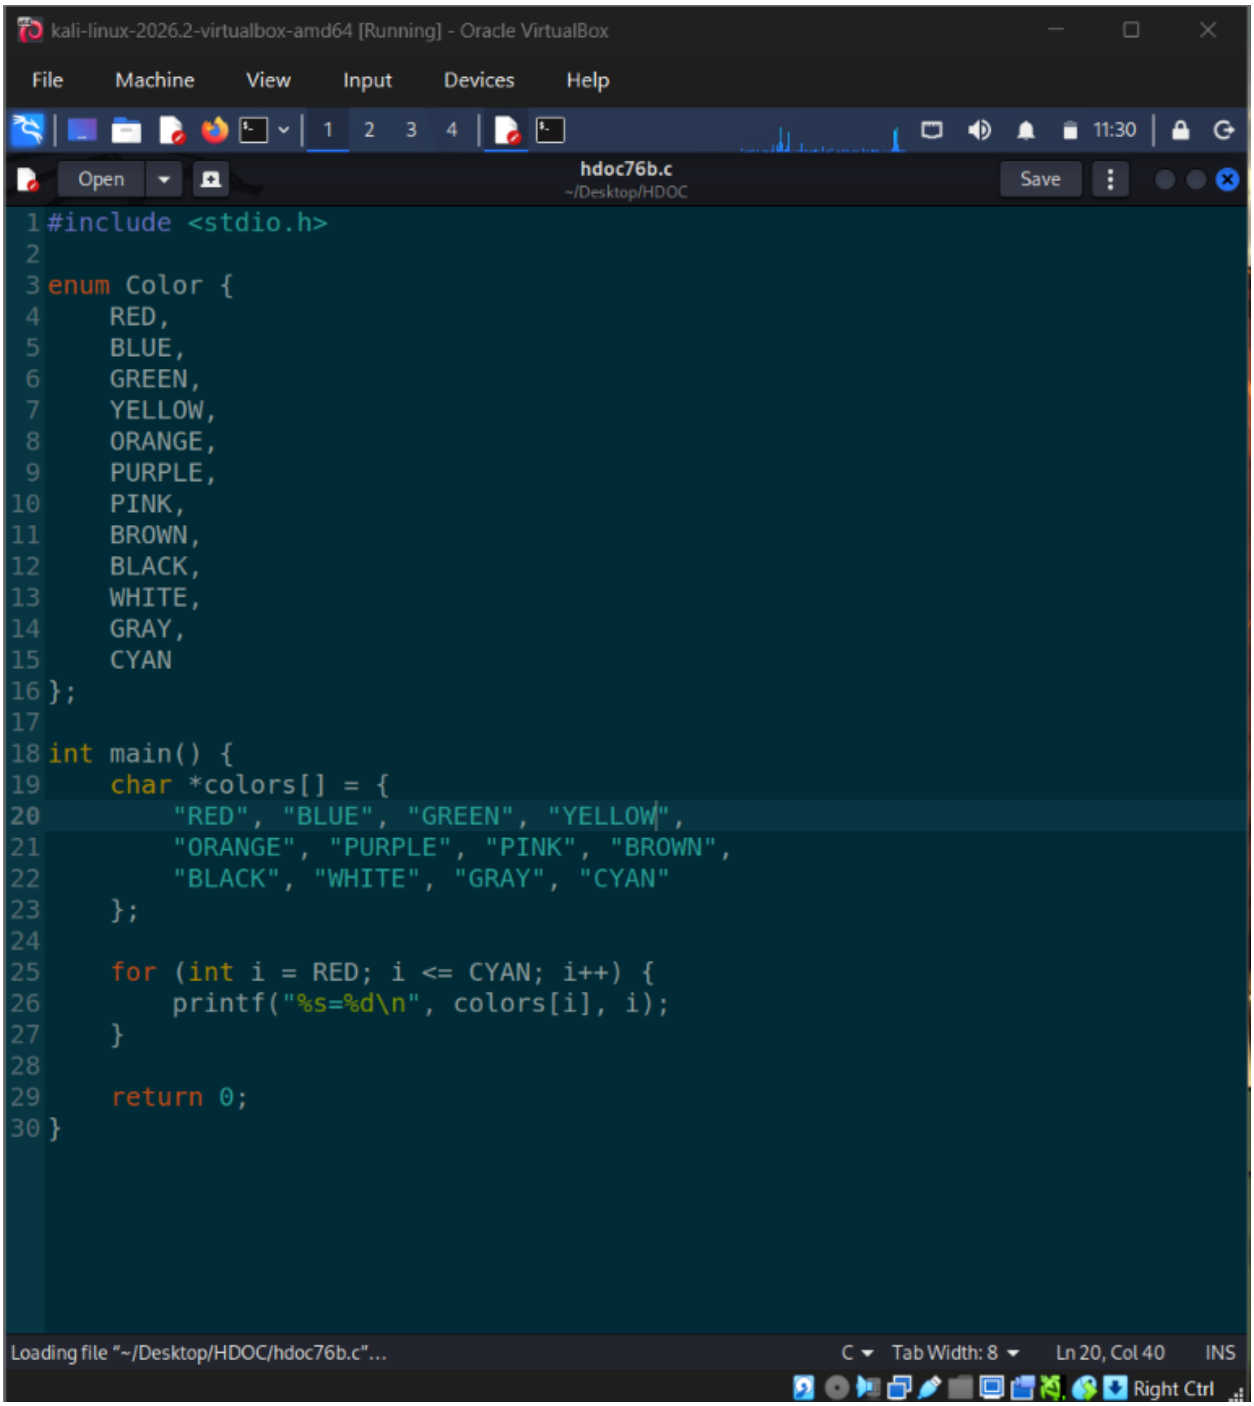

# Compilation and Execution

**Program 1 compilation command: gcc hdoc76a.c -o hdoc76a**

**Program 1 execution command: ./hdoc76a**

**Execution Screenshot:**




**Program 2 compilation command: gcc hdoc76b.c -o hdoc76b**

**Program 2 execution command: ./hdoc76b**

**Execution Screenshot:**

