

Kick Start 2015 - Round D

gBalloon

Problem

The G tech company has deployed many balloons. Sometimes, they need to be collected for maintenance at the company's tower, which is located at horizontal position 0. Each balloon is currently at horizontal position P_i and height H_i .

G engineers can move a balloon up and down by sending radio signals to tell it to drop ballast or let out air. But they can't move the balloon horizontally; they have to rely on existing winds to do that.

There are M different heights where the balloons could be. The winds at different heights may blow in different directions and at different velocities. Specifically, at height j , the wind has velocity V_j , with positive velocities meaning that the wind blows left to right, and negative velocities meaning that the wind blows right to left. A balloon at position P at a height with wind velocity V will be at position $P+V$ after one time unit, $P+2V$ after two time units, etc. If a balloon touches the tower, it is immediately collected.

It costs $|H_{\text{original}} - H_{\text{new}}|$ points of energy to move one balloon between two different heights. (This transfer takes no time.) You have Q points of energy to spend, although you do not need to spend all of it. What is the least amount of time it will take to collect all the balloons, if you spend energy optimally?

Input

The first line of the input gives the number of test cases, T . T test cases follow. The first line of each case has three integers N , M , and Q , representing the number of balloons, the number of height levels, and the amount of energy available.

The second line has M integers; the j th value on this line (counting starting from 0) is the wind velocity at height j .

Then, N more lines follow. The i th of these lines consists of two integers, P_i and H_i , representing the position and height of the i th balloon.

Output

For each test case, output one line containing "Case #x: y", where x is the test case number (starting from 1) and y is the minimum number of time units needed to collect all of the balloons, returns IMPOSSIBLE if it's impossible to collect all the balloons using the energy given.

Limits

Time limit: 30 seconds per test set.

Memory limit: 1 GB.

Small dataset (Test Set 1 - Visible)

$$1 \leq T \leq 100.$$

$$1 \leq N \leq 10.$$

$$1 \leq M \leq 10.$$

$$-10 \leq V_j \leq 10.$$

$$1 \leq Q \leq 10.$$

$$0 \leq H_i < M.$$

$$-10 \leq P_i \leq 10.$$

Large dataset (Test Set 2 - Hidden)

$$1 \leq T \leq 25.$$

$$1 \leq N \leq 100.$$

$$1 \leq M \leq 1000.$$

$$-100 \leq V_j \leq 100.$$

$$1 \leq Q \leq 10000$$

$$0 \leq H_i < M.$$

$$-10000 \leq P_i \leq 10000.$$

Sample


Sample Input

```
2
2 4 1
2 1 -2 -1
3 3
-2 1
1 3 1
1 -1 -2
-2 2
```

Sample Output

```
Case #1: 2
Case #2: IMPOSSIBLE
```

Here is an example:

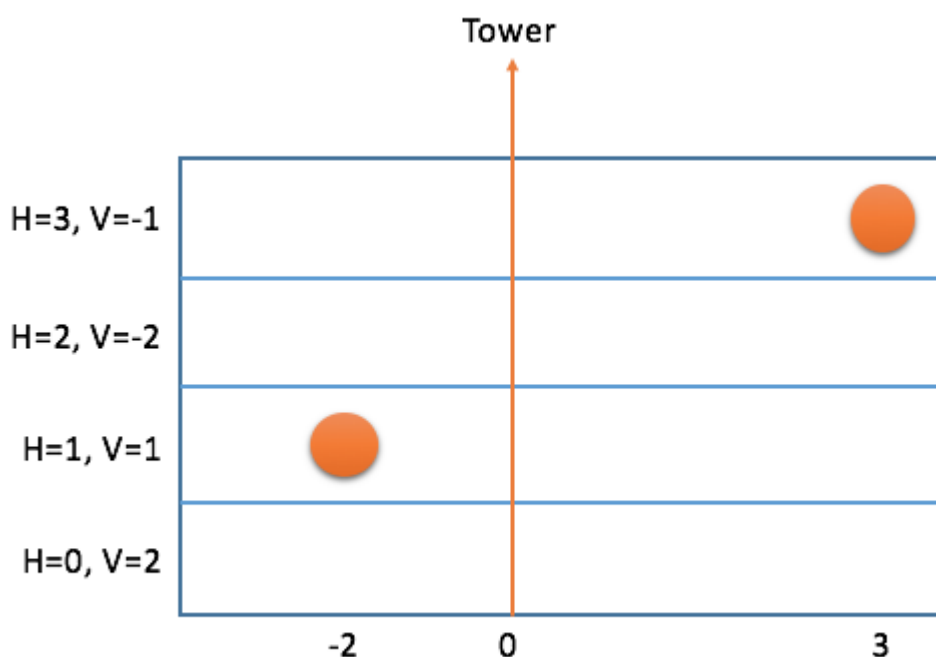

In the sample case, there are two balloons in the sky, and you have 1 energy point to use. The best solution is to immediately spend 1 energy point to move the balloon at position 3, height 3

down to height 2. Once you've done that, it will take 2 time units for both balloons to reach the tower.