

Detecting child unsafe videos using transcripts

Shritishma Reddy & Pratik Kamble

February, 17th 2019

1 Abstract

In this project, we propose an end-to-end pipeline for the detection of child unsafe videos using video transcripts. Given the spread of digital media and increase in media consumption by kids (ages 3-12) over the past decade, there is a great need for the filtering of unsafe content found within reach of said age group. While traditional parental systems do exist, this would be an online scalable system, that would only benefit from the increasing video consumption.

2 Introduction

This pipeline has three phases:

- Data acquisition: Collection of a holistic video-transcript dataset representative of children viewing habits and trends.
- Unsafe pattern detection: Analyze speech patterns and clustering hotspot zones to form a timeline representation.
- Video Classification: Classification of videos into unsafe types, if unsafe, viz. religious, abusive, drug use, etc.

2.1 Data Acquisition

The data acquisition process depends a lot on the type of genre distribution. A study [1] has found that children consume just over three hours of media, as of 2015; the numbers having since then gone up further.

The time spent with on screen media dramatically increases from the toddler to preschool to school-age years. Children under two have a screen time average of 53 minutes per day. This increases to almost two and a half hours per day among two to four year old and almost three hours for kids in the five to eight year old range. By age eight, 96% of children have watched TV, 90% have used a computer, 81% have played console video games, and 60% have played games or used apps on a portable device. Thus by order of data-source, we should

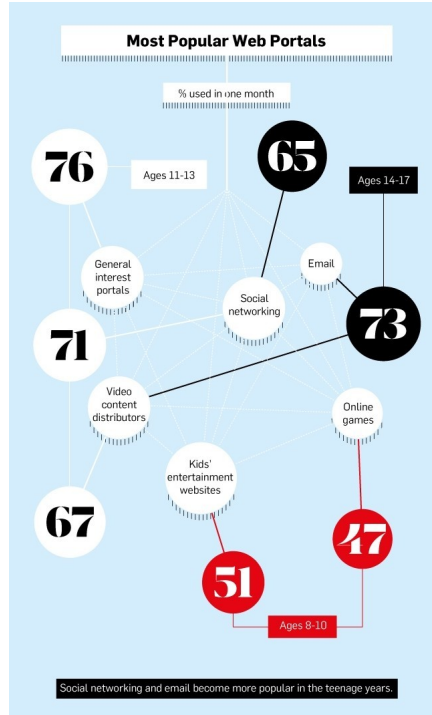


Figure 1: Major content sources and distribution

have a dataset representative mainly of TV show content, followed by YouTube and lastly, game video data.

Luckily, all video footage from various sources can be obtained from YouTube, along with transcript data. TV show snippets, actual online vlog and other consumable media, as well as video game footage can be found on the streaming platform.

2.2 Unsafe Pattern Detection

Once we have the annotated data, we have to run through it and classify according to unsafe-ness. Once criterion that is of importance is categories that may influence minds may be quite different from ones for adolescents or adults.

As seen from the figure 1, the main categories of media streaming are entertainment websites, online games, email, social networking and general interest portals. Breaking down the type of content found on these sites, the main type of genres are as follows:

- Religion-based hate speech: This occurs in chatrooms and online forums,

both high target kid influence

- Color-based hate speech: Depending on race and ethnicity, such sort of speech may be hidden in meaning and harder to detect.
- Foul Language: Kids usually pick up on foul language and the age of such exposure is lower this decade than it ever was.

2.3 Video Classification

3 Annotation and labeling

4 Speech Classification

5 Zonal clustering and overall classification

6 Conclusion

References

- [1] Dr. Brent Conrad. Viewing statistics by time. <http://www.techaddiction.ca/media-statistics.html>, 2015.