ADVANCED

# Webhook

Note that `X-Iyz-Signature` and `X-Iyz-Signature-V2` will no longer supported. We expect our merchants to enhance their system to `X-Iyz-Signature-V3` in timely manner.


iyzico uses webhooks to notify your application when the transaction is done. (Success, Failure) When a payment attempt is made, it is possible to receive the transaction result via HTTP **POST** notification. The first notification will be sent after **10-15** seconds of the initial payment attempt.

It is a JSON Payload and server to server HTTP request. iyzico will keep continuing sending notifications every 15 minutes until your server responds with a status of **"2xx"**. Notifications will stop after **3 attemps**.

In iyzico, all of the Payment Methods operations results directly which towards the use of webhooks could be optional. For an instance, in a successful payment request, latest response contains all the payment details. However webhooks can still be used to trigger different mechanisms if desired.

## How to activate Webhooks?

After login to iyzico Merchant Portal, you can find the Webhook Notifications under the menu called **"Settings" > "Merchant Settings" > "Merchant Notifications" (HTTPS URL is required)**

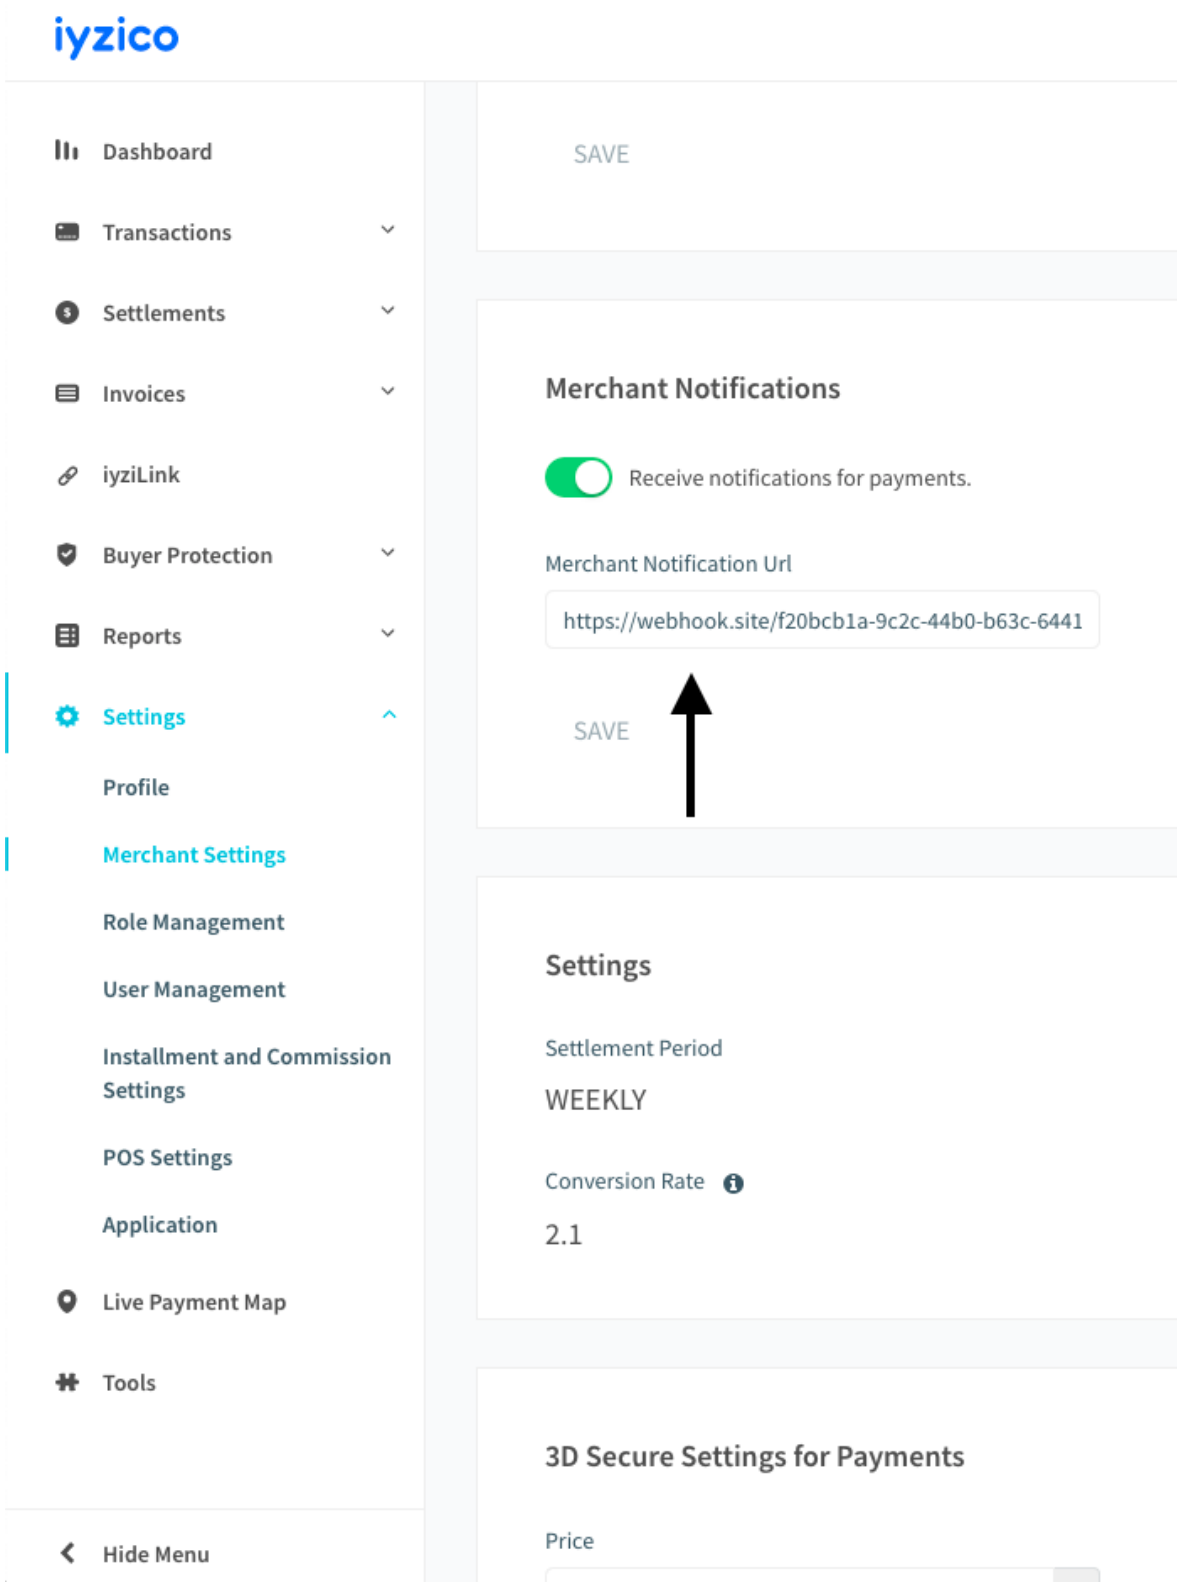


# Webhook Forms

Webhooks posts on 2 distinguishable formats;

- Direct Format
- HPP(Hosted Payment Page) Format

## Direct Format

Following webhook format appears on NON-3DS and 3DS payment requests.

| Parameter | Type | Description |
| --- | --- | --- |
| **paymentConversationId** | string | Merchant's reference id for the related payment. |
| **merchantId** | string | Merchant's id, MID. |
| **paymentId** | string | Relevant paymentId which belongs to the payment. |
| **status** | string | Payment status. Values: FAILURE, SUCCESS, INIT_THREEDS, CALLBACK_THREEDS, BKM_POS_SELECTED, INIT_APM, INIT_BANK_TRANSFER, INIT_CREDIT, PENDING_CREDIT, INIT_CONTACTLESS |
| **iyziReferenceCode** | string | A unique reference code for the notification |
| **iyziEventType** | string | Shows the request type. Values: CHECKOUT_FORM_AUTH, PAYMENT_API, API_AUTH, THREE_DS_AUTH, THREE_DS_CALLBACK, BANK_TRANSFER_AUTH, BKM_AUTH, BALANCE, CONTACTLESS_AUTH, CONTACTLESS_REFUND, CREDIT_PAYMENT_AUTH, CREDIT_PAYMENT_PENDING, CREDIT_PAYMENT_INIT, REFUND_RETRY_FAILURE, REFUND_RETRY_SUCCESS |

| | | |
|---|---|---|
| **iyziEventTime** | long | Unix timestamp value of first notification. |
| **iyziPaymentId** | long | Relevant paymentId which belongs to the payment. |

## HPP Format

Similar to above, next webhook format appears on hosted page solutions which are PWI, CF.

| Parameter | Type | Description |
| --- | --- | --- |
| **paymentConversationId** | string | Merchant's reference id for the related payment. |
| **merchantId** | string | Merchant's id, MID. |
| **token** | string | The token generated for the related payment |
| **status** | string | Payment status. Values: FAILURE, SUCCESS, INIT_THREEDS, CALLBACK_THREEDS, BKM_POS_SELECTED, INIT_APM, INIT_BANK_TRANSFER, INIT_CREDIT, PENDING_CREDIT, INIT_CONTACTLESS |
| **iyziReferenceCode** | string | A unique reference code for the notification. |
| **iyziEventType** | string | Shows the request type. Values: CHECKOUT_FORM_AUTH, PAYMENT_API, API_AUTH, THREE_DS_AUTH, THREE_DS_CALLBACK, BANK_TRANSFER_AUTH, BKM_AUTH, BALANCE, CONTACTLESS_AUTH, CONTACTLESS_REFUND, CREDIT_PAYMENT_AUTH, CREDIT_PAYMENT_PENDING, CREDIT_PAYMENT_INIT, REFUND_RETRY_FAILURE, REFUND_RETRY_SUCCESS |
| [illegible] | [illegible] | Unix timestamp value of |

| | | |
|---|---|---|
| **iyziEventTime** | long | first notification. |
| **iyziPaymentId** | long | Relevant paymentId which belongs to the payment. |

## Validation of Notifications

To verify source of webhook, iyzico sends encrypted a variable in the header called `X-IYZ-SIGNATURE-V3` that can be decrypt with only merchants their own `SECRET KEY`.

> Note that `X-Iyz-Signature` and `X-Iyz-Signature-V2` will no longer supported. We expect our merchants to enhance their system to `X-Iyz-Signature-V3` in timely manner.

### Validation of Direct Format

`SECRET KEY`, `eventType` and `paymentId` should be created with the given order below. This string should be encrypted with HMACSHA256 and the result should be encoded with HEX. Final value should should be equal to `X-IYZ-SIGNATURE` in the header.

Hashing Sample for Direct Format

```
1  // Create the key for HMAC
2  const key = secretKey + iyziEventType + paymentId + paymentConve
3
4  // Generate HMAC SHA256 signature
5  const hmac256 = crypto.createHmac('sha256', secretKey)
6                        .update(key)
7                        .digest('hex');
```

| Order | Parameter | Description |
|---|---|---|
| **1** | **secretKey** | Merchant's secret key |
| **2** | **iyziEventType** | Shows the request type. Values: API_AUTH, THREE_DS_AUTH, BKM_AUTH |
| **3** | **paymentId** | Unique iyzico reference code of realted payment |
| **4** | **paymentConversationId** | Merchant's reference id for the related payment. |
| **5** | **status** | Payment status. Values: FAILURE, SUCCESS, INIT_THREEDS, CALLBACK_THREEDS, BKM_POS_SELECTED, INIT_APM, INIT_BANK_TRANSFER, INIT_CREDIT, PENDING_CREDIT, INIT_CONTACTLESS. |

## Validation of HPP Format

`SECRET KEY`, `iyziEventType`, `iyziPaymentId`, `token`, `paymentConversationId`, `status`, `eventType` and `token` should be created with the given order below. This string should be encrypted with HMACSHA256 and the result should be encoded with HEX. Final value should should be equal to `X-IYZ-SIGNATURE-V3` in the header.

Hashing Sample for HPP Format

```
// Create the key for HMAC
const key = secretKey + iyziEventType + iyziPaymentId + token +

// Generate HMAC SHA256 signature
const hmac256 = crypto.createHmac('sha256', secretKey)
                      .update(key)
                      .digest('hex');
```

| Order | Parameter | Description |
| --- | --- | --- |
| 1 | **secretKey** | Merchant's secret key. |
| 2 | **iyziEventType** | Shows the request type. Values: CHECKOUT_FORM_AUTH, BALANCE, BANK_TRANSFER_AUTH |
| 3 | **iyziPaymentId** | Relevant paymentId which belongs to the payment. |
| 4 | **token** | The token generated for the related payment. |
| 5 | **paymentConversationId** | Merchant's reference id for the related payment. |
| 6 | **status** | Payment status. Values: FAILURE, SUCCESS, INIT_THREEDS, CALLBACK_THREEDS, BKM_POS_SELECTED, INIT_APM, INIT_BANK_TRANSFER, INIT_CREDIT, PENDING_CREDIT, INIT_CONTACTLESS |

Previous
Refund & Cancel

Next
SFTP

Last updated 5 months ago