

API preparation

Table of Contents

- 1.1 API Authentication
- 1.2 Status Codes
- 1.3 Human Handoff Webhook Event

API Authentication

MaiAgent uses API keys for authentication.

Authentication Method

All API requests must include an API Key in the HTTP Header, in the following format:


```
const headers = {  
  "Authorization": "Api-Key YOUR_API_KEY_HERE",  
  "Content-Type": "application/json"  
}
```


How to Obtain an API Key?

Please log in to the MaiAgent system backend and follow these steps:

Click the "Username" dropdown menu in the upper right corner.

Click "Account" to go to the profile page.

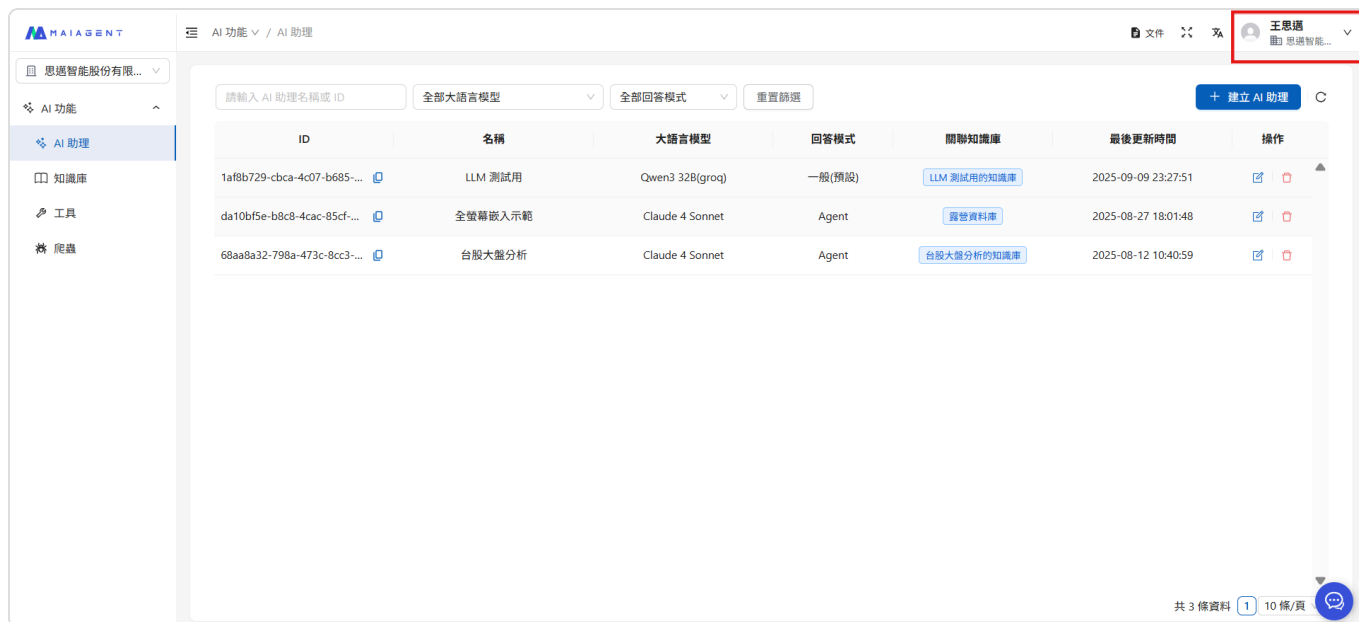

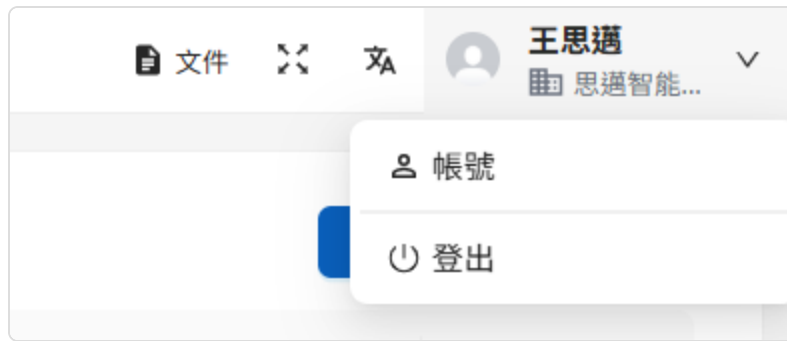

Switch the page to the API Key page.



You can then copy and view the "API Key".



Security Reminder: Please keep your API key secure and do not share it in public places. Key Format Description: The API key is a combination of alphanumeric characters.

Error Handling

When authentication fails, the API will return a 401 Unauthorized HTTP error code:

Invalid or Missing API Key

```
{  
  "detail": "Authentication credentials were not provided."  
}
```

Fix suggestion: Check if the request header contains the correct Authorization field. The format should be: `Authorization: Api-Key YOUR_API_KEY`

Incorrect API Key Format

```
{  
  "detail": "Invalid API key format."  
}
```

Fix suggestion: Confirm that the API Key format is correct. Check if the correct prefix `Api-Key` is used instead of `Bearer`, and ensure the API Key itself does not have extra spaces or characters.

Status Codes

When sending an HTTP request via the API, you can use the following status codes to check if the API request was successful:

Status Code Descriptions

Success Codes

Status Code	Description
200	Request successful
201	Resource created successfully

Success Response Example

This is a content demonstration. The response format may vary for different endpoints. Please refer to the documentation for the specific endpoint.

```
{
  "count": "integer",
  "next": "string|null",
  "previous": "string|null",
  "results": [
    // Result content returned
  ]
}
```

Error Codes

Status Code	Description
400	Bad Request
401	Authentication failed
403	Permission denied

Status Code	Description
404	Resource not found
500	Server error

Error Response Example

400 - Bad Request: Required field missing

```
{  
  "files": ["This field is required."],  
  "filename": ["This field is required."],  
  "file": ["This field is required."]  
}
```

Human Handoff Webhook Event

When the support portal (Inbox) completes a "handoff to human" assignment, MaiAgent pushes a `handoff.created` event to your configured endpoint via HTTPS POST, allowing dispatch, alerting, or CRM systems to take over automatically without polling.

How to Enable

This is self-service for the customer's administrator or integration staff in the admin console—no engineering assistance required:

Admin console → Settings → Inbox → select an inbox → "Handoff to Human" tab → "Notifications" tab

Turn on the "Webhook Notification (System Integration)" toggle and enter the receiving endpoint URL (only URLs starting with `https://` are accepted)

(Optional but recommended) Enter a signing secret to enable source verification (see "Signature Verification" below)

Webhook, Notification Center, and Email are three independent toggles that do not affect one another; they are off by default and enabled per inbox. This channel is unrelated to the inbox's existing "Message Webhook" (for sending and receiving messages).

Event Format

POST

Content-Type: application/json

```
{
  "event": "handoff.created",
  "conversationId": "6c2b7c1e- ... ",
  "inboxId": "0f9a3d42- ... ",
  "organizationId": "b1d20c77- ... ",
  "assigneeId": "3e8f5a90- ... ",
  "contactId": "a4c1f6b3- ... ",
  "conversationUrl": "https://admin.maiagent.ai/ ... "
}
```

Field	Type	Description
event	string	Always <code>handoff.created</code>
conversationId	string (uuid)	Conversation identifier
inboxId	string (uuid)	Inbox identifier
organizationId	string (uuid)	Organization identifier
assigneeId	string (uuid)	null
contactId	string (uuid)	null
conversationUrl	string (uri)	Link to the conversation page in the admin console

The payload contains only identifiers and the admin console link, **not the conversation text content**. If you need the conversation content, use the identifiers to query the Conversations and Messages APIs.

Signature Verification (Recommended)

After a signing secret is configured in the admin console, each push includes the following header:

```
X-MaiAgent-Signature-256: sha256=
```

The value is the HMAC-SHA256 hexadecimal digest computed with the secret over the **raw request body bytes**. Always verify using the raw bytes as received; do not parse and re-serialize first (differences in field order and whitespace will produce a mismatched digest).

```
import hashlib
import hmac

def verify_signature(raw_body: bytes, header_value: str, secret: str) → bool:
    expected = 'sha256=' + hmac.new(secret.encode(), raw_body,
    hashlib.sha256).hexdigest()
    return hmac.compare_digest(expected, header_value)
```

The secret is write-only: it is not displayed after saving, and the admin console only shows "Configured". Saving with the field left empty keeps the existing secret; to replace it, enter a new value directly; to remove it, use the "Clear Secret" action. When no secret is configured, pushes are sent without the signature header.

Response and Retries

The receiving endpoint should respond with a 2xx status code within 10 seconds; the response body can be anything.

On timeout, connection failure, or a non-2xx response, the system retries automatically, up to 3 times at 60-second intervals. Retries send exactly the same content as the original push, so the receiving endpoint should handle them idempotently (for example, deduplicate by `conversationId`).

A failed Webhook push does not affect the main handoff flow, nor does it affect Notification Center or Email notifications.