# Natural Computing



LMU Munich summer term 2025

**Thomas Gabor** 

Who strongly prefers German?



Who strongly prefers English?



### Preface

- lecture
- exercises
- exam

current schedule and all further information
to be found on moodle
https://moodle.lmu.de/course/view.php?id=38504

#### Material

- what happens in this room
- slides
- video recordings (as much as possible)
- the definition sheet
- exercise sheets (with solutions)
- literature

#### Slides

- found on moodle
- versions: preview raw scribbled



#### Video Recordings

- we try to capture as much as possible
- not everything is guaranteed to be found online

#### Video Recordings

We need some help with that!!

#### The Definition Sheet

#### Natural Computing Definition Sheet

Thomas Gabor LMU Munich

Maximilian Zorn LMU Munich

Claudia Linnhoff-Popien LMU Munich

summer term 2022

Notation.  $\wp(X)$  denotes the power set of X. # denotes vector or sequence concatenation, i.e., given two vectors  $\mathbf{x} = (x_1, \dots, x_{|\mathcal{X}|})$  and  $\mathbf{y} = (y_1, \dots, y_{|\mathcal{X}|})$  and  $\mathbf{y} = (y_1, \dots, y_{|\mathcal{X}|})$  and  $\mathbf{y} = (y_1, \dots, y_{|\mathcal{X}|})$ . A vector  $(x_0, \dots, x_{n-1})$  with length  $n \in \mathbb{N}$  unspecified function arguments  $(f(\cdot) = 0)$  is the constant function that always where they can be used trivially.

Definition 1 (Conway's game of life). Let G = (V, E) be a graph with vertices V and (undirected) edges  $E \subseteq V \times V$ . We define  $neighborhood(:) = \{w \mid (v, w) \in E\}$  as a pology for C. A state  $x \in V$  is a mapping of vertices to the labels  $\{dead, alive\}$ , i.e., the state space V is given via define |w| = |w| = |w|. Let  $x_t$  be a state that exists at time step  $t \in N$ . We the evolution of a state  $x_t$  to its subsequent state  $x_{t+1}$  is given deterministically via

$$x_{t+1}(v) = \begin{cases} dead & \text{if } |v|_{x_t} \leq 1, \\ x_t(v) & \text{if } |v|_{x_t} = 2, \\ dive & \text{if } |v|_{x_t} = 3, \\ dead & \text{if } 4 \leq |v|_{x_t}, \end{cases}$$

$$e (G, x_S) \text{ is called } x_t = 1, \dots, x_t = 1.$$

for all  $v \in V$ . A tuple  $(G, x_S)$  is called an instance of the game of life for initial state  $x_S \in \mathcal{X}$ .

#### **Exercise Sheets**

- published online, solutions discussed in this room, then solution suggestion published online
- include programming exercises

#### Look forward to...




Max Zorn

#### Literature

Brabazon, O'Neill, McGarraghy. Natural Computing Algorithms. Springer, 2015.

link-springer-com.emedien.ub.uni-muenchen.de/book/10.1007/978-3-662-43631-8

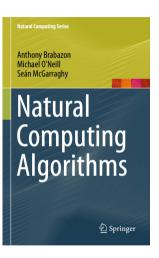

...more later!

#### Questions?


#### Who is doing a Master's degree?



#### Who took Computational Intelligence?




#### Who has experience in any natural science?



#### Who can program a deep neural network?



#### Who can program a quantum computer?




Who has mastered at least one programming language?



#### Who is fluent in Python?






# Introduction

Natural Computing
is
algorithms
found in or inspired by
nature.

## A different perspective on computer science

#### Does computer science belong among the sciences?

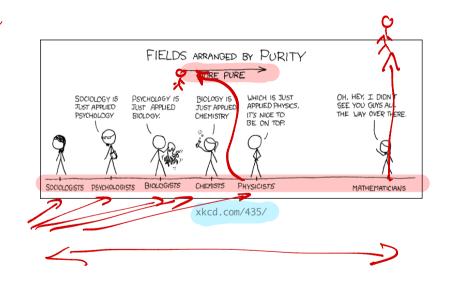



"Computer science is no more about computers than astronomy is about telescopes, biology is about microscopes or chemistry is about beakers and test tubes."

Michael R. Fellows and Ian Parberry (1993)

en.wikiquote.org/wiki/Computer\_science#Disputed
 archive.cra.org/CRN/issues/9301.pdf





"The history of the universe can be thought of as a sequence of information processing revolutions, each of which builds on the technology of the previous ones."

Seth Lloyd. Programming the Universe. Vintage Books, 2006.

#### Why nature?

Physics

Chemistry


Biology Sociology

quantum computing simulated annealing particle swarms artificial chemistry systems v cellular automata game of life evolutionary algorithms neural networks social computing

# The Game of Life

#### Who knows Conway's Game of Life?



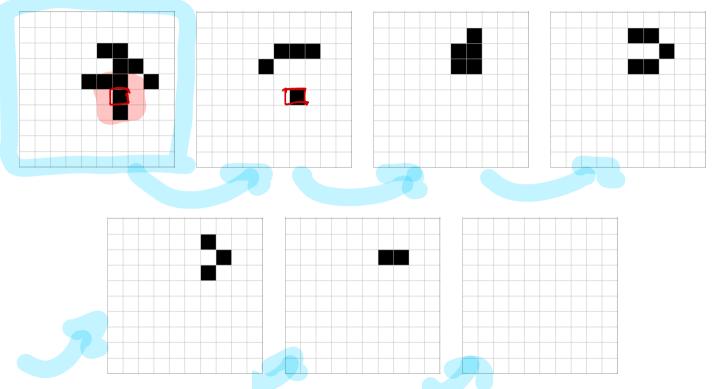

**Definition 3** (Conway's game of life (standard)). Let G = (V, E) be a graph with vertices V and (undirected) edges  $E \subseteq V \times V$  with a fixed degree of 8 for all nodes. We define  $surroundings: V \to \wp(V)$  via

$$surroundings(v) = \{w \mid (v, w) \in E\}$$

so that |surroundings(v)| = 8 and  $v \notin surroundings(v)$  for all  $v \in V$ . A state  $x \in \mathcal{X}$  is a mapping of vertices to the labels  $\{dead, alive\}$ , i.e., the state space  $\mathcal{X}$  is given via  $\mathcal{X} = (V \to \{dead, alive\})$ . Let  $x_t$  be a state that exists at time step  $t \in \mathbb{N}$ . We define

$$|v|_{x_t} = |\{w \mid w \in surroundings(v) \land x_t(w) = alive\}|.$$

In the game of life, the evolution of a state  $x_t$  to its subsequent state  $x_{t+1}$  is given deterministically via

$$\mathbf{x}_{t+1}(v) = \begin{cases} dead & \text{if } |v|_{\mathbf{x}_t} \leq 1, \\ \mathbf{x}_t(v) & \text{if } |v|_{\mathbf{x}_t} = 2, \\ alive & \text{if } |v|_{\mathbf{x}_t} = 3, \\ dead & \text{if } |v|_{\mathbf{x}_t} \geq 4, \end{cases}$$

for all  $v \in V$ . A tuple  $(G, x_0)$  is called an instance of the game of life for initial state  $x_0 \in \mathcal{X}$ .

Let's try

conwaylife.com