


PUBLISHED: 31-JUL-2012

2014.0 RANGE ROVER (LG), 303-05


ACCESSORY DRIVE - V8 N/A 5.0L PETROL/V8 S/C 5.0L PETROL

COMPONENT LOCATION - NATURALLY ASPIRATED VEHICLES

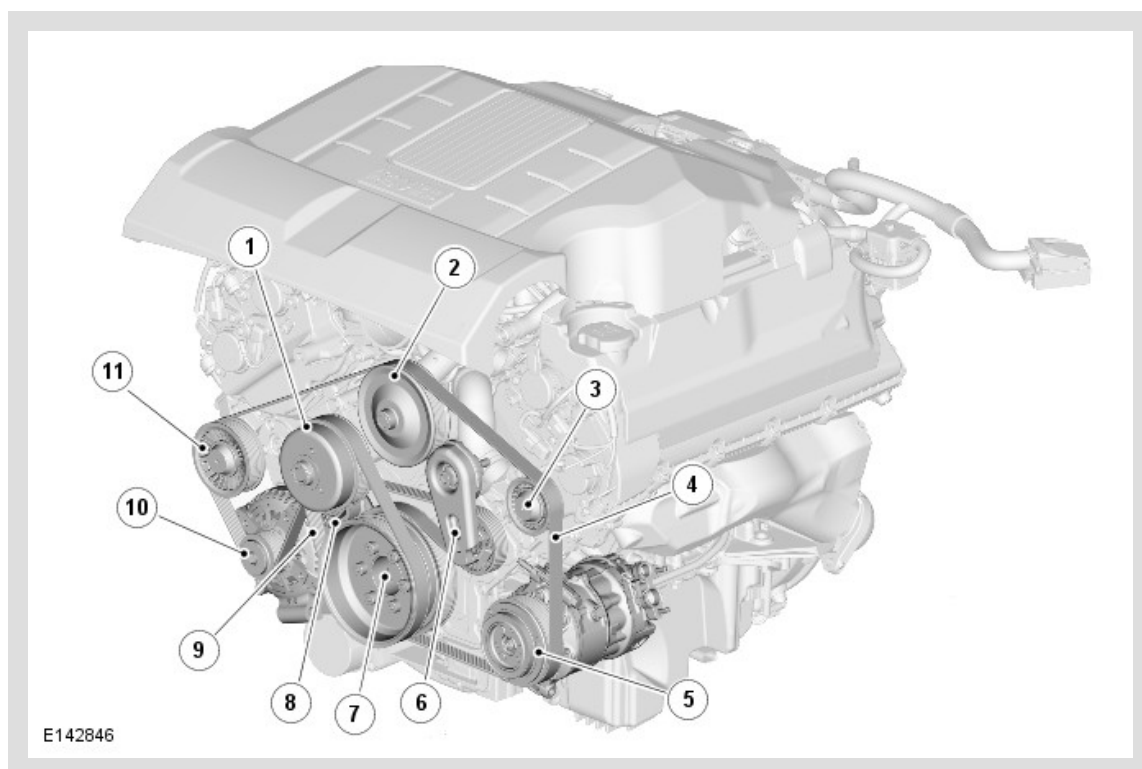

ITEM	DESCRIPTION
1	Viscous cooling fan pulley
2	Coolant pump
3	Idler pulley
4	Primary drive belt
5	Air conditioning compressor
6	Belt tensioner
7	Crankshaft pulley/torsional vibration damper
8	Idler pulley
9	Secondary drive belt
10	Generator
11	Idler pulley

COMPONENT LOCATION - SUPERCHARGED VEHICLES

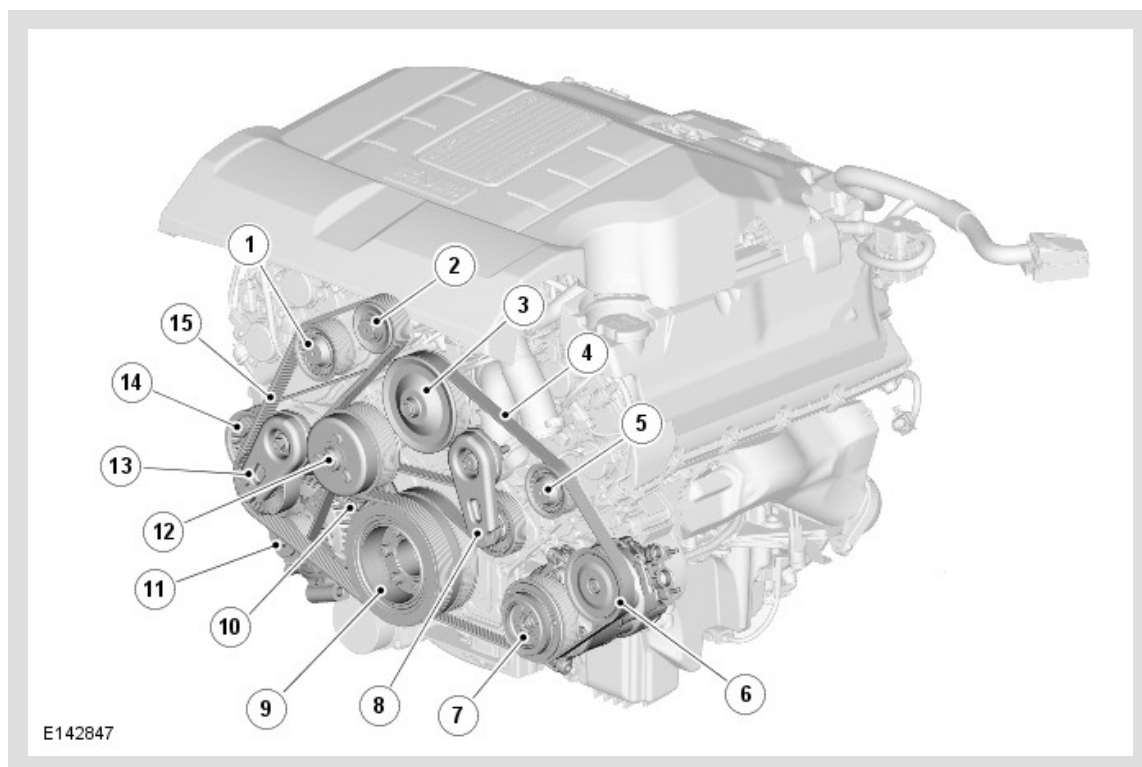

ITEM	DESCRIPTION
1	Idler pulley
2	Supercharger
3	Coolant pump
4	Primary drive belt
5	Idler pulley
6	Dynamic response pump
7	Air conditioning compressor
8	Primary belt tensioner
9	Crankshaft pulley/torsional vibration damper
10	Idler pulley
11	Generator
12	Viscous cooling fan pulley
13	Secondary belt tensioner
14	Idler pulley
15	Secondary drive belt

INTRODUCTION

The accessory drive is a belt system powered by a pulley attached to the front of the crankshaft. The crankshaft pulley, which incorporates a torsional vibration damper, drives primary and secondary drive belts. Except for the secondary drive belt on NA (naturally aspirated) engines, a belt tensioner is incorporated into each belt run to maintain the drive belts at the correct tension. Together with idler pulleys, the belt tensioners also guide the drive belts clear of obstructions and set the correct 'wrap-around' of the accessory component drive pulleys to ensure a slip-free drive.

PRIMARY DRIVE BELT

The primary drive belt is a six-ribbed poly-V belt that drives the:

- Coolant pump.
- Dynamic response pump (SC (supercharger) engine only).
- A/C (air conditioning) compressor.
- Generator.

SECONDARY DRIVE BELT

The secondary drive belt is an eight-ribbed poly-V belt that drives the pulley of the viscous cooling fan. On SC vehicles, the secondary drive belt also drives the SC .

BELT TENSIONERS

Each belt tensioner consists of an idler pulley on the end of a spring loaded pivot arm. The pivot arm can be turned for removal and installation of the belt. Each belt tensioner is calibrated to automatically maintain the correct tension in the related drive belt.