

2016.0 RANGE ROVER (LG), 303-01

ENGINE - TDV6 3.0L DIESEL - GEN 2/TDV6 3.0L DIESEL

OIL FILTER ELEMENT (G1509150)

REMOVAL AND INSTALLATION

12.60.02	ELEMENT - OIL FILTER - RENEW	3000 CC, TDV6	0.1	USED WITHINS	+
----------	---------------------------------------	------------------	-----	-----------------	---

REMOVAL

CAUTION:


Make sure that the correct tools are used to remove and install the oil filter element cap.

NOTE:

Some variation in the illustrations may occur, but the essential information is always correct.

1. Refer to: [Engine Cover - TDV6 3.0L Diesel](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

2.

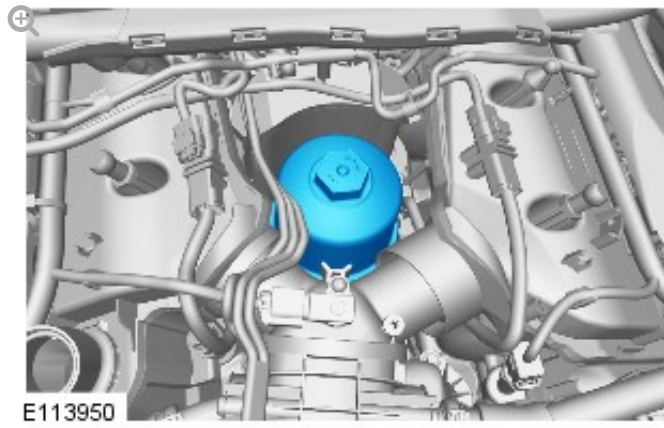


- Rotate the oil filter element housing six complete turns counter-clockwise.
- Allow the engine oil to drain from the oil filter element housing for two minutes.
- Remove the oil filter element housing.

3.

NOTE:

Remove and discard the O-ring seal.

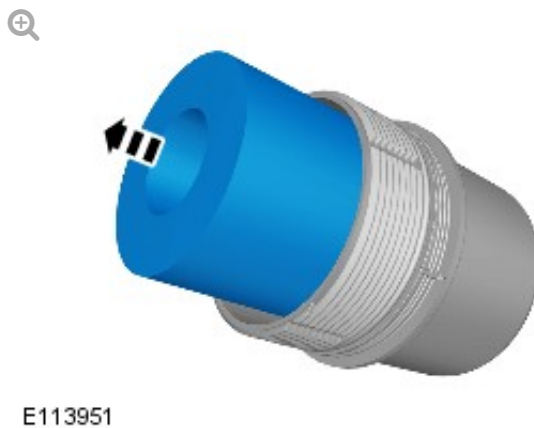

INSTALLATION


1.

CAUTION:

A new O-ring seal is to be installed.


NOTE:

Lubricate the O-ring seal with clean engine oil.

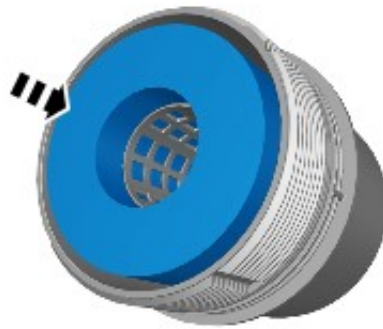

E113952

2.

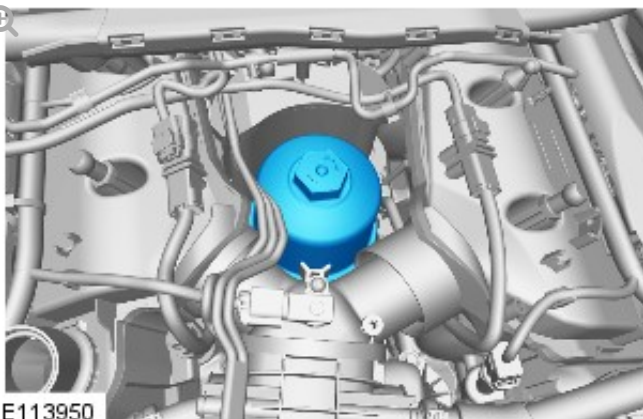

E113950

Torque: 28 Nm

3. Refer to: [Engine Cover - TDV6 3.0L Diesel](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).
4. Start and run the engine.

5. Check and top-up the engine oil.