


`ce_string_new_with_data_inrange`

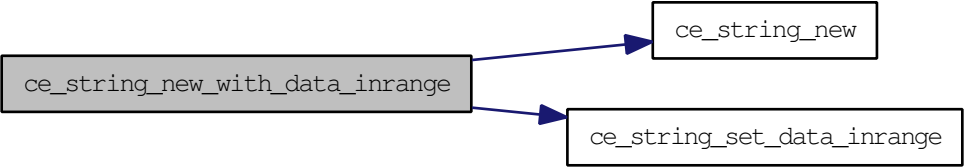

```
graph LR; A[ce_string_new_with_data_inrange] --> B[ce_string_new]; A --> C[ce_string_set_data_inrange];
```

The diagram illustrates the relationships between three functions. A central function, `ce_string_new_with_data_inrange`, is shown in a grey box on the left. Two arrows originate from its right side: one points diagonally upwards and to the right to a box containing `ce_string_new`, and the other points diagonally downwards and to the right to a box containing `ce_string_set_data_inrange`. All boxes have black borders and the text is in a monospaced font.

`ce_string_new`

`ce_string_set_data_inrange`