Drift-Regularized Multi-Token Prediction via On-Policy Self-Distillation

Po-Wei Huang, Feng-Ting Liao
Department of Physics, University of Oxford
MediaTek Research

1 Objective

This research investigates latent representation alignment in policy distillation, aiming to improve multi-token generation beyond supervision based solely on token-level predictions. While conventional knowledge distillation primarily constrains output distributions, the geometry of intermediate latent representations remains underdetermined.

Our goal is to establish how latent geometric alignment can improve the accuracy–efficiency trade-off in multi-token prediction. To this end, we develop a geometry-aware drifting regularizer that aligns student and teacher latent-state distributions, and compare it with conventional token-level supervision and paired feature regression. We will like to demonstrate that population-level drifting offers advantages over pointwise regression and token-level alignment in terms of better thoughput and latency while maintaining or improving reasoning accuracy.

2 Novelty

Our contributions are twofold: introducing drifting regularization [2] as a latent-space supervision objective for multi-token prediction (MTP) self-distillation, and systematically investigating how its attraction–repulsion components, sampling strategies, and hyperparameters influence representation alignment and generation performance.

First, we adapt drifting to language-model hidden representations, where teacher states serve as positive samples and other student states form the negative population. The resulting attraction–repulsion field encourages population-level alignment without enforcing exact pointwise correspondence, providing an alternative to conventional paired feature regression (Section 4).

Second, we decompose the drifting formulation into three components to examine their respective contributions and identify suitable sampling strategies (Section 4.2). We further investigate how these design choices affect the alignment of teacher and student feature distributions and their relationship to multi-token rollout performance.

3 Impact

We hypothesize that improved latent representation alignment can enhance multi-token prediction beyond the gains achievable through token-level self-distillation alone. In particular, preserving the teacher's representation geometry may help the student maintain coherent and distinguishable predictive states across longer prediction horizons, potentially improving generation quality without sacrificing parallelism.

The proposed approach could enable the model to produce more reliable tokens per forward pass, thereby reducing generation latency and increasing token throughput under standalone MTP inference. Since drifting regularization is applied only during training, it introduces no additional inference module or verification stage.

Preprint.

More broadly, this study aims to clarify the relationship between representation geometry, token-level prediction quality, and the accuracy–acceleration trade-off in self-distilled language models. Such findings could inform the design of representation-level supervision for other parallel generation and model distillation frameworks.

4 Methods

We propose a drift-regularized loss for multi-token prediction via self-distillation. We first recap on the MTP framework and its token-level supervision, then introduce the drifting regularization objective, its challenge, our proposed self-negative correction loss. Finally, we describe the proposed experimental design, evaluation metrics, and preliminary results. For convenience, notation is provided in Appendix 7.

4.1 Preliminaries

Multi-token prediction (MTP) via self-distillation by Kirchenbauer et al. [5] converts a pretrained autoregressive language model into a standalone multi-token predictor through on-policy self-distillation. The pretrained model serves as a frozen teacher, while a student initialized from the same checkpoint learns to predict multiple future tokens simultaneously. The teacher evaluates the student's proposed continuation autoregressively, providing token-level supervision without requiring an additional verification model during inference.

During the training, for each region r, a prefix c_r is followed by $k_r - 1$ trainable `<MTP>` mask tokens, allowing the student to propose k_r future tokens in one forward pass. Repeated position IDs and blocked causal attention preserve the original context computation while allowing each prediction state to attend to the prefix and preceding masks. At horizon j, the student produces latent state $u^S_{r,j}$ and distribution $p^S_{r,j}$, yielding a greedy proposal $\hat{y}_{r,j} = \arg\max_v p^S_{r,j}(v)$.

The teacher then supplies targets on the continuation actually proposed by the student, rather than on a fixed ground-truth continuation. With a frozen autoregressive teacher,

$$u^T_{r,j} = H_{\theta_T}(c_r, \hat{y}_{r,<j}), \qquad \bar{y}_{r,j} = \arg\max_v p_{\theta_T}(v \mid c_r, \hat{y}_{r,<j}). \tag{1}$$

The hard-teacher token objective is

$$\mathcal{L}_{\mathrm{MTP}} = -\frac{1}{N_{\mathrm{act}}} \sum_{r,j} \log p^S_{r,j}(\bar{y}_{r,j}), \qquad N_{\mathrm{act}} = \sum_r k_r. \tag{2}$$

This common token objective is retained in every experimental family so that changes in rollout behaviour can be attributed more clearly to the added representation losses.

4.2 Latent-space supervision

We study how different forms of latent-space supervision affect the geometry of student representations and their alignment with the teacher in MTP via self-distillation. In particular, we propose to investigate how drifting regularization, which encourages population-level alignment, complements pointwise alignment (e.g., SmoothL1) between corresponding student and teacher states.

We introduce SmoothL1 regression as one of the baselines to align each student latent state with its corresponding teacher state, providing direct representation-level supervision to complement the hard-teacher token loss used in MTP training. For active position $i = (r, j)$, let $x_i = \phi_S(u^S_i)$ and $y^+_i = \phi_T(u^T_i)$ denote student and frozen-teacher features under a shared normalization. Paired SmoothL1 regression supplies a direct target for each student state:

$$\mathcal{L}_{\mathrm{SmoothL1}} = \frac{1}{N_{\mathrm{act}} d} \sum_{i=1}^{N_{\mathrm{act}}} \sum_{m=1}^{d} \rho_\beta\big(x_{i,m} - \mathrm{sg}(y^+_{i,m})\big), \tag{3}$$

where $\rho_\beta(z) = z^2/(2\beta)$ for $|z| < \beta$ and $|z| - \beta/2$ otherwise. The loss promotes a pointwise teacher–student alignment, although enforcing individual correspondences may restrict the flexibility of the student representation distribution.

Drifting loss was originally introduced in the context of generative modelling by Deng et al. [2], providing an alternative perspective on distributional alignment. Rather than enforcing pointwise correspondence between individual samples, drifting constructs a vector field that drives the generated distribution towards the target distribution through attraction and repulsion. Specifically, generated samples are attracted towards samples from the target distribution while being repelled from samples drawn from the generated distribution. The resulting drifting field vanishes when the two distributions match, establishing an equilibrium.

We extend this principle to the MTP setting by treating the teacher and student hidden-state representations as samples from the target and generated distributions, respectively. This enables population-level alignment through interactions among teacher and student representations, without explicitly enforcing pointwise agreement between corresponding latent states. In our framework, the drifting loss serves as an auxiliary regularisation term alongside the original token-level prediction loss, encouraging the student to learn the teacher's representation geometry while maintaining accurate token predictions.

Following Deng et al. [2], we adopt a feature-space Laplace affinity to quantify the similarity between latent-state representations:

$$\kappa_h(x_i, y_l) = \exp\left(-\frac{\|x_i - y_l\|_2}{\tau_h}\right), \tag{4}$$

where $\tau_h > 0$ is a temperature parameter controlling the sensitivity of the affinity to distances in the hidden-state space.

For each prediction position i, the student hidden-state representation x_i serves as an anchor for constructing the drifting field. We define a positive pool $\mathcal{J}_i^+$ consisting of teacher hidden-state representations y_l^+. Similarly, the negative pool $\mathcal{J}_i^-$ consists of student hidden-state representations y_l^-, where $y_l^- = \mathrm{sg}(x_l)$ and $\mathrm{sg}(\cdot)$ denotes the stop-gradient operation.

To determine the relative contribution of each representation to the drifting field, we normalise the affinities independently within the positive and negative pools. For $s \in \{+, -\}$, denoting the positive and negative pools respectively, the normalised affinity weights are defined as

$$a_{il}^s = \frac{\kappa_h(x_i, y_l^s)}{\sum_{m \in \mathcal{J}_i^s} \kappa_h(x_i, y_m^s) + \epsilon}, \qquad l \in \mathcal{J}_i^s, \tag{5}$$

where $\epsilon > 0$ is introduced for numerical stability. This normalisation ensures that the affinity weights within each pool sum to approximately unity for a given anchor, allowing the attraction and repulsion terms to be computed as separately normalised weighted averages.

The drifting field is then constructed as the difference between these two contributions. The positive weights a_{il}^+ determine the attraction towards teacher representations, whereas the negative weights a_{il}^- determine the repulsion from student representations. Consequently, the estimated drifting field for anchor x_i is given by

$$\widehat{V}_i = \sum_{l \in \mathcal{J}_i^+} a_{il}^+ (y_l^+ - x_i) - \sum_{l \in \mathcal{J}_i^-} a_{il}^- (y_l^- - x_i). \tag{6}$$

This formulation provides a population-level alignment signal that encourages the student hidden-state distribution to approach the teacher hidden-state distribution, rather than directly minimising the distance between individual teacher–student representation pairs.

We train against a stopped, drifted target,

$$\mathcal{L}_{\text{drift}} = \frac{1}{N_{\text{act}}} \sum_i \left\| x_i - \mathrm{sg}\left(x_i + \eta \frac{\widehat{V}_i}{\|\widehat{V}_i\|_2 + \epsilon} \right) \right\|_2^2. \tag{7}$$

Here η controls the magnitude of the drift-induced target displacement. Pool composition and horizon grouping are implementation choices, separate from the kernel. Could use more positive terms like - while and avoid negative terms like - unlike, however, etc when you try to make contrasts. Unlike paired regression, this formulation encourages the student representation distribution to approach that of the teacher without requiring exact correspondence between individual latent states.

While MTP self-distillation makes an explicit correspondence between each student prediction state x_i and its teacher counterpart y_i^+, providing additional structural information, it also introduces challenges in constructing balanced positive and negative populations for the drifting field, as discussed in the following section.

Paired self-distillation and self-negative correction The construction of the positive and negative pools $\mathcal{J}_i^+$ and $\mathcal{J}_i^-$ requires careful consideration of sample selection. In particular, including the student anchor itself in the negative pool or retaining its paired teacher representation in the positive pool can introduce undesirable weighting effects. We therefore introduce a correction to mitigate these issues which will be introduced at the end of this section.

Directly including the student anchor x_i in the negative population can cause its self-affinity $\kappa_h(x_i, x_i) = 1$ to dominate the normalized negative weights, despite producing zero displacement. Conversely, including the paired teacher y_i^+ in the positive population while excluding x_i from the negative population introduces an asymmetric weighting of paired and unpaired interactions.

To characterize this asymmetry, we define the normalized paired-teacher affinity a_i, the weighted mean P_i of other teacher features, and the weighted mean N_i of other student features:

$$\begin{aligned} a_i &= a_{ii}^+, \\ P_i &= \frac{1}{1-a_i} \sum_{j \neq i} a_{ij}^+ y_j^+, \\ N_i &= \sum_{j \neq i} a_{ij}^- x_j. \end{aligned} \tag{8}$$

Here, a_{ij}^+ and a_{ij}^- are the row-normalized teacher and student affinities, respectively, with the student diagonal excluded from a_{ij}^-. The definition of P_i applies when $a_i < 1$; otherwise its weighted contribution vanishes.

The resulting drifting field admits a three-term decomposition:

$$\begin{aligned} \widehat{V}_i^{\text{masked}} = & \underbrace{a_i(y_i^+ - x_i)}_{\text{paired attraction}} \\ & + \underbrace{(1-a_i)(P_i - N_i)}_{\text{population correction}} \\ & + \underbrace{a_i(x_i - N_i)}_{\text{residual repulsion}}. \end{aligned} \tag{9}$$

The first term attracts the student towards its paired teacher, while the second captures the difference between the remaining teacher and student populations. The third term is an additional repulsive contribution caused by the mismatch in normalization: unpaired teacher features carry total weight $1 - a_i$, whereas other student features retain unit total weight.

The residual term may introduce an undesirable drift even when the teacher and student distributions are perfectly aligned on a pairwise basis. In this scenario, both the pairwise and population-level contributions vanish, whereas the residual term arising from the negative pool $\mathcal{J}_i^-$ remains nonzero. Consequently, the residual term continues to push the anchor away from its equilibrium position, disrupting the balance between attraction and repulsion. To eliminate this residual term, we introduce a *tied self-negative* construction that assigns the student anchor the same negative weight as its paired teacher's positive weight:

$$\widetilde{a}_{ij}^- = \begin{cases} a_i, & j = i, \\ (1-a_i)a_{ij}^-, & j \neq i. \end{cases} \tag{10}$$

This preserves the normalization $\sum_j \widetilde{a}_{ij}^- = 1$ while maintaining the relative affinities among other student features. The resulting field becomes

$$\boxed{\widehat{V}_i^{\text{tied}} = a_i(y_i^+ - x_i) + (1-a_i)(P_i - N_i).} \tag{11}$$

Although the self-negative contributes no direct displacement, its assigned weight reduces the repulsive contribution from other student states. Under exact pointwise teacher–student matching, the tied field vanishes, unlike the diagonal-masked formulation.

Table 1: Training objectives and experimental configurations. M0 provides the token-only baseline, M1 and M2 compare population-level drifting with pointwise feature regression, and M3 evaluates the tied self-negative correction described in Section 4.2. The legend labels are used consistently across figures.

ID	Figure legend	Training objective	Purpose
M0	`MTPloss`	Hard-teacher MTP only	Token-supervision baseline
M1	`Drift+MTPloss`	MTP + diagonal-masked drifting	Population-level alignment baseline
M2	`SmoothL1+MTPloss`	MTP + paired SmoothL1	Pointwise feature-regression baseline
M3	`TieDrift+MTPloss`	MTP + tied self-negative drifting	Self-negative correction ablation (Section 4.2)

4.3 Experimental design: drifting and its baselines

The experiments are designed to distinguish the effects of population-level alignment, pointwise feature regression, and self-negative correction. M0 provides the token-only reference, while M2 represents paired SmoothL1 regression. We also compare drifting with the student anchor excluded from the negative population (M1) and the proposed tied self-negative construction (M3) to investigate whether eliminating the residual repulsive term improves representation alignment and downstream multi-token prediction performance. All configurations retain the same hard-teacher MTP objective to enable controlled comparisons.

We will compare these families at matched initialization, data exposure, and evaluation settings wherever feasible. In the pilot configurations, the drifting coefficient $w_{\mathrm{drift}} = 0.05$ corresponds to an approximately 30% auxiliary-to-token gradient-norm ratio; SmoothL1 with $w_{\mathrm{SmoothL1}} = 0.53$ corresponds to approximately 20%.

4.4 Evaluation: from feature geometry to rollout performance

A geometric improvement matters for this proposal only if its relationship to generation can be measured. We therefore separate latent diagnostics from end-to-end rollout outcomes. The current pilot uses MetaMathQA for training and GSM8K for free-rollout evaluation; broader benchmarks will be chosen for larger checkpoints. The frozen autoregressive teacher under sequential decoding ($k = 1$) is the capability-retention reference.

Feature spread, maximum mean discrepancy (MMD) [3], and Sinkhorn transport cost [1] assess different aspects of teacher–student geometry.We also evaluate token-level expected calibration error (ECE) [4] to assess how closely the model's predicted token confidence reflects its empirical prediction accuracy. All metrics are reported separately for each prediction horizon to isolate horizon-dependent effects and avoid confounding trends arising from aggregating predictions across different horizons. Free-rollout accuracy is compared against the effective number of emitted tokens per decoding pass,

$$k_{\mathrm{eff}} = \frac{\text{emitted non-padding tokens}}{\text{decoding forward passes}}. \tag{12}$$

Both fixed-k and confidence-adaptive decoding will be assessed. Measured tokens per second and end-to-end latency will be reported separately, because k_{eff} is a proxy for acceleration rather than a wall-clock speedup.

4.5 Preliminary Results: 1B pilot

We conducted preliminary experiments on a 1B-parameter model to evaluate the effects of different latent supervision objectives on representation geometry and token generation. In particular, we examine whether the tied self-negative correction improves the alignment properties of conventional drifting while preserving its population-level geometric behaviour. The experimental configurations are summarized in Table 1.

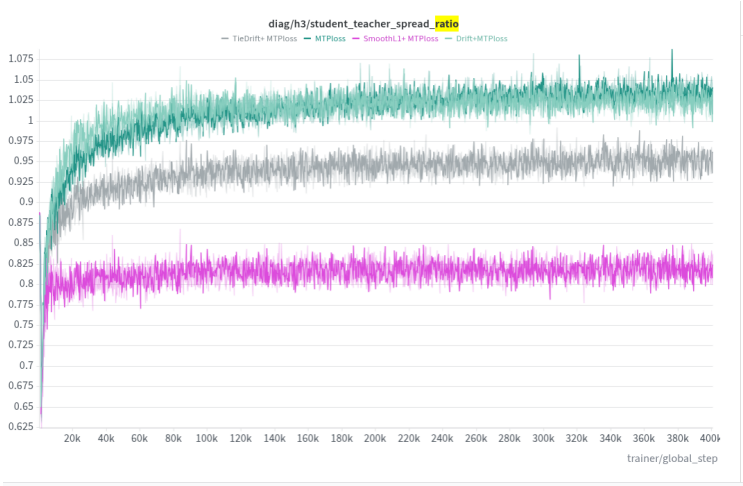


Figure 1: **Effect of latent regularization on relative feature spread at prediction horizon $h = 3$.** ««««< HEAD very challenging to read. Maybe increase the font size? also the student/teacher ratio is not clear. Should put the definition to appendix or make citation in text. The horizontal axis represents the global training step, =======
The horizontal axis represents the micro training step, »»»> 4b1af37 (Revision from FT's Comments) while the vertical axis shows the ratio of the student's mean pairwise latent-state feature distance to that of the frozen teacher. Paired SmoothL1 regression produces the strongest contraction (approximately 0.82), while conventional drifting and the token-only baseline maintain ratios close to unity (approximately 1.03). The tied self-negative formulation achieves an intermediate ratio (approximately 0.95), preserving more feature dispersion than SmoothL1 while exhibiting slightly greater contraction than conventional drifting. The experimental configurations corresponding to each legend entry are defined in Table 1, and definition of student_teacher_spread_ratio is in paragraph 4.5.

Geometric spread: drifting preserves relative dispersion. student_teacher_spread_ratio is a metric developed to compare how widely the student's predictions are spread with how widely the teacher's are. At prediction horizon h, let $\{s_i\}_{i=1}^N$ and $\{t_i\}_{i=1}^N$ denote the student and teacher predictive hidden states at the N supervised positions. We define

$$\rho_h = \frac{\bar{d}_{SS}}{\bar{d}_{TT} + \epsilon}, \qquad \bar{d}_{SS} = \frac{1}{N(N-1)} \sum_{i \neq j} \|s_i - s_j\|_2, \qquad \bar{d}_{TT} = \frac{1}{N(N-1)} \sum_{i \neq j} \|t_i - t_j\|_2, \quad (13)$$

with $\epsilon = 10^{-8}$. It $\rho_h < 1$ means the student is under-dispersed, collapsing toward a mean prediction; $\rho_h > 1$ means it is over-dispersed; and $\rho_h \approx 1$ means the two spreads are similar.

Figure 1 compares the ratio of mean pairwise student and teacher feature distances at prediction horizon $h = 3$. Paired SmoothL1 regression produces the strongest contraction of student representations, whereas conventional drifting maintains a spread ratio close to unity. The tied self-negative formulation exhibits similarly preserved feature dispersion, suggesting that correcting the asymmetric repulsive field does not substantially compromise this property of drifting. However, agreement in average pairwise distance alone does not establish complete distributional alignment.

Distribution alignment: tied drifting improves short-horizon matching. Figure 2 evaluates teacher–student alignment using maximum mean discrepancy (MMD) and Sinkhorn transport cost across prediction horizons. Conventional drifting generally improves MMD relative to token-only MTP at longer horizons, but exhibits weaker alignment at the first prediction position. The tied self-negative formulation reduces this short-horizon discrepancy, particularly at $k = 1$, while maintaining comparable MMD at longer horizons. This behaviour is consistent with the proposed self-negative correction: excluding the student anchor while retaining its paired teacher introduces an additional repulsive contribution $a_i(x_i - N_i)$, which may displace student features away from their paired teacher representations. Removing this residual term may therefore be particularly beneficial at short horizons, where the prediction state more closely resembles the next-token prediction (NTP) setting.

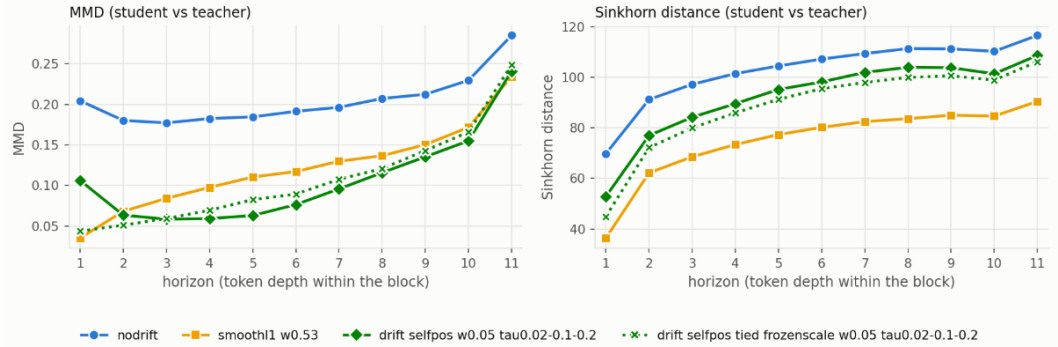


Figure 2: **Tied self-negative drifting improves short-horizon distribution alignment.** Maximum mean discrepancy (MMD; left) and Sinkhorn transport cost (right) between student and frozen-teacher feature distributions across prediction horizons. Lower values indicate closer agreement under the respective metrics. Conventional drifting improves MMD relative to token-only MTP at longer horizons but exhibits a larger discrepancy at $k = 1$. The tied self-negative correction reduces this short-horizon MMD while maintaining comparable performance at longer horizons. SmoothL1 achieves lower Sinkhorn costs across the evaluated horizons, highlighting differences between distributional matching criteria.

Nevertheless, the Sinkhorn results show that SmoothL1 remains competitive, indicating that different regularizers favour distinct aspects of representation alignment.

Rollout performance: geometric alignment and generation accuracy. The practical objective is to improve generation accuracy at a given effective number of emitted tokens per pass. Figure 3 compares GSM8K free-rollout accuracy against effective k under confidence-adaptive and fixed-k decoding. Both drifting formulations generally improve the accuracy–acceleration trade-off relative to token-only MTP over much of the evaluated range. The tied self-negative formulation remains competitive with conventional drifting and achieves higher accuracy at several intermediate operating points, although neither method consistently dominates. SmoothL1 also remains competitive, particularly at selected operating points. These preliminary results suggest that correcting the self-negative interaction can improve short-horizon representation alignment without sacrificing the generation benefits associated with population-level regularization.

These pilots establish a concrete next step: determine which geometric properties are predictive of rollout quality, and where pointwise regression, drifting, or their combination is preferable. The 8B study will repeat the comparisons with matched budgets, broader bandwidth and horizon sweeps, and stronger validation before moving to the final larger-model experiment.

5 Risks

The wrong neighbours can give the wrong drift. A teacher feature may be close in Euclidean distance without representing a comparable prediction context. Small or heterogeneous pools could therefore push the student in unhelpful directions, especially at longer horizons. We will inspect pool composition and kernel weights by horizon, vary bandwidth and pool size, and omit updates when too few usable neighbours are available.

A better-looking feature space may not generate better answers. The pilot already shows why feature distances cannot be the sole success criterion: SmoothL1 and drifting change spread and transport cost differently. Strong regularization may also damage the token objective. We will compare methods at similar auxiliary gradient strengths and judge improvements primarily by free-rollout accuracy at matched effective k, followed by measured throughput and latency.

Training overhead versus inference gains. Drifting introduces additional computational overhead during training through pairwise feature interactions, which may limit its practicality at larger model

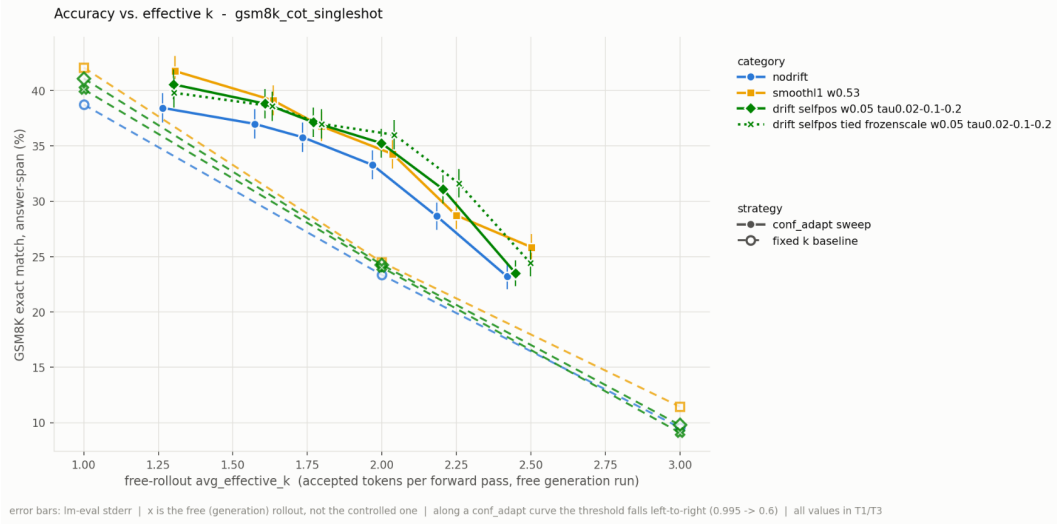


Figure 3: **Accuracy–acceleration trade-off under different latent regularization objectives.** GSM8K free-rollout exact-match accuracy versus the effective number of emitted tokens per forward pass for the 1B pilot models. Filled markers connected by solid lines represent confidence-adaptive decoding, while open markers and dashed lines indicate fixed-(k) decoding. Both conventional and tied self-negative drifting generally improve accuracy over token-only MTP at comparable effective prediction horizons. Tied drifting remains competitive with conventional drifting, with improvements at several intermediate operating points. Error bars indicate evaluation standard errors. Higher accuracy and larger effective (k) are preferable, although effective (k) does not directly measure wall-clock acceleration.

scales. We will measure training wall-clock time to quantify this additional cost and compare inference latency and token throughput across different training objectives. These measurements will establish whether improvements in generation quality and inference efficiency justify the additional training cost.ference gain.

Results on one maths benchmark may not transfer. The current evidence comes from MetaMathQA-trained models evaluated on GSM8K. It does not establish benefits for other reasoning tasks or open-ended generation. Larger-model evaluation will therefore include held-out tasks beyond GSM8K, with benchmark overlap checked and model-selection data kept separate from final tests.

6 Timeline & Resource Requirements

The baseline reproduction is complete, and the current work is moving from 1B pilot diagnostics to controlled hyperparameter selection and larger-model validation. The remaining phases depend on compute availability.

1. **Completed:** reproduce on-policy MTP, establish the frozen-teacher reference, and validate free-rollout evaluation.
2. **Ongoing:** compare drifting, SmoothL1, and combined losses at 1B; examine feature geometry and the effects of kernel bandwidth and training horizon.
3. **Next:** use an 8B model to select hyperparameters under matched training budgets, with repeated evaluations and additional reasoning benchmarks.
4. **Final study:** transfer the selected settings to a 32B mixture-of-experts (MoE) model and measure accuracy, effective k, throughput, and latency.

Computing resource request. For 2 billion training tokens and a frozen teacher, we estimate approximately 10 hours of idealized compute for an 8B dense model using four NVIDIA B200 GPUs at 40% model FLOPs utilization. We request access to four B200 GPUs for approximately two days per 8B configuration to allow for MTP-specific overhead, evaluation, and profiling. Multiple configurations and seeds would require additional allocations. The final 32B MoE run will be budgeted after profiling its active-parameter compute and full-model memory requirements. Access to GPUs, storage, and large-model training support from the University of Oxford Department of Computer Science and the MediaTek Computing Research Centre would help complete the proposed comparisons.

References

[1] Marco Cuturi. Sinkhorn distances: Lightspeed computation of optimal transportation distances. In *Advances in Neural Information Processing Systems*, volume 26, pages 2292–2300, 2013. URL https://arxiv.org/abs/1306.0895.

[2] Mingyang Deng, He Li, Tianhong Li, Yilun Du, and Kaiming He. Generative modeling via drifting. *arXiv preprint arXiv:2602.04770*, 2026. doi: 10.48550/arXiv.2602.04770. URL https://arxiv.org/abs/2602.04770.

[3] Arthur Gretton, Karsten M. Borgwardt, Malte J. Rasch, Bernhard Schölkopf, and Alexander Smola. A kernel two-sample test. *Journal of Machine Learning Research*, 13(25):723–773, 2012. URL https://www.jmlr.org/papers/v13/gretton12a.html.

[4] Abhinav Joshi, Areeb Ahmad, and Ashutosh Modi. Calibration across layers: Understanding calibration evolution in LLMs. *arXiv preprint arXiv:2511.00280*, 2025. doi: 10.48550/arXiv.2511.00280. URL https://arxiv.org/abs/2511.00280.

[5] John Kirchenbauer, Abhimanyu Hans, Brian Bartoldson, Micah Goldblum, Ashwinee Panda, and Tom Goldstein. Multi-token prediction via self-distillation. *arXiv preprint arXiv:2602.06019*, 2026. doi: 10.48550/arXiv.2602.06019. URL https://arxiv.org/abs/2602.06019.

7 Notation Reference

Table 2: Summary of notation used in the methodology.

Symbol	Definition
$i = (r, j)$	Active prediction position in region r, horizon j
r	MTP prediction region index
j	Prediction horizon within an MTP region
N_{act}	Number of active prediction positions
d	Dimension of the latent feature space
S, T	Student and frozen teacher models
u_i^S, u_i^T	Student and teacher hidden states at position i
ϕ_S, ϕ_T	Student and teacher feature normalization maps
x_i	Normalized student latent representation
y_i^+	Corresponding normalized teacher representation
y_l^-	Detached student representation used as a negative
$\text{sg}(\cdot)$	Stop-gradient operation
$\mathcal{J}_i^+$	Positive (teacher) sample pool for anchor i
$\mathcal{J}_i^-$	Negative (student) sample pool for anchor i
κ_h	Laplace affinity kernel in feature space
τ_h	Kernel temperature (distance scale)
a_{il}^+	Normalized positive affinity weight
a_{il}^-	Normalized negative affinity weight
$\widehat{V}_i$	Estimated drifting field at anchor x_i
η	Drift target displacement scale
ϵ	Numerical stability constant
$\mathcal{L}_{\text{SmoothL1}}$	Paired latent-state regression loss
ρ_β	SmoothL1 penalty function
β	SmoothL1 quadratic-to-linear transition threshold
$\mathcal{L}_{\text{drift}}$	Drifting regularization loss