

Exercises- Week 4

Wednesday, September 11, 2024 3:35 PM

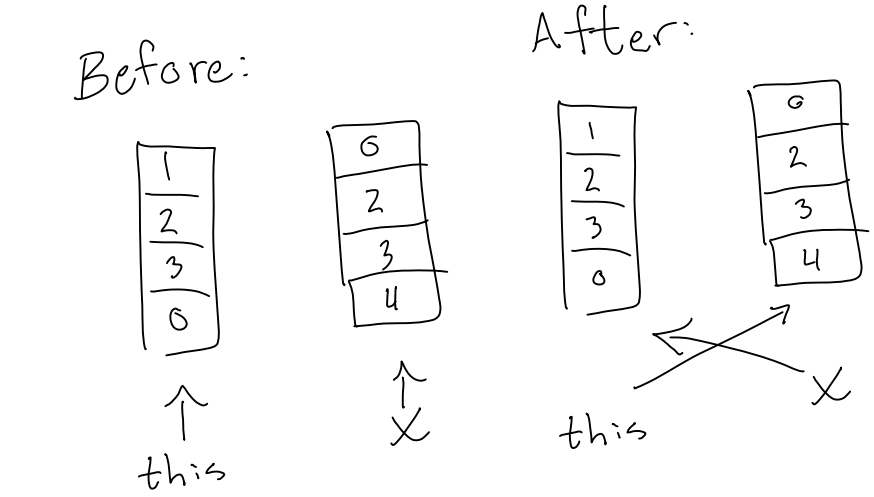

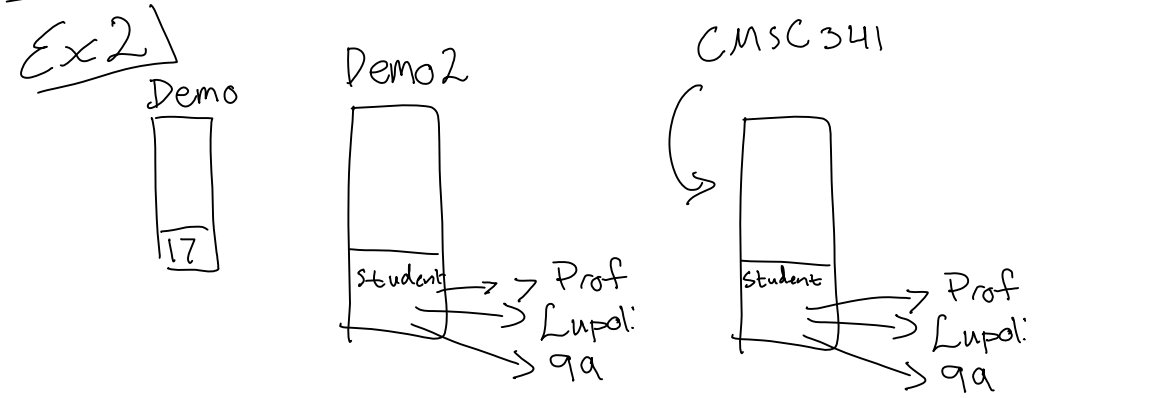

Comparison, assignment, cout operators are overloaded because a stack can contain any data type, including class data types.

Ex Coding for STL

What is the difference between the 2 versions you chose?
I chose version 1 and 2.

Header: *The difference between v1 and v2 is that v1 defines the displayStack and displayQueue in this file.*
Source: *v1 and v2 initialize their overloaded functions here. V1 actually defines them in this class.*
Driver: *v2 defines all of it's overloaded functions in this class, as well as the template functions.*

What are the similarities?
They all contain the same function definitions.

Are the includes for each file spaced differently?
Yes, but I don't know if there's any reason why.

What did you learn from this exercise?
I already knew that you can define functions in new locations. I guess I didn't know you could define a template outside of the location it's being used but I guess since driver.cpp was including the files which had the functions defined then it doesn't matter.

What do you like about each version?
V1 creates all of the template functions where they will be used, which is good and bad, but I didn't like the placement of any of the rest of their function definitions. V2 placed it's function definitions almost exclusively inside of the Student.cpp class which is where I think they should go.

Do you have any other questions?
No.

Big Oh notes for Stacks

Method	Big O(STL)	Notes
erase	O(n)	
size	O(1)	
Push_back	O(1)	
Pop_back	O(1)	
display	??	??