

Beamer template

Using pandoc, knitr, Weave, etc...

Timothée Poisot

Université de Montréal

November 28, 2017

MAIN GOALS

- 1. Easy generation of slides
- 2. Integration with R and Julia
- 3. Looks nice

FONTS AND SPACING

The document uses the Noto family - https://www.google.com/get/noto/

Main body Noto Sans (or Serif)

Maths Noto Sans

Code Noto Mono

The linespread value has been increased to about 1.3

SERIF FONT THEME

The default font theme is sans serif. You can change the template/pl.tex first line to:

```
@@ -1,4 +1,4 @@
-\documentclass[11pt, compress, aspectratio=1610]{beamer}
+\documentclass[11pt, compress, aspectratio=1610, serif]{beamer}
\usetheme{pl}
```




The structure elements are in teal, inline code is in blue, and alerted text in orange.

The background is off-white: it will *look* like it's white, but with less eyestrain.

The foreground is not-quite-black either.

TABLES

PID	COMMAND	%CPU	TIME	#TH
25645	top	16.3	00:02.03	1/1
25642	bash	0.0	00:00.01	1
25641	login	0.0	00:00.02	2
25634	mdworker	0.0	00:00.07	3
25624	mdworker	0.0	00:00.14	4
25591	mdworker	0.0	00:00.14	3
25571	com.apple.iC	0.0	00:00.31	5
25414	installd	0.0	00:00.52	2
25366	com.apple.We	0.0	00:00.07	4

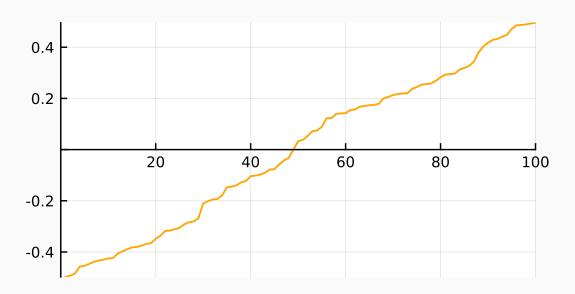

The Input family of fonts has some support for Greek and mathematical symbols:

$$\frac{1}{N}\frac{d}{dt}N = N(r - \alpha N)$$

You can use \alert within math blocks.

Using sections

SECTION TITLES

Every section will have a small band with the background image.

They are first-level headers in markdown:

Section


Slide-title

Slide content

There is a customized color scheme for code highlighting.

```
a = 2.0
b, c = "abc", 'c'
# This code does nothing (useful)
for i in 1:10
   rand()
   @elapsed println("i:\t$i")
end
```

We can also use unicode characters.

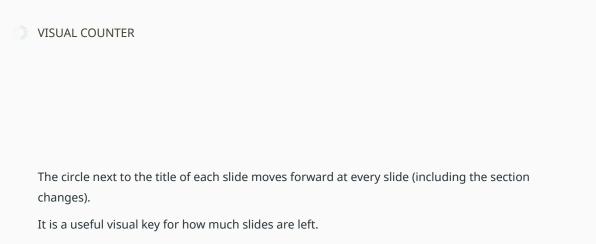

OUTPUT

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Morbi sollicitudin nisi vitae lorem interdum, eget elementum quam elementum. Curabitur quis leo eu metus consequat ultricies. Curabitur sit amet convallis risus. Cras vel arcu id risus efficitur commodo et eget velit. Curabitur consequat eleifend magna, ut ultricies lorem scelerisque eu. Mauris faucibus neque sit amet est elementum, suscipit placerat est interdum. Phasellus sed convallis est. Nunc fermentum convallis odio eget gravida. Duis venenatis dictum tempor.



The background image is generated from the makebackground. j1 file. It's the k-nearest neighbour graph of a series of random points.

The file is background. png – it can be replaced by any file as long as the replacement file is in the 16:10 format (for example, a 1600×1000 image).



This is to avoid the awkward "Switching to black" thing that happens when there are no slides

The final slide displays the background picture.

left.

Reproducible documents



Documents slides. Jmd and slides. Rmd will be detected.

They will be converted to slides.md using either R/knitr or Julia/Weave.jl.


Specific commands

CROPPED IMAGES

The roundpicture command will display a picture, resized to fit into a circle:

\roundpicture{images/nb.png}{Optional text}

Note that the image must be a square.



PLAIN SLIDE

This will create a plain slide:

```
## {.plain}

\plain{This is large text on the background image.}
```

Note that the text within the \plain command must be LTEX.

This is large text on the background image.

