



RETO

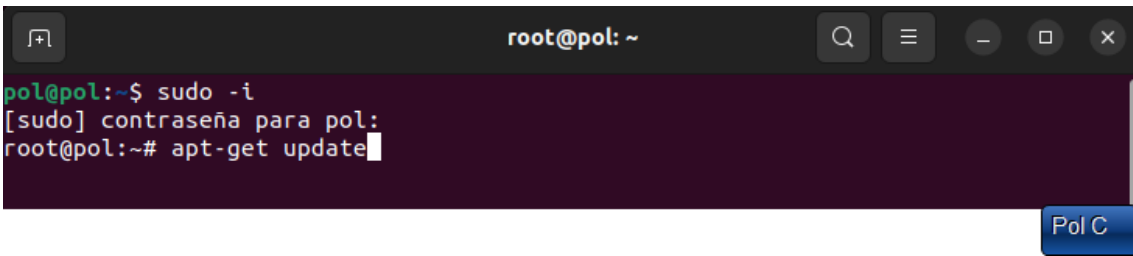


En la terminal ponemos el siguiente comando para entraren modo administrador

A terminal window titled 'pol@pol: ~' with search, menu, and window control icons. The prompt is 'pol@pol:~\$' and the command 'sudo -i' is being entered. A blue button labeled 'Pol C' is at the bottom right.

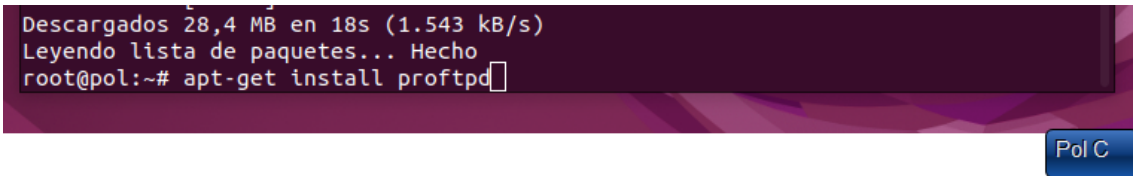
```
pol@pol:~$ sudo -i
```

Después este comando para activar todos los paquetes

A terminal window titled 'root@pol: ~' with search, menu, and window control icons. It shows the transition from 'pol@pol:~\$' to 'root@pol:~#' after entering 'sudo -i' and providing a password. The command 'apt-get update' is entered. A blue button labeled 'Pol C' is at the bottom right.

```
pol@pol:~$ sudo -i
[sudo] contraseña para pol:
root@pol:~# apt-get update
```

Y este para activar FTP

A terminal window titled 'root@pol: ~' with search, menu, and window control icons. It shows the output of 'apt-get update' and then the command 'apt-get install proftpd' being entered. A blue button labeled 'Pol C' is at the bottom right.

```
Descargados 28,4 MB en 18s (1.543 kB/s)
Leyendo lista de paquetes... Hecho
root@pol:~# apt-get install proftpd
```

Para mirar el estado de FTP

```
root@pol:~# service proftpd status
● proftpd.service - ProFTPD FTP Server
   Loaded: loaded (/lib/systemd/system/proftpd.service; enabled; vendor prese
   Active: active (running) since Fri 2026-03-06 12:53:32 CET; 50s ago
 Main PID: 5139 (proftpd)
    Tasks: 1 (limit: 4542)
   Memory: 4.8M
      CPU: 92ms
   CGroup: /system.slice/proftpd.service
           └─5139 "proftpd: (accepting connections)" "" "" "" "" "" "" "" "" ""
mar 06 12:53:31 pol systemd[1]: Starting ProFTPD FTP Server...
mar 06 12:53:31 pol proftpd[5137]: Checking syntax of configuration file
mar 06 12:53:32 pol systemd[1]: Started ProFTPD FTP Server.
```

Después este comando es para abrir el archivo de configuración FTP

```
root@pol:~# vi /etc/proftpd/proftpd.conf
```

Y en el mismo documento ponemos el siguiente comando el cual eliminia líneas innecesarias

```
# Disable MultilineRFC2228 per https://github.com/proftpd/proftpd/issues/1085
:/^s*#/d
```

:/^S/d

Luego este para poder ver nuestra IP

```
root@pol:~# ifconfig
docker0: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    inet 172.17.0.1 netmask 255.255.0.0 broadcast 172.17.255.255
    ether b2:40:d3:dc:83:38 txqueuelen 0 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

ens33: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.100.88 netmask 255.255.255.0 broadcast 192.168.100.255
    inet6 fe80::9100:e664:abe5:60fd prefixlen 64 scopeid 0x20<link>
    ether 00:0c:29:f1:83:2d txqueuelen 1000 (Ethernet)
    RX packets 362182 bytes 496968798 (496.9 MB)
    RX errors 0 dropped 161 overruns 0 frame 0
    TX packets 72579 bytes 4960281 (4.9 MB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Bucle local)
    RX packets 361 bytes 36703 (36.7 KB)
```

Pol C

Y al final entrar el el servicio FTP

```
pol@pol:~$ ftp 172.17.0.1
Connected to 172.17.0.1.
220 Servidor ProFTPD (Debian) [::ffff:172.17.0.1]
Name (172.17.0.1:pol): pol
331 Contraseña necesaria para pol
Password:
230 Usuario pol conectado
Remote system type is UNIX.
Using binary mode to transfer files.
ftp>
```

Pol C