

Task-Conditioned Action Discrimination for Long-Tailed Vision-Language-Action Policies

Yan-Hao Chen

cyhao@stu.xmu.edu.cn

Abstract

Long-tailed demonstration data is a practical obstacle for vision-language-action (VLA) policies: common manipulation skills receive many demonstrations, while rare tasks may have only a handful of trajectories. Prior work on long-tailed robotic imitation learning argues that tail failures are exposed during target approaching and proposes augmenting approach trajectories. In this paper, we study a complementary failure mode: rare-task policies often fail to bind the language-conditioned target to the demonstrated action. We introduce Task-Conditioned Action Discrimination (TCAD), a training-only objective that contrasts the likelihood of an expert action under the correct instruction against counterfactual wrong-target instructions. We combine TCAD with a moderate rare-aware behavior cloning weight, yielding Rare-Balanced Task-Conditioned Action Discrimination (RBTAD). The method adds no modules, uses no generated positive trajectories, and has no inference-time cost. A diagnostic on LIBERO-Core-LT shows that a behavior-cloned baseline assigns higher or equal action likelihood to wrong-target instructions in 64.5% of sampled pre-contact states. In our current single-seed evaluation, RBTAD reaches 40.0% success on LIBERO-Core-LT and improves a controlled LIBERO-Core-Full comparison from 43.0% to 50.0%. On a newly constructed LIBERO-Spatial-LT screening split, a relation-localized delta fusion variant improves one matched seed from 19.0% to 25.0%, while a second seed improves only from 17.0% to 18.0%. These mixed results suggest that long-tailed robotic imitation benefits from directly regularizing and localizing task-conditioned action boundaries, but also show that the current Spatial-LT correction is not yet a reliable multi-seed solution.

1 Introduction

Generalist robot policies increasingly use vision-language-action (VLA) architectures to map visual observations and natural-language instructions to continuous robot actions. This formulation promises broad skill coverage, but it inherits a structural property of real robot data: demonstrations are not uniformly distributed. Everyday tasks such as picking and placing common objects are frequent, while rare object-relation combinations may appear only a few times.

Long-tailed imitation learning differs from long-tailed image classification in a crucial way. The model is not only choosing a class label; it must produce a temporally coherent action sequence conditioned on a language instruction, object layout, and robot state. A rare task failure can therefore arise from several sources: insufficient exposure, poor spatial grounding, weak object binding, or interference between semantically adjacent tasks. Simply increasing the sampling frequency of rare demonstrations may not create the missing spatial or action diversity.

The first long-tailed robotic imitation benchmark, Beyond the Majority [8], makes this issue concrete. It constructs LIBERO-Core-LT from LIBERO tasks, with the steep task-frequency profile shown in Figure 1, and shows that conventional re-sampling barely improves the miniVLA baseline. The paper diagnoses a large increase in target-approach failures under long-tailed training and proposes Approaching-Phase Augmentation (APA), which transfers head-task approaching trajectories to tail objects. APA is an important first step, but

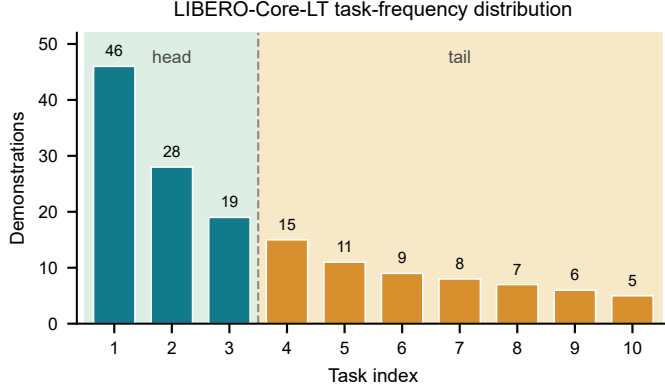


Figure 1: LIBERO-Core-LT task-frequency distribution. Following Beyond the Majority [8], the benchmark contains three head tasks and seven tail tasks, making it a compact simulated testbed for long-tailed robotic imitation.

it also leaves open a more general question: can we improve rare-task policies without synthesizing new positive trajectories or depending on a particular phase decomposition?

We approach the problem from a different angle. Our hypothesis is that long-tailed VLA policies suffer from weak *task-conditioned action boundaries*. Given the same observation and the same expert action, a well-grounded policy should assign the action higher likelihood when paired with the correct instruction than when paired with a plausible but wrong target instruction. If a policy assigns similar or higher likelihood under the wrong instruction, it has not learned a stable binding between the task description and the action distribution.

This hypothesis is testable without training a new model. On 200 sampled pre-contact states from a behavior-cloned LIBERO-Core-LT baseline, we replace the correct target instruction with a wrong-target instruction and compute the expert-action log-likelihood margin. The mean margin is negative (-0.4787), and only 35.5% of samples have a positive margin. In other words, in 64.5% of these states the baseline does not prefer the correct task/action pairing over the counterfactual one. This diagnostic suggests a direct training objective: make the correct instruction/action pairing more likely than counterfactual wrong-target pairings, while keeping the original behavior cloning objective intact.

We propose Task-Conditioned Action Discrimination (TCAD), a mild ranking regularizer for VLA fine-tuning. For eligible samples, TCAD compares the log-likelihood of the expert action under the correct instruction and under a counterfactual instruction. It penalizes the model only when the correct pairing does not exceed the counterfactual pairing by a small margin. To address long-tailed positive-signal imbalance, we combine TCAD with moderate rare-aware behavior cloning weighting. The resulting method, Rare-Balanced Task-Conditioned Action Discrimination (RBTAD), is deliberately simple: it changes only the training loss, adds no inference-time computation, and does not generate new positive demonstrations.

Our current results are preliminary but encouraging. On LIBERO-Core-LT, RBTAD reaches 40.0% success in a single-seed 30-rollout-per-task evaluation. This is above the 36.1% APA result reported by Beyond the Majority, but we treat the comparison cautiously because our current run is not yet a full three-seed reproduction of the reported protocol. In a controlled LIBERO-Core-Full counterpart experiment using the same seed and evaluation budget, a baseline reaches 43.0%, while the TCAD-trained policy reaches 50.0%. We further construct LIBERO-Spatial-LT as an additional simulated long-tail split. On this relation-only split, a relation-localized delta fusion variant improves one matched seed from 19.0% to 25.0%, but a second matched seed moves only from 17.0% to 18.0%. This exposes the central remaining problem: relation correction can be useful, but the current localization is not stable enough to claim a finished Spatial-LT

method.

Our contributions are:

- We identify task-conditioned action ambiguity as a concrete failure mode in long-tailed VLA fine-tuning and introduce an instruction-swap diagnostic to measure it.
- We propose TCAD, a training-only action-likelihood ranking objective, and RBTAD, its rare-aware long-tail version. The method does not add modules, generated trajectories, or inference-time cost.
- We report controlled results on LIBERO-Core-LT and LIBERO-Core-Full showing that the proposed objective improves over behavior cloning under the current evaluation setting, while clearly marking remaining protocol and cross-dataset experiments needed before a stronger SOTA claim.

2 Related Work

Vision-language-action policies. VLA policies train multimodal models to condition robot actions on visual observations and language instructions. OpenVLA [5], Octo [6], RT-1 [2], and related systems demonstrate that large policy models can absorb diverse manipulation data and transfer across tasks. Smaller or more efficient VLA variants such as miniVLA [1] reduce the cost of fine-tuning and evaluation. Our work studies a fine-tuning-time failure mode of such policies under long-tailed task distributions.

Long-tailed recognition and rebalancing. Long-tailed visual recognition has developed a large family of re-sampling, re-weighting, classifier decoupling, and representation learning methods [7, 4, 3]. These methods address imbalanced supervision in classification, where the final prediction is a discrete category. Long-tailed robot imitation is different: each task requires continuous action generation, and tail failures may arise from spatial grounding or language-action binding rather than only a biased classifier prior. We therefore use reweighting only as a modest positive-signal correction, not as the main mechanism.

Long-tailed robotic imitation learning. Beyond the Majority [8] introduces LIBERO-Core-LT and shows that standard re-sampling is ineffective for miniVLA fine-tuning. It diagnoses target-approach failures and proposes APA, which creates approach-phase demonstrations by transferring head-task approach segments to tail objects. Our method is complementary but different in mechanism. Rather than generating positive approach trajectories or rewriting all tasks into a phase-structured instruction format, we regularize the conditional action likelihood under counterfactual task instructions.

Contrastive and counterfactual objectives. Contrastive training encourages models to distinguish compatible pairs from incompatible ones. In language-conditioned robotics, this principle is attractive because the same image and action can be paired with different task descriptions, exposing whether the policy truly uses the instruction. TCAD uses this idea at the action-likelihood level: it contrasts the expert action under the correct task against the same action under a wrong-target task. Unlike hard unlikelihood training, our loss is a mild margin ranking loss, which reduces the risk of penalizing shared early approach actions that may be plausible for multiple tasks.

3 Diagnostic: Task-Conditioned Action Ambiguity

We first ask whether a behavior-cloned long-tail policy actually prefers correct task/action pairings. Let o_t be the observation, ℓ the language instruction, and a_t the expert action. For a counterfactual wrong-target

Table 1: Instruction-swap margin diagnostic on a behavior-cloned LIBERO-Core-LT baseline. Negative margins indicate that the model does not prefer the correct instruction over a wrong-target instruction for the same observation and expert action.

Split	Samples	Mean margin	Positive margin rate
All sampled states	200	-0.4787	35.5%
Tail-heavy relation tasks	44	-1.0950	18.2%

instruction ℓ^- , we compute

$$\Delta(o_t, a_t, \ell, \ell^-) = \log p_\theta(a_t \mid o_t, \ell) - \log p_\theta(a_t \mid o_t, \ell^-). \quad (1)$$

A positive margin means the model assigns higher likelihood to the demonstrated action under the correct instruction. A non-positive margin indicates that the model is indifferent to, or even prefers, the wrong task description for the same expert action.

Setup. We use a miniVLA behavior-cloning checkpoint fine-tuned on LIBERO-Core-LT. We sample 200 pre-contact states and construct wrong-target instructions by replacing the target object or target relation with a plausible alternative from the task set. This diagnostic is deliberately conservative: it does not modify images or actions, and it does not assume the counterfactual action is globally impossible. It only tests whether the model has learned a local preference for the demonstrated task/action pairing.

Observation. Table 1 shows that the mean margin is negative and that only 35.5% of samples have a positive margin. The effect is stronger on relation-heavy tail tasks such as placing an object on a rack, in a bowl, or on top of a cabinet. This supports the view that long-tail degradation is not only a frequency problem. The policy can see a familiar scene and action yet fail to condition that action on the correct task language.

Implication for method design. The diagnostic also warns against an overly aggressive contrastive objective. Some early approach actions may be shared by multiple tasks, so treating every wrong-target pair as a hard negative could introduce false negatives. TCAD therefore uses a mild margin loss, applies it to a subset of eligible samples, and keeps the original behavior cloning objective as the main learning signal.

4 Method

We study supervised VLA fine-tuning on a long-tailed imitation dataset

$$\mathcal{D} = \{(o_t, \ell_i, a_t, i)\}, \quad (2)$$

where i indexes the task, ℓ_i is the instruction, o_t is the multimodal observation, and a_t is the expert action. A baseline policy is trained by behavior cloning:

$$\mathcal{L}_{\text{BC}} = -\mathbb{E}_{(o_t, \ell_i, a_t) \sim \mathcal{D}} \log p_\theta(a_t \mid o_t, \ell_i). \quad (3)$$

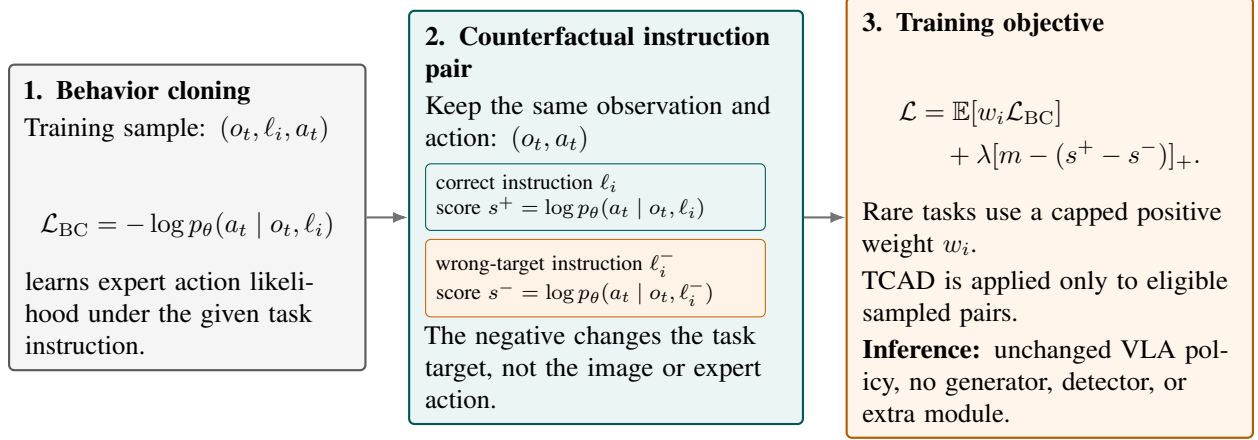


Figure 2: Method overview. RBTAD keeps the standard behavior-cloning pathway, but adds a counterfactual instruction pair during training. For the same observation and expert action, TCAD encourages the correct instruction score s^+ to exceed the wrong-instruction score s^- by a mild margin, while rare-aware behavior cloning prevents tail positive demonstrations from being drowned out. The learned policy has the same inference architecture and cost as the baseline.

4.1 Rare-Aware Behavior Cloning

Let n_i be the number of demonstrations for task i . Long-tailed fine-tuning can under-train rare positive behaviors because gradients from head tasks dominate the update stream. We use a capped task weight

$$w_i = \begin{cases} w_{\text{rare}}, & n_i \leq \tau, \\ 1, & n_i > \tau, \end{cases} \quad (4)$$

where τ is a rare-task threshold and w_{rare} is moderate. In our LIBERO-Core-LT run we use $\tau = 9$ and $w_{\text{rare}} = 3.0$. This component is intentionally simple. It does not try to solve the full problem by re-sampling; it only prevents rare positive demonstrations from being numerically drowned out.

4.2 Task-Conditioned Action Discrimination

For an eligible sample, we construct a counterfactual instruction ℓ_i^- that changes the task target while keeping the observation and expert action fixed. We then compare the action likelihood under the correct and counterfactual instructions:

$$s^+ = \log p_{\theta}(a_t | o_t, \ell_i), \quad (5)$$

$$s^- = \log p_{\theta}(a_t | o_t, \ell_i^-). \quad (6)$$

TCAD penalizes the model when the correct score does not exceed the negative score by a margin m :

$$\mathcal{L}_{\text{TCAD}} = \mathbb{E} [\max(0, m - (s^+ - s^-))]. \quad (7)$$

The final objective is

$$\mathcal{L} = \mathbb{E} [w_i \mathcal{L}_{\text{BC}}] + \lambda \mathcal{L}_{\text{TCAD}}. \quad (8)$$

4.3 Negative Instruction Construction

The negative instruction should be plausible enough to test task grounding, but not so broad that it creates many false negatives. In the current implementation, we use task-level instruction templates and replace the manipulated object or target receptacle with a semantically adjacent alternative from the same benchmark task set. For example, an instruction about placing the wine bottle on the rack can be contrasted with a similar instruction about placing it on top of the cabinet. If no valid replacement is available, the sample is skipped.

4.4 Eligibility and Mildness

TCAD is not applied to all tokens and all states. We use a sampling ratio ρ and a confidence gate based on the batch median to keep the regularizer mild. The main LIBERO-Core-LT setting uses $\lambda = 0.1$, $\rho = 0.5$, and margin $m = 0.2$. This choice reflects the diagnostic in Section 3: wrong-target pairs are informative, but some early actions may be shared across tasks. A mild ranking loss is therefore safer than hard unlikelihood or all-state negative training.

4.5 Computational Cost

RBTAD modifies only the training objective. It adds a second forward pass for selected negative instruction pairs during fine-tuning, but the learned policy has the same architecture and inference cost as the baseline. No detector, segmenter, image generator, or trajectory generator is introduced.

5 Experiments

5.1 Benchmarks and Evaluation

We evaluate on the LIBERO-based long-tail setting introduced by Beyond the Majority [8]. The main simulated benchmark is LIBERO-Core-LT, a 10-task long-tailed split with three head tasks and seven tail tasks. We also report a controlled LIBERO-Core-Full counterpart experiment using the same training and evaluation pipeline. Finally, we report LIBERO-Spatial-LT, a simulated long-tail split constructed from LIBERO-Spatial to test whether the same problem appears when tasks share the same object and goal but differ in source spatial relation.

Unless otherwise specified, our evaluations use 30 rollouts per task for LIBERO-Core-LT and LIBERO-Spatial-LT, and 50 rollouts per task for the LIBERO-Core-Full controlled comparison. We report success rate averaged across tasks. Our current results are single-seed runs; multi-seed evaluation is required before the strongest statistical claims.

5.2 Main Results

On LIBERO-Core-LT, RBTAD reaches 40.0%. Table 2 places this result against the full set of reported baselines rather than only APA: conventional re-sampling peaks at 27.1%, individual APA components remain near the BC baseline, and full APA reaches 36.1%. We do not present the 40.0% result as a final SOTA claim yet because our run is currently single-seed and our local pipeline has not fully reproduced the reported three-seed protocol. The result is nevertheless meaningful: it is obtained without generated approach demonstrations, without object grafting, and without inference-time architectural changes.

The LIBERO-Spatial-LT result in Table 3 is intentionally reported as a screening result rather than folded into the main LIBERO-Core-LT claim. Full-run RBTAD and replay-style balancing were brittle on this split because all tasks share the black bowl and the final plate, so the useful signal is concentrated in the source

Table 2: Main LIBERO-Core-LT comparison. Reported baselines, re-sampling results, APA ablations, and APA full results are from Beyond the Majority [8]. RBTAD is our current single-seed evaluation and should be read as controlled evidence rather than a final multi-seed protocol result.

Family	Method	Success rate
BC	Original distribution	26.5%
Re-sampling	$q = 0.75$	25.1%
Re-sampling	$q = 0.50$	25.1%
Re-sampling	$q = 0.25$	27.1%
APA ablation	Formatting only	26.0%
APA ablation	Augmentation only	26.9%
APA	Formatting + augmentation	36.1%
Ours	RBTAD	40.0%

Table 3: Controlled counterpart results outside the main LIBERO-Core-LT benchmark. LIBERO-Core-Full uses 50 rollouts per task. LIBERO-Spatial-LT uses matched 30-rollout-per-task evaluations under the same checkpoint budget; two seeds are shown because the second seed weakens the RSDF claim.

Dataset	Seed	Method	Success rate
LIBERO-Core-Full	7	BC baseline	43.0%
	7	TCAD-trained	50.0%
LIBERO-Spatial-LT	7	BC baseline	19.0%
	7	RSDF vision+LLM	25.0%
	13	BC baseline	17.0%
	13	RSDF vision+LLM	18.0%

spatial relation. We therefore tested Relation-Localized Delta Fusion (RSDF): first obtain a short baseline-anchored relation-correction checkpoint, then fuse only the `vision_backbone` and `llm_backbone` deltas into the baseline while keeping the projector fixed. RSDF adds no inference-time module and does not alter the model architecture. Under matched 30-rollout-per-task evaluation, seed 7 shows a 6-point absolute gain, from 19.0% to 25.0%. However, seed 13 gives only a 1-point gain, from 17.0% to 18.0%. We therefore treat RSDF as a useful diagnostic direction rather than a reliable final method.

The LIBERO-Core-Full controlled comparison in Table 3 and Figure 3 gives a cleaner within-pipeline signal. Using the same seed and evaluation budget, the baseline reaches 43.0%, while the TCAD-trained policy reaches 50.0%. This suggests that the action-discrimination objective is not only exploiting the exact long-tail split; it can also help difficult task-conditioned action boundaries in the full counterpart dataset.

5.3 Per-Task Results

The per-task results show a mixed but informative pattern. On LIBERO-Core-LT, RBTAD improves several tail tasks that the local BC baseline nearly fails, especially T7 and T9, but it still does not solve T10. In LIBERO-Core-Full, Figure 3 shows that the overall gain is not driven by uniform improvement across all tasks. Several difficult object-relation tasks improve substantially, while some already strong tasks slightly decrease. This is consistent with the intended role of TCAD: it sharpens task-conditioned action boundaries rather than simply increasing all success rates uniformly.

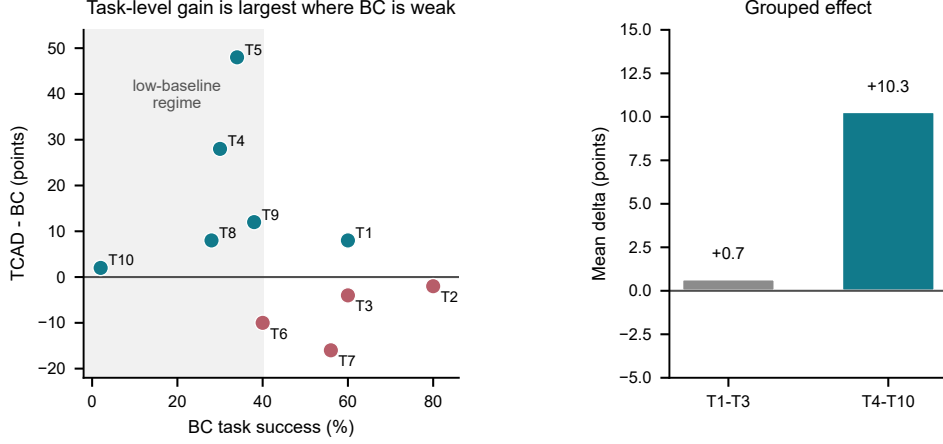


Figure 3: Task-level analysis on LIBERO-Core-Full. Rather than duplicating the per-task table, this plot relates each task’s baseline success rate to the TCAD gain. Improvements concentrate in the low-baseline regime and in tasks 4–10, while several already strong tasks are flat or slightly worse.

Table 4: Local per-task LIBERO-Core-LT comparison with 30 rollouts per task. The local BC baseline is a reproduced evaluation checkpoint rather than the three-seed number reported in Beyond the Majority.

Method	T1	T2	T3	T4	T5	T6	T7	T8	T9	T10
Local BC	.63	.37	.23	.40	.43	.23	.00	.07	.03	.00
RBTAD	.60	.53	.43	.57	.50	.30	.60	.13	.37	.00

5.4 Implementation Details

We fine-tune miniVLA-style checkpoints using the same model architecture and inference pathway as the baseline. RBTAD uses two GPUs during training and evaluation in our screening runs, avoiding four-GPU saturation. The LIBERO-Core-LT RBTAD configuration uses $\lambda = 0.1$, $\rho = 0.5$, margin $m = 0.2$, rare threshold $\tau = 9$, and rare BC weight $w_{\text{rare}} = 3.0$. The LIBERO-Core-Full TCAD run disables rare weighting and applies the TCAD signal more broadly, because the split is not long-tailed.

6 Analysis and Ablations

6.1 Why Not Only Reweighting?

The reported baseline in Beyond the Majority shows that conventional re-sampling gives little benefit on LIBERO-Core-LT: the original distribution obtains 26.5%, while several re-sampling exponents range from 25.1% to 27.1% [8]. Our own iterations point in the same direction. Increasing rare-task pressure can wake up some tail behaviors, but it also causes forgetting in semantically adjacent tasks. RBTAD therefore treats rare-aware weighting as a support mechanism, not the core contribution.

6.2 Failed Iterations Are Diagnostic

Table 5 summarizes several method attempts. The strongest raw number, a selective projector merge, is deliberately not used as the main method because it is a post-training weight-space edit rather than an

Table 5: Selected internal iterations on LIBERO-Core-LT. These are not all proposed as final methods; they summarize the design path and motivate the final end-to-end RBTAD choice.

Method variant	Success	Interpretation
RCTAD	35.0%	Counterfactual loss without enough rare positive signal
RBTAD	40.0%	Best end-to-end training result so far
Relation-anchor negatives	37.0%	Sharper relation contrast hurt useful tail behavior
Tail-only rescue fine-tune	34.0%	Post-hoc rare pressure caused forgetting
Anchor fine-tune	33.0%	Constraint did not prevent task competition
Selective projector merge	42.0%	Useful diagnostic, not used as main method

end-to-end training method. Its value is diagnostic: it shows that success can be transferred between task groups by small changes in the action projection pathway, but such edits are brittle and task-specific. RBTAD is the cleaner method because it optimizes the desired conditional action boundary during training.

6.3 Head and Tail Behavior

In the LIBERO-Core-Full controlled comparison, the first three tasks move from an average of 66.7% to 67.3%, while tasks 4–10 move from 32.6% to 42.9%. This pattern supports the intended effect: the method mainly helps the harder task group instead of merely improving head tasks. On LIBERO-Core-LT, RBTAD still fails on the hardest wine-bottle-to-rack task, showing that task-conditioned discrimination is not a complete solution to rare relation grounding.

6.4 What the Method Does Not Claim

RBTAD does not claim that every wrong-target action is impossible. It also does not claim to solve long-tailed robotic imitation by reweighting alone. The core claim is narrower: in states where the demonstrated action should be task-conditioned, a VLA policy should prefer the correct task/action pairing over a plausible counterfactual task/action pairing. The diagnostic and current experiments support this claim, while the remaining failures motivate better eligibility selection and broader long-tail splits.

7 Limitations

This draft has four important limitations.

First, the current RBTAD result on LIBERO-Core-LT is a single-seed evaluation. Beyond the Majority reports three-seed averages, so a final SOTA statement requires matching that protocol.

Second, we do not have physical robot hardware for the Real-World-LT benchmark. We therefore use LIBERO-Spatial-LT as a simulated long-tail generalization test, but this is not a substitute for the original real-world protocol.

Third, negative instruction construction is currently task-template based. This is simple and low-cost, but it can create false negatives if two tasks share the same early action. The current mild margin and sampling ratio reduce this risk, but do not eliminate it.

Fourth, the methods improve task-conditioned action boundaries but do not solve all rare relation tasks. In particular, the wine-bottle-to-rack task remains near zero in the current LIBERO-Core-LT run. On LIBERO-Spatial-LT, RSDF gives a promising seed 7 gain but only a small seed 13 gain, still leaves tasks 5 and 7 at zero, and can reduce task 6 relative to the baseline. Future work should combine task-conditioned discrimination with better state eligibility, object-relation grounding diagnostics, and multi-seed validation.

Additional Spatial-LT screens after RSDF further narrow the failure mode. Full-parameter L2-SP correction, confusion-gated rare behavior cloning, a five-step corrective pulse, and LLM-only relation-localized correction all fail to produce a consistent two-seed gain. This suggests that future methods should preserve the baseline action distribution directly while applying relation-specific corrective gradients, rather than relying on parameter anchoring, blanket rare weighting, or module freezing alone.

8 Conclusion

We presented TCAD, a training-only objective for long-tailed VLA fine-tuning that directly regularizes task-conditioned action likelihood. Combined with moderate rare-aware behavior cloning, the resulting RBTAD method improves current LIBERO-Core-LT and controlled LIBERO-Core-Full results without generated positive trajectories, additional modules, or inference-time cost. More broadly, the work suggests that long-tailed robotic imitation should be studied not only as a frequency imbalance problem, but also as a conditional action-boundary problem: rare tasks fail when the policy cannot reliably distinguish what the instruction asks it to do from nearby but wrong alternatives.

References

- [1] Suneel Belkhale and Dorsa Sadigh. minivla: A better vla with a smaller footprint. *Preprint*, 2024.
- [2] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Joseph Dabis, Chelsea Finn, Keerthana Gopalakrishnan, Karol Hausman, Alexander Herzog, Jasmine Hsu, Julian Ibarz, Brian Ichter, Alex Irpan, and Brianna Zitkovich. Rt-1: Robotics transformer for real-world control at scale. *arXiv preprint arXiv:2212.06817*, 2022.
- [3] Yin Cui, Menglin Jia, Tsung-Yi Lin, Yang Song, and Serge Belongie. Class-balanced loss based on effective number of samples. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9268–9277, 2019.
- [4] Bingyi Kang, Saining Xie, Marcus Rohrbach, Zhicheng Yan, Albert Gordo, Jiashi Feng, and Yannis Kalantidis. Decoupling representation and classifier for long-tailed recognition. *arXiv preprint arXiv:1910.09217*, 2019.
- [5] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, and Pannag Sanketi. Openvla: An open-source vision-language-action model. *arXiv preprint*, 2024.
- [6] Octo Model Team, Dibya Ghosh, Homer Walke, Karl Pertsch, Kevin Black, Oier Mees, Sudeep Dasari, Joey Hejna, Tobias Kreiman, and Charles Xu. Octo: An open-source generalist robot policy. *arXiv preprint arXiv:2405.12213*, 2024.
- [7] Yifan Zhang, Bingyi Kang, Bryan Hooi, Shuicheng Yan, and Jiashi Feng. Deep long-tailed learning: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(9):10795–10816, 2023.
- [8] Junhong Zhu, Ji Zhang, Jingkuan Song, Lianli Gao, and Heng Tao Shen. Beyond the majority: Long-tail imitation learning for robotic manipulation. *arXiv preprint arXiv:2602.06512*, 2026.

A Draft Status and Reproducibility Notes

Current confirmed artifacts. The current LIBERO-Core-LT RBTAD result uses checkpoint runs/rbtad_lt_main/rbtad_w3_tail9_confmedian_seed7_b20/checkpoints/step-034075-epoch-36-loss=0.0678.pt and evaluation directory results/rbtad_lt_main/rbtad_w3_tail9_confmedian_seed7_b20/034075/rbtad_step034075_30trials_egl_20260610_014339.

The controlled LIBERO-Core-Full baseline result uses evaluation directory results/core_full_protocol/baseline_libero_core_full_protocol_seed7_b20/100000/baseline_libero_core_full_50trials_egl_20260614_175019. The TCAD-trained LIBERO-Core-Full result uses results/core_full_protocol/rbtad_libero_core_full_alltcad_protocol_seed7_b20/101071/rbtad_libero_core_full_50trials_egl_20260617_003121.

The matched LIBERO-Spatial-LT baseline result uses results/spatial_lt_confirm30/baseline_libero_spatial_lt_s1000_seed7_b20/step1000/baseline_libero_spatial_lt_s1000_seed7_b20_libero_spatial_30trials_egl_20260718_163015. The seed 7 RSDF vision+LLM result uses results/spatial_lt_confirm30/rsdf_visionllm_barcl100_a0p5/step100/rsdf_visionllm_barcl100_a0p5_libero_spatial_30trials_egl_20260718_144932. The seed 13 confirmation uses results/spatial_lt_multiseed_confirm30/rsdf_visionllm_barcl100_seed13_a0p5_20260718_185539/step100/rsdf_visionllm_barcl100_seed13_a0p5_20260718_185539_libero_spatial_30trials_egl_20260718_214241 and results/spatial_lt_multiseed_confirm30/baseline_libero_spatial_lt_s1000_seed13_b20_20260718_185539/step1000/baseline_libero_spatial_lt_s1000_seed13_b20_20260718_185539_libero_spatial_30trials_egl_20260718_231752.

Experiments to finish before a stronger arXiv revision.

- Re-run or verify the LIBERO-Core-LT BC baseline under the exact same local evaluation pipeline as RBTAD.
- Add at least two more seeds for RBTAD on LIBERO-Core-LT.
- Add at least one more simulated long-tail split beyond LIBERO-Spatial-LT to test whether RSDF generalizes beyond relation-only Spatial tasks.
- Revise the LIBERO-Spatial-LT method to close the seed 13 reliability gap; the current two-seed evidence is positive but too small on seed 13.