

Class 13: Pathway Analysis from RNA-Seq Results

Angela Bartolo PID: A15932451

Section 1. Differential Expression Analysis

```
library(DESeq2)
```

```
Loading required package: S4Vectors
```

```
Loading required package: stats4
```

```
Loading required package: BiocGenerics
```

```
Attaching package: 'BiocGenerics'
```

```
The following objects are masked from 'package:stats':
```

```
IQR, mad, sd, var, xtabs
```

```
The following objects are masked from 'package:base':
```

```
anyDuplicated, aperm, append, as.data.frame, basename, cbind,  
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,  
get, grep, grepl, intersect, is.unsorted, lapply, Map, mapply,  
match, mget, order, paste, pmax, pmax.int, pmin, pmin.int,  
Position, rank, rbind, Reduce, rownames, sapply, setdiff, sort,  
table, tapply, union, unique, unsplit, which.max, which.min
```

Attaching package: 'S4Vectors'

The following objects are masked from 'package:base':

expand.grid, I, unname

Loading required package: IRanges

Attaching package: 'IRanges'

The following object is masked from 'package:grDevices':

windows

Loading required package: GenomicRanges

Loading required package: GenomeInfoDb

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

colAlls, colAnyNAs, colAnys, colAvgsPerRowSet, colCollapse,
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
colWeightedMeans, colWeightedMedians, colWeightedSds,
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgsPerColSet,

```
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
rowWeightedSds, rowWeightedVars
```

Loading required package: Biobase

Welcome to Bioconductor

```
Vignettes contain introductory material; view with
'browseVignettes()'. To cite Bioconductor, see
'citation("Biobase")', and for packages 'citation("pkgname")'.
```

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

```
rowMedians
```

The following objects are masked from 'package:matrixStats':

```
anyMissing, rowMedians
```

```
colData <- read.csv("GSE37704_metadata.csv")
head(colData)
```

```
      id      condition
1 SRR493366 control_sirna
2 SRR493367 control_sirna
3 SRR493368 control_sirna
4 SRR493369      hoxa1_kd
5 SRR493370      hoxa1_kd
6 SRR493371      hoxa1_kd
```

```
countData <- read.csv("GSE37704_featurecounts.csv", row.names =1)
head(countData)
```

| | length | SRR493366 | SRR493367 | SRR493368 | SRR493369 | SRR493370 |
|-----------------|-----------|-----------|-----------|-----------|-----------|-----------|
| ENSG00000186092 | 918 | 0 | 0 | 0 | 0 | 0 |
| ENSG00000279928 | 718 | 0 | 0 | 0 | 0 | 0 |
| ENSG00000279457 | 1982 | 23 | 28 | 29 | 29 | 28 |
| ENSG00000278566 | 939 | 0 | 0 | 0 | 0 | 0 |
| ENSG00000273547 | 939 | 0 | 0 | 0 | 0 | 0 |
| ENSG00000187634 | 3214 | 124 | 123 | 205 | 207 | 212 |
| | SRR493371 | | | | | |
| ENSG00000186092 | 0 | | | | | |
| ENSG00000279928 | 0 | | | | | |
| ENSG00000279457 | 46 | | | | | |
| ENSG00000278566 | 0 | | | | | |
| ENSG00000273547 | 0 | | | | | |
| ENSG00000187634 | 258 | | | | | |

To match the countData with the colData, the length column in countData must be removed.

Q. Complete the code below to remove the troublesome first column from countData

```
# Note we need to remove the odd first $length col
countData <- as.matrix(countData[,colData$id])
head(countData)
```

| | SRR493366 | SRR493367 | SRR493368 | SRR493369 | SRR493370 | SRR493371 |
|-----------------|-----------|-----------|-----------|-----------|-----------|-----------|
| ENSG00000186092 | 0 | 0 | 0 | 0 | 0 | 0 |
| ENSG00000279928 | 0 | 0 | 0 | 0 | 0 | 0 |
| ENSG00000279457 | 23 | 28 | 29 | 29 | 28 | 46 |
| ENSG00000278566 | 0 | 0 | 0 | 0 | 0 | 0 |
| ENSG00000273547 | 0 | 0 | 0 | 0 | 0 | 0 |
| ENSG00000187634 | 124 | 123 | 205 | 207 | 212 | 258 |

We must remove the zeros in the entries.

Q. Complete the code below to filter countData to exclude genes (i.e. rows) where we have 0 read count across all samples (i.e. columns).

```
zeros <- rowSums(countData) > 0
countData = countData[zeros, ]
head(countData)
```

| | SRR493366 | SRR493367 | SRR493368 | SRR493369 | SRR493370 | SRR493371 |
|-----------------|-----------|-----------|-----------|-----------|-----------|-----------|
| ENSG00000279457 | 23 | 28 | 29 | 29 | 28 | 46 |
| ENSG00000187634 | 124 | 123 | 205 | 207 | 212 | 258 |
| ENSG00000188976 | 1637 | 1831 | 2383 | 1226 | 1326 | 1504 |
| ENSG00000187961 | 120 | 153 | 180 | 236 | 255 | 357 |
| ENSG00000187583 | 24 | 48 | 65 | 44 | 48 | 64 |
| ENSG00000187642 | 4 | 9 | 16 | 14 | 16 | 16 |

```
nrow(countData)
```

```
[1] 15975
```

3. Setup and run DESeq2

```
#!/ message:false
library(DESeq2)
```

```
dds = DESeqDataSetFromMatrix(countData=countData,
                              colData=colData,
                              design=~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

```
dds = DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
res <- results(dds)
head(res)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 6 rows and 6 columns

| | baseMean | log2FoldChange | lfcSE | stat | pvalue |
|-----------------|-------------|----------------|-----------|------------|-------------|
| | <numeric> | <numeric> | <numeric> | <numeric> | <numeric> |
| ENSG00000279457 | 29.9136 | 0.1792571 | 0.3248216 | 0.551863 | 5.81042e-01 |
| ENSG00000187634 | 183.2296 | 0.4264571 | 0.1402658 | 3.040350 | 2.36304e-03 |
| ENSG00000188976 | 1651.1881 | -0.6927205 | 0.0548465 | -12.630158 | 1.43990e-36 |
| ENSG00000187961 | 209.6379 | 0.7297556 | 0.1318599 | 5.534326 | 3.12428e-08 |
| ENSG00000187583 | 47.2551 | 0.0405765 | 0.2718928 | 0.149237 | 8.81366e-01 |
| ENSG00000187642 | 11.9798 | 0.5428105 | 0.5215598 | 1.040744 | 2.97994e-01 |
| | padj | | | | |
| | <numeric> | | | | |
| ENSG00000279457 | 6.86555e-01 | | | | |
| ENSG00000187634 | 5.15718e-03 | | | | |
| ENSG00000188976 | 1.76549e-35 | | | | |
| ENSG00000187961 | 1.13413e-07 | | | | |
| ENSG00000187583 | 9.19031e-01 | | | | |
| ENSG00000187642 | 4.03379e-01 | | | | |

4. Annotation results

I need to add annotation to my results including gene symbols and entrezids et. For this I will use the Annotationdbi package

```
library(AnnotationDbi)
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

```
[1] "ACCNUM"      "ALIAS"      "ENSEMBL"    "ENSEMBLPROT" "ENSEMBLTRANS"
[6] "ENTREZID"    "ENZYME"     "EVIDENCE"   "EVIDENCEALL" "GENENAME"
[11] "GENETYPE"    "GO"         "GOALL"      "IPI"          "MAP"
[16] "OMIM"        "ONTOLOGY"   "ONTOLOGYALL" "PATH"         "PFAM"
[21] "PMID"        "PROSITE"    "REFSEQ"     "SYMBOL"       "UCSCKG"
[26] "UNIPROT"
```

```
res$symbol = mapIds(org.Hs.eg.db,
  keys=row.names(res),
  keytype="ENSEMBL",
  column="SYMBOL",
  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,
  keys=row.names(res),
  keytype="ENSEMBL",
  column="ENTREZID",
  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna


DataFrame with 6 rows and 8 columns

| | baseMean | log2FoldChange | lfcSE | stat | pvalue |
|-----------------|-----------|----------------|-----------|------------|-------------|
| | <numeric> | <numeric> | <numeric> | <numeric> | <numeric> |
| ENSG00000279457 | 29.9136 | 0.1792571 | 0.3248216 | 0.551863 | 5.81042e-01 |
| ENSG00000187634 | 183.2296 | 0.4264571 | 0.1402658 | 3.040350 | 2.36304e-03 |
| ENSG00000188976 | 1651.1881 | -0.6927205 | 0.0548465 | -12.630158 | 1.43990e-36 |
| ENSG00000187961 | 209.6379 | 0.7297556 | 0.1318599 | 5.534326 | 3.12428e-08 |
| ENSG00000187583 | 47.2551 | 0.0405765 | 0.2718928 | 0.149237 | 8.81366e-01 |

| | | | | | |
|-----------------|-------------|-------------|-------------|----------|-------------|
| ENSG00000187642 | 11.9798 | 0.5428105 | 0.5215598 | 1.040744 | 2.97994e-01 |
| | padj | symbol | entrez | | |
| | <numeric> | <character> | <character> | | |
| ENSG00000279457 | 6.86555e-01 | NA | NA | | |
| ENSG00000187634 | 5.15718e-03 | SAMD11 | 148398 | | |
| ENSG00000188976 | 1.76549e-35 | NOC2L | 26155 | | |
| ENSG00000187961 | 1.13413e-07 | KLHL17 | 339451 | | |
| ENSG00000187583 | 9.19031e-01 | PLEKHN1 | 84069 | | |
| ENSG00000187642 | 4.03379e-01 | PERM1 | 84808 | | |

```
res = res[order(res$pvalue),]
write.csv(res, file = "deseq_results.csv")

plot( res$log2FoldChange, -log(res$padj) )
```

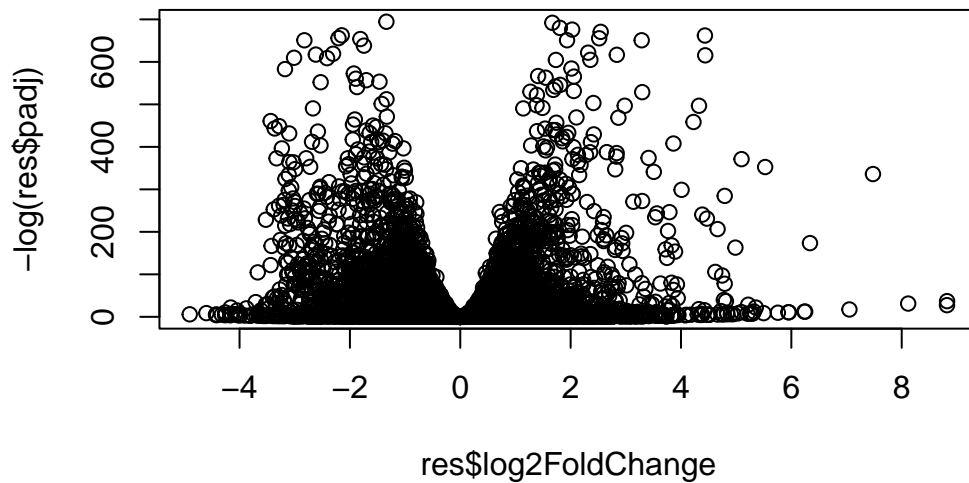

```
#!/ message:false
library(pathview)
```

```
#####
Pathview is an open source software package distributed under GNU General
```


Public License version 3 (GPLv3). Details of GPLv3 is available at <http://www.gnu.org/licenses/gpl-3.0.html>. Particullary, users are required to formally cite the original Pathview paper (not just mention it) in publications or products. For details, do `citation("pathview")` within R.

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

#####

```
library(gage)
```

```
library(gageData)
```

Focus in on signaling pathways

```
data(kegg.sets.hs)
data(sigmet.idx.hs)

# Focus on signaling and metabolic pathways only
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

# Examine the first 3 pathways
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
```

```
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
```

```
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
```

```
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"
```

```

[9] "108"      "10846"    "109"      "111"      "11128"    "11164"    "112"      "113"
[17] "114"      "115"      "122481"   "122622"   "124583"   "132"      "158"      "159"
[25] "1633"     "171568"   "1716"     "196883"   "203"      "204"      "205"      "221823"
[33] "2272"     "22978"    "23649"    "246721"   "25885"    "2618"     "26289"    "270"
[41] "271"      "27115"    "272"      "2766"     "2977"     "2982"     "2983"     "2984"
[49] "2986"     "2987"     "29922"    "3000"     "30833"    "30834"    "318"      "3251"
[57] "353"      "3614"     "3615"     "3704"     "377841"   "471"      "4830"     "4831"
[65] "4832"     "4833"     "4860"     "4881"     "4882"     "4907"     "50484"    "50940"
[73] "51082"    "51251"    "51292"    "5136"     "5137"     "5138"     "5139"     "5140"
[81] "5141"     "5142"     "5143"     "5144"     "5145"     "5146"     "5147"     "5148"
[89] "5149"     "5150"     "5151"     "5152"     "5153"     "5158"     "5167"     "5169"
[97] "51728"    "5198"     "5236"     "5313"     "5315"     "53343"    "54107"    "5422"
[105] "5424"     "5425"     "5426"     "5427"     "5430"     "5431"     "5432"     "5433"
[113] "5434"     "5435"     "5436"     "5437"     "5438"     "5439"     "5440"     "5441"
[121] "5471"     "548644"   "55276"    "5557"     "5558"     "55703"    "55811"    "55821"
[129] "5631"     "5634"     "56655"    "56953"    "56985"    "57804"    "58497"    "6240"
[137] "6241"     "64425"    "646625"   "654364"   "661"      "7498"     "8382"     "84172"
[145] "84265"    "84284"    "84618"    "8622"     "8654"     "87178"    "8833"     "9060"
[153] "9061"     "93034"    "953"      "9533"     "954"      "955"      "956"      "957"
[161] "9583"     "9615"

```

```

foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)

```

```

      1266      54855      1465      51232      2034      2317
-2.422719  3.201955 -2.313738 -2.059631 -1.888019 -1.649792

```

Run gauge

```

#Get the results
keggres = gage(foldchanges, gsets=kegg.sets.hs)

```

Look at the first few down (less) pathways

```

attributes(keggres)

```

```

$names
[1] "greater" "less"    "stats"

```

```
head(keggres$less)
```

| | | p.geomean | stat.mean | p.val |
|----------|------------------------------|--------------|-----------|--------------|
| hsa04110 | Cell cycle | 8.995727e-06 | -4.378644 | 8.995727e-06 |
| hsa03030 | DNA replication | 9.424076e-05 | -3.951803 | 9.424076e-05 |
| hsa03013 | RNA transport | 1.375901e-03 | -3.028500 | 1.375901e-03 |
| hsa03440 | Homologous recombination | 3.066756e-03 | -2.852899 | 3.066756e-03 |
| hsa04114 | Oocyte meiosis | 3.784520e-03 | -2.698128 | 3.784520e-03 |
| hsa00010 | Glycolysis / Gluconeogenesis | 8.961413e-03 | -2.405398 | 8.961413e-03 |
| | | q.val | set.size | exp1 |
| hsa04110 | Cell cycle | 0.001448312 | 121 | 8.995727e-06 |
| hsa03030 | DNA replication | 0.007586381 | 36 | 9.424076e-05 |
| hsa03013 | RNA transport | 0.073840037 | 144 | 1.375901e-03 |
| hsa03440 | Homologous recombination | 0.121861535 | 28 | 3.066756e-03 |
| hsa04114 | Oocyte meiosis | 0.121861535 | 102 | 3.784520e-03 |
| hsa00010 | Glycolysis / Gluconeogenesis | 0.212222694 | 53 | 8.961413e-03 |

```
pathview(gene.data = foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory C:/Users/abart/OneDrive/Documents/BIMM143/RStudios/Class_13_a

Info: Writing image file hsa04110.pathview.png

