

# Cybermycelium: Domain Driven Distributed Reference Architecture For Big Data Systems

Pouya Ataei, Alan Litchfield

<sup>a</sup>*School of Engineering, Computer and Mathematical Sciences, Auckland University of Technology, Auckland, New Zealand*

---

## Abstract

The ubiquity of digital devices, the infrastructure of today, and the ever increasing proliferation of digital products have dawned a new era, the era of big data. This era began when the volume, variety and velocity of data overwhelmed traditional systems that used to analyze and store that data. This precipitated a new class of software systems, namely big data systems. Whereas big data systems provide competitive advantage to businesses, many failed to harness the power of it. It has been estimated that only 20% of companies have successfully implemented a big data project. This is due to various challenges of adopting big data such as organizational culture, rapid technology change, system development, data architecture and data engineering. This paper aims to facilitate big data system development, architecture and data engineering by introducing a domain driven decentralized big data reference architecture. This artefact is developed following the guidelines of empirically grounded reference architectures, and has been evaluated in a real world scenario. At the end, a prototype of the artefact has been instantiated and utilized to solve a real problem in practice. Our results displayed a good degree of applicability and some thought-provoking architectural tradeoffs and challenges.

**Keywords:** Reference architecture, Architecture, Big data reference architecture, Big data architecture, Big data systems, Big data software engineering,

---

## 1. Introduction

Since the dawn of internet and world wide web, humanity has witnessed a degree of connection beyond reckoning. The proliferation of digital devices pervaded with powerful software applications have created cyber communities that constantly mutate [1]; [2]. In a world where we have network infrastructures that can support up to 250Mbps of data transmission, and smart phones and IOT devices that can have processing power of up to 3 Ghz, data becomes ubiquitous, the quantum that lays the foundation of the nexus [3].

According to InternetLiveStates.com [4], only in one second, there are 9,878 tweets sent, 1,138 instagram photos uploaded, 3,117,720 emails sent, 99,738 Google searches made, and 94,144 Youtube videos viewed. That is, if it has taken 5 second to read the preceding paragraph, during that time, 15,588,600 emails are sent.

Driven by the ambition to harness the power of this deluge of data, the term 'Big Data' (BD) was coined [5]. BD initially emerged to address the challenges associated with various characteristics of data such as velocity, variety, volume and variability [2]. BD is the practice of extracting patterns, theories, and predictions from a large set of structured, semi-structured, and unstructured data for the purposes of business competitive advantage [6]; [7]. BD is a game-changing innovation, heralding the dawn of a new data-oriented industry.

Nonetheless, BD is not a magical wand that can enchant any business process. While a lot of opportunities exist in BD, subsuming an emergent and rather high-impacting technology like BD to current state of affairs in organizations, is a daunting task. According to recent survey from Databricks, only 13% of the organizations excel at delivering on their data strategy [8]. Another survey by NewVantage Partners indicated that only 24% organization have successfully gone data-driven [9]. This survey also states that only 30% of organizations have a well established strategy for their BD endeavour. In addition, surveys from McKinsey & Company ([10]) and Gartner ([11]) further support these numbers, which illuminates on the scarcity of successful BD implementations in

the industry.

There are various challenge for adoption of big data such as 'data architecture', 'rapid technology change', 'lack of sufficiently skilled data engineers', and 'organization's cultural challenges of becoming data-driven' [2];[12]. Among  
35 these challenges, 'data architecture' is highlighted. A successful big data system is built upon a solid data architecture, serving as a blue print that affects data lifecycle management, guides data integration, control data assets and handle change. Nevertheless, majority of BD systems are developed on-premise as ad-hoc complicated solutions that do not adhere to the practices of software  
40 engineering and software architecture [13]; [14]. As the data ecosystem grows and new technologies and data processing techniques are introduced, the software architect will have a harder time maintaining a solution that address the emergent requirements.

This can potentially create grounds for an immature architecture that results in solutions that are hard to scale, hard to maintain, and raise high-entry  
45 blockades [3]. Since the approach of ad-hoc design to BD system development is not desirable and may leave many architects and data engineers in the dark, novel data architectures that are designed specifically for BD are required. To contribute to this goal, we explore the notion of reference architectures (RAs)  
50 and present a distributed domain-driven software RA for BD systems. This RA is called Cybermycelium. The contribution of this work is threefold: 1) explicating design theories underlying current big data systems, 2) explicating design theories that generates the artifacts constructs, and 3) the artifact.

The contents of this paper is presented in the following order: 1) in *back-*  
55 *ground* section, we provide a brief discussion on what's known about the topic under investigation, the problems associated with it, and the rationale for our study, 2) in *research methodology* section, we discuss the integral elements of our research methodology with corresponding justifications, 3) in *requirement specification* section, we discuss the requirements that has led to creation of the  
60 artifact, 4) in *why Cybermycelium* section, we expand on the problem stated in the background section and provide with theories that explains the challenges

of maintaining current BD systems, 5) in *Cybermycelium: A Domain Driven Distributed Reference Architecture for Big Data Systems* section, we explicate the theories that underpin the artifact development and the artifact itself, 6) in *Evaluation* section, we provide an evaluation of the artifact, 7) in *discussion* section, we elaborate on other BD RAs, and the distinct qualities and limitations of our artifact, 8) in *conclusion*, we conclude the study summing up the findings.

## 2. Background

In this section, we provide a brief discussion on what is known about BD architectures, articulate the research gap and problems that need addressing, and present with the objective of this research.

### 2.1. Big Data Architectures: State of the art

The available body of knowledge and the knowledge from practice highlight 3 generations of BD architectures;

1. **Enterprise Data Warehouse:** this is perhaps one of the oldest approaches to business intelligence and data crunching and has existed even before the term BD was coined [15]. Usually developed as proprietary software, this data architecture pivot on enterprise data warehouse, ETL jobs, and a data visualization software such as Microsoft Power BI. As the data sources and consumers grow, this architecture suffers from hard to main ETL jobs, and visualizations that can be created and understood by a certain group of stakeholders, hindering data’s positive impact on business. This also means, new transformations will take longer to be added to the workload, the system is monolithic and hard to scale, and only a few group of hyper-specialized individuals are able to operate the system. Moreover, data warehouses have been designed with different assumptions that cannot effectively handle the characteristics of big data.

2. **Data Lake:** to address the challenges occurred in the first generation of data architectures, a new BD ecosystem emerged. This new ecosystem revolved around a data lake, in a way that there isn't as much transformations on the data initially, but rather everything is dumped into the data lake and retrieved when necessary. Although data lake architecture have reached a higher level of success in comparison to the first generation of the data architectures, they are still far from optimal. As data consumer and data providers grow, data engineers will be immensely challenged to avoid creation of data swamp [16], and because there is usually no concept of data owner, the whole stack is usually operated by a group of hyper-specialized data engineers, creating silos, and barriers for gradual adoption. This also means various teams' concerns will often go into data engineers backlog through an intermediary such as business analyst and they will not be in control of how and when they can consume the data they desire. Furthermore, data engineers are usually oblivious of the semantics and value of the data they are processing; they simply do not know how is that data useful or which domain it belongs to. This will overtime decrease the quality of data processing, results in haphazard data management, and make maintenance and data engineering a complicated task.
3. **Cloud Based Solutions:** Given the cost and complexity of running a data lake on-premise alongside the whole data engineering pipeline, and the substantial talent gap currently faced in the market [6], the third generation of BD architectures tend to revolve around as-a-service or on-demand cloud-based solutions. This generation of architecture tends to be leaning towards stream-processing with architectures such as Kappa or Lambda [17], or frameworks that unify batch and stream processing such as Apache Beam [18] or Databricks [19]. This is usually accompanied by cloud storage such as Amazon S3, and streaming technologies such as Amazon Kinesis. Whereas this generation tends to solve various issues regarding the complexity and cost of data handling and digestion, it still

120 suffers from the same fundamental architectural challenges. It does not  
have clear data domains, a group of siloed hyper-specialized data engineers  
are running them, and data storage through a monolithic data pipelines  
soon becomes a choke-point.

To discuss the integral facets that embroil these architectures, one must  
125 look at the characteristics of these architectures and the ways in which they  
achieve their ends. Except for one case [3], all the architectures and RAs found  
as the result of this study, were designed underlying monolithic data pipeline  
architecture with four major components being data consumer, data processing,  
data infrastructure and data providers.

130 The process of turning data into actionable insights in these architectures  
usually follow a similar lifecycle;

1. **Data Ingestion:** system beings to ingest data from all corners of the  
enterprise, including both transactional, operational and external data.  
For instance, in a practice management software for veterinaries, data  
135 platform can ingest and persist transactional data such as 'user interaction  
with therapeutics', 'number of animals diagnosed', or 'number of invoices  
created' and 'medicines dispensed'.
2. **Data Transformation:** data captured from the previous step is then  
cleansed for duplication, quality, and potentially scrubbed for privacy poli-  
140 cies. This data then goes through a multifaceted enrichment process to  
facilitate data analysis. For instance, a journey of the veterinary nurse  
can be captured at every stage, enriched with demographics and animal  
breed for regression analysis and aggregate views.
3. **Data Serving:** at this stage, data is ready to be served to diverse array of  
145 needs ranging from machine learning to marketing analytics, to business  
intelligence to product analysis and customer journey optimization. In  
the 'veterinary practice management software' example, the data platform  
can provide real-time data through event backbone system such as Kafka  
about customers who have applied and have been dispensed restricted

150       veterinary medicine (RVM) to make sure that these transactions comply  
with the conditions of the registration of these products.

The lifecycle depicted is indeed a high-level abstract view of prevalent BD systems. Howbeit, it highlights an important matter; these systems are all operating underlying monolithic data pipeline architecture that tends to account  
155 for all sorts of data in one architectural construct. This means, data that logically belong to different domains are now all lumped together and crunched in one place, making maintainability and scalability a daunting task [20].

While architectures in software engineering have gone through series of evolution in the industry, adopting a more decentralized and distributed approaches  
160 such as microservice architecture, event driven architectures, reactive systems, and domain driven design [21], the data engineering, and in specific BD ecosystems do not seem to be adopting many of these patterns. Evidence collected from this study have proven that attention to decentralized BD systems, meta-data, and privacy is deficient. Therefore, the whole idea of 'monolithic data  
165 pipeline architecture with no clearly defined domains and ownership' brings significant challenges to design, implementation, maintenance and scaling of BD systems.

To address these issues, we explore a domain-driven distributed RA for BD systems and propose an RA that addresses some of the challenges. The RA is  
170 inspired by the advances in software engineering architectures, and in specific microservices, domain-driven design, and reactive systems.

## 2.2. *Why reference architecture?*

To justify why we have chosen reference architectures as the suitable artefact, first we have to clarify two assumptions;

- 175       1. having a sound software architecture is essential to the successful development and maintenance of software systems [22]
2. there exist a sufficient body of knowledge in the field of software architecture to support the development of an effective RA [1]

One of the focal tenets of software architecture is that every system is developed to satisfy a business objective, and that the architecture of the system is a bridge between abstract business goals to concrete final solutions [22]. While the journey of BD can be quite challenging, the good news is that a software RA can be designed, analyzed and documented incorporating best practices, known techniques, and patterns that will support the achievement of the business goals. In this way, the complexity can be absorbed, and made tractable.

Practitioners of complex systems, software engineers, and system designers have been frequently using reference architectures to have a collective understanding of system components, functionalities, data-flows and patterns which shape the overall qualities of system and help further adjust it to the business objectives [23]; [24]. In software product line (SPL) development, RAs are generic artifacts that are configured and instantiated for a particular domain of systems [25]. In software engineering, major IT giants like IBM has referred to RAs as the 'best of best practices' to address unique and complex system development challenges [23]. There is a fair amount of literature on reference architectures, and whereas different authors definition may vary, they all share the same tenets.

A reference architecture is amalgamation of architectural patterns, standards, and software engineering techniques that bridge the problem domain to a class of solutions. This artefact can be partially or completely instantiated and prototyped in a particular business context together with other supporting artefact to enable its use. RAs are often created from previous RAs [1]. Based on the premises discussed and taking all into consideration, RAs can facilitate the issues of BD architecture and data engineering because of the following reasons;

1. RAs can promote adherence to best practice, standards, specifications and patterns
2. RAs can endow the data architecture team with openness and increase operability, incorporating architectural patterns that ensue desirable pre-



defined quality attributes

- 210 3. RAs can be the best initial start to the BD journey, capturing design issues when they are still cheap
4. RAs can bring different stakeholders on the same table and help achieve consensus around major technological constructs
5. RAs can be effective in identifying and addressing cross-cutting concerns
- 215 6. RAs can serve as the organizational memory around design decisions, enlightening next subsequent decisions
7. RAs can act as a summary and blueprint in the portfolio of software engineers and software architects, resulting in better dissemination of knowledge

### 220 3. Research Methodology

Our research methodology is made up of two major phases. First we explore the body of knowledge in academia and industry to identify architecturally significant requirements (ASR) for BD systems, and secondly we discuss the chosen methodology for developing the artifact

#### 225 3.1. Requirement Specification

Architecture aims to produce systems that are addressing specific requirements, and one cannot succeed in designing a successful architecture if requirements are unknown [22]. Therefore, in this section, we strive to firmly define the requirements necessary for the development of Cybermycelium. We present 230 with three integral pieces of information:

1. Determining the type of the requirement
2. Identifying the right approach for categorization of the requirements
3. Identifying the right approach for presentation of the requirements

For maximum clarity, we've mapped the following sub-sections against the 235 above mentioned elements.

### 3.1.1. *Type of requirements*

Precursor to theorizing about the potential of Cybermycelium, we needed to define what are the requirements. System and software requirements come in different flavours and can range from a sketch on a napkin to formal (mathematical) specifications. Therefore, we first needed to identify what kind of requirements is the most suitable for the purposes of this study. To answer this question, we first explored the body of evidence to understand the current classification of software requirements.

There's been various attempts to defining and classifying software and system requirements. For instance, Sommerville [26] classified requirements into three levels of abstraction that are namely 1) user requirements, 2) system requirements and 3) design specifications. The author then mapped these requirements against user acceptance testing, integration testing and unit testing. While this could satisfy the requirements of this study, we opted for a more general framework provided by Laplante [27]. In Laplante's approach, requirements are categorized into three categories of 1) functional requirements, 2) non-functional requirements, and 3) domain requirements.

Our objective is to define the high-level requirements of big data systems, thus we do not fully explore 'non-functional' requirements. Majority of non-functional requirements are emerged from the particularities of an environment, such as a banking sector or healthcare, and do not correlate to our study. Therefore, our primary focus is one functional and domain requirements and secondly on non-functional requirements.

### 3.1.2. *Categorizing requirements*

After having filtered out the right type of requirement, we then sought for a rigorous and relevant method to categorize the requirements. For this purpose, we followed the well-established categorization method based on BD characteristics, that is the 5Vs. These 5Vs are velocity, veracity, volume, Variety and Value [28], [29]. Nadal et al. [30] have underpinned their reference architecture on these characteristics and requirements that goes with them. Moreover, NIST

BD Public Working Group embarked on a large scale study to extract requirements from variety of application domains such as Healthcare, Life Sciences, Commercial, Energy, Government, and Defense. The result of this study was the formation of general requirements under seven categories. In another effort  
 270 by Volk et al. ([31]), nine use cases for BD projects are identified by collecting theories and use cases from the literature and categorizing them using a hierarchical clustering algorithm. Bashari et al. ([32]) focused on the security and privacy requirements of BD systems, Yu et al. presented the modern components of BD systems ([33]), Eridaputra et al. ([34]) created a generic model for  
 275 BD requirements using goal oriented approaches, and Al-jaroodi et al. ([35]) investigated general requirements to support BD software development.

We've also studied other reference architectures developed for BD systems to understand general requirements. In one study, Ataei et al. [36] assessed the body of evidence and presented with a comprehensive list of BD reference  
 280 architectures. This study helped us realize the spectrum of BD reference architectures, how they are designed and the general set of requirements. By analyzing these studies and by evaluating the design and requirement engineering required for BD reference architectures, we adjusted our initial categories of requirements and added security and privacy to it.

### 285 3.1.3. *Present requirements*

After knowing the type and category of requirements, We looked for a rigorous approach to present these requirements. There are numerous approaches used for software and system requirement representation including informal, semiformal and formal methods. For the purposes of this study, we opted for  
 290 an informal method because it is a well established method in the industry and academia [37]. Our approach follows the guidelines explained in ISO/IEC/IEEE standard 29148 [38] for representing functional requirements. We have also taken inspiration from Software Engineering Body of Knowledge [39]. However, our requirement representation is organized in term of BD characteristics.

295 *3.2. The artifact development methodology*

There are a few studies that have addressed the systematic development of reference architectures. Cloutier et al [23] present a high-level model for RA development through collection of contemporary information and capturing the essence of architectural advancements. In another effort, PuLSE-DSSA  
300 is proposed by Bayer et al. [40] in the context of product line development and domain engineering. PuLSE-DSSA emphasizes on capturing the existing architectural knowledge. Stricker et al. [41] propose a pattern-based approach for creating an RA. This study revolves around software engineering patterns motivated by the work of Gamma et al [42]; and proposes a structural approach  
305 that includes three layers of patterns with well-defined hierarchical relationships. Nakagawa, Martins, Felizardo, and Maldonado [43] propose an approach to RA design outside of product line management context that is concentrated towards aspect-oriented systems.

Galster and Avgeriou [44] propose an empirically grounded reference ar-  
310 chitecture based on two main facets; Existing RAs in practice and available literature on RAs. Along the same vein, Nakagawa et al [45] presented ProSA-RA which is a 4 phase methodology that unlike many other methodologies do provide a more comprehensive instructions on RA evaluation. In addition, this methodology benefits from an ecosystem of complementary constructs that aid  
315 in RA design and evaluation such as RAModel [46] and a framework for evaluation of RAs (FERA) [47]. In a recent study, Derras et al. [48] propose a schema of practical RA development in the context of software product line and domain engineering. This study is based on capturing knowledge from architectures in practice with attention to variability, configurability and product line devel-  
320 opment. The findings provide a four-phase process to develop quality driven reference architectures. This approach is influenced by ISO/IEC 26550 [49].

By analysis and study of all these approaches for design and development of RAs, a common pattern has been witnessed. Whereas some of them are more recent and some belong to years ago, there are commonalities that has been  
325 observed. All these approaches are grounded on three main pillars, 1) Existing

RAs 2) RAs in literature 3) Architectures in practice. Taking this into consideration and by analyzing the results of the systematic literature review conducted by Ataei et al [1] we found 'Empirically-grounded reference architectures' proposed by Galster and Avgeriou [44], a suitable methodology, because firstly it's  
330 been adopted by many studies, and secondly it's comparatively in-line with the nature of our study.

Nevertheless, we did not fully adopt this methodology and rather customized to the needs of this particular research. This is due to some inherent limitations that has been witnessed with the methodology. For instance we could not find  
335 a comprehensive guideline on how to identify data sources and how it could be categorized and synthesized into the creation of the RA in the third step of the methodology, therefore we employed the Nakagawa's information source investigation guidelines and the overall idea of the RAModel. Another limitation we've faced was with evaluation of the RA. As evaluation, second to a sound  
340 research methodology is one of the key elements of any good design science research, we had to look for a stronger and more systematic evaluation approach than what was discussed in 'empirically grounded RAs' methodology. For this purpose, and inspired by the works of Angelov et al [50]; [51], we first created an prototype of the RA in practice, and then used 'The architecture tradeoff  
345 analysis method' (ATAM) [52] to evaluate the artefact.

This research methodology is constituent of 6 phases which are respectively;  
1) Decision on the type of the RA 2) Design strategy 3) Empirical acquisition of data 4) Construction of the RA 5) Enable RA with variability 6) Evaluation of the RA. The phrase 'empirically grounded' refers to two major elements;  
350 firstly the reference architecture should be grounded in well-established and proven principles; secondly, the reference architecture should be evaluated for applicability and validity. These don't only belong to Galster and Avgeriou methodology, and other researchers such as Cloutier [23] and Derras et al [25] have promoted the same ideas.

355 It is worth mentioning that this methodology is iterative, meaning that the results gained from the evaluation phase (6th phase) determines the subsequent

iterations until the design reaches saturation.

### 3.3. Step1: Decision on type of the RA

Precursor to any effective RA development, is the decision on type of it. The  
360 type of the RA is significant, as it illuminates on information to be collected  
and the construction of the RA in later phases. The selection on the type of  
RA for the purposes of this study is based on two dimensions; the classification  
framework proposed by Angelov et al. [53] and the usage context [54].

Based on the classification framework proposed by Angelov et al. [53], five  
365 types of RA are defined. This framework has been developed with the goal of  
supporting analysis of RAs with regards to context, goal, and the architecture  
specification/design relationships. It is based on 3 major dimensions namely  
context, goals, and design, each having their own corresponding sub-dimensions.  
These dimensions and sub-dimensions are derived by the means of interrogatives  
370 (the usage of interrogates is a well-established practice for problem analysis).

The interrogatives ‘When’, ‘Where’, and ‘Who’ have been used to address  
the ‘context’, ‘Why’ has been used to address ‘goal’, and ‘How’ and ‘What’ have  
been used to address ‘design’ dimension. The outcome of the study categorizes  
RAs in two major groups; 1) standardization RAs and 2) Facilitation RAs. This  
375 framework has been chosen because it is completely in-line with the purposes of  
this study and aims to demarcate a clear domain for the RA to be developed.  
The comprehensive classification of the RAs with examples in practice illumi-  
nates on how different RAs are playing roles in the industry and how they are  
classified. This brings clarity on what should be developed and what boundaries  
380 should be drawn.

By reading the results of the recent SLR conducted by Ataei et al on BD  
RAs [1], we’ve added more examples of the RAs on top of what was provided by  
Angelov [53], and provided an updated list of RA classifications with examples.  
This list can be found at Appendix B.

385 The domain driven distributed BD RA chosen for the purposes of this study  
pursues two major goals; 1) enabling and support the development and data en-

engineering of BD systems 2) concurrently ensuring that interoperability between different heterogeneous components of the BD system is established. Therefore, the outcome artefact will be a BD RA that is a classical standardization RA  
390 designed to be implemented in multiple organizations.

### 3.4. Step2: Selection of Design Strategy

Angelov et al [50] and Galster et al[44] have both presented that RAs can have two major design strategies to them; 1) RAs that are designed from scratch (practice driven), 2) RAs that are based on other RAs (research driven). De-  
395 signing RAs from scratch is rare, and usually takes place in an emergent domain that have not perceived a lot of attention. On the other hand, most RAs today are the amalgamation of a priori concrete architectures, models, patterns, best practices, and RAs, that together provide a compelling artefact for a class of problems.

400 RAs developed from scratch tend to create more prescriptive theories, whereas RAs developed based on available body of knowledge tends to provide with more descriptive design theories. The RA designed for the purposes of this study is a research-based RA based on existing RAs, concrete architectures, and best practices.

### 405 3.5. Step 3: Empirical Acquisition of Data

As aforementioned, due to the limitation witnessed by this research methodology, we have augmented this phase, and increased the systematicity and transparency of data collection and synthesis through various academic methods such as systematic literature review or SLR.

410 This phase is made up of three major undertakings; 1) identification of data sources; 2) capturing data sources; 3) synthesis of data sources.

#### 3.5.1. Identification of data sources

To identify suitable data sources, we've employed the first step of ProSA-RA methodology, 'information source investigation'. This step is an endeavour

415 to capture focal and ancillary knowledge and theories that revolve around the target domain, and lay the ground of RA development.

To unearth the architectural quanta, and to highlight gradations between various approaches to BD system development, we've selected most relevant sources as the followings;

- 420 1. **Practice-led conferences:** given that majority of recent advancements for emerging technologies such as microservices architecture [55];[56] [57] and BD are coming from virtually hosted practice-led conferences, we've chosen some of the best conferences hold world-wide for the purposes of data collection. These conferences are 1) Qcon [58] 2) State of Data Mesh  
425 by ThoughtWorks [59] 3) Worldwide Software Architecture Summit'21 [60] and 4) Kafka Summit Europe 2021 [61]. Our objective was to capture the frontiers of software architecture and emerging approaches currently being practiced in IT giants such as Google, Facebook and Netflix. Among all the speech in these conferences, we looked for topics that entailed  
430 or were related to the keywords 'emergent software architecture trends', 'distributed software architecture', and 'BD software architecture'. We used the software Nvivo to code the transcripts from the conference videos. We used the aforementioned keywords as the codes and associated different texts, summative, essence-capturing sentences, and evocative attributes to  
435 them. During this process, a new theme 'domain driven design' emerged. We added that into the list of codes as well.
2. **Publications:** in order to capture evidence from the body of knowledge, we conducted a systematic literature review (SLR), following the guidelines of PRISMA presented by Moher et all [62], and Kitchenham et al.  
440 [63]. Although PRISMA is a comprehensive guidelines for conducting a systematic literature review, it is derived from the healthcare community and is driven by assumptions that may not be thoroughly relevant to software engineering and information system researchers. To this end, we adopted some guidelines from Kitchenham et al. for evidence based



445

software engineering.

The main objective of this SLR was to highlight common architectural constructs found among all the BD RAs. This SLR is build on top of our recent work [1] that covered all the RAs by 2020.

450

The initial SLR included IEEE Explore, ScienceDirect, SpringerLink, ACM library, MIS Quarterly, Elsevier, AISel as well as citation databases such as Scopus, Web of Science, Google Scholar, and Research Gate. The SLR search keywords used were 'Big Data Reference Architectures', 'Reference Architectures in the domain of Big Data', and 'Reference Architectures and Big Data'. We followed the same methodology, but this time for the years 2021 and 2022. Our aim was to find out if there has been any new BD RA published.

455

By the result of this SLR, we've found 3 more BD RAs ([3]; [64]; [65]) and we've added two new standards ([66]; [67]) to further solidify our study. Converging these new SLR with the old, covering the years 2010-2022, we've pooled 89 literature in the primary phase, and another 10 by snowballing and citation searching. These 99 literature then went through our inclusion, exclusion. These criteria is as blow;

460

- Inclusion criteria:
  - (a) Primary and secondary studies between Jan 1st 2020 and Sep 1st 2022 focused on the topics of BD RA, BD architecture, and BD architectural components
  - (b) Research that indicates the current state of RAs in the field of BD and demonstrates possible outcomes
  - (c) Studies that are scholarly publications, books, book chapters, thesis, dissertations, or conference proceedings
  - (d) Grey literature such as white paper that includes extensive information on BD RAs
- Exclusion criteria:
  - (a) Informal literature surveys without any clearly defined research questions or research process

465

470

475

- (b) Duplicate reports of the same study (a conference and journal version of the same paper)
- (c) Short papers (less than 5 pages)
- (d) Studies that are not written in English

480 The screening process was conducted by each researcher separately. Dis-  
agreement among researchers were resolved using Krippendorff's alpha [68]. Our  
aim was not to get involved in a very complicated statistics model, so we've done  
most of the computations using SPSS, specifically with Hayes' Macro. Our  $\alpha$   
value was within the acceptable range (above 80).

485 After excluding papers based on inclusion and exclusion criteria, and as  
suggested by Kitchenham et al [63], we assessed studies based on their quality.  
For this purposes, and inspired by Critical Appraisal Skills Programme (CASP  
[69]), we developed our quality framework based on 7 criteria. The 7 criteria  
tested literature on 4 major areas that can critically affect the quality of the  
490 studies. These categories and the corresponding criteria are as following;

1. *Minimum quality threshold:*

- (a) Does the study report empirical research or is it merely a 'lesson learnt' report based on expert opinion ?
- (b) The objectives and aims of the study is clearly communicated, in-  
495 cluding the reasoning for why the study was undertaken ?
- (c) Does the study provide with adequate information regarding the con-  
text in which the research was carried out ?

2. *Rigour:*

- (a) Is the research design appropriate to address the objectives of the  
500 research ?
- (b) Is there any data collection method used and is it appropriate ?

3. *Credibility:*

- (a) Does the study report findings in a clear and unbiased manner ?

4. *Relevance:*

- 505 (a) Does the study provides value for practice or research

Taken all together, these 7 criteria gave us a measure of the extent to which a particular study's findings could make a valuable contribution to the review. These criteria were disseminated as a checklist among researchers with value for each property being dichotomous, that is 'yes' or 'no' in two phases. In the first phase, researchers only assess the quality based on the first major area ( minimum quality threshold ). If the study passed the first phase, it would then go into the second phase, where it was assessed for credibility, rigour and relevance. The quality is agreed if 75% of the responses are positive for any given study with at least 75% inter-rater reliability.

### 3.5.2. Data Synthesis

After pooling the studies, 13 studies have been removed based on inclusion and exclusion criteria. From there on, 76 studies have been assessed for eligibility based on the quality framework and the inclusion criteria. The result of this process handed over 63 studies from this branch ( identification of studies visa database and registers ). From the other branch ( identification of data via other methods ), 10 records identified through citation searching. These reports have been assessed through the same quality framework, inclusion and exclusion criteria, yielding 5 studies. Together 68 studies pooled for this SLR as depicted in figure 1.

These 68 studies are comprising of journal papers, conference papers, book chapters, tech reports, tech surveys white papers, standards, master dissertation, and PhD thesis. Out of the pool of these studies, 39.4% are from IEEE Explore, 4.4% are from ScienceDirect, 23.5% are from Springerlink, 13.2% are from ACM, and 29.4% are from other sources such as citation search, Google Scholar and Research Gate. 30 journal articles, 14 conference papers, 6 whitepapers, 2 ISO standards, 14 book chapters, and 2 postgraduate studies have been selected. 26% of these studies are from the year 2010-2013, 33% are from the years 2013-2015, and 51% are from the years 2016-2022. These stats are portrayed in figure 2.

By this stage, the research objective is set, studies are pooled, assessed and

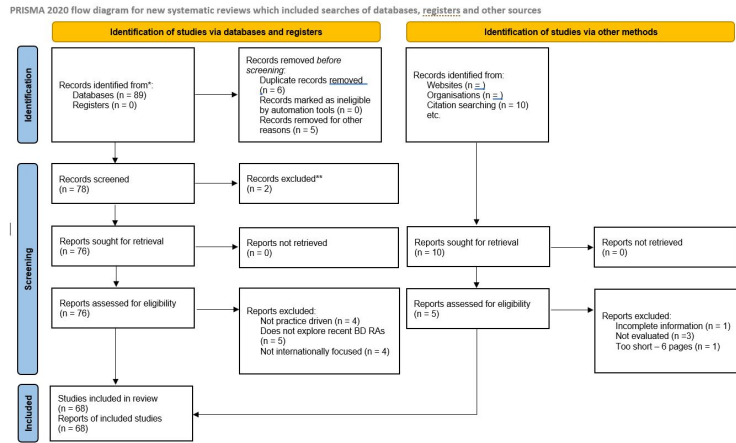


Figure 1: PRISMA flowchart

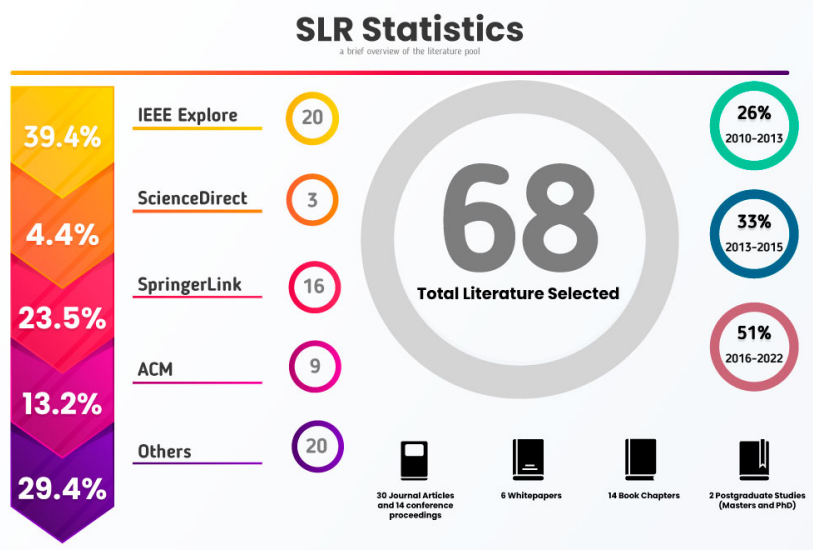


Figure 2: SLR statistics

refined, thus the research embarked on the actual synthesis of data. For this purpose, we employed thematic synthesis presented by Cruzes et al. [70]. An integral element of this phase is data extraction, in which the essence of the studies are obtained in an explicit and consistent manner. We opted for an integrated approach to coding ([71]) using the software Nvivo [72]. All the

keywords aforementioned has been created as nodes in the software, which are then associated to relevant sentences in studies. After coding all the studies, the findings have been synthesized to create theories, which in turn emerged themes and patterns. The findings gained from this SLR grounded the foundation for various aspect of the SLR development. To increase transparency, RAs and standards found as the result of this SRL is presented in Appendix A.

### 3.6. Construction of the RA

Based on the themes, theories, and patterns realized in the previous steps, the process of RA construction took place. Integral to this step was the identification of elements that the RA should contain, how these elements should be synthesized, and how the RA can be portrayed and communicated. To describe our RA, we followed ISO/IEC/IEEE 42010 standard [73]. This standard pivots on concrete architectures, so we did not 100% conform to it, but rather the good and relevant parts of it has been taken. For instance, architecture viewpoints, statement of corresponding rules, and expression of the architecture through architecture description languages (ADLs) have had direct impact on the construction of this RA.

A key challenge in the development of this RA was to strike a balance between the specificity of the micro patterns and approaches to system development and general architectural concepts that reflect a view of the system as an array of interrelated entities. Angelove et al [74] approached this problem by the means of interrogative through a defined framework that aims to guide the creation of RAs. Cloutier et al [23] suggest that a RA should entail technical, business and customer context views, whereas Vogel et al [75] provided classified RA views based on the usage context, as industry specific, platform specific, industry crosscutting and product line RAs.

Stricker et al [76] expressed their pattern-based RA by adhering several distinct views into one. Chang et al [77] presented NIST BD RA as a system constituent of logical components connected through interoperability interfaces in several fabrics. On the other hand, ISO/IEC/IEEE 42010 refrains from using

phrases such as “technical architecture”, “physical architecture”, or “business architecture”.

Taking the best evidence from the available body of knowledge, We decided to adhere several views into one and express the RA through a multi-layer  
575 modeling language called Archimate. Archimate is a mature modeling language developed by Open Group that provides with a uniform representation of high-level architectural diagram aimed at portraying and delineating enterprise architecture [78]. Archimate being listed as a standard architecture description language in ISO/IEC/IEEE 42010, is designed based on a set of related concepts that are specialized towards the system at different architectural layers.  
590 This means that the architect is enhanced with an integrated architectural tool that visualizes and describes different architecture domains and their underlying relations [79]; [80].

Archimate utilizes service-orientation to distinguish and relate the application, business and technology layer and use realization relationships to create  
585 relationship between concrete elements and more abstract elements across three layers. In addition, Archimate can be customized to account for varying needs of the architect.

### *3.7. Enabling RA with variability*

590 Enabling RA with variability is an important process that helps with the instantiation of it. This allows RA to remain useful as a priori artefact when it comes to organization-specific regulations, and regional policies that constrain the architect design decisions [81].

Variability management has been studied in the domain of Business Process Management (BPM) [82]; [83]; [84] and Software Product Line Engineering (SPLE) [85][86]; [87]; [88]; [89]. In BPM, variability management revolves around efficient handling of different variants in business processes, whereas in SPLE, variability management is about modifying and extending the software artefact to account of the requirements of a specific context.

600 Clear identification of variability and explicit communication of it improves

communication between stakeholders, allows for traceability between variation causes and effects and facilitates the decision making [90].

Variation points are decided based on the data collected in previous steps. Galster et al [44] suggest that there are three approaches to enabling variability;

- 605 1. Annotation of the RA
2. Variability views
3. Variability models

We could not find an in-detail explanation of how one should choose the appropriate variability enabling approach. Therefore, inspired by the works of Rurua et al [81], we decided to extend the RA with variability, by the means of Archimate annotations. We have achieved this in two steps; first we developed a custom layer that represents focal variability concepts, and then we extended the RA through annotation. The aim of this process is not find all variability points that may emerge in the usage context, but to provide with high-level system related architectural variabilities that an architect may consider for improvement of design and adoption of the RA.

The variability model is depicted in Fig 3 by the means of Archimate's motivation layer. This modeling is driven by the works of Pohl et al [85] and in specific their graphical notation of variability information, and Rurua et al [81] and in specific, their variability management concepts model. Our variability model can be employed by the architect on variable components of Cybermycelium discussed in 6.2.

### 3.8. *Evaluation of the RA*

Evaluation of the RA is to ensure that it has achieved the goals stated prior to development, to test its effectiveness and usability, and to make sure that it addresses the identified problems. Two fundamental pillars of the evaluation is the correctness and the utility of the RA and how efficient it can be adapted and instantiated [44]. The quality of RA can be assessed by how it can be transformed into an effective organization-specific concrete architecture. The

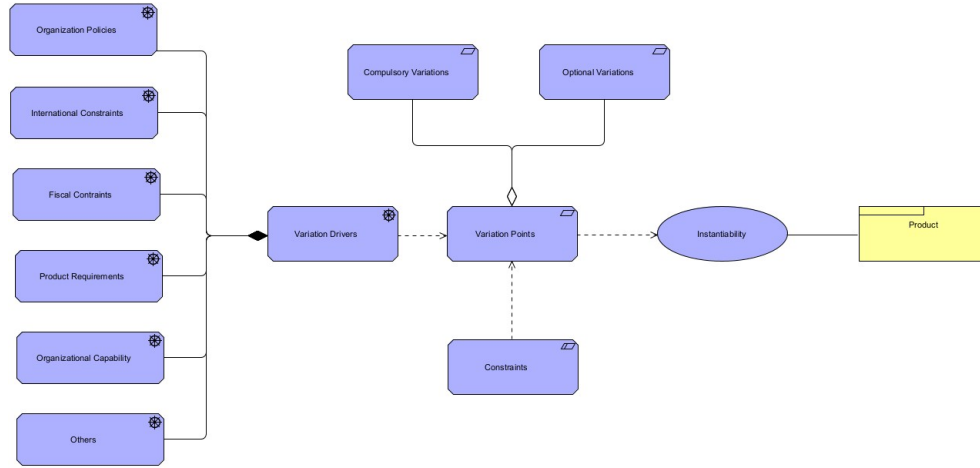


Figure 3: Variability management concepts model

fact that this RA is built upon former RAs helps making the evaluation steps easier as this research can get inspiration from other studies and their approach to evaluation [91].

Nevertheless, evaluation of the RAs is a well-known challenge among researchers [54]; [92]; [93]; [94]. RAs and concrete architectures have distinct qualities. They vary in at least 3 major ways;

1. RAs are of higher level of abstraction
2. In RAs stakeholders are not clearly grouped
3. RAs tend to be focused more on architectural qualities

While there are many well-established methods for assessing concrete architectures such as Scenario-based Architecture Analysis Method [95], Architecture Level Modifiability Analysis [96], Performance Assessment of Software Architecture [97], Architecture Trade-off Analysis Method [98], none of these methods can be directly applied to evaluate RAs. To support this statement, three major issues have been identified. These issues are as follows;

1. One of the main problems for applying existing evaluation methods to RA is the lack of clearly defined group of stakeholders [50], while ATAM and



other methods are highly dependent on participation of stakeholders for evaluation. Due to the level of abstractness of the RA, reaching various group of stakeholders and persuade them to anticipate in the study, is  
650 problematic and does not fit to the timeline of this study. Even more notably, it is unlikely that all stakeholders will unite around a common reference architecture as different members may or may not agree with the overall idea of the RAs, may come from different backgrounds, and may lack architectural visions

655 2. Evaluation frameworks and methods for concrete architectures make use of scenarios. Howbeit due to RAs level of abstraction, creation of usable scenarios is difficult. Either a large set of scenarios should be developed covering all the aspects of the RA with regards to specific domain, or a more general scenarios should be developed to cover all the aspects. In the  
660 first approach, a large number of scenarios, makes data analysis troublesome and a tedious process. Moreover, the order of prioritization of these scenarios and defining them, and validating them is a problematic task. In the second approach, due to the generality of the scenario, evaluation of effectiveness and usability of the RA becomes difficult and may become  
665 incomplete [92]. These challenges have been observed even in the evaluation of highly complex concrete architectures in the domain of information systems [99].

Based on the problems discussed above, available methods of architecture analysis are not sufficient in evaluating the RA. This has been addressed by  
670 various researchers in the industry.

In one study, Angelov et al [50], modified ATAM and extended it to resonate well with RAs. This process took place by invitation of representatives from leading industries for the evaluation process, and the selection of various contexts and defined scenarios for these contexts. Furthermore, ATAM has  
675 been extended to evaluate completeness, buildability and applicability. Howbeit the selection of the right candidate and involving them in the process is a

time-consuming and daunting task and may yield incomplete information. In addition, candidates maybe lacking architectural visions, increasing the threat to validity.

680 In addition to extending ATAM for RAs, Graaf et al [100] presented an evaluation approach in which SAAM is extended to help reduce the organizational impact of it. In Another study by Maier et al [94], as a postgraduate thesis in Eindhoven University of Technology, the evaluation of the RA has been conducted by mapping it against existing concrete architectures described  
685 in industrial whitepapers and reports. Along the lines, Galstar et al [44] suggested reference implementations, prototyping and incremental approach for the validation of the RA.

Rohling et al [101] have evaluated their RA by mapping it against the requirements set for the study. This was facilitated by the RA research methodology  
690 created by Nakagawa et al [102] and the complementary RAModel [46].

Inspired by all the studies listed, for the purposes of this study, we will first create a prototype of the RA in an actual organizational setup and then we will use ATAM to evaluate the concrete architecture.

#### 4. Requirement Specification

695 By the result of the processes conducted in 3.1, and by carefully evaluating similar approaches to requirement specification, we tailored a set of requirement for the development for Cybermycelium. These requirements are presented in Table 1. These requirements are mapped against our components discussed in 6.2.

#### 700 5. Why Cybermycelium?

In this section, we present with theories that aim to explain the limitations of current BD architectures. While we have briefly discussed the current status of BD architectures and failure modes in 2.1, this section digs deeper into these challenges.

Table 1: BD system requirements

Volume	<b>Vol-1)</b> System needs to support asynchronous, streaming, and batch processing to collect data from centralized, distributed, and other sources, <b>Vol-2)</b> System needs to provide a scalable storage for massive data sets
Velocity	<b>Vel-1)</b> System needs to support slow, bursty, and high-throughput data transmission between data sources, <b>Vel-2)</b> System needs to stream data to data consumers in a timely manner, <b>Vel-3)</b> System needs to be able to ingest multiple, continuous, time varying data streams, <b>Vel-4)</b> System shall support fast search from streaming and processed data with high accuracy and relevancy, <b>Vel-5)</b> System should be able to process data in real-time or near real-time manner
Variety	<b>Var-1)</b> System needs to support data in various formats ranging from structured to semi-structured and unstructured data, <b>Var-2)</b> System needs to support aggregation, standardization, and normalization of data from disparate sources, <b>Var-3)</b> System shall support adaptations mechanisms for schema evolution, <b>Var-4)</b> System can provide mechanisms to automatically include new data sources
Value	<b>Val-1)</b> System needs to be able to handle compute-intensive analytical processing and machine learning techniques, <b>Val-2)</b> System needs to support two types of analytical processing: batch and streaming, <b>Val-3)</b> System needs to support different output file formats for different purposes, <b>Val-4)</b> System needs to support streaming results to the consumers
Security & Privacy	<b>SaP-1)</b> System needs to protect and retain privacy and security of sensitive data, <b>SaP-2)</b> System needs to have access control, and multi-level, policy-driven authentication on protected data and processing nodes.

Veracity	<p><b>Ver-1)</b> System needs to support data quality curation including classification, pre-processing, format, reduction, and transformation,</p> <p><b>Ver-2)</b> System needs to support data provenance including data life cycle management and long-term preservation.</p>
----------	---

705 *5.1. A need for a paradigm shift*

If our aspiration to enhance every business aspect with data needs to come to fruition, we need a different approach to data architecture. Traditional data warehouse approaches to business intelligence, while have addressed the volume and computing aspect of data, have failed to address other characteristics of  
710 it; heterogeneity and proliferation of data sources (variety), the speed at which data arrives and needs to be processed (velocity), the rate at which data mutates (variability), and the truth or quality of the data (veracity).

Suppose company A would want to adopt a BD initiative to embark on this complex endeavour, what would be the first step ? does the company have to  
715 worry about high-throughput stream processing ? does it have to worry about regional privacy regulations? does it have to worry about cost-efficient batch processing? perhaps yes to all of these questions, but what's even more integral to the success of the whole endeavour is the underlying architecture that governs the entire system, its components, their relations to each other, data flow and  
720 principles and standards that govern the quality attributes and evolution of the system.

This architecture and design process if done underlying current prevalent approaches, can bring about colossal losses, and leave many managers disappointed. Nevertheless, we don't claim that all these architectures will fail, per-  
725 haps some have proven to be successful in a specific context. There are two threats to maintainability and scalability of these systems;

1. **Data source proliferation:** as the BD system grows and more data sources are added, the ability to ingest, process, and harmonize all these data in one place diminishes. This in turn, reduces maintainability, makes

730 company reliant on lead data engineers who built the infrastructure, and  
makes scaling these systems very difficult. The proliferation of data sources  
if not managed carefully, can result in data swamps as well, which makes  
understanding data domains, and providing data as a service a compli-  
cated task.

735 2. **Data consumer proliferation:** organizations that utilize rapid experi-  
mentation approaches such Hypothesis-Driven Development and Contin-  
uous Delivery [103] constantly introduce new use cases for data to be con-  
sumed in different domains. This means that variability of the data rises,  
and the sum of aggregations, projections, and slices increases, which in  
740 turn adds more work to the backlog of the data engineering team, slowing  
down the process of serving the data to consumers. Inability to account  
for the data consumer demands can be a point of friction in organizations  
[20].

To address these challenges, the lead architect or the architecture governance  
745 group will then have to choose the right architectural quanta to segregate the  
monolith. According to Ford et al [104], an architectural quantum is a compo-  
nent of a system with high functional cohesion that is independently deployable;  
this is also referred to as a service [105]. The main motivation for segregating  
the monolith into its architectural quantum, is to parallelize work in various  
750 business domain, to reach a better velocity, reduce cost, promote ownership,  
increase performance and reach higher operational scalability.

Currently, these architectures are usually segregated into pipelines that each  
process data differently. While each pipeline has its own responsibility to handle  
various aspect of the BD system, there is still a high coupling between the  
755 pipelines, as 'data cleansing' phase cannot start after 'data ingestion'. This  
coupling is even more highlighted when the company is at the stage of rapid  
experimentation with data sources and would like to explore new domains of  
insight generation, and this in turn means that delivering new features and  
values is orthogonal to the axis of change.

760 Using the same practice management software example, given that a new  
class of animals (equine animals as opposed to small animals) should be incor-  
porated for data analysis; the data engineering team should then modify and  
extend the whole pipeline of ingest, process and serve to account for the partic-  
ularity of the data captured regarding this new class of animals. New ingestion  
765 services required, the schema might change, the veracity checking mechanisms  
might differ, cleansing varies and more. This implies an end-to-end dependency  
which affects external teams, slows down processes and make maintenance grad-  
ually harder. This implies that using pipeline as an architectural quantum in  
such a coupled way is perhaps not the most efficient architecture to BD systems.

770 Another major issue with the current architectural approaches is that data  
engineering is usually confined into a team of hyper-specialized individuals who  
are siloed from the operational units of the organization. These teams, being  
fully responsible for creating the infrastructure for data processing, are often  
absent of business knowledge and the domain, which limits their productivity.  
775 These individual usually have a limited understanding of the data sources, data  
provenance, data consumers, the changing nature of the business domains, the  
overall product vision, and the application side of things, yet they are responsible  
to provide data for a large array of analytical and operational needs in a timely  
manner. For instance, given a context in which a product owner and application  
780 developer can cooperate, the synergy between the data engineer, application  
developer, and product owner can bring about more mature decisions that can  
align the requirements across various technical and logical domains and allow  
for various stakeholders to contend and communicate their concerns.

Whereas there could be other factors to be discussed deeply in this paper  
785 regarding current BD architectures, our aim is not to explore any further and  
emphasize more on the solution artefact we've designed to address some of these  
challenges. This artifact is discussed in the next section.

## 6. Cybermycelium: A Domain Driven Distributed Reference Architecture for Big Data Systems

790 This section is constituent of two integral elements: theory and artifact. First we begin by exploring the major architectural constructs that underpins our artifact and then we present the artifact and describe its components.

### 6.1. The Theory

There are various design and kernel theories employed to justify our artifact  
795 and the decisions made. These theories are described in following sub-sections.

#### 6.1.1. A paradigm shift: distributed domain driven architecture

Based on the premises discussed in 5.1, one can infer that the idea of monolithic and centralized data pipelines that are highly coupled and operated by silos of hyper-specialized BD engineers has limitations and can bring organizations  
800 into a bottleneck.

We therefore, explore a domain driven distributed and decentralized architecture for BD systems and posit that this architecture can address some of the challenges discussed. This idea is inspired by the advancements in software engineering architecture, and in specific event-driven microservice architecture  
805 [106], domain driven design [107], and reactive systems [108].

Data usually comes into two different flavours; 1) operational data which serves the need of an application, facilitates logic, and can include transactional data and 2) analytical data which usually has the temporality to it, and is aggregated to provide with insights.

810 These two different flavours, despite being related, have different characteristics and trying to lump them together may result in a morass. To this end, Cybermycelium realizes the varying nature between these two planes and respects the difference. Cybermycelium aims to transfigure current architectural approaches by proposing an inversion of control, and a topology based on product domains and not the technology [109]. Our proposition is that handling two  
815

different archetypes of data, should not necessarily result in siloed teams, heavy backlogs, and a coupled implementation.

To further elucidate on this matter, we take the example of the microservice architecture. As the industry sailed away from the monolithic n-tier architectures into Service Oriented Architectures (SOA), organizations faced a lot of challenges. One prevalent issue was around the maintenances of Enterprise Service Bus (ESB) or SOA bus, which is the locus of aggregation. While the aggregation layer could be written very thin, the reality is that the transformation of XML and logical operations started to bloat the SOA bus. This added a new level of coupling between internal and external elements of the system as a whole [110]; [111]; [112].

Microservices architecture, being the evolution of SOA, move away from smart pipelines into dumb pipelines and smart services removing the need for the locus of aggregation and control. Moreover, there was no business logic written in the pipelines, and each service was segregated usually with the help of domain driven design.

Whereas microservices architecture still have its challenges, the gradations of software architectures in software engineering industry can be analogous to the data engineering domain. One can perceive the pipeline architecture and its coupling nature similar to SOA and its practice of writing business logic in the SOA bus to connect the services.

Based on the premises discussed and overcome the limitations, we posit 4 underpinning principles for Cybermycelium;

1. Distributed Domain driven services with bounded context
2. Data as a service
3. Data infrastructure automation
4. Governance through a federation service
5. Event driven services



### 6.1.2. *Distributed Domain driven services with bounded context*

845      Integral to Cybermycelium, is the distribution and decentralization of services into domains that have clear bounded context. Perhaps one the most challenging things one might face when it comes to architecting a distributed system is: based on what architectural quanta should we break down the system. This issue has been repeatedly discussed for example among adopters of  
850      microservices architecture . Cybermycelium, inspired by the concept of domain-drive design, tends to sit data close to the product domain that relates to it. This implies that data inheres in the product domain and as a facet of it [56].

         This is mainly driven by the fact that most organizations today are decomposed based on their products. These products are the capability of the business  
855      that are segregated into various domains. Domain’s bounded context is operated by various teams with different visions and concerns, incorporating data into a bounded context can result in a synergy that can improve the management of evolution and continuous change. This can be micro, such as application developers communicating with data engineers about collecting user data in a  
860      nested data structures or in flat ones, or macro, such as application developers thinking about redesigning their graphql schema in an intermediary layer that may affect the data engineers ingestion services.

         It is worth mentioning that, we are absorbing the concept of domain-driven design into this study to facilitate communication and increase the adoption,  
865      rigour and relevance of our RA. Communication is a key component of any software development endeavour [113], and without it essential knowledge sharing can be compromised. Often data engineers and business stakeholders have no direct interaction with one another. Instead, the domain knowledge is translated through intermediaries such as business analyst or project managers to series of  
870      tasks to be done [114]. This implies at least two translations from two different ontologies.

         In each translation, information is lost, which is the essential domain knowledge, and this implies risk to the overall data quality. In such data engineering

process, the requirement often gets distorted, and data engineer has no aware-  
875 ness of the actual business domain and the problem being addressed. Often  
times, problems being solved through data engineering, are not simple mathe-  
matical problems or a riddle, but rather have broader scopes. An organization  
may decide to optimize workflows and process through continuous data-driven de-  
cision making, and a data architecture that is overly centralized and not flexible  
880 can risk a project failure.

To this challenge, domain-driven design proposes a better approach to convey  
knowledge from domain experts to data engineers. In domain-driven design,  
instead of intermediary translations, business domains are projected into actual  
data engineering, emphasizing on creation of one shared terminology, that is  
885 the ubiquitous language. We do not aim to explore all facets of domain-driven  
design in this study, but it's worth mentioning that each business has it's own  
domain, and constituent core, generic and supporting sub-domains, and this  
varies from context to context.

### 6.1.3. *Data as a service:*

890 Data can be conceived as the fourth dimension of a product next to UI/UX,  
business and application (6.1.3). Each domain provides its data as a service.  
This data is consisting of both operational and analytical data. This also implies  
that any friction and coupling between data is removed. For instance, the  
'invoice' domain will provide the transactional data about number of invoices  
895 and total of discounts with analytical data such as which practices have created  
what number of invoices in what period of time.

However this data-as-a-service model should be carefully implemented to ac-  
count for explorability, discoverability, security, and quality. The data provided  
as a service should have the identical qualities to customer-facing products. This  
900 also implies, that a product owner should now treat data facet as an aspect of the  
product and employ objective measures that assure the desired quality. These  
measures can be net promoter scores from data consumers, data provenance,  
and decreased lead time. Product owners, in addition to the application and

## ***Product Domain***

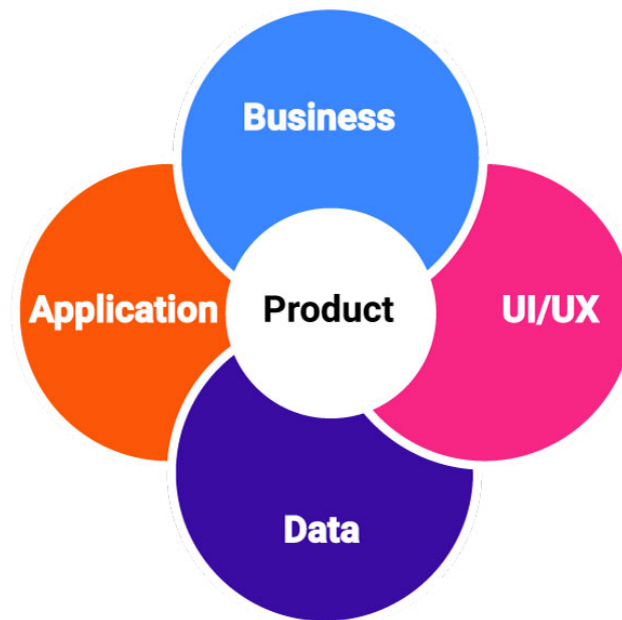


Figure 4: Product Facets

design aspect of the product, must now incorporate this new facet, and try  
905 to understand the needs of the data consumers, how they consume the data,  
and what are the common tools and technologies to consume the data. This  
knowledge can help shaping better interfaces for the product.

Product domains may also need to ingest data from upstream domains, and  
this requires the definition of clear interfaces. Furthermore, each domain should  
910 also account for metadata. Metadata is derived from the nature of the product  
and its data lifecycle. Data can be ingested and served in various forms such  
as tables, graphs, JSON, events, and many more; but in order for the data  
to be useful for analytical purposes, there is a need to associate data with its  
corresponding metadata that encompasses semantics, and history.

915 *6.1.4. Data infrastructure automation*

As the number of product domain increases, the effort required to build, deploy, execute, and monitor services increases. This includes the data pipelines required for that product domain to carry out its functions. The platform skills required for these kinds of work is usually found in Devops engineers and site reliability engineers. Application developers and data engineers are usually not adept at carrying out such workloads in an efficient manner. For this reason, there is a need for highly abstract reusable infrastructural components that can be easily utilized. This implies that teams should be equipped with required infrastructure as a service, that can be easily employed to account for BD needs.

925 One way to provision such infrastructure as a service, is to utilize infrastructure as a code software tools like Terraform [115] and following the principles of GitOps. Besides, data infrastructure may be extended based on currently running infrastructure for application payloads. However, this might be challenging, as the BD ecosystem is growing rapidly, and while a software application might be running on a EC2 worker node in an EKS cluster on Amazon, the BD system maybe running on Databricks, or using a customer data platform ( CDP ) solution like Segment [116], HDFS [117], or Amazon Kinesis. This brings the challenge of composing data and application infrastructure together to provide a coherent, cost-efficient and interoperable infrastructure.

935 Nevertheless, this should not be a daunting task, as one can simply extend the EKS confis and add a new pod to the network, which installs Databricks through a Helm Chart [118]. In addition, the data infrastructure should be accompanied with proper tooling. Tools like GNU Make [119], makes it quite easy for developers and data engineers to deploy infrastructure as they demand. A mature infrastructure as a service should provide the team with core infrastructures such as BD storage, stream processing services, batch processing services, event backbones or message queues, and data integration technologies.

#### 6.1.5. Governance through a federation service

The other principle of Cybermycelium is the global governance or the global  
945 standardization of the services. This principle is perhaps a lesson learnt from the  
studied application of Miroservices architecture in the industry [21]. Distributed  
architectures are made up of independent collection of nodes, with distinct life-  
cycle that are deployed separately and are owned by various teams. As the  
number of these services grow, and the interconnections increase, the challenge  
950 of maintaining and scaling the system increases. This means services need to  
interoperate, ingest data from other services, perform graph or set operations  
in a timely manner and do stream processing.

In order to scale and maintain these independently deployed yet intercon-  
nected services, Cybermycelium needs a governance model that embrace domain  
955 autonomy, decentralization, automation, Devops, and interoperability through  
federated government. This requires a shift in thinking, which obsoletes many  
prevalent assumptions of software and data engineering. The point of federation  
is not to suppress or kill the creativity and innovation of the teams, but rather,  
introduction of global contracts and standards that are in-line with company's  
960 resources and vision. Nevertheless, finding equilibrium between right amount of  
centralization and decentralization introduces challenge. For instance, semantic  
related metadata can be left to the product domain to decide, whereas poli-  
cies and standards for metadata collection should be global. This is somewhat  
analogous to architectural principles in TOGAF's ADM [120].

965 The definition of these standards is up to the architecture, or architec-  
tural governance group, and is usually achieved through service level objectives  
(SLOs) or well-defined contracts and standards.

#### 6.1.6. Event driven services

Cybermycelium has been designed in a decentralized and distributed man-  
970 ner. Despite the advantages of decentralized systems in terms of maintenances  
and scalability, communication between the services remains a challenge. As  
the number of services grow, the communication channels increases, and this

soon turns into a nexus of interconnected services that each try to meet its own end. Each service will need to learn about the other services, their interfaces, and how the messages will be processed. This increases the coupling between services and makes maintenance a challenging task. We argue that this should not be the aim of a distributed RA such as Cybermycelium.

One approach to alleviate these issues is asynchronous communication between services through events. This is a different paradigm to a typical REST style of communication. A point-to-point communication occurs between services as series of 'command', like getting or updating a certain resources, whereas event-driven communication happens as a series of events. This implies that instead of service A commanding service B for certain computation, service B reacts to a change of state through an event, without needing to know about service A.

This provides a 'dispatch and forget' kind of a model, in which a service is only responsible to dispatch an event to a topic of interest for the desired computation. In this way, the service does not need to wait for the response and see what happens after the event is dispatched, and is only responsible for dispatching events through a well-defined contract. Underlying this paradigm, services do not need to know about each other, but rather they need to know what 'topic' they are interested in.

This is analogous to a kitchen, where instead of a waiter needing to communicate directly to another waiter and to the chef and to the cook, they all react to certain events, such as customers coming in, or an order slip being left on a counter. The subtlety lies in the underlying paradigm and philosophy of 'event' instead of 'command'. This paradigm solves many issues of communication in distributed BD systems such as long running blocking tasks, throughput, maintenance, scale and ripple effect of service failure.

It is worth mentioning, that eventual consistency (BASE) is preferred over ACID transactions for performance and scalability reasons. The detail of these two varying kind of transactions is outside the scope of this study.

## 6.2. The Artefact

After having discussed many kernel and design theories, the necessary theoretical foundation is created for the design and development of the artefact. Cybermycelium is created with Archimate and displays the RA mostly in technology layer. Displaying these services in technology layer means that it's up to the designer to decide what flow and application should exist in each node. For the sake of completion, and as every software is designed to account for a business need, we have assumed a very simple BD business process. While this business layer could vary in different context, Cybermycelium should be able to have the elasticity required to account for various business models. To ease understanding of the RA, we sub-diagrammed the product domain (6).

Cybermycelium is made up of 11 main components and 9 variable components as depicted in figure 5.

The main elements are;

1. **Ingress Service:** The ingress service is responsible for exposing the necessary port and endpoint for the data to flow to the system. Depending on the nature of the request, the ingress service will load balance to either batch processing controller or stream processing controller. It is essential for the ingress service to operate asynchronously to avoid any potential choke points. In addition, ingress handles the SSL termination, and potentially name-based virtual hosting. Ingress has several benefits. Firstly, it helps with security by preventing port proliferation and direct access to services. Secondly, it help with performance by distributing requests based on their nature, and SSL termination. Thirdly, if there's a need for object mutation through a proxy, ingress is the best architectural construct. Having an ingress also means that the point of entry is clear, which makes monitoring easier, and allows for other components of the architecture to remain in private networks. This component addresses the requirements Vol-1, Vol-2, Var-1, Var-3, Var-4, Val-1, Val-3, Val-4, SaP-1 and SaP-2.
2. **Batch Processing Controller:** Batch processing controller is responsi-

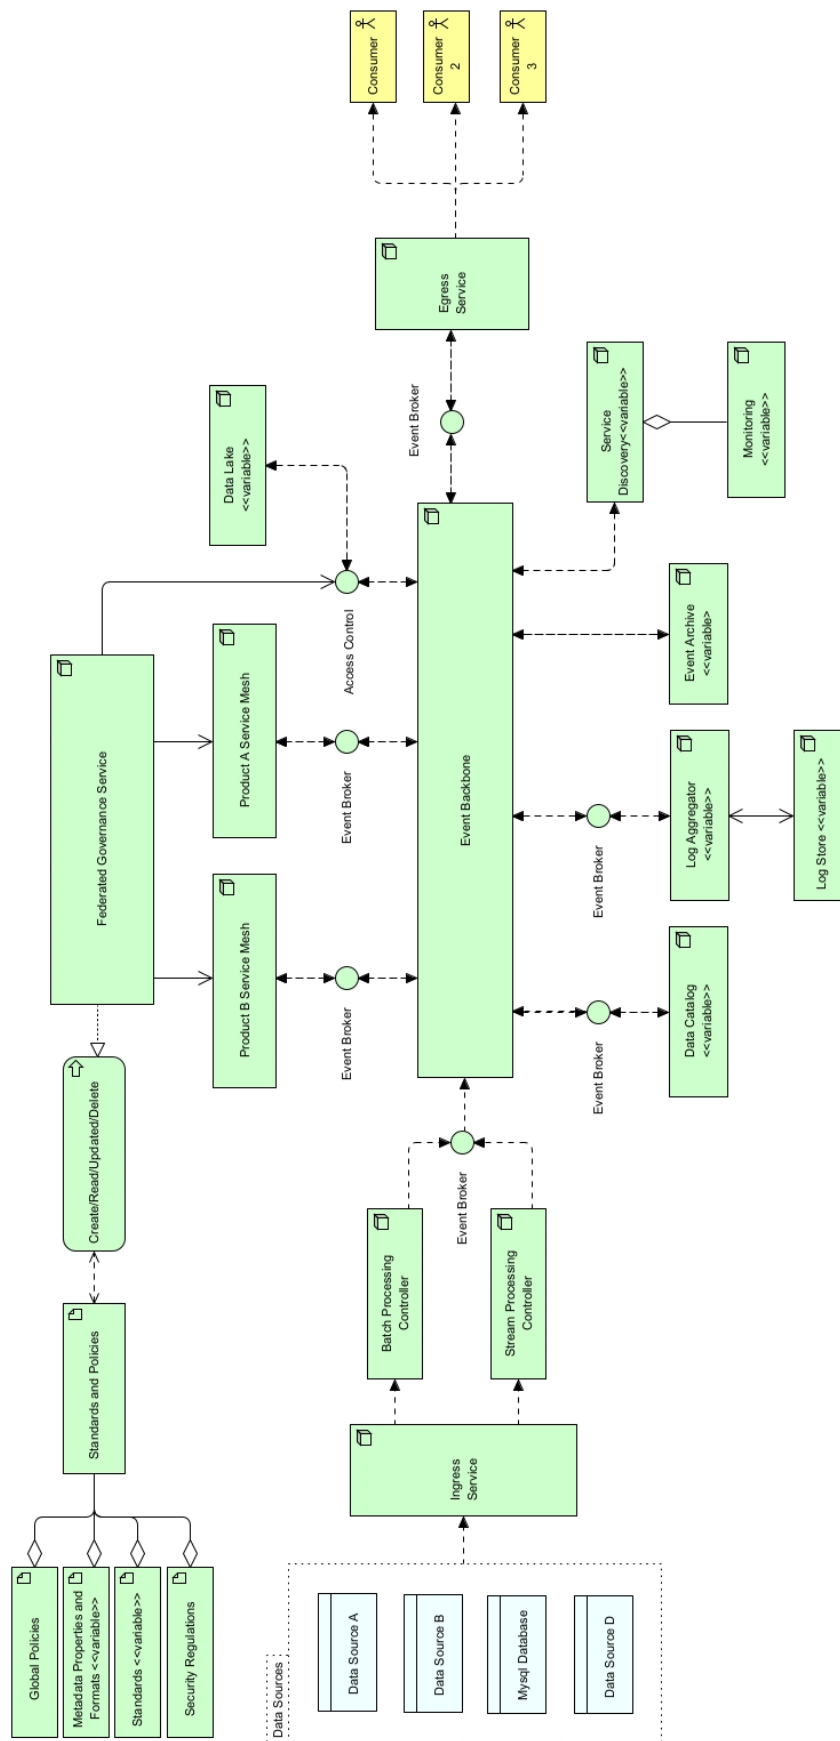


Figure 5: Cybermycelium BD Reference Architecture



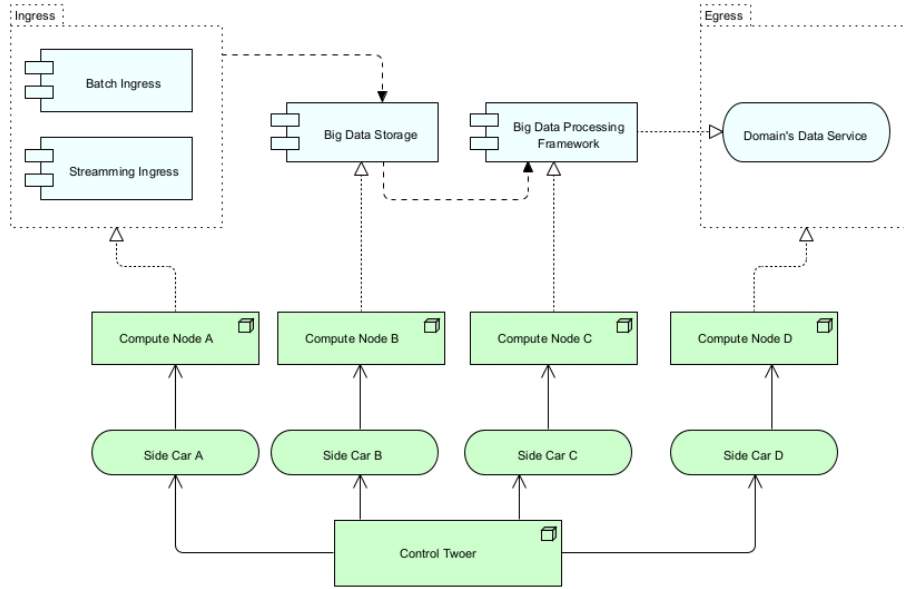


Figure 6: Cybermycelium Product Domain Design

ble for dispatching batch events to the event backbone. This service should be a small service (could be a Lambda) with the main responsibility of receiving a request for batch processing and dispatching an event to the event broker. Because the nature of the request is of type batch and has been clearly distinguished by the ingress, batch processing controller can dispatch events in bulk and asynchronously. This is the main difference of this service to stream processing controller. Batch processing controller can execute other non compute-intensive tasks such as scrubbing properties from the given data or adding headers. Having a specific controller for batch processing improves monitoring and allows for customized batch event producing. This component addresses the requirements Val-1, Val-1, and Val-2.

3. **Stream Processing Controller:** Stream processing controller is responsible for dispatching streaming events to the event backbone through the event broker. This service has been segregated from the batch service as it has to account for a different nature of events. Streams are syn-

chronous in nature, and can require high-throughput. This service is  
1050 a small service as well, but non-heavy computations such as enabling  
stream provenance, and one-pass algorithms can be utilized. Having a  
specific controller for stream processing means that custom attributes can  
be associated to stream events, and the events can potentially be treated  
differently based on the nature of the system. This also eases monitoring  
1055 and discovery. This component addresses the requirements Vol-1, Vel-1,  
Vel-2, Vel-4, Vel-5, Val-2,

4. **Event Broker:** Event brokers are designed to achieve 'inversion of control'. As the company evolves and requirements emerge, the number of  
nodes or services increases, new regions of operations may be added, and  
1060 new events might need to be dispatched. As each service has to communicate with the rest through the event backbone, each service will be  
required to implement its own event handling module. This can easily  
turn into a spaghetti of incompatible implementations by various teams,  
and can even cause bugs and unexpected behaviors. To overcome this  
1065 challenge, an event broker is introduced to each service of the architecture. Each service connects to its local event broker and publishes and  
subscribes to events through that broker. One of the key success criteria  
of the event broker is a unified interface that sits at a right level of abstraction to account for all services of the architecture. Event brokers, being  
1070 environmentally agnostic can be deployed to any on-premise, private or  
public infrastructure. This frees up engineers from having to think about  
the event interface they have to implement and how it should behave.  
Event brokers can also account for more dynamism by learning which  
events should be routed to which consumer applications. Moreover, event  
1075 brokers do also implement circuit breaking, which means if the service  
they have to broke to is not available and does not respond for a certain  
amount of time, the broker establishes unavailability of the service to the  
rest of the services, so no further requests come through. This is essential  
to preventing a ripple effect over the whole system if one system fails. This

1080 component indirectly addresses the requirements Val-1, and Ver-1.

5. **Event Backbone:** This is the heart of the Cybermycelium, facilitating  
communication among all the nodes. Event backbone in itself should be  
distributed and ideally clustered to account for the ever-increasing scale of  
the system. Communication occurs as choreographed events from services  
1085 analogous to a dance troupe. In a dance troupe, the members respond to  
the rhythm of the music by moving according to their specific roles. In  
here, each service (dancer) listens and reacts to the event backbone (music)  
and takes the required action. This means services are only responsible  
for dispatching events in a 'dispatch and forget' model, and subscribe to  
1090 the topics that are necessary to achieve their ends. Event backbone thus  
ensures a continues flow of data among services so that all systems are in  
the correct state at all times. Event backbone can be used to mix several  
stream of events, cache events, archive events, and other manipulation of  
events, so long as it's not too smart! or does not become a ESB of SOA  
1095 architectures. Ideally, an architect should perceive the event backbone as  
series of coherent nodes that aim to handle various topics of interest. Over  
the time, event backbone can be monitored for access patterns and can be  
tuned to facilitate communication in an efficient manner. This component  
addresses the requirements Vel-1, Vel-2, Vel-3, Vel-4, Vel-5, Val-1, Val-2,  
1100 Ver-1, Ver-2, and Ver-3.

6. **Egress Service:** The egress service is responsible for providing necessary  
APIs for the consumers of the system to request data in demand. This  
is a self-serve data model in which data scientists or business analyst can  
readily request data from various domains based on the data catalogue.  
1105 Clients can first request for a data catalogue and then use the catalogue to  
request for the product domain that accounts for the desired data. This  
request can include several data products. Egress is responsible to route  
the request to the data catalogue, and to corresponding product 'service  
mesh' in order to resolve values. The egress realizes the address to service  
1110 meshes and other services through the data catalog and service discovery.

The egress service should cache the resolved addresses and values in order to increase performance and response time. An architect can even choose to implement a complete query cache component inside the egress service, however that will increase complexity and can affect modifiability. This component is to avoid having people requesting directly to data engineers for various big data requirements, and means that people can just request for what data they need, analogous to a person who orders food at a restaurant; menu being the data catalog, and egress being the waiter. This component addresses the requirements Vel-2, Vel-4, Val-3, Val-4, SaP-1, and SaP-2.

7. **Product Domain Service Mesh:** As previously discussed, a product is a capability of the business, and each product has its own domain consisting of the bounded context and the ubiquitous language. From a system and architectural point of view, these domains are referred to as a 'service mesh'. Each service mesh is made up of a batch ingress, stream ingress, big data storage, big data processing framework, domain's data service, the required compute nodes to run these services, a side car per service and a control tower. These components provide the necessary means for the domain to achieve its ends. This architectural component removes the coupling between the teams and promotes team autonomy. This means people across various teams are enhanced with the desired computational nodes and tools necessary, and can operate with autonomy and scale without having to be negatively affected by other teams or having friction with platform teams or siloed data engineering teams. Depending on the context and the business, the architect may create several domains. This component indirectly addresses Vol-1, Vel-3, Vel-4, Vel-5, Var-1, Var-2, Var-3, Val-1, Val-2, Val-3, Val-4, Sap-1, SaP-2, Ver-1, Ver-2, and Ver-3.

8. **Federated Governance Service:** Evidently, Cybermycelium is a distributed architecture that encompasses variety of independent services with independent lifecycle that are built and deployed by independent teams. Whereas teams have their autonomy established, in order to

avoid haphazard, out-of-control and conflicting relations, there should be a global federated governance that aims to standardize these services. This will facilitate the interoperability between services, communication, aggregates, and even allows for a smoother exchange of members across teams. This also means the most experienced people at a company such as technical leads and lead architects will prevent potential pitfalls that more novice engineers may fall into. However the aim of this service is not centralize control in anyway, as that would be going a step backward into the data warehouse era. The aim of this service is to allow autonomous flow in the river of standards and policies that tend to protect company from external harm. For instance, failing to comply to GDPR while operating in europe can sets forth fines up to 10 million euros, and this may not be something that novice data engineers or application developers are fully aware of. The real challenge of the governance team is then to figure out the necessary abstraction of the standards to the governance layer and the level of autonomy given to the teams. The federated governance service is made up of various components such as global policies, metadata elements and formats, standards and security regulations. These components are briefly discussed below;

- (a) **Global Policies:** general policy that govern's the organizational practice. This could be influenced by internal and external factors. For instance, complying to GDPR could be a company's policy and should be governed through the federated governance service.
- (b) **Metadata Properties and Formats:** this is an overarching metadata standard defining the required elements that should be captured as metadata by any service within the organization; it can also include the shape of metadata and the properties of it. For instance, the governance team may decide that each geographic metadata should conform to ISO 19115-1 [121].
- (c) **Standards:** overall standards for APIs (for instance Open API), versioning (for instance SemVer), interpolation, documentation (for in-

stance Swagger), data formats, languages supported, tools supported, technologies that are accepted and others.

- 1175 (d) **Security Regulations:** company wide regulations on what's considered secured, what softwares are allowed, how interfaces should be conducted and how the data should be secured. For instance, company may choose to alleviate risks associated with OWASP top 10 application security risks.

1180 This component can indirectly affect all requirements.

9. **Data Catalog:** As the products increases, more data become available to be served to consumers, interoperability increases, and maintenance becomes more challenging. If then, there is no automatic way for various teams to have access to the data they desire, a rather coupled and slow BD culture will evolve. To avoid these challenges and to increase discoverability, collaboration, and guided navigation, the service data catalog should be implemented. Data catalog has been listed as a must-have by Gartner [122] and introduces better communication dynamics, easier data serve by services and intelligent collaboration between services. This component addresses the requirements Vel-4, Var-1, Var-3, and Var-4.
- 1185
- 1190

10. **Logging Aggregator and Log Store:** If all services employ the idea of localized logging, and simply generate and store logs in their own respective environments, debugging, issue finding and maintenance can become a challenging task. This is due to the distributed nature of Cybermycelium and the requirements to trace transactions among several services. In order to overcome this challenge, we've employed the log aggregator pattern popularized by Chris Richardson [123]. The log aggregator service is responsible for retrieving logging events through the event broker from individual services and write the collected data into the log store. The log aggregator configuration and semantics is up to the designer and architecture team. This allows for a distributed tracing, and graceful scaling of organizational logging strategies. This component indirectly addresses the requirements Vol-1, Vel-1, Val-1, and Ver-1.
- 1195
- 1200

11. **Event Archive:** As the quantity of services grow, the topics in event backbone increases, and the number of events surges. Along the lines of these events, there could be a failure, resulting in timeout and a loss of series of events. This brings system in a wrong state and can have detrimental ripple effect on all services. Cybermycelium tends to handle these failures by using an event archive. The event archive as the name states, is responsible for registering events, so they can be retrieved in the time of failure. If there was a blackout in certain geographical location and the event backbone went down, the backbone can recover itself and bring back the right state of the system by reading the events from the event archive. The event broker is responsible for circuit breaking, so the service do not request any more events to the backbone while its down. The time to expiry, and what events should be archived is decided based on context in which Cybermycelium is implemented. This component indirectly addresses the requirements Vol-1, Vel-1, Val-1, and Ver-1.
12. **Data Lake:** Whereas Cybermycelium is a great advocate of decentralized and distributed systems, we do not find it necessary for each product domain to have it's own kind of a data lake or data storage. This is to prevent duplication, contrasting data storage approaches, decreased operability among services and lack of unified raw data storage mechanisms. Data lake has been designed to store large volume of data in raw format before it can get accessed for analytics and other purposes. This means data can be first stored in the data lake with corresponding domain ownership before it needs to be accessed and consumed by various services. Structured, semi-structured, unstructured and psudo-structured data can be stored in data lake before it gets retrieved for batch and stream processing. Nevertheless, this does not imply that all data should directly go to the data lake; the flow of data is determined based on the particularities of the context in which the system is embodied. One approach that we find suitable is for each team to own a unit of storage in the data lake, which is handled by the access control as depicted on the model. This

1235 component addresses the requirements Vol-2, Vel-1, Var-1, Var-3, Var-4,  
Val-3.

1240 13. **Service Discovery:** In a distributed setup like Cybermycelium, how do  
services discover the location of other services? This is achieved through  
service discovery. As the practice of hard-coding service addresses in con-  
figuration files is not a maintainable or scalable approach, one has to think  
1245 about an automated scalable solution in which services can become dis-  
coverable by other services. The service discovery node is responsible for  
this job. This is achieved through services registering themselves to the  
service discovery node when they boot up. Service discovery then ensures  
that it keeps an accurate list of services in the system, and provides the  
API necessary for others to learn about the services. For instance, it's  
idiomatic for an engineer to specify a command to be executed when a  
Docker container starts (*Node server.js*); thus one can imagine extending  
the boot up instructions to achieve the registration to the service discov-  
1250 ery node. This somewhat resembles to DHCPs and house wifi networks.  
This component indirectly addresses the requirements Vel-2, Vel-4, Var-2,  
Var-4, Val-3, Val-4, SaP-2.

1255 14. **Monitoring:** Monitoring systems are integral to robustness of highly dy-  
namic ecosystem of distributed systems and directly affect metrics such  
as mean time to resolution (MTTR). Services emit colossal amounts of  
multi dimensional telemetry data that covers a vast spectrum of platform  
and operating system metrics. Having these telemetry data captured,  
handled and visualized, helps systems engineers, software reliability en-  
gineers, and architects proactively address upcoming issues. Based on  
1260 these premises, the main responsibility of this service is to capture and  
provide telemetry data from other service to increase the overall awareness  
of the Cybermycelium ecosystem. This service is tightly aggregated with  
the service discovery. Monitoring services help storing these data to fuel  
proactive actions. This component indirectly addresses all requirements.



1265 The variable elements in Cybermycelium can be adjusted, modified and even  
omitted based on the architect’s decision and the particularities of the context.  
The aim of this RA is not limit the creativity of data architect, but to facili-  
tate their decision making process, through introduction of well-known patterns  
and best practices from different school of thoughts. While we still recommend  
1270 keeping the variable components, an architect may decide to embark on a more  
complicated metadata approach rather than just a data catalog. We do not  
elaborate on all alternative options for each variable module as industry con-  
stantly changes, and architects constantly aim to design systems that address  
the emerging problem domains.

## 1275 **7. Evaluation:**

Of particular importance to development of a RA, is the evaluation of it.  
As discussed earlier, we aim to evaluate the correctness and utility of the RA  
by how it can be turned into an effective context-specific concrete architecture,  
following the guidelines of ATAM. The main goal of ATAM is to appraise the  
1280 architectural decisions and their consequences in light of quality attributes. This  
method ensures that the architecture is under the right trajectory and in-line  
with the context. Architecture is a an amalagamation of risks, tradeoffs, and  
sensitivity points. Using ATAM increased our confidence by uncovering key  
architectural tradeoffs, risks, and sensitivity points.

1285 For ATAM to be successful there should not be a precise mathematical  
analysis of system’s quality attributes, but rather trends should be identified  
where architectural patterns are correlated with a quality attribute of interest.  
For brevity purposes, we do not expand on what ATAM is, and the details of  
each steps in it, and we only explain how the evaluation has been conducted  
1290 through ATAM. It is important to note that, this wasn’t a setup in which an  
outside evaluation team would come to a company to evaluate an architecture  
in practice, but it was our prototype that we brought into a company to test its  
utility and relevance. While we could have achieved this with technical action

research or leight weight architecture evaluation, we found ATAM to be in-  
1295 line with our conceptual constructs, which are architectural constructs. ATAM  
provided us with a framework to discuss architectural concepts in a rigorous  
way [124]. We created the prototype, and played the role of the evaluator, thus  
there was a risk of bias. To avoid bias, we invited a third-party researcher who is  
familiar with ATAM to observer the overall process and partake in architectural  
1300 probing questions.

For instantiation of the RA, We utilized ISO/IEC 25000 SQuaRE standard  
(Software Product Quality Requirements and Evaluation) [125] for technology  
selection. We did not fully adopt this standard, but were rather inspired by it to  
make a better decision. The quality model in the standard is based on charac-  
1305 teristics, sub-characteristics and standards. This standard also references many  
other standards for maintenance and quality keeping of computer systems. The  
detailed explanation of the standards and its constituent elements are outside  
the scope of this study.

By applying standard and the requirements of Cybermycelium to the pool of  
1310 available tools in the industry, we succesfully created the prototype. We chose  
the tools are the mostly adopted and do support the architectural requirements  
of Cybermycelium. We did not want to develop tools from scratch, as that  
would delay our evaluation artefact and this would affect the stakehodlers neg-  
atively. In addition, many mature tools exist that statisfy our architectural  
1315 requirements, so therefore 'reinventing the wheel' was unnecessary.

We chose Node JS for all APIs and custom scripting, Nginx as our ingress,  
AWS Lambdas for stream and batch processing controllers, Kafka for event  
backbone, Kafka event brokers as the event broker, AWS application load bal-  
ancer as the egress load balancer, Istio as the control tower, Envoy as the side  
1320 car, Kubernetes as the container orchestrator, AWS S3 as the BD store and  
event archive, and Data Bricks for stream and batch processing. The prototype  
created out of Cybermycelium is depicted in figure 7

We aimed to incorporate most components of our RA into this instance,  
however logging, monitoring, service discovery, federated governance service,

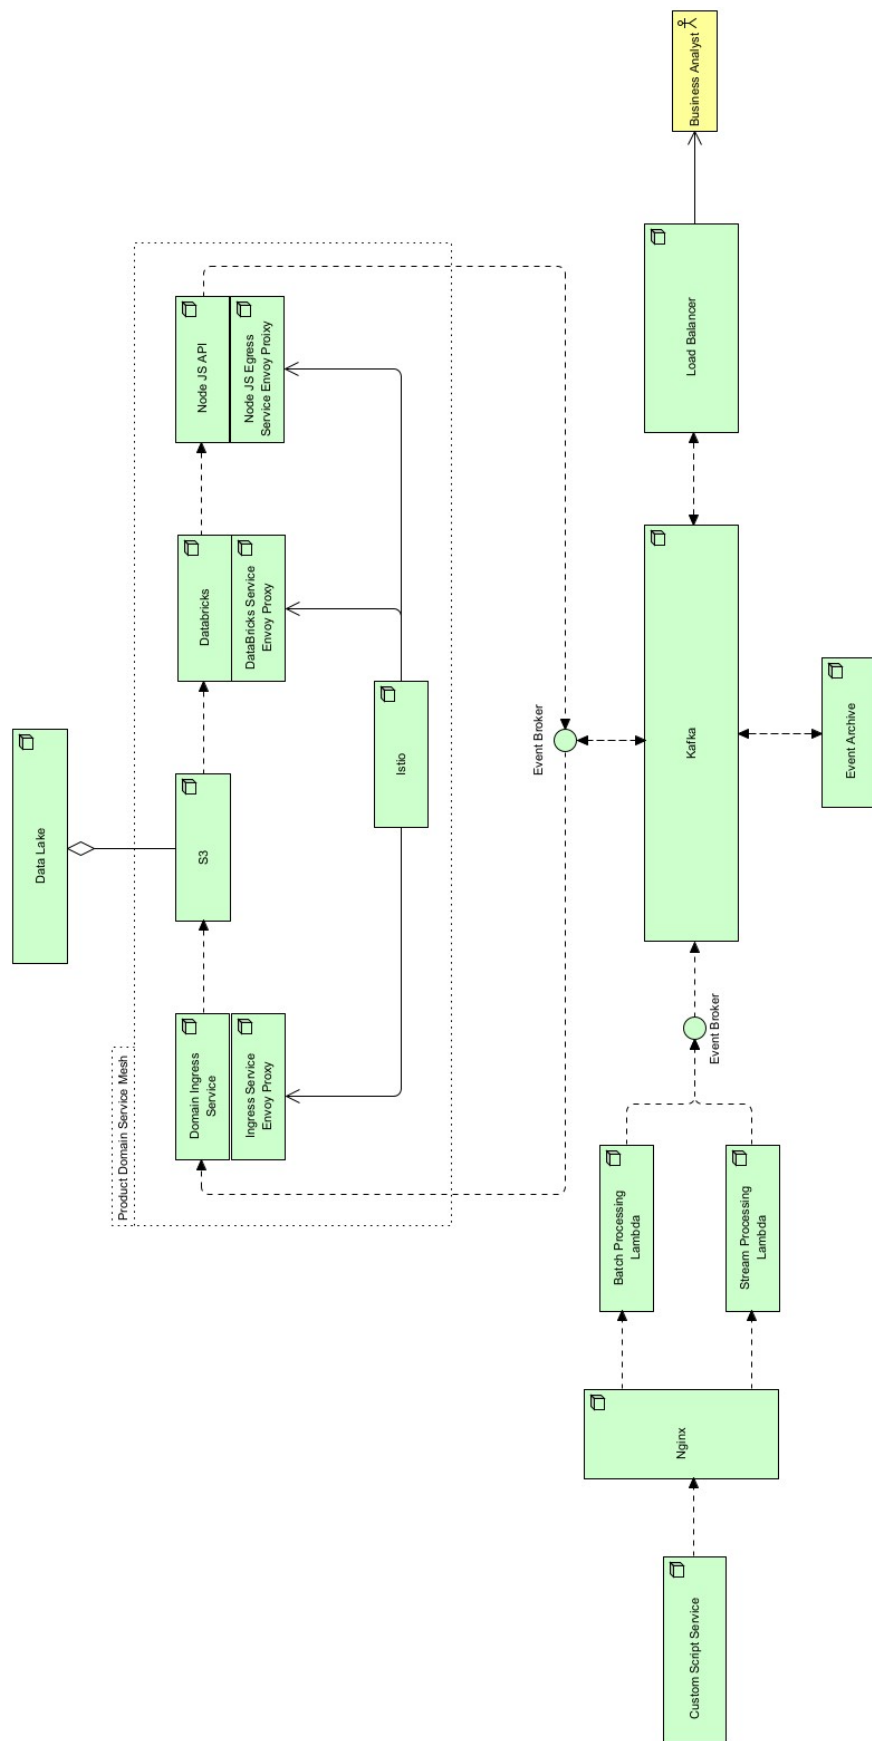


Figure 7: Cybermycelium Instantiation

1325 and data catalog has been omitted. Some details of this evaluation is omitted  
to protect the security, and intellectual property of the practice, and some details  
are modified for academic purposes. These modifications have not affected the  
integrity of the evaluation. This evaluation is an iterative process, collecting  
feedback from different group of stakeholders in each phase.

#### 1330 7.1. Phase 1:

This evaluation is undertaken in a subsidiary of a large-scale international  
company that has over 6000 employees all around the globe. The subsidiary  
company offers a practice management software for veterinary practitioners via  
Software as a Service (Saas) and has over 15,000 customers from the USA,  
1335 UK, Australia, New Zealand, Canada, Singapore and Ireland, among which  
are some of the biggest equine hospitals, universities and veterinary practices.  
The company is currently at the stage of shifting from centralized synchronous  
architecture into decentralised event driven microservices architecture, and is  
ambitious to adopt artificial intelligence and BD.

1340 The initial step was the identification of relevant stakeholders. For this  
purpose we have approached the key stakeholders in the company's technical  
governance team. Our aim was to incorporate at least two lead architects of  
the company in this process. We emphasized on architects that have been with  
business for a long period of time. This was to ensure that we do not miss any  
1345 important element in the process of evaluation. As a result, we invited two lead  
development architects, head of product, and a business analyst for phase 1.

##### 7.1.1. Step 1 and 2: Introduction

During the initial meeting, in step 1, ATAM was presented with clear de-  
scription of its purposes. In step 2, stakeholders discussed the background of the  
1350 business, some of the challenges faced, the current state of affairs, the primary  
business goals, and architecturally significant requirements. This step illumi-  
nated on integral elements such as: 1) most important functions of the system,

2) any political, regional, or managerial constraints, 3) the business context and how it relates to our prototype, 4) architectural drivers.

1355 *7.1.2. Step 3: Present the Architecture*

In step 3, the prototype has been presented, our assumptions have been stated, and variability points portrayed.

*7.1.3. Step 4: Identifying Architectural Approaches*

1360 To establish the architectural styles, we first analyzed the prototype with respect to key quality attributes chosen for this evaluation which are performance, availability and modifiability.

- For performance, Nginx, Kafka, Istio, DataBricks and the AWS Application Load Balancer have been described.
- For availability, Kafka, Event archive, Nginx, controllers, Data Lake and 1365 Istio have been discussed.
- For modifiability, the concept of domain driven design, the service mesh, zero coupling, the plug and play nature of the archetype, the ability to add desirable services through event brokers, and the distributed nature of the architecture has been discussed.

1370 We then probed each of the quality attributes for potential risks, tradeoffs, and sensitivity/variability points.

*7.1.4. Step 5: Utility Tree Elicitation:*

In order to generate the utility tree, first we had to learn what are the most important quality attributes. While we learnt about these quality attributes in step 2, in this step we probed deeper. We first presented our assumptions, 1375 and double-checked it with the stakeholders. Whereas some stakeholders raised concerns over privacy, the members unanimously agreed that performance, availability, and maintainability are the most important quality attributes. This was

in-line with our assumptions. In this process, we rated the technical difficulty,  
 1380 and the key stakeholders rated the business importance.

Based on these premises, the utility tree has been generated (figure 8).

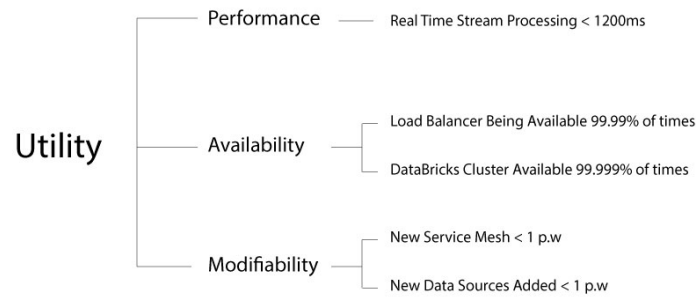


Figure 8: Utility Tree

#### 7.1.5. Step 6: Analyze Architectural Approaches:

After having scenarios prioritised and architectural approaches identified,  
 it's time to analyze if the architectural approaches are the fitting for the given  
 1385 scenarios. In this step, we asked the lead architects to probe the architecture  
 and we explained how the prototype is addressing each scenario.

The result of this step, was identification of sensitivity points, trade-offs,  
 risks and non-risks. This step took longer than what we anticipated, as variety  
 of questions arose and many aspects of the architecture was challenged. The  
 1390 detail is discussed in 7.2.3.

#### 7.2. Phase 2:

This phase was a more serious phase of our evaluation, as we invited more  
 stakeholders, collected more scenarios and even created simulations. For this  
 phase, in addition to lead architectes, we invited a product owner responsible

1395 for the product in which the artifact is tested, a quality assurance engineer and several developers. We repeated step 1, and provided with recap of step 2 to 6, and shared the current list of risks, non-risks, sensitivity points, and tradeoffs.

This phase is an iteration of phase one, so we collected scenarios, analyzed architectural approaches, and finally presented the result of the evaluation.

#### 1400 7.2.1. Step 7: Brainstorm and Prioritize Scenarios

While utility tree was created in step 5, the purpose of this brainstorming was to get a pulse of the larger stakeholder community and capture more scenarios.

Scenarios are the quantum of ATAM, and help capturing stimuli to which the architecture has to react. These stimuli help to highlight system's ability to  
1405 too meet desired functional and non-functional requirements [98]. Based on this premise, in this step, we asked stakeholders to come up with three different kind of scenarios namely growth scenarios (anticipated changes), use-case scenarios (typical usage of the system) and exploratory scenarios (extreme cases). The result of this created 20 scenarios, which we then asked stakeholders to vote  
1410 on. The result of the voting yielded 5 scenarios which are described as two user journeys;

- A cat owner brings a cat to the veterinary hospital. The cat has symptoms of a lyme disease, and should be diagnosed in a timely manner to avoid master problems.
- 1415 • There has been numerous cases of cancer in pets in certain environments. This environment should be analyzed to see if environmental factors play a cancer inducing role.

#### 7.2.2. Step 8: Analyze Architectural Approaches

Before starting this step, we took a few days break to simulate the scenarios  
1420 against our prototype. While ATAM does not prescribe this, we augmented our evaluation with this simulation to ensure that we do not overlook any necessary architectural detail. This improved our confidence in our RA and the architectural probing questions to come.

We emulated the scenarios against the prototype by creating relevant topics  
1425 in the Kafka, having the data flow, having the ingress in the service mesh digest  
it and flow it into the storage and processing and so on so forth. We've been using  
real world data, so there was no need for data fabrication and synthesis. We  
configured Nginx to pass the request to the responsible Lambdas, and Lambdas  
then produced the necessary events and sent it to Kafka.

1430 We presented our simulation alongside some metrics we captured and displayed  
in our cloud served Grafana instance. From here on, this step followed the exact  
same procedure as step 6, with a difference that this time there's been more  
extensive probing and analysis of the architecture and the simulated scenarios.  
The simulation and results of it helped clarifying on some of our  
1435 architectural constructs and led to emergence of several questions:

- How does the system recover if the event backbone goes out of order?
- What if the service mesh ingress is not available?
- Should privacy be its own service? or should it sit in federation ?
- Should have a dedicated service mesh for metadata management?
- 1440 • How easy it is to extend and modify current services?
- Should there be a certain order to events ?
- Is there a benefit in creating event mesh between event brokers?
- Where is the best place to scrub sensitive data from the incoming streams?

### 7.2.3. Step 9: Present Results

1445 In this last step, the collected theories from the process of evaluation is  
discussed in terms of quality attributes, risks, sensitivity points, tradeoffs and  
other unplanned discussions that arose during the meetings.

Based on the result of our evaluation, stakeholders feedback, utility tree, and  
the architectural qualities of Cybermycelium, we deduce that system quality  $Q_S$ ,



1450 is a function  $f$  of the quality attributes availability  $Q_A$ , performance  $Q_P$ , and  
modifiability  $Q_M$ .

$$Q_S = f(Q_M, Q_A, Q_P) \quad (1)$$

#### 7.2.3.1. Performance

In order to analyze our approach in-line with the utility tree, after having created the simulated scenarios, we used a cloud stress testing testing agent (StressStim-  
1455 ulus). After having run this stress test a couple of times, it has become evident to us that cold start latency of AWS Lambda services can affect the performance requirements stated in the utility tree. A Lambda can take anywhere from 100ms to over a second on cold start time. This latency varies and hard to nail down, but even considering the latency, we have captured an average  
1460 of 1000ms response time from our system which is inline with the utility tree. While replacing Lambdas with EC2s or Fargates could solve this issue, it would increase the cost, affect the maintainability of the architecture (a server has to be provisioned and maintained), and would require rework of several services.

In addition, other Lambda like solutions exist that have actually solved the  
1465 cold start problem; one good example is cloud workers offered by CloudFlare. However the company chosen for the purposes of this evaluation is not yet open to a multi-cloud approach, and thus AWS is the only option. Moreover, one could implement predictable start-ups with provisioned concurrency, but that requires more effort and is outside the scope of this study. As our architecture  
1470 is distributed, we have also measured the latency in between services as tail latency is a known issue in distributed systems. Due to the fact that our service mesh was hosted in a private network on a virtual cloud, we could not find any major issue with cloud latency, and our average response time was under 1000ms. Implementing a streaming processing in Databricks, we opted not to  
1475 use micro-batch to have an accurate evaluation, and we decided not to configure the fair scheduling pool, so as to test the worst case scenario.

After creating and analyzing various performance models of the system, it

has come clear to us that latency, and side-effects like input/output, and mutation/transformations were the most important performance sensitivity points.

1480 Our performance model were built underlying the following cases;

- Priodic, regular data dispatch to the product domain
- Sending large volume of data (over 200mb) to the system, reaching the throughput threshold
- Sending many request simultaneously through the cloud stress testing tool

1485 The event-driven nature of the system really helped with handling throughput and concurrency. Whereas there has been bottlenecks in the areas of storage and network latency, the system managed to reach desired performance on average. Given this insight and after some rigorous testing, we characterize the system's performance sensitivity as follows;

$$Q_P = h(s, l, cbp) \quad (2)$$

1490 That is the system is sensitive to side effects (s), latency (l), and concurrency back pressure (cbp).

#### 7.2.3.2. Availability:

As guided by the utlity tree, the key stimulus to model for the prototype is the failure of the ingress (load balancer), the data processing cluster and most importantly the event backbone. Due to the distributed nature of Cybermycelium, 1495 and the derived prototype, failure in one service, if not handled properly, can have a ripple effect on the system. This is one area, where we found the idea of 'event brokers' really helpful. By implementing circuit breakers in event brokers, we prevented the other nodes of the system to be affected by failure of one. We 1500 also archived the events that the node was about to receive before it failed.

Whereas the event archive has played an ancillary role in providing archive to various circuit breakers, it's main functionality was to provide event history to the event backbone in the case of failure. This is again achieved by circuit

breaking at the broker level and event retrieval from the event archive. On the  
 1505 other hand, in relation to container orchestration and health check, Kubernetes  
 provided with a declarative API to handle the state of the system. With setting  
 replica sets, and necessary deployments, the master node kept ensuring that  
 certain number of pods are always available. This implies that it's critical for  
 master node to be available at all times.

1510 Based on these findings, we characterized system's availability as following  
 ( $g$  is fraction of time that system is working);

$$Q_A = g(\lambda_E, \mu_C, \mu_S) \quad (3)$$

That is, system availability is primarily affected by the failure rate of the  
 event backbone ( $\lambda_E$ ), the time it takes for circuit breaker to trip and become  
 available again ( $\mu_C$ ), and the time it takes for the service to recover from failure  
 1515 ( $\mu_S$ ).

One major factor that really helped alleviating many issues of the distributed  
 systems, was the cloud-native aspect of Cybermycelium. Whereas this aspect  
 of the architect has not been discussed previously, the prototype was easily  
 deployed in AWS with well-known Amazon web services. As we did not han-  
 1520 dle on-premise data centers, many of the hardware was handled by the cloud  
 company.

### 7.2.3.3. Modifiability:

To analyze modifiability, we followed the guidelines of SAAM [95]. The dis-  
 tributed and service driven nature of the prototype allowed us to easily achieve  
 1525 the utility tree and even further. All of our cloud based infrastructure has been  
 written as Terraform code in HCL, which meant adding a new node in the sys-  
 tem, was as easy as copying the worker groups block in the EKS configuration,  
 and setting the hardware properties of it. We could then easily deploy different  
 services and deployments and have them run our public docker images. Bro-  
 1530 kers were also streamlined, and we could spin up a new broker within minutes.

One area that we found a bit challenging to modify was perhaps the Databricks cluster, and the EKS ALB ingress (Nginx).

Certification management was also easily handled through Istio, local Cert-Manager and Let's encrypt. One area that could be taking a bit longer was the  
1535 inclusion of private docker image secrets as a Kubernetes secret, and having it refreshed every 12 hours. To the best of our knowledge, cron jobs were the only way to achieve this, but the implementation was not straight forward.

On the other hand, bringin up a scalable Kafka cluster was not that difficult, but there were so many configurations that one can choose to turn on or amend.  
1540 This can potentially affect modifiability in the long run, when the company might have varying and sometimes conflicting requirements.

Modifiability is also affected by the skillset of the engineers and how familiar they are with Kubernetes, Databricks and Istio. Taking all these into consideration, we characterize system's modifiability as follows (s is the skill set  
1545 required);

$$Q_M = s(K, D, K) \quad (4)$$

That is, the system modifiability is affected the Kubernetes maintenances (K), Databricks maintenances, versioning and configuration (D), and Kafka versioning, maintenance and configuration.

#### 7.2.3.4. Tradeoff Points:

1550 As a result of these analyses, we identified two tradeoff points;

1. Event backbone and event brokers
2. Service mesh

One area that arose many worries is the event backbone. Event backbone being the communication facilitator has raised a lot of questions and many worried that this might turn into a bloated architectural component like enterprise  
1555 service bus (ESB) in the service oriented architectures (SOAs). We addressed

many of these questions and issues both in a discussion and the prototype. Implementing event archive meant that if the event backbone went down, we could restore the previous state of affairs and bring services to the correct state. The  
1560 implementation of circuit breakers through the event brokers further solidified the availability of the architecture and could be deemed to affect reliability too. Along the lines, event brokers helped us address some of the modifiability challenges. Having these event brokers setup, meant that different environments do not implement their own event processing mechanism, and the interface is unified  
1565 across. This clear interface contributed positively to the overall modifiability of the system and allowed engineers to simply copy the broker for their services. In addition, brokers also improved interoperability, and hard to trace bugs due to event processor mismatch.

Given all, Cybermycelium does not tend to dictate what has to be done, or  
1570 kill the creativity of the architects, but rather aims to shed light on a novel perspective to designing BD systems. Therefore, the event backbone and event brokers introduce tradeoff between performance, availability and reliability. Whereas eliminating the event backbone may increase availability longitudinally, and increase modifiability cross-sectionally, it may affect the performance quality attribute in a negative way. This is due to the fact that the event backbone  
1575 is distributed in nature, can scale well to account for demands, can cache and remember communication paths, merge event streams, provide with windowing techniques, and be configured to facilitate certain access patterns that are common to the system.

Another area where stakeholders were challenged was the idea of service mesh.  
1580 Whereas this makes a lot of sense to developers who had to figure out the twisted platform work, the benefit perhaps was not that evident to everyone from the beginning. This is another area of tradeoff. While having the service mesh affects the modifiability of the system in a negative way from platform point  
1585 of view, it does increase it from data engineering and software engineer point of view. The service mesh may also affect performance slightly, but the effect is negligible. Service mesh also affects availability positively by streamlining

the platform interfaces, providing an orchestrator ( control tower ), and doing health checks through proxies.

#### 1590 7.2.3.5. *Limitation and Future Research*

Cybermycelium is a new perspective to BD system development and tends to absorb many of the well-established patterns and ideas from various domains. Being distributed in nature, there are still many areas in which Cybermycelium can improve. For instance, we still don't have a great answer to tail latency  
1595 issues which can affect system negatively. Besides that, we received feedbacks that many developers find Cybermycelium a complex architecture that require a lot of skill to implement. It requires the understanding of event-driven systems, event streaming, service meshing, data mesh, cloud computing and even data mesh. We do not think that a modern distributed BD architecture should  
1600 be simple, but we thrive to simplify the ways in which one can absorb Cybermycelium.

Taking all into consideration, we posit that distributed BD systems are still at infancy stage, and there's much work required to facilitate this area of research. These research could be in the areas of BD distributed patterns, event  
1605 driven BD systems, data mesh, BD reference architecture, and methods for creating BD distributed architectures.

Moreover, the security, privacy and metadata aspect of BD needs substantial work at macro and micro level. We need more mature technologies and better architectures that compose these technologies in a solution. This is one  
1610 major area we have on our roadmap.

## 8. Discussion

Our findings from this study yielded the fact that progress is uneven in the area of BD RAs. While there are many researches in the area of data warehousing, artificial intelligence, data science, and IOT, data engineering seems to  
1615 be needing more research. While, there are many well established approaches

for crunching large volume of data, or handling dimensionality of complex data sets, the overall organization of BD technologies, which is the architecture, needs more attention from academia and industry.

Majority of the BD RAs that we have analyzed were running underlying some  
1620 sort of a monolithic data pipeline with a central storage. This is a challenging architecture to scale and maintain. How does one takes preventive measures to stop a data lake from turning into a data swamp ? How a team of hyper-specialized siloed data engineers that are running the data pipelines, will be aware of the actual business problem and therefore keep a certain level of quality  
1625 of that data? how data interoperability is achieved? how data ownership is institutionalized ?

If a software engineers decides to, for instance, manipulate a certain field in a certain entity's schema for the development of a new feature, how will this affect the data engineering process and how is this communicated? as data becomes  
1630 more and more available to the company, the ability to consume it all in one place diminishes.

On the other hand, the current state of BD RAs do not seem to be very far away from traditional data warehousing approaches. In fact, some of them have adopted the idea of data marts and propose them as BD solution, but using  
1635 newer technologies. Moreover, some architectures have attempted to utilize data lake to serve data analysts and business intelligence.

We posit that neither the attempt to onboard BD analytics workloads to data warehouses, nor the attempt to serve business intelligence with data lakes is gonna result in a scalable and maintainable system. We therefore propose the  
1640 need for future research directions in the area of decentralized and distributed BD RAs.

We also felt that the quality of many of BD RAs published does not seem to be enough to meet the industrial expectations. This is due to the challenges of developing BD RAs and the cost and resources required to evaluate these  
1645 artifacts. It is also worth mentioning that a rigorous methodology for evaluating reference architectures are quite rare, and while there are studies that have

attempted to address these issues ([50]), there is a need for more research in this area.

Given all, we posit that RAs can be considered an effective initial point to design and development of BD systems. These artifacts helps facilitating communication, capture requirements from various stakeholders, and catch design issues while they are still cheap. Based on this, therefore, more and more attention needs to be given to this area and its foundational methodological needs. This study does not aim to do a deep comparison of Cybermycelium and other RAs, the major architectural constructs, the challenges associated to current BD RAs, and the reasoning behind our artifact should elucidate the varying nature of our artifact.

## 9. Conclusion

Data engineering is a complicated endeavour, and while there are many good practices for service distribution in software engineering, the BD domain does not seem to benefit from all of these ideas. This has made BD system development a daunting task, and many companies have failed to bring to light the potential of data-driven decision making. Therefore, there is more and more research required in the areas of data architecture, and the ways in which the data flows between various components. RAs are a good start to such complicated tasks. By absorbing the best of knowledge from the practice and injecting it as a living model into practice, practitioners can benefit from already identified pitfalls. BD systems has got a long way to mature, but with clear direction both in the industry and academia, this aspiration can come to fruition in near future.

## References

- [1] P. Ataei, A. T. Litchfield, Big data reference architectures, a systematic literature review.



- 1675 [2] B. B. Rad, P. Ataei, The big data ecosystem and its environs, International Journal of Computer Science and Network Security (IJCSNS) 17 (3) (2017) 38.
- [3] P. Ataei, A. Litchfield, Neomycelia: A software reference architecture for big data systems, in: 2021 28th Asia-Pacific Software Engineering Conference (APSEC), IEEE Computer Society, Los Alamitos, CA, USA, 2021, pp. 452–462. doi:10.1109/APSEC53868.2021.00052.  
1680 URL <https://doi.ieeecomputersociety.org/10.1109/APSEC53868.2021.00052>
- [4] I. L. Stats, Internet live stats (2019).  
URL <https://www.internetlivestats.com/>
- 1685 [5] M. Lycett, ‘datafication’: Making sense of (big) data in a complex world (2013).
- [6] B. B. Rada, P. Ataeib, Y. Khakbizc, N. Akbarzadehd, The hype of emerging technologies: Big data as a service.
- [7] M. Huberty, Awaiting the second big data revolution: from digital noise to value creation, Journal of Industry, Competition and Trade 15 (1) (2015) 35–47.  
1690
- [8] M. technology review insights in partnership with Databricks, Building a high-performance data organization (2021).  
URL [https://databricks.com/p/whitepaper/](https://databricks.com/p/whitepaper/mit-technology-review-insights-report)  
1695 **mit-technology-review-insights-report**
- [9] N. Partners, Big data and ai executive survey 2021 (2021).  
URL [https://www.supplychain247.com/paper/big\\_data\\_and\\_ai\\_executive\\_survey\\_2021/pragmadik](https://www.supplychain247.com/paper/big_data_and_ai_executive_survey_2021/pragmadik)
- [10] M. Analytics, The age of analytics: competing in a data-driven world, Tech. rep., Technical report, San Francisco: McKinsey & Company (2016).  
1700

- [11] H. Nash, Cio survey 2015, Association with KPMG.
- [12] N. Singh, K.-H. Lai, M. Vejvar, T. Cheng, Big data technology: Challenges, prospects and realities, IEEE Engineering Management Review.
- [13] I. Gorton, J. Klein, Distribution, data, deployment, STC 2015 (2015) 78.
- 1705 [14] S. Nadal, V. Herrero, O. Romero, A. Abelló, X. Franch, S. Vansummeren, D. Valerio, A software reference architecture for semantic-aware big data systems, Information and software technology 90 (2017) 75–92.
- [15] E. M. Leonard, Design and implementation of an enterprise data warehouse, Marquette University, 2011.
- 1710 [16] W. Brackenbury, R. Liu, M. Mondal, A. J. Elmore, B. Ur, K. Chard, M. J. Franklin, Draining the data swamp: A similarity-based approach, in: Proceedings of the workshop on human-in-the-loop data analytics, 2018, pp. 1–7.
- [17] J. Lin, The lambda and the kappa, IEEE Internet Computing 21 (05) 1715 (2017) 60–66.
- [18] Apache beam.  
URL <https://beam.apache.org/>
- [19] Databricks.  
URL <https://databricks.com/>
- 1720 [20] Z. Dehghani, How to move beyond a monolithic data lake to a distributed data mesh (2019).  
URL <https://martinfowler.com/articles/data-monolith-to-mesh.html>
- 1725 [21] N. Alshuqayran, N. Ali, R. Evans, A systematic mapping study in microservice architecture, in: 2016 IEEE 9th International Conference on Service-Oriented Computing and Applications (SOCA), IEEE, 2016, pp. 44–51.

- 1730 [22] R. K. Len Bass, Dr. Paul Clements, Software Architecture in Practice (SEI Series in Software Engineering) 4th Edition, Addison-Wesley Professional; 4th edition, 2021.
- [23] R. Cloutier, G. Muller, D. Verma, R. Nilchiani, E. Hole, M. Bone, The concept of reference architectures, *Systems Engineering* 13 (1) (2010) 14–27.
- 1735 [24] J. Kohler, T. Specht, Towards a secure, distributed, and reliable cloud-based reference architecture for big data in smart cities, in: *Big Data Analytics for Smart and Connected Cities*, IGI Global, 2019, pp. 38–70.
- [25] M. Derras, L. Deruelle, J.-M. Douin, N. Levy, F. Losavio, Y. Pollet, V. Reiner, Reference architecture design: A practical approach, in: *IC-SOFT*, pp. 633–640.
- 1740 [26] I. Sommerville, *Software Engineering*, 9/E, Pearson Education India, 2011.
- [27] P. A. Laplante, *Requirements engineering for software and systems*, Auerbach Publications, 2017.
- 1745 [28] J. Bughin, Big data, big bang?, *Journal of Big Data* 3 (1) (2016) 2. doi: 10.1186/s40537-015-0014-3.
- [29] B. B. Rad, P. Ataei, The big data ecosystem and its environs, *International Journal of Computer Science and Network Security (IJCSNS)* 17 (3) (2017) 38.
- 1750 [30] S. Nadal, V. Herrero, O. Romero, A. Abelló, X. Franch, S. Vansummeren, D. Valerio, A software reference architecture for semantic-aware big data systems, *Information and software technology* 90 (2017) 75–92.
- [31] M. Volk, D. Staegemann, I. Trifonova, S. Bosse, K. Turowski, Identifying similarities of big data projects—a use case driven approach, *IEEE Access* 8 (2020) 186599–186619.

- 1755 [32] B. Bashari Rad, N. Akbarzadeh, P. Ataei, Y. Khakbiz, Security and privacy challenges in big data era, *International Journal of Control Theory and Applications* 9 (43) (2016) 437–448.
- [33] J.-H. Yu, Z.-M. Zhou, Components and development in big data system: A survey, *Journal of Electronic Science and Technology* 17 (1) (2019) 51–  
1760 72.
- [34] H. Eridaputra, B. Hendradjaya, W. D. Sunindyo, Modeling the requirements for big data application using goal oriented approach, in: 2014 international conference on data and software engineering (ICODSE), IEEE, 2014, pp. 1–6.
- 1765 [35] J. Al-Jaroodi, N. Mohamed, Characteristics and requirements of big data analytics applications, in: 2016 IEEE 2nd International Conference on Collaboration and Internet Computing (CIC), IEEE, 2016, pp. 426–432.
- [36] P. Ataei, A. T. Litchfield, Big data reference architectures, a systematic literature review.
- 1770 [37] M. Kassab, C. Neill, P. Laplante, State of practice in requirements engineering: contemporary data, *Innovations in Systems and Software Engineering* 10 (4) (2014) 235–241.
- [38] I. 29148:2018, *Iso/iec 29148:2018* (2018).  
URL <https://www.iso.org/standard/72089.html>
- 1775 [39] A. Abran, J. W. Moore, P. Bourque, R. Dupuis, L. Tripp, Software engineering body of knowledge, IEEE Computer Society, Angela Burgess (2004) 25.
- [40] J. Bayer, T. Forster, D. Ganesan, J.-F. Girard, I. John, J. Knodel, R. Kolb, D. Muthig, Definition of reference architectures based on existing systems, *Fraunhofer IESE*, March.  
1780

- [41] V. Stricker, K. Lauenroth, P. Corte, F. Gittler, S. De Panfilis, K. Pohl, Creating a reference architecture for service-based systems—a pattern-based approach, in: Towards the Future Internet, IOS Press, 2010, pp. 149–160.
- 1785 [42] E. Gamma, R. Helm, R. Johnson, R. E. Johnson, J. Vlissides, et al., Design patterns: elements of reusable object-oriented software, Pearson Deutschland GmbH, 1995.
- [43] E. Y. Nakagawa, R. M. Martins, K. R. Felizardo, J. C. Maldonado, Towards a process to design aspect-oriented reference architectures, in: XXXV Latin American Informatics Conference (CLEI) 2009, 2009.
- 1790 [44] M. Galster, P. Avgeriou, Empirically-grounded reference architectures: a proposal, in: Proceedings of the joint ACM SIGSOFT conference—QoSA and ACM SIGSOFT symposium—ISARCS on Quality of software architectures—QoSA and architecting critical systems—ISARCS, 2011, pp. 153–158.
- 1795 [45] E. Y. Nakagawa, M. Guessi, J. C. Maldonado, D. Feitosa, F. Oquendo, Consolidating a process for the design, representation, and evaluation of reference architectures, in: 2014 IEEE/IFIP Conference on Software Architecture, IEEE, 2014, pp. 143–152.
- 1800 [46] E. Y. Nakagawa, F. Oquendo, M. Becker, Ramodel: A reference model for reference architectures, in: 2012 Joint Working IEEE/IFIP Conference on Software Architecture and European Conference on Software Architecture, IEEE, 2012, pp. 297–301.
- [47] J. F. M. Santos, M. Guessi, M. Galster, D. Feitosa, E. Y. Nakagawa, A checklist for evaluation of reference architectures of embedded systems (s)., in: SEKE, Vol. 13, 2013, pp. 1–4.
- 1805 [48] M. Derras, L. Deruelle, J. M. Douin, N. Levy, F. Losavio, Y. Pollet, V. Reiner, Reference architecture design: a practical approach,

- in: 13th International Conference on Software Technologies (ICSOFT),  
 1810 SciTePress-Science and Technology Publications, 2018, pp. 633–640.
- [49] I. WG, Iso/iec 26550: 2015-software and systems engineering–reference  
 model for product line engineering and management, ISO/IEC, Tech. Rep.
- [50] S. Angelov, J. J. Trienekens, P. Grefen, Towards a method for the eval-  
 uation of reference architectures: Experiences from a case, in: European  
 1815 Conference on Software Architecture, Springer, 2008, pp. 225–240.
- [51] S. Angelov, J. J. Trienekens, P. Grefen, Extending and adapting the archi-  
 tecture tradeoff analysis method for the evaluation of software reference  
 architectures.
- [52] R. Kazman, M. Klein, M. Barbacci, T. Longstaff, H. Lipson, J. Carriere,  
 1820 The architecture tradeoff analysis method, in: Proceedings. fourth ieee  
 international conference on engineering of complex computer systems (cat.  
 no. 98ex193), IEEE, 1998, pp. 68–78.
- [53] S. Angelov, P. Grefen, D. Greefhorst, A classification of software reference  
 architectures: Analyzing their success and effectiveness, in: 2009 Joint  
 1825 Working IEEE/IFIP Conference on Software Architecture & European  
 Conference on Software Architecture, IEEE, 2009, pp. 141–150.
- [54] S. Angelov, P. Grefen, An e-contracting reference architecture, Journal of  
 Systems and Software 81 (11) (2008) 1816–1844.
- [55] Y. Gan, Y. Zhang, D. Cheng, A. Shetty, P. Rathi, N. Katarki, A. Bruno,  
 1830 J. Hu, B. Ritchken, B. Jackson, et al., An open-source benchmark suite for  
 microservices and their hardware-software implications for cloud & edge  
 systems, in: Proceedings of the Twenty-Fourth International Conference  
 on Architectural Support for Programming Languages and Operating Sys-  
 tems, 2019, pp. 3–18.

- 1835 [56] R. Laigner, Y. Zhou, M. A. V. Salles, Y. Liu, M. Kalinowski, Data management in microservices: State of the practice, challenges, and research directions, arXiv preprint arXiv:2103.00170.
- [57] N. Dragoni, S. Giallorenzo, A. L. Lafuente, M. Mazzara, F. Montesi, R. Mustafin, L. Safina, Microservices: yesterday, today, and tomorrow, 1840 Present and ulterior software engineering (2017) 195–216.
- [58] Qcon software conferences (2022).  
URL <https://qconferences.com/>
- [59] State of data mesh 2022 (2022).  
URL [https://www.thoughtworks.com/about-us/events/](https://www.thoughtworks.com/about-us/events/state-of-data-mesh-2022)  
1845 [state-of-data-mesh-2022](https://www.thoughtworks.com/about-us/events/state-of-data-mesh-2022)
- [60] Worldwide software architecture summit’21 (2021).  
URL [https://events.geekle.us/software\\_architecture/](https://events.geekle.us/software_architecture/)
- [61] Kafka summit europe 2021 (2021).  
URL [https://www.confluent.io/events/](https://www.confluent.io/events/kafka-summit-europe-2021/)  
1850 [kafka-summit-europe-2021/](https://www.confluent.io/events/kafka-summit-europe-2021/)
- [62] D. Moher, L. Shamseer, M. Clarke, D. Ghersi, A. Liberati, M. Petticrew, P. Shekelle, L. A. Stewart, Preferred reporting items for systematic review and meta-analysis protocols (prisma-p) 2015 statement, Systematic reviews 4 (1) (2015) 1–9.
- 1855 [63] B. A. Kitchenham, D. Budgen, P. Brereton, Evidence-based software engineering and systematic reviews, Vol. 4, CRC press, 2015.
- [64] C. Castellanos, B. Perez, D. Correal, Smart transportation: A reference architecture for big data analytics, in: Smart Cities: A Data Analytics Perspective, Springer, 2021, pp. 161–179.
- 1860 [65] G. M. Sang, L. Xu, P. d. Vrieze, Simplifying big data analytics systems with a reference architecture, in: Working Conference on Virtual Enterprises, Springer, 2017, pp. 242–249.

- [66] I. O. for Standardization (ISO/IEC), Iso/iec 20546:2019 (2019).  
URL <https://www.iso.org/standard/68305.html>
- 1865 [67] I. O. for Standardization (ISO/IEC), Iso/iec tr 20547-1:2020 (2020).  
URL <https://www.iso.org/standard/71275.html>
- [68] K. Krippendorff, Computing krippendorff’s alpha-reliability.
- [69] CASP. [link].  
URL <https://casp-uk.net/casp-tools-checklists/>
- 1870 [70] D. S. Cruzes, T. Dyba, Recommended steps for thematic synthesis in software engineering, in: 2011 international symposium on empirical software engineering and measurement, IEEE, 2011, pp. 275–284.
- [71] J. Lofland, L. H. Lofland, Analyzing social settings.
- [72] Unlock insights in your data with the best qualitative data analysis software (2022).  
1875 URL <https://www.qsrinternational.com/nvivo-qualitative-data-analysis-software/home>
- [73] I. International Organization for Standardization (ISO/IEC), Iso/iec/ieee 42010:2011 (2017).  
1880 URL <https://www.iso.org/standard/50508.html>
- [74] S. Angelov, P. Grefen, D. Greefhorst, A framework for analysis and design of software reference architectures, Information and Software Technology 54 (4) (2012) 417–431.
- [75] O. Vogel, I. Arnold, A. Chughtai, E. Ihler, T. Kehrler, U. Mehlig, U. Zdun,  
1885 Software-architektur: Grundlagen–konzepte, Praxis 2.
- [76] V. Stricker, K. Lauenroth, P. Corte, F. Gittler, S. De Panfilis, K. Pohl, Creating a reference architecture for service-based systems-a pattern-based approach, in: Future Internet Assembly, pp. 149–160.



- 1890 [77] W. L. Chang, D. Boyd, Nist big data interoperability framework: Volume 6, big data reference architecture, Report (2018).
- [78] M. Lankhorst, A language for enterprise modelling, in: Enterprise Architecture at Work, Springer, 2013, pp. 75–114.
- 1895 [79] M. M. Lankhorst, H. A. Proper, H. Jonkers, The anatomy of the archimate language, International Journal of Information System Modeling and Design (IJISMD) 1 (1) (2010) 1–32.
- [80] W. Engelsman, D. Quartel, H. Jonkers, M. van Sinderen, Extending enterprise architecture modelling with business goals and requirements, Enterprise information systems 5 (1) (2011) 9–36.
- 1900 [81] N. Rurua, R. Eshuis, M. Razavian, Representing variability in enterprise architecture, Business & Information Systems Engineering 61 (2) (2019) 215–227.
- [82] M. La Rosa, W. M. van der Aalst, M. Dumas, A. H. Ter Hofstede, Questionnaire-based variability modeling for system configuration, Software & Systems Modeling 8 (2) (2009) 251–274.
- 1905 [83] M. Rosemann, W. M. Van der Aalst, A configurable reference modelling language, Information systems 32 (1) (2007) 1–23.
- [84] A. Hallerbach, T. Bauer, M. Reichert, Capturing variability in business process models: the provop approach, Journal of Software Maintenance and Evolution: Research and Practice 22 (6-7) (2010) 519–546.
- 1910 [85] K. Pohl, G. Böckle, F. Van Der Linden, Software product line engineering: foundations, principles, and techniques, Vol. 1, Springer, 2005.
- [86] L. Chen, M. A. Babar, A systematic review of evaluation of variability management approaches in software product lines, Information and Software Technology 53 (4) (2011) 344–362.

- 1915 [87] K. Schmid, I. John, A customizable approach to full lifecycle variability management, *Science of Computer Programming* 53 (3) (2004) 259–284.
- [88] M. Svahnberg, J. Van Gurp, J. Bosch, A taxonomy of variability realization techniques, *Software: Practice and experience* 35 (8) (2005) 705–754.
- [89] M. Sinnema, S. Deelstra, P. Hoekstra, The covamof derivation process, in: 1920 *International Conference on Software Reuse*, Springer, 2006, pp. 101–114.
- [90] K. Czarnecki, P. Grünbacher, R. Rabiser, K. Schmid, A. Wasowski, Cool features and tough decisions: a comparison of variability modeling approaches, in: *Proceedings of the sixth international workshop on variability modeling of software-intensive systems*, 2012, pp. 173–182.
- 1925 [91] R. Sharpe, K. Van Lopik, A. Neal, P. Goodall, P. P. Conway, A. A. West, An industrial evaluation of an industry 4.0 reference architecture demonstrating the need for the inclusion of security and human components, *Computers in industry* 108 (2019) 37–44.
- [92] P. Avgeriou, Describing, instantiating and evaluating a reference architecture: A case study, *Enterprise Architecture Journal* 342 (2003) 1–24. 1930
- [93] E. Cioroai, S. Chren, B. Buhnova, T. Kuhn, D. Dimitrov, Towards creation of a reference architecture for trust-based digital ecosystems, in: *Proceedings of the 13th European Conference on Software Architecture-Volume 2*, pp. 273–276.
- 1935 [94] M. Maier, A. Serebrenik, I. Vanderfeesten, Towards a big data reference architecture, University of Eindhoven.
- [95] R. Kazman, L. Bass, G. Abowd, M. Webb, Saam: A method for analyzing the properties of software architectures, in: *Proceedings of 16th International Conference on Software Engineering*, IEEE, 1994, pp. 81–90.
- 1940 [96] P. Bengtsson, N. Lassing, J. Bosch, H. van Vliet, Architecture-level modifiability analysis (alma), *Journal of Systems and Software* 69 (1-2) (2004) 129–147.

- [97] L. G. Williams, C. U. Smith, Pasasm: a method for the performance assessment of software architectures, in: Proceedings of the 3rd international workshop on Software and performance, pp. 179–189.
- [98] R. Kazman, M. Klein, M. Barbacci, T. Longstaff, H. Lipson, J. Carriere, The architecture tradeoff analysis method, in: Proceedings. Fourth IEEE International Conference on Engineering of Complex Computer Systems (Cat. No. 98EX193), IEEE, pp. 68–78.
- [99] P. Bengtsson, J. Bosch, Scenario-based software architecture reengineering, in: Proceedings. Fifth International Conference on Software Reuse (Cat. No. 98TB100203), IEEE, 1998, pp. 308–317.
- [100] B. Graaf, H. Van Dijk, A. Van Deursen, Evaluating an embedded software reference architecture-industrial experience report, in: Ninth European Conference on Software Maintenance and Reengineering, IEEE, 2005, pp. 354–363.
- [101] A. J. Rohling, V. V. G. Neto, M. G. V. Ferreira, W. A. Dos Santos, E. Y. Nakagawa, A reference architecture for satellite control systems, *Innovations in Systems and Software Engineering* 15 (2) (2019) 139–153.
- [102] E. Y. Nakagawa, R. M. Martins, K. R. Felizardo, J. C. Maldonado, Towards a process to design aspect-oriented reference architectures, in: XXXV Latin American Informatics Conference (CLEI) 2009, 2009.
- [103] B. O'Reilly, How to implement hypothesis-driven development (2014).  
URL <https://www.thoughtworks.com/insights/articles/how-implement-hypothesis-driven-development>
- [104] N. Ford, R. Parsons, P. Kua, Building evolutionary architectures: support constant change, " O'Reilly Media, Inc.", 2017.
- [105] S. Newman, Building microservices, " O'Reilly Media, Inc.", 2021.

- [106] A. Bellemare, Building Event-Driven Microservices: Leveraging Organizational Data at Scale, O'Reilly Media, 2020.  
 URL [https://www.amazon.com/Building-Event-Driven-Microservices-Leveraging-Organization/dp/1492057894/ref=sr\\_1\\_1?crid=1WQYXJT85E0CL&keywords=event+driven+microservices&qid=1647139910&srefix=event+driven+microservi%2Caps%2C307&sr=8-1](https://www.amazon.com/Building-Event-Driven-Microservices-Leveraging-Organization/dp/1492057894/ref=sr_1_1?crid=1WQYXJT85E0CL&keywords=event+driven+microservices&qid=1647139910&srefix=event+driven+microservi%2Caps%2C307&sr=8-1)
- [107] E. Evans, E. J. Evans, Domain-driven design: tackling complexity in the heart of software, Addison-Wesley Professional, 2004.
- [108] L. Aceto, A. Ingólfssdóttir, K. G. Larsen, J. Srba, Reactive systems: modelling, specification and verification, cambridge university press, 2007.
- [109] Z. Dehghani, Data mesh principles and logical architecture (2020).  
 URL <https://martinfowler.com/articles/data-mesh-principles.html>
- [110] P. Di Francesco, Architecting microservices, in: 2017 IEEE International Conference on Software Architecture Workshops (ICSAW), IEEE, 2017, pp. 224–229.
- [111] O. Zimmermann, Microservices tenets, Computer Science-Research and Development 32 (3) (2017) 301–310.
- [112] M. Waseem, P. Liang, M. Shahin, A systematic mapping study on microservices architecture in devops, Journal of Systems and Software 170 (2020) 110798.
- [113] G. P. Sudhakar, A model of critical success factors for software projects, Journal of Enterprise Information Management.
- [114] V. Khononov, Learning Domain-Driven Design, ” O'Reilly Media, Inc.”, 2021.
- [115] Terraform is an open-source infrastructure as code software tool that provides a consistent cli.  
 URL <https://www.terraform.io/>

- [116] The leading customer data platform.  
URL <https://segment.com/>
- [117] The hadoop distributed file system.  
2000 URL [https://hadoop.apache.org/docs/r1.2.1/hdfs\\_design.html](https://hadoop.apache.org/docs/r1.2.1/hdfs_design.html)
- [118] The package manager for kubernetes.  
URL <https://helm.sh/>
- [119] Gnu make.  
URL [https://www.gnu.org/software/make/manual/make.html#](https://www.gnu.org/software/make/manual/make.html#toc-An-Introduction-to-Makefiles)  
2005 [toc-An-Introduction-to-Makefiles](https://www.gnu.org/software/make/manual/make.html#toc-An-Introduction-to-Makefiles)
- [120] A. Josey, TOGAF® Version 9.1-A Pocket Guide, Van Haren, 2016.
- [121] ISO, Iso 19115-1:2014, International Organization for Standardization.
- [122] G. D. S. Ehtisham Zaidi, Augmented data catalogs: Now an enterprise must-have for data and analytics leaders, Tech. rep., Gartner (2019).
- 2010 [123] C. Richardson, Microservices Patterns: With examples in Java, Manning; 1st edition, 2018.  
URL [https://www.amazon.com/Microservices-Patterns-examples-Chris-Richardson/dp/1617294543/ref=tmm\\_pap\\_swatch\\_0?\\_encoding=UTF8&qid=1648261674&sr=8-1](https://www.amazon.com/Microservices-Patterns-examples-Chris-Richardson/dp/1617294543/ref=tmm_pap_swatch_0?_encoding=UTF8&qid=1648261674&sr=8-1)
- 2015 [124] R. J. Wieringa, Design science methodology for information systems and software engineering, Springer, 2014.
- [125] ISO, Iso/iec 25000:2005 (2014).
- [126] B. Geerdink, A reference architecture for big data solutions introducing a model to perform predictive analytics using big data technology, in: 8th international conference for internet technology and secured transactions (ICITST-2013), IEEE, 2013, pp. 71–76.  
2020

- [127] D. Quintero, F. N. Lee, et al., IBM reference architecture for high performance data and AI in healthcare and life sciences, IBM Redbooks, 2019.
- [128] B. Levin, Big data ecosystem reference architecture, Microsoft Corporation.  
2025
- [129] P. Viana, L. Sato, A proposal for a reference architecture for long-term archiving, preservation, and retrieval of big data, in: 2014 IEEE 13th International Conference on Trust, Security and Privacy in Computing and Communications, IEEE, 2014, pp. 622–629.
- [130] J. Kreps, Questioning the lambda architecture, Online article, July 2015.  
2030 URL <https://www.oreilly.com/radar/questioning-the-lambda-architecture/>
- [131] Y. Demchenko, C. De Laat, P. Membrey, Defining architecture components of the big data ecosystem, in: 2014 International conference on collaboration technologies and systems (CTS), IEEE, 2014, pp. 104–112.  
2035
- [132] D. Cackett, Information management and big data, a reference architecture, Oracle: Redwood City, CA, USA.  
URL <https://www.oracle.com/technetwork/topics/entarch/articles/info-mgmt-big-data-ref-arch-1902853.pdf>
- [133] A. Ghandour, Big data driven e-commerce architecture, International Journal of Economics, Commerce and Management 3 (5) (2015) 940–947.  
2040
- [134] M. A. Martínez-Prieto, C. E. Cuesta, M. Arias, J. D. Fernández, The solid architecture for real-time management of big semantic data, Future Generation Computer Systems 47 (2015) 62–79.
- [135] P. Pääkkönen, D. Pakkala, Reference architecture and classification of technologies, products and services for big data systems, Big data research 2 (4) (2015) 166–186.  
2045

- [136] G. M. Sang, L. Xu, P. De Vrieze, A reference architecture for big data systems, in: 2016 10th International Conference on Software, Knowledge, Information Management & Applications (SKIMA), IEEE, 2016, pp. 370–375.
- [137] J. Klein, R. Buglak, D. Blockow, T. Wuttke, B. Cooper, A reference architecture for big data systems in the national security domain, in: 2016 IEEE/ACM 2nd International Workshop on Big Data Software Engineering (BIGDSE), IEEE, 2016, pp. 51–57.
- [138] A. Cuzzocrea, A reference architecture for supporting secure big data analytics over cloud-enabled relational databases, in: 2016 IEEE 40th Annual Computer Software and Applications Conference (COMPSAC), Vol. 2, IEEE, 2016, pp. 356–358.
- [139] Sap - nec reference architecture for sap hana & hadoop.  
URL <https://www.scribd.com/document/418835912/Whitepaper-NEC-SAPHANA-Hadoop>
- [140] L. Heilig, S. Voß, Managing cloud-based big data platforms: a reference architecture and cost perspective, in: Big data management, Springer, 2017, pp. 29–45.
- [141] P. Ünal, Reference architectures and standards for the internet of things and big data in smart manufacturing, in: 2019 7th International Conference on Future Internet of Things and Cloud (FiCloud), IEEE, 2019, pp. 243–250.
- [142] M. Kiran, P. Murphy, I. Monga, J. Dugan, S. S. Baveja, Lambda architecture for cost-effective batch and speed big data processing, in: 2015 IEEE International Conference on Big Data (Big Data), IEEE, 2015, pp. 2785–2792.
- [143] D. Hollingsworth, U. Hampshire, Workflow management coalition: The

- 2075 workflow reference model, Document Number TC00-1003 19 (16) (1995)  
224.
- [144] H. Zimmermann, Osi reference model-the iso model of architecture for  
open systems interconnection, IEEE Transactions on communications  
28 (4) (1980) 425–432.
- 2080 [145] OATH, Oath reference architecture, release 2.0 initiative for open authen-  
tication, OATH.  
URL [https://openauthentication.org/wp-content/uploads/2015/  
09/ReferenceArchitectureVersion2.pdf](https://openauthentication.org/wp-content/uploads/2015/09/ReferenceArchitectureVersion2.pdf)
- [146] A. L. Pope, The CORBA reference guide: understanding the common  
2085 object request broker architecture, Addison-Wesley Longman Publishing  
Co., Inc., 1998.
- [147] M. Press, L. Joyner, G. Malcolm, Application Architecture for. NET:  
Designing Applications and Services, Microsoft Press, 2002.
- [148] D. Greefhorst, P. Gehner, Achmea streamlines application development  
2090 and integration, Via Nova Architectura.
- [149] D. Greefhorst, Een applicatie-architectuur voor het web bij de bank—de  
pro’s en contra’s van toestandsloosheid, Software Release Magazine 2.
- [150] H. Wu, A reference architecture for Adaptive Hypermedia Applications,  
Citeseer, 2002.
- 2095 [151] A. H. Norta, Exploring dynamic inter-organizational business process col-  
laboration (2007).

## Appendix A. Studies Included in the Systematic Literature Review

Study	Author	Year	Type
-------	--------	------	------



Towards a big Data reference architecture	[94]	2013	Master's Dissertation
A reference architecture for Big Data solutions introducing a model to perform predictive analytics using Big Data technology	[126]	2013	Conference Paper
IBM - Reference architecture for high performance analytics in healthcare and life science	[127]	2013	Book
Big data ecosystem reference architecture	[128]	2013	White Paper
A proposal for a reference architecture for long-term archiving, preservation, and retrieval of Big Data	[129]	2014	Conference Paper
Questioning the Lambda architecture; Kappa Architecture	[130]	2014	Blog
Defining architecture components of the Big Data Ecosystem	[131]	2014	Conference Paper
Oracle - Information Management and Big Data: A Reference Architecture	[132]	2014	White Paper
Big Data driven e-commerce architecture	[133]	2015	Journal Article
The solid architecture for real-time management of big semantic data	[134]	2015	Journal Article

Reference architecture and classification of technologies, products and services for big data systems	[135]	2015	Journal Article
A Reference Architecture for Big Data Systems	[136]	2016	Conference Paper
A reference architecture for Big Data systems in the national security domain	[137]	2016	Conference Paper
A Reference Architecture for Supporting Secure Big Data Analytics over Cloud-Enabled Relational Databases	[138]	2016	Conference Paper
SAP - NEC Reference Architecture for SAP HANA & Hadoop	[139]	2016	White Paper
Managing Cloud-Based Big Data Platforms: A Reference Architecture and Cost Perspective	[140]	2017	Journal Article
Scalable data store and analytic platform for real-time monitoring of data-intensive scientific infrastructure	[140]	2017	PhD Dissertation
A software reference architecture for semantic-aware Big Data systems; Bolster Architecture	[30]	2017	Journal Article
Simplifying big data analytics systems with a reference architecture	[65]	2017	Conference Paper
ISO/IEC/IEEE 42010:2011	[73]	2017	Standard

NIST Big Data Interoperability Framework: Volume 6, Big Data Reference Architecture	[77]	2018	White Paper
Towards a secure, distributed, and reliable cloud-based reference architecture for Big Data in smart	[24]	2019	Book Chapter
Reference Architectures and Standards for the Internet of Things and Big Data in Smart Manufacturing	[141]	2019	Conference Paper
Lambda architecture	[142]	2019	Conference Paper
ISO/IEC 20546:2019	[66]	2019	Standard
ISO/IEC TR 20547-1:2020	[67]	2020	Standard
NeoMycelia: A software reference architecture for big data systems	[3]	2021	Conference Paper
Smart transportation: A reference architecture for big data analytics	[64]	2021	Journal Article

Table A.2: RAs and Standards found by the result of the SLR

## Appendix B. RA classification

### 1. Standardization RAs

- 2100 (a) Type 1: classical, standardization architectures designed to be implemented in multiple organizations. Examples are:
- i. WRM [143]
  - ii. OSI RM [144]

- iii. OATH [145]
  - 2105 iv. COBRA [146]
  - v. Neomycelia [3]
  - vi. Kappa [130]
  - vii. Bolster [14]
- (b) Type 2: classical, standardization architectures designed to be im-
  - 2110 plemented in a single organization
    - i. Fortis Bank Reference Software Architecture [53]
- 2. Facilitation RAs
  - (a) Type 3: classical, facilitation reference architectures for multiple or-
    - 2115 ganizations designed by a software organization in cooperation with
      - i. Microsoft Application Architecture for .Net [147]
      - ii. IBM PanDOORA
      - iii. OATH [145]
      - iv. COBRA [146]
  - 2120 (b) Type 4: classical, facilitation architectures designed to be imple-
    - mented in a single organization
      - i. Achmea Software Reference Architecture [148]
      - ii. ABN-AMRO Web Application Architecture [149]
  - (c) Type 5: preliminary, facilitation architectures designed to be imple-
    - 2125 mented in multiple organizations
      - i. ERA [54]
      - ii. AHA [150]
      - iii. eSRA [151]