


Explore&Go widget

Technical Documentation

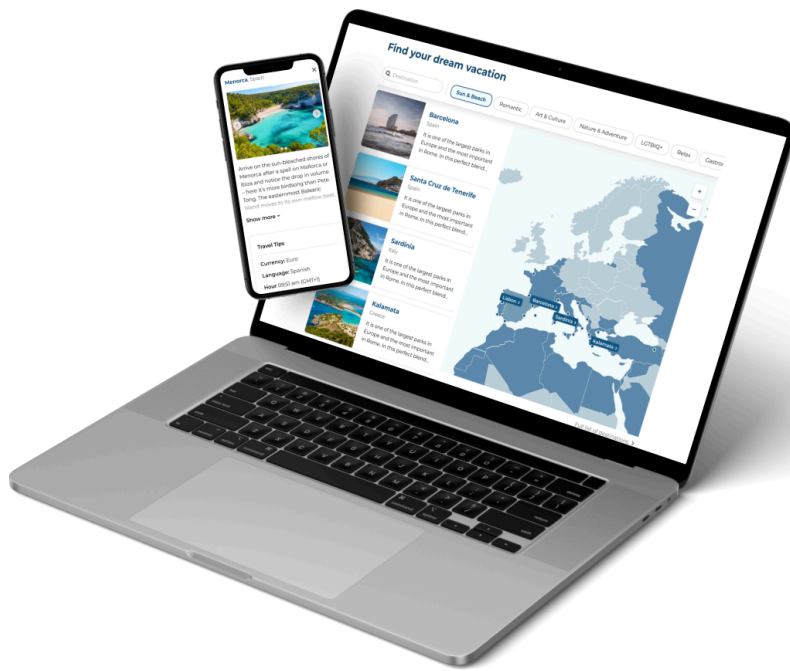

Updated: **July 2025**



Table of contents

The code	3
Customization	4
Available parameters	4
Angular implementation	8
1 - Create a new component	8
2 - Import the component in NgModule	8
3 - Add the component whenever you want to use it.	8
User interaction tracking	9
Current Supported Languages	10
Browser Support	10
Assistance	11


The code

The code you have to embed to show the widget is composed of three main parts:

- **API Key.** Provided to you by Smartvel.
- **Language.** You should change the language for each site in case you use different languages. The language code must be a 2-code ISO format (e.g. en, es, fr, de)
- **Autoloader.** It loads the last version of the widget and all the settings assigned to your API key.

```
<exploreandgo data-apikey='Your API Key' data-lang='en'></exploreandgo>  
<!--Load Smartvel libs-->  
<script src="https://cdn.smartvel.com/scripts/exango/boot.min.js"></script>
```

Once you implement the code, you should see something similar to this:

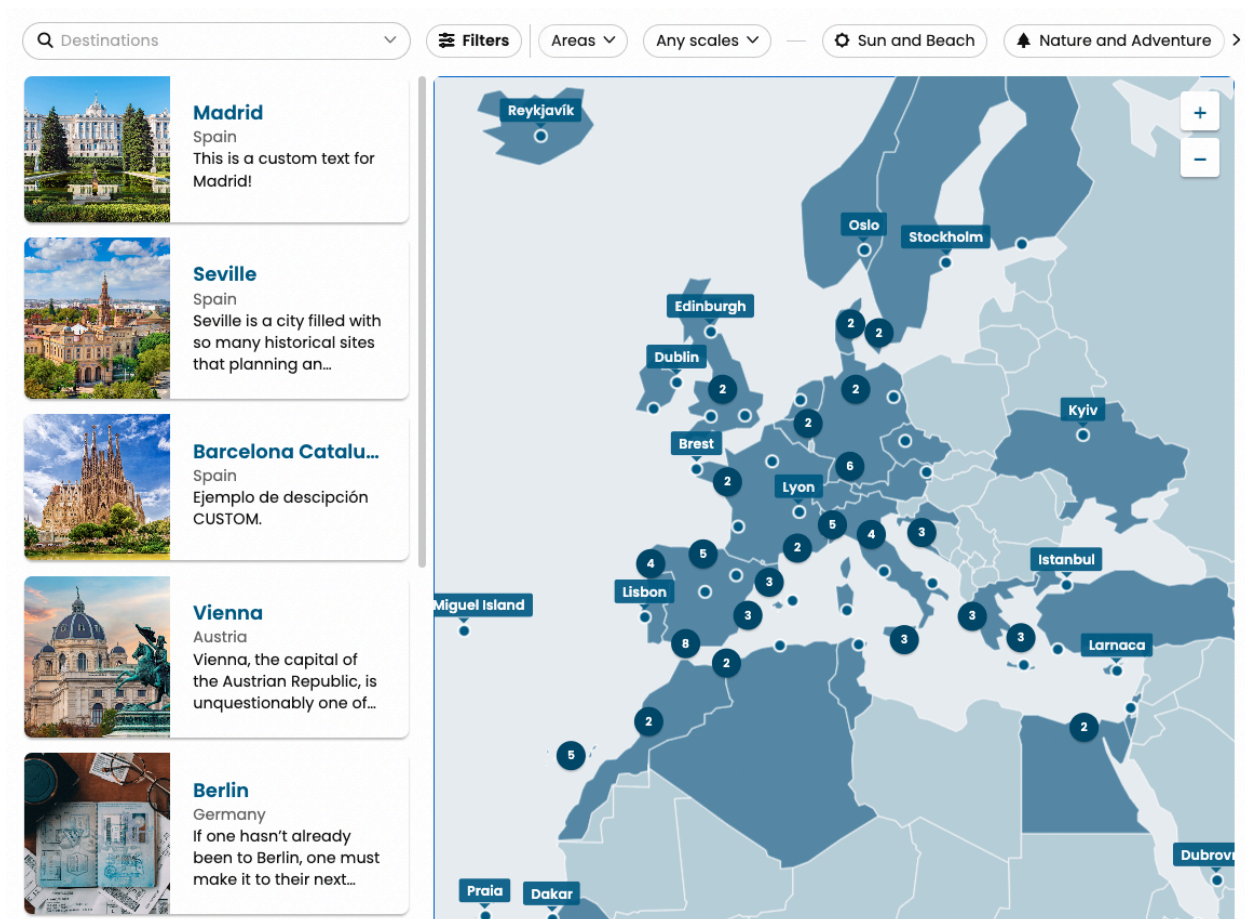

Customization

You may want to use Smartvel Widget in different scenarios. If that is the case, you will need to use some parameters, either including them in the HTML or in the URL.

Available parameters

HTML Parameter	URL Parameter	Value type	Definition
data-lang	lang	str	Language in which the widget will display information • ISO-639-1 format. • Optional. Default Value: en
data-market	market	str	When directing the banner to individual landing pages based on destinations, utilize this parameter to also consider the market. In other words, you can specify whether, for example, when clicking on the banner link for Barcelona, it should redirect to: - www.smartvel.com/en/UK/Barcelona for the "UK" market - www.smartvel.com/en/US/Barcelona for the "US" market To ensure alignment between your destinations, languages, and markets for specific locations, please provide us with the different values of the "market" parameter you intend to use. This will allow us to configure your settings accordingly. Contact Smartvel for more details. • Optional, except when using personalized links per destination.
data-center	-	array	Longitude and latitude for the center of the map loaded by default. • Optional. Default Value: [37, 0]

data-zoom	-	number	Initial zoom of the map. The higher the number, the more zoom will be applied. Optional. Default Value: 1
data-destination	dt	string number	If you need to load the widget with a specific destination, use this parameter to indicate the smartvel_id or the IATA code of the destination. Example: - dt=9705 loads the widget with the page of Barcelona - dt=FCO loads the widget with the page of Rome Contact us if you need the smartvel_id's.
data-region	region	number	If you need to load the widget showing a country and its regions/states, use this parameter to indicate the smartvel_id of the country. Example: region=15 loads the widget with Spain and the silhouettes of its Comunidades Autónomas. Contact us if you need the smartvel_id's. <u>Note:</u> the silhouettes feature is available only for certain countries. Possibility to include new silhouettes on demand.
data-origin	or	string number	If you want to show different destinations based on the origin of the user, you will need to: - Provide Smartvel with the possible destinations from all your origins. Ask our team to know how. - Include this parameter and specify an origin city by default. The accepted values of this parameter are the smartvel_id or the IATA code of the destination. Example: - or=9694 loads the widget with Madrid as the origin shown by

			default. The shown destinations are referred to Madrid. • or=JFK loads the widget with New York City as the origin shown by default. The shown destinations are referred to New York City. If you need the smartvel_id of your regions, please contact us.
data-stops	stops	string	This parameter allows to show all the destinations from a certain Origin (including the ones with connection flights) or only direct flights. Possible values: "all", "direct" Example: • data-stops="direct"
data-prices	prz	boolean	If set to true, prices to different destinations will be shown once an Origin is selected. This feature is available only if your pricing data has been previously integrated.
data-currency	currency	string	Currency of prices shown by default Example: • data-currency="USD"
data-autoplay_video	-	boolean	If true, destination videos start automatically.
data-top_reasons_order	-	array	This parameter allows to choose the category of the top activities shown on the page of a destination. Needs to have 4 categories in a row. Possible values: "places", "events", "restaurants". Example: • data-top_reasons_order="places,places,events,restaurants"

data-categories	cats	string	This parameter allows to choose the interests tags activated when loading the widget. Possible values: - sun_and_beach - romantic - art_and_culture - gastronomy - lgbti_friendly - nature_and_adventure - nightlife_and_party - relax - rural - urban Example: • data-categories="sun_and_beach,romantic" will show destinations that are romantic and have a beach when loading the widget.
data-temperature_units	tu	string	Set the temperature unit (Celsius or Farenheit) for the destination's average monthly temperature chart. Possible values: C,F

Angular implementation

Follow the next steps for implementing an integration with Angular:

1 - Create a new component

smt-exploreandgo.component.html:

```
<exploreandgo data-apikey='Your API Key' data-lang='en'></exploreandgo>
```

smt-exploreandgo.component.ts:

```
import { Component, NO_ERRORS_SCHEMA } from '@angular/core';

@Component({
  selector: 'app-smt-exploreandgo',
  templateUrl: './smt-exploreandgo.component.html',
  standalone: true,
  schemas: [NO_ERRORS_SCHEMA],
})

export class SmartvelExploreandgoComponent {
  smartvelScript: HTMLScriptElement;
  constructor() {
    this.smartvelScript=document.createElement("script");
    this.smartvelScript.src=
"https://cdn.smartvel.com/scripts/exango/boot.min.js";
    document.body.appendChild(this.smartvelScript);
  }
}
```

2 - Import the component in NgModule

3 - Add the component whenever you want to use it.

```
<app-smt-exploreandgo/>
```


User interaction tracking

The widget currently generates events when a user performs the following actions:

- Consults a destination
- Activates a filter (either categories or prices)
- Clicks on a CTA (banner or tag prices)

For instance, you can track if a user clicks on the "Sun&Beach" and "Romantic" filters, opens the destination "Barcelona" and clicks on the banner "Travel to Barcelona".

To capture and track these events accurately, you will need to implement the following JavaScript code underneath the implementation code of the widget. By implementing that code, the widget will automatically send/push those actions and you only need to program how you want to store them. That is:

```
window.addEventListener(  
  "DESTINATION_CLICK",  
  function (e) {  
    /* Do your thing here */  
  },  
  false);
```

Please make sure to replace the comment `/* Do your thing here */` with the actual code logic that you want to execute when the event is triggered.

The events that can be captured are:

- **DESTINATION_CLICK**

Which will give the following data:

*id: region_id_by_smartvel
iata: iata_code_destination
name: destination_name*

Action registered: click on a destination through the following actions:

- Main list destination
- Map destination
- Destination input
- Destination through "Surprise me" carousel
- Other destinations from selected origin - secondary list
- Other nearby destinations section (at the bottom of selected destination)

- **MAP_FILTER_EXPLOREGO**

Which will give you the following data:

id: category_id_by_smartvel

name: slug_name_category

Action registered: click on an interest filter through the chips displayed over the map

Action registered: click on a interest filter through the filter's button

- **DESTINATION_BOOK**

Which will give you the following data:

id: region_id_by_smartvel

iata: iata_code_destination

name: destination_name

price: price or null (when no price is found)

currency: (\$, €, £...) or null (when no price is found)

iataOri: iata_code_origin_city

idOri: region_id_origin_by_smarvel

nameOri: origin_name

Action registered: click on a CTA to book a trip through the the following actions:

- *Click on destination main banner*
- *Click price on map*
- *Click price button on destination header*
- *Click price on main list*
- *Click price on secondary list (Other destinations from selected origin)*
- *Click on destination price on "Surprise me" carousel*

- **ORIGIN_CITY**

Which will give you the following data:

id: region_id_by_smartvel

iata: iata_code_destination

name: destination_name

Action registered: city indicated as Origin

- **ANY_STOPS, DIRECT_FLIGHT**

Which will give you the following data:

stops: number_stops (any/direct)

Action registered: Direct flights or Any stops on the "Stops" filter

Current Supported Languages

The following languages are supported by the widget. However, if you are interested in any other languages, please contact us at support@smartvel.com.

- Spanish (es)
- English (en)
- French (fr)
- Italian (it)
- German (de)
- Portuguese (pt)
- Dutch (nl)
- Hebrew (he)
- Romanian (ro)
- Arabic (ar)

Browser Support

Our widget renders on Firefox, Safari and Chrome based browsers (that includes EDGE last version > 78). We are working to provide EDGE v12-18 compatibility.

More information: <https://caniuse.com/#feat=custom-elementsv1>

Assistance

If you have any doubts about how to proceed or use our information, contact us in support@smartvel.com.