

AWS Cloud Practical

Name: Pooja Prakash Belgaumkar

1. Replicating a static website hosted on an EC2 instance from one AWS region to another region using an AMI.

- Launch an EC2 instance in the eu-north-1 region.

EC2 > Instances > i-0658c91a42ee7ac64

Instance summary for i-0658c91a42ee7ac64 (Instance A) [Info](#)

[Refresh](#) [Connect](#) [Instance state ▼](#) [Actions ▼](#)

Updated 3 minutes ago

Instance ID i-0658c91a42ee7ac64	Public IPv4 address 51.20.68.154 open address ↗	Private IPv4 addresses 10.0.12.55
IPv6 address -	Instance state Running	Public DNS ec2-51-20-68-154.eu-north-1.compute.amazonaws.com open address ↗
Hostname type IP name: ip-10-0-12-55.eu-north-1.compute.internal	Private IP DNS name (IPv4 only) ip-10-0-12-55.eu-north-1.compute.internal	Elastic IP addresses -
Answer private resource DNS name -	Instance type t3.micro	AWS Compute Optimizer finding Opt-in to AWS Compute Optimizer for recommendations. Learn more ↗
Auto-assigned IP address 51.20.68.154 [Public IP]	VPC ID vpc-024f8931266570790 (MyVPC) ↗	

- Connect to the instance and install the Apache web server (httpd), because Apache serves static files over HTTP. Then start and enable the httpd service.

```
#  
##### Amazon Linux 2023  
#####  
#####  
#####  
#####  
#####  
#####  
  
[ec2-user@ip-10-0-12-55 ~]$ sudo yum update -y  
Amazon Linux 2023 Kernel Livepatch repository                267 kB/s | 31 kB    00:00  
Dependencies resolved.  
Nothing to do.  
Complete!  
[ec2-user@ip-10-0-12-55 ~]$ sudo yum install httpd -y  
Last metadata expiration check: 0:00:30 ago on Sat Feb 14 12:37:51 2026.  
Dependencies resolved.
```

Package	Architecture	Version	Repository	Size
Installing:				
httpd	x86_64	2.4.66-1.amzn2023.0.1	amazonlinux	47 k
Installing dependencies:				
apr	x86_64	1.7.5-1.amzn2023.0.4	amazonlinux	129 k
apr-util	x86_64	1.6.3-1.amzn2023.0.2	amazonlinux	97 k
apr-util-lmdb	x86_64	1.6.3-1.amzn2023.0.2	amazonlinux	13 k
generic-logos-httpd	noarch	18.0.0-12.amzn2023.0.3	amazonlinux	19 k
httpd-core	x86_64	2.4.66-1.amzn2023.0.1	amazonlinux	1.4 M
httpd-filesystem	noarch	2.4.66-1.amzn2023.0.1	amazonlinux	13 k

```
[ec2-user@ip-10-0-12-55 ~]$ sudo systemctl start httpd  
[ec2-user@ip-10-0-12-55 ~]$ sudo systemctl enable httpd  
Created symlink /etc/systemd/system/multi-user.target.wants/httpd.service → /usr/lib/systemd/system/httpd.se  
rvice.  
[ec2-user@ip-10-0-12-55 ~]$ sudo systemctl status httpd  
● httpd.service - The Apache HTTP Server  
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; enabled; preset: disabled)  
   Active: active (running) since Sat 2026-02-14 12:38:39 UTC; 38s ago  
     Docs: man:httpd.service(8)  
 Main PID: 25893 (httpd)  
 Status: "Total requests: 0; Idle/Busy workers 100/0;Requests/sec: 0; Bytes served/sec:  0 B/sec"  
 Tasks: 177 (limit: 1067)  
Memory: 13.3M  
 CPU: 85ms  
CGroup: /system.slice/httpd.service  
├─25893 /usr/sbin/httpd -DFOREGROUND  
├─25894 /usr/sbin/httpd -DFOREGROUND  
├─25895 /usr/sbin/httpd -DFOREGROUND  
├─25896 /usr/sbin/httpd -DFOREGROUND  
└─25897 /usr/sbin/httpd -DFOREGROUND
```


```
Feb 14 12:38:39 ip-10-0-12-55.eu-north-1.compute.internal systemd[1]: Starting httpd.service - The Apache HT  
Feb 14 12:38:39 ip-10-0-12-55.eu-north-1.compute.internal httpd[25893]: Server configured, listening on: po  
Feb 14 12:38:39 ip-10-0-12-55.eu-north-1.compute.internal systemd[1]: Started httpd.service - The Apache HT
```

- Navigate to the `/var/www/html` directory and create an `index.html` file. Add the required HTML code for the static website.

```
[ec2-user@ip-10-0-12-55 ~]$ cd /var/www/html
[ec2-user@ip-10-0-12-55 html]$ sudo nano index.html
[ec2-user@ip-10-0-12-55 html]$
```

```
GNU nano 8.3 index.html
<!DOCTYPE html>
<html>
<head>
  <title>My Cloud Website</title>
  <style>
    body {
      background: linear-gradient(to right, #4facfe, #00f2fe);
      text-align: center;
      font-family: Arial;
      color: white;
      margin-top: 100px;
    }
    h1 {
      font-size: 50px;
    }
  </style>
</head>
<body>
  <h1>🚀 Hello from Region A</h1>
  <p>This static website is running on EC2.</p>
</body>
</html>
```

- Access the web page using the public IP address of Instance A to verify that the website is working properly.

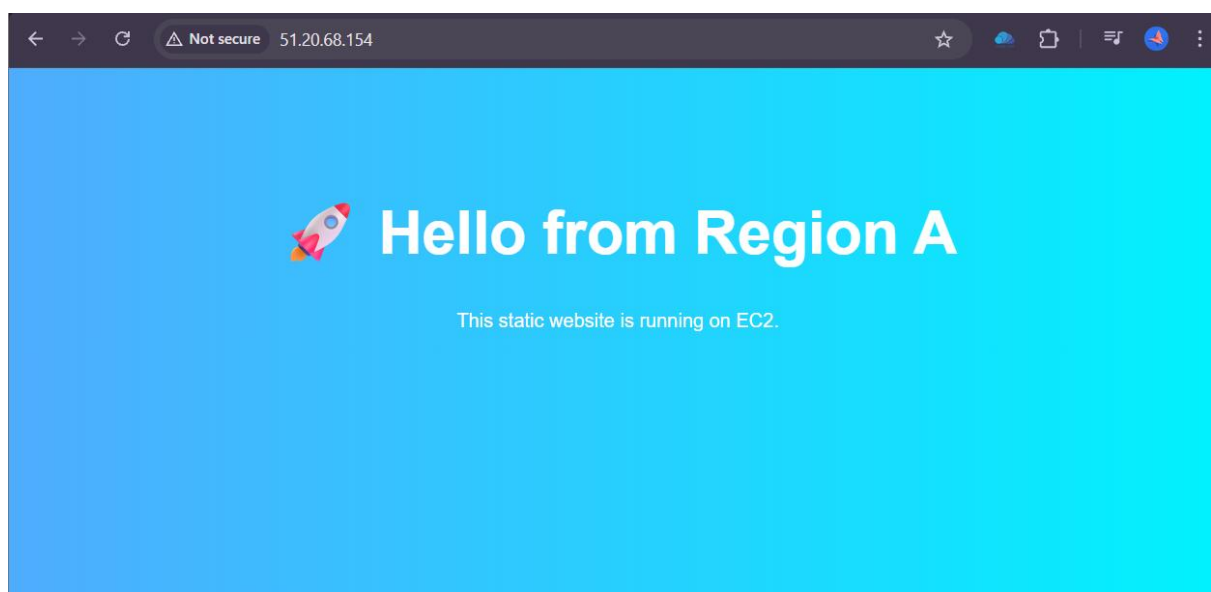

- Create an AMI of the instance and name it static-site-ami. Wait until the AMI status becomes Available.

EC2 > Instances > i-0658c91a42ee7ac64 > Create image

Create image [Info](#)

An image (also referred to as an AMI) defines the programs and settings that are applied when you launch an EC2 instance. You can create an image from the configuration of an existing instance.

Image details

Instance ID
 i-0658c91a42ee7ac64 (Instance A)

Image name

Maximum 127 characters. Can't be modified after creation.

aws | Search | [Alt+S] | Ask Amazon Q | Europe (Stockholm) | PoojaPrakash

EC2 > AMIs

Amazon Machine Images (AMIs) (1/1) [Info](#)

Owned by me | Find AMI by attribute or tag

AMI ID = ami-0283581086ec6bbf9 | Clear filters

☒	Name	AMI name	AMI ID	Source	Owner	Visibility	Status	Created
☒	static-site-ami	static-site-ami	ami-0283581086ec6bbf9	787169320097/static-site-ami	787169320097	Private	Available	2026/

- Create an AMI of the instance and name it static-site-ami. Wait until the AMI status becomes Available.

EC2 > AMIs > ami-0283581086ec6bbf9 > Copy AMI

Copy AMI [Info](#)

Create a copy of an Amazon Machine Image in a Region.

Copy Amazon Machine Image (AMI)

Original AMI ID
 [ami-0283581086ec6bbf9](#)


AMI copy name

AMI copy description


Destination Region
A copy of the original AMI will be created in the destination Region.

☐ **Copy tags**
Includes your user-defined AMI tags when copying the AMI.

Region
eu-north-1 (Stockholm)

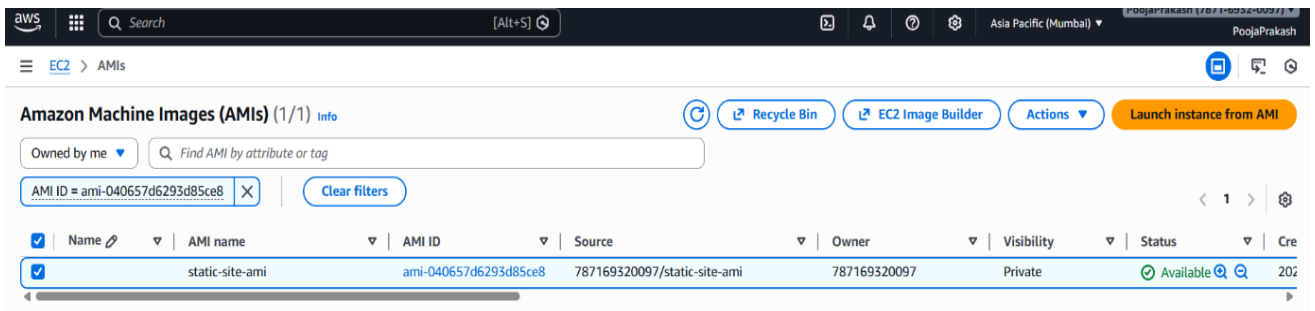

- Launch a new EC2 instance in the destination region using the copied AMI.

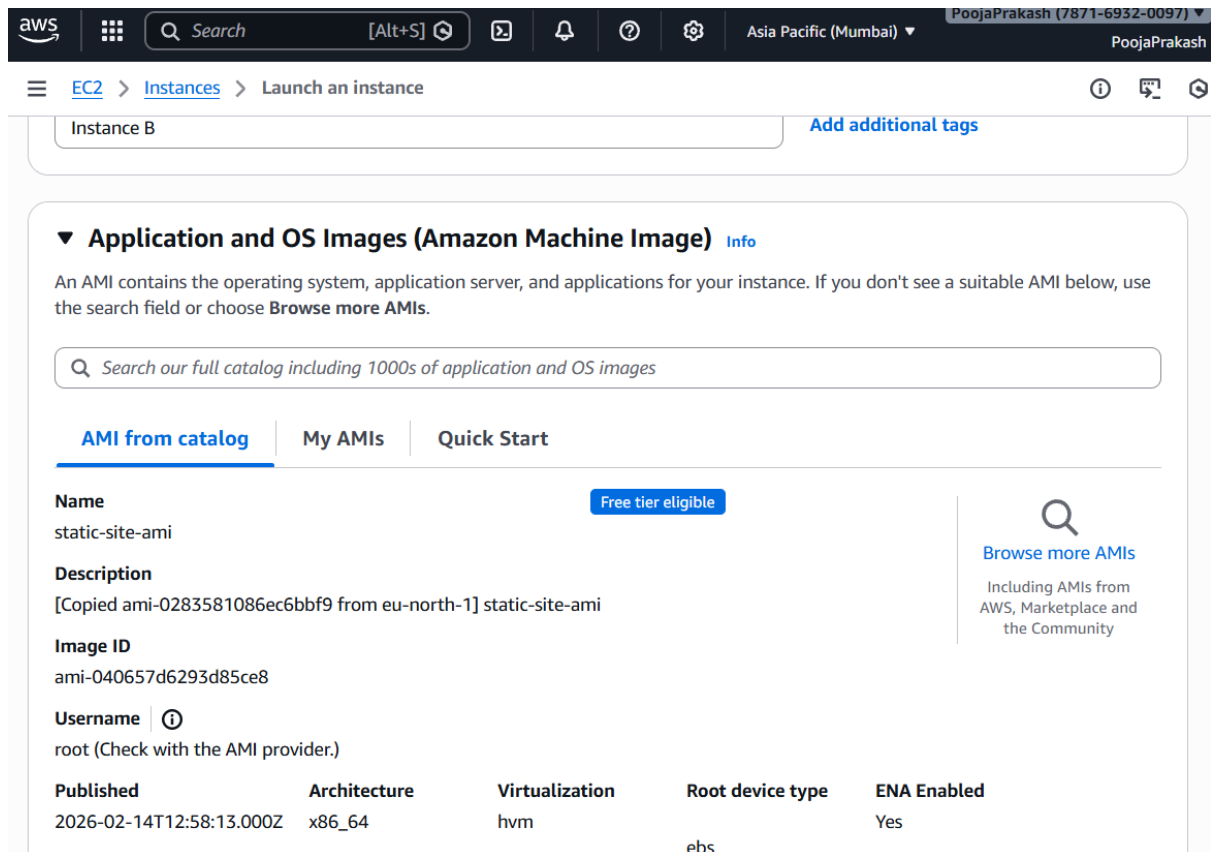

- Launch a new EC2 instance in the destination region using the copied AMI.

