

Day 30

1. Create a new person record

The screenshot shows the Postman interface for a POST request to `http://localhost:9090/persons`. The request is configured with the following details:

- Method:** POST
- URL:** `http://localhost:9090/persons`
- Body Type:** raw (selected), with JSON selected from the dropdown.
- Body Content:**

```
1 {  
2   "id": "101",  
3   "name": "Poonam"  
4 }
```
- Status:** 200 OK
- Response Body:** The response is displayed in JSON format, matching the request body:

```
{  
  "id": "101",  
  "name": "Poonam"  
}
```


2. Retrieve a person record by ID

The screenshot shows the Postman interface for a GET request to `http://localhost:9090/persons/101`. The request is configured with the following details:

- Method:** GET
- URL:** `http://localhost:9090/persons/101`
- Body Type:** none (selected)
- Status:** 200 OK
- Response Body:** The response is displayed in JSON format, matching the person record from the first screenshot:

```
{  
  "id": "101",  
  "name": "Poonam"  
}
```

3. Retrieve all person records

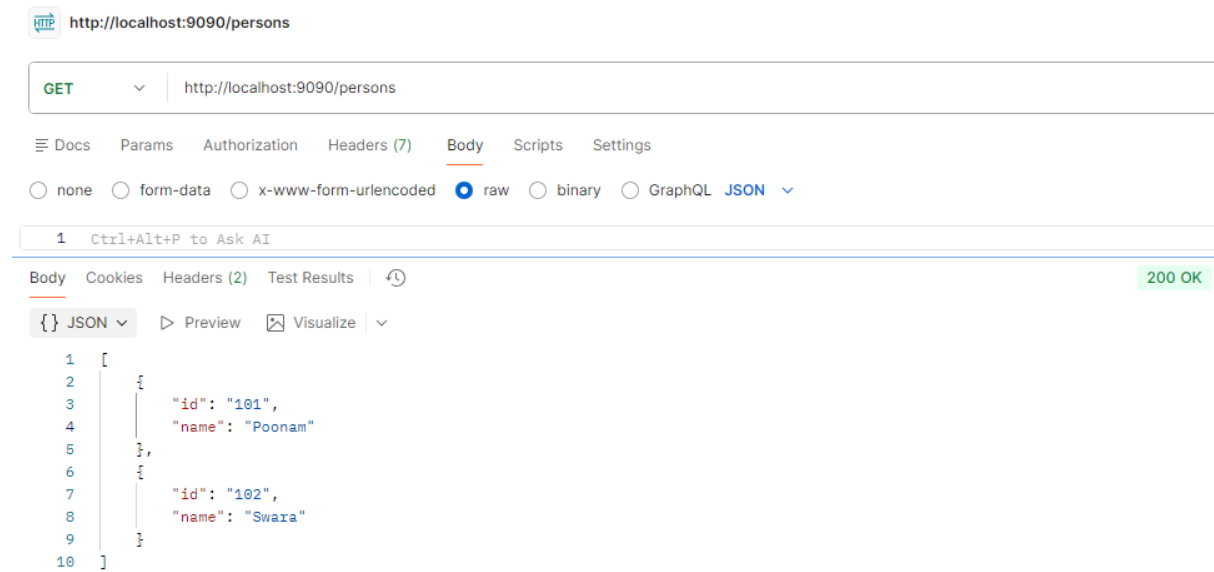

HTTP GET http://localhost:9090/persons

GET http://localhost:9090/persons

Docs Params Authorization Headers (7) Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON


1 Ctrl+Alt+P to Ask AI

Body Cookies Headers (2) Test Results 200 OK

{ } JSON Preview Visualize

```
1 [
2   {
3     "id": "101",
4     "name": "Poonam"
5   },
6   {
7     "id": "102",
8     "name": "Swara"
9   }
10 ]
```

4. Update an existing person record

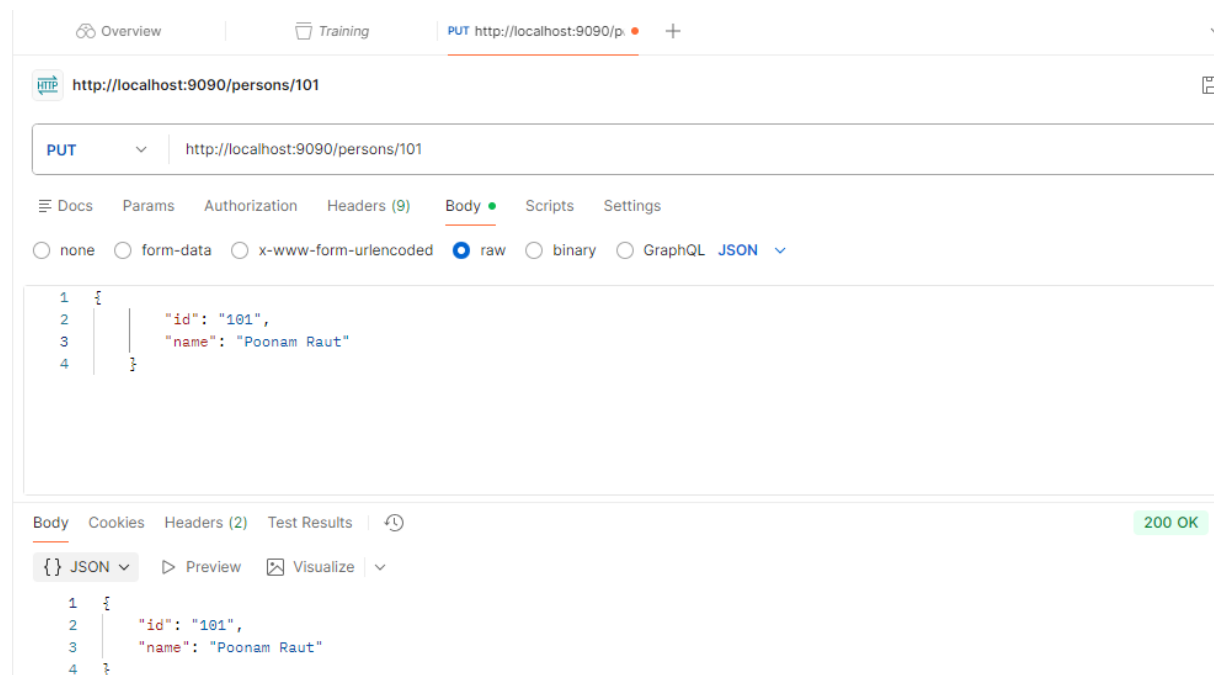

Overview Training PUT http://localhost:9090/p. +

HTTP PUT http://localhost:9090/persons/101

PUT http://localhost:9090/persons/101

Docs Params Authorization Headers (9) Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "id": "101",
3   "name": "Poonam Raut"
4 }
```

Body Cookies Headers (2) Test Results 200 OK

{ } JSON Preview Visualize

```
1 {
2   "id": "101",
3   "name": "Poonam Raut"
4 }
```

5. Delete a person record

The screenshot shows a REST client interface with a sidebar on the left containing 'Overview' and 'Training' tabs. The main area displays a DELETE request to 'http://localhost:9090/persons/101'. Below the URL bar, there are tabs for 'Docs', 'Params', 'Authorization', 'Headers (7)', 'Body', 'Scripts', and 'Settings'. The 'Body' tab is selected, and the request body is set to 'raw'. At the bottom, there is a status bar showing '1 Ctrl+Alt+P to Ask AI'.

Overview | Training | **DEL** http://localhost:9090/persons/101 +

DELETE http://localhost:9090/persons/101

Docs Params Authorization Headers (7) **Body** Scripts Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL **JSON** ▾

1 Ctrl+Alt+P to Ask AI