

Problem List

1832. Check if the Sentence Is Pangram

Solved

Easy

Topics

Companies

Hint

A **pangram** is a sentence where every letter of the English alphabet appears at least once.

Given a string `sentence` containing only lowercase English letters, return `true` if `sentence` is a **pangram**, or false *otherwise*.

Example 1:

Input: `sentence = "thequickbrownfoxjumpsoverthelazydog"`
Output: `true`
Explanation: sentence contains at least one of every letter of the English alphabet.

3K

67

Code

Java

Auto

```
1 class Solution {
2     public boolean checkIfPangram(String sentence) {
3         boolean[] arr = new boolean[26];
4         for(int i=0;i<sentence.length();i++)
5         {
6             arr[sentence.charAt(i) - 'a'] = true;
7         }
8
9         for(int i=0;i<26;i++)
10        {
11            if(!arr[i])
12            {
13                return false;
14            }
15        }
16        return true;
17    }
```

Saved

Ln 3, Col 9

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Input

Problem List

1869. Longer Contiguous Segments of Ones than Zeros

Solved

Description

Editorial

Solutions

Submit

Easy

Topics

Companies

Hint

Given a binary string `s`, return `true` if the **longest** contiguous segment of `1`'s is **strictly longer** than the **longest** contiguous segment of `0`'s in `s`, or return `false` otherwise.

- For example, in `s = "110100010"` the longest continuous segment of `1`s has length `2`, and the longest continuous segment of `0`s has length `3`.

Note that if there are no `0`'s, then the longest continuous segment of `0`'s is considered to have a length `0`. The same applies if there is no `1`'s.

Example 1:

580

12

1

Onlin

Code

Java

Auto

```
1 class Solution {
2     public boolean checkZeroOnes(String s) {
3
4         int one = 0;
5         int zero = 0;
6         int maxone = 0;
7         int maxzero = 0;
8
9         for(int i=0; i<s.length();i++)
10            {
11                if(s.charAt(i) == '1')
12                {
13                    one++;
14                    zero = 0;
15                }
16            }
17     }
```

Saved

Ln 11, Col 32

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Case 3

Input

Problem List

1281. Subtract the Product and Sum of Digits of an Integer

Solved

Easy

Topics

Companies

Hint

Given an integer number n , return the difference between the product of its digits and the sum of its digits.

Example 1:

Input: $n = 234$
Output: 15
Explanation:
Product of digits = $2 * 3 * 4 = 24$
Sum of digits = $2 + 3 + 4 = 9$
Result = $24 - 9 = 15$

Example 2:

Input: $n = 4421$

2.9K

94

7 Online

Code

Java

Auto

Ln 14, Col 30

```
1 class Solution {
2     public int subtractProductAndSum(int n) {
3
4         int sum = 0;
5         int product = 1;
6
7         while(n > 0)
8         {
9             int digit = n % 10;
10            sum += digit;
11            product *= digit;
12            n = n / 10;
13        }
14        return product - sum;
15    }
```

Saved

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Input

Problem List

<

>

🔍

👤

🔧

🔥 0

🔄

👤

🌐

Premium

Description

Editorial

Solutions

2235. Add Two Integers

Solved

Easy

Topics

Companies

Given two integers `num1` and `num2`, return the *sum* of the two integers.

Example 1:

Input: `num1 = 12, num2 = 5`

Output: `17`

Explanation: `num1` is 12, `num2` is 5, and their sum is `12 + 5 = 17`, so 17 is returned.

Example 2:

Input: `num1 = -10, num2 = 4`

Output: `-6`

Explanation: `num1 + num2 = -6`, so -6 is returned.

👍 2.2K

👎

💬 435

☆

📄

🕒

7 Online

Code

Java

Auto

```
1 class Solution {
2     public int sum(int num1, int num2) {
3
4         return num1 + num2;
5     }
6 }
7
```

Saved

Ln 5, Col 9

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Input

Problem List

1295. Find Numbers with Even Number of Digits

Solved

Easy

Topics

Companies

Hint

Given an array `nums` of integers, return how many of them contain an **even number** of digits.

Example 1:

Input:

`nums = [12,345,2,6,7896]`

Output:

`2`

Explanation:

12 contains 2 digits (even number of digits).

345 contains 3 digits (odd number of digits).

2 contains 1 digit (odd number of digits).

6 contains 1 digit (odd number of digits).

Code

Java

Auto

```
1 class Solution {
2     public int findNumbers(int[] nums) {
3
4         int even = 0;
5
6         for (int n : nums)
7         {
8             int count = 0;
9
10            while (n > 0) {
11                n = n / 10;
12                count++;
13            }
14
15            if (count % 2 == 0) {
16                even++;
17            }
18        }
19    }
20 }
```

Saved

Ln 8, Col 12

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

3K

210

17 On

Problem List

2469. Convert the Temperature

Solved

Easy

Topics

Companies

Hint

You are given a non-negative floating point number rounded to two decimal places `celsius`, that denotes the temperature in Celsius.

You should convert Celsius into **Kelvin** and **Fahrenheit** and return it as an array `ans = [kelvin, fahrenheit]`.

Return the array `ans`. Answers within 10^{-5} of the actual answer will be accepted.

Note that:

- `Kelvin = Celsius + 273.15`
- `Fahrenheit = Celsius * 1.80 + 32.00`

Example 1:

764

104

7 Onlin

Code

Java

Auto

```
1 class Solution {
2     public double[] convertTemperature(double celsius) {
3
4         return new double[]
5         {
6             celsius + 273.15,
7             celsius * 1.8 + 32
8         };
9     }
10 }
11
```

Saved

Ln 8, Col 11

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Solved

Given an array of integers `nums`, return the number of *good pairs*.

A pair (i, j) is called *good* if `nums[i] = nums[j]` and $i < j$.

Input: nums = [1,2,3,1,1,3]
Output: 4
Explanation: There are 4 good pairs (0,3), (0,4), (3,4), (2,5) 0-indexed.

Input: nums = [1,1,1,1]
Output: 6

5.9K 142 10 Online

Java   Auto

☒ Case 1 ☒ Case 2 ☒ Case 3

Problem List

Accepted

Editorial

Sol

All Submissions

Accepted 56 / 56 testcases passed


Poorna Kal... submitted at Jun 28, 2026 15:06

Runtime

0 ms | Beats 100.00%

Memory

42.24 MB | Beats 17.93%

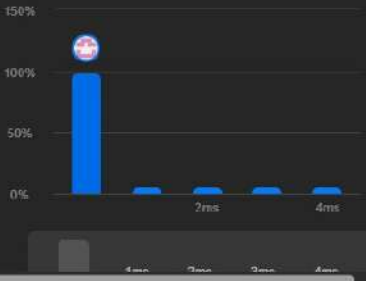

Code

Java Auto

```
1 class Solution {
2     public int countDigits(int num) {
3
4         int count = 0;
5         int n = num;
6
7         while(n>0)
8         {
9             int digit = n%10;
10
11             if( digit != 0 && num % digit == 0)
12             {
13                 count++;
14             }
15             n = n/10;
16         }
17     }
18 }
```

Saved

Ln 15, Col 22

Testcase

Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Case 3

Input

num =

Problem List

<

>

🔍

👤

🔒

Submit

📄

🌟

🔧

⚙️

🔥 0

🔄

👤

🌐

Premium

Description

Editorial

Solutions

Submit

2119. A Number After a Double Reversal

Solved

Easy

Topics

Companies

Hint

Reversing an integer means to reverse all its digits.

• For example, reversing 2021 gives 1202. Reversing 12300 gives 321 as the leading zeros are not retained.

Given an integer num, reverse num to get reversed1, then reverse reversed1 to get reversed2. Return true if reversed2 equals num. Otherwise return false.

Example 1:

Input: num = 526

Output: true

Explanation: Reverse num to get 625, then reverse 625 to get 526, which equals num.

808

👤

56

🌟

📄

🔄

2 Online

Code

Java

Auto

Ln 4, Col 42

```
1 class Solution {
2     public boolean isSameAfterReversals(int num) {
3
4         return num == 0 || num % 10 != 0;
5
6     }
7 }
```

Saved

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Case 3

Input

num =

Problem List

1323. Maximum 69 Number

Solved

Easy

Topics

Companies

Hint

You are given a positive integer `num` consisting only of digits 6 and 9.

Return the maximum number you can get by changing at most one digit (6 becomes 9, and 9 becomes 6).

Example 1:

Input: `num = 9669`
Output: `9969`
Explanation:
Changing the first digit results in 6669.
Changing the second digit results in 9969.
Changing the third digit results in 9699.

3.3K

428

2 Online

<https://leetcode.com/problems/maximum-69-number/>

Code

Java

Auto

```
1 class Solution {
2     public int maximum69Number (int num) {
3
4         int n = num;
5         int n1 = 0;
6         int n2 = 1;
7
8         while(n>0)
9         {
10             if(n % 10 == 6)
11             {
12                 n1 = n2;
13             }
14             n = n/10;
15             n2 *= 10;
16         }
17     }
18 }
```

Saved

Ln 14, Col 13

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Case 3

Input

num =