


1. Creating and Renaming Files/Directories

Create a directory named `test_dir` using `mkdir`.


Inside `test_dir`, create an empty file called `example.txt`.

Rename `example.txt` to `renamed_example.txt` using `mv`


```
mkdir test_dir
```

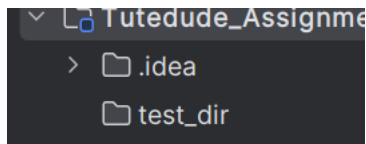

```
touch test_dir/example.txt
```



```
mv test_dir/example.txt test_dir/renamed_example.txt
```

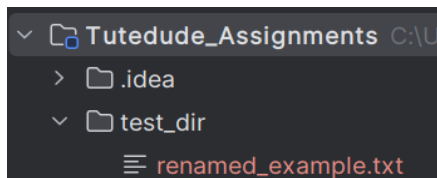

2. Viewing File Contents

Use `cat` to display the contents of `/etc/passwd`.

Display only the first 5 lines of `/etc/passwd` using `head`.

Display only the last 5 lines of `/etc/passwd` using `tail`.

```
$ cat sample.txt
head -n 5 sample.txt
tail -n 5 sample.txt
line1
line2
line3
line4
line5
line6
line1
line2
line3
line4
line5
line2
line3
line4
line5
line2
```

These commands are correct for a Linux environment. Since I'm using Git Bash on Windows, /etc/passwd is not available, so I tested the commands using a sample file instead.

3. Searching for Patterns


Use grep to find all lines containing the word "root" in /etc/passwd.

```
services > cd C:\Users\user\OneDrive - Text
$ echo "root user" > sample.txt
echo "admin user" >> sample.txt
grep "root" sample.txt
root user
```

4. Zipping and Unzipping

Compress the test_dir directory into a file named test_dir.zip using zip.

Unzip test_dir.zip into a new directory named unzipped_dir.

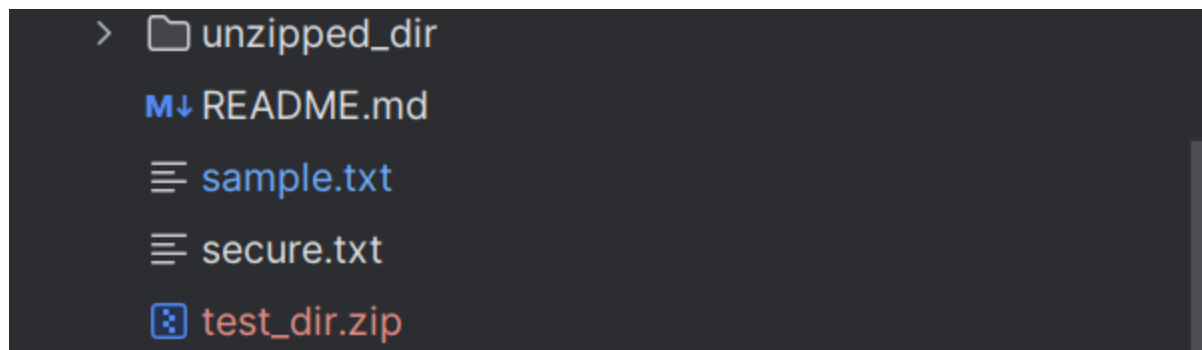

5. 5. Downloading Files

Use wget to download a file from a URL (e.g., <https://example.com/sample.txt>).

cat robots.txt

```
User-agent: *
User-agent: Yandex
Disallow: /search
Allow: /search/about
Allow: /search/howsearchworks
Disallow: /sdch
Disallow: /groups
Disallow: /index.html?
Disallow: /?
Allow: /?hl=
Disallow: /?hl=*%
Allow: /?hl=*%gws_rd=ssl$
Disallow: /?hl=*%*%gws_rd=ssl
Allow: /?gws_rd=ssl$
Allow: /?pt1=true$
Disallow: /imgres
Disallow: /u/
Disallow: /setprefs
Disallow: /m?
Disallow: /m/
Allow: /m/finance
Disallow: /wml?
Disallow: /wml/?
Disallow: /wml/search?
Disallow: /xhtml?
```

Files read:

6. Changing Permissions

Create a file named `secure.txt` and change its permissions to read-only for everyone using `chmod`.

```
touch secure.txt
```

```
chmod 444 secure.txt
```

```
$ ls -l secure.txt
-r--r--r-- 1 pkm00 1049089 0 May 25 18:12 secure.txt
```

7. Working with Environment Variables

Use `export` to set a new environment variable called `MY_VAR` with the value "Hello, Linux!".

```
export MY_VAR="Hello, Linux!"
```

```
pkm00@NBBLRBYGFJB4 MINGW64
$ echo $MY_VAR
Hello, Linux!
```