

BOOKING FLIGHT TICKET

1.CREATE DATABASE:

```
create database Booking;
```

Create database is used to create a new database in MySQL.

2.USE DATABASE:


```
use Booking;
```

USE database is used to select a database that we want to work with

3.CREATE TABLE:

```
Create table BookingPro(book_id int,booking_name varchar(30),Day varchar(10),price int);
```

Create table is used to create a new table inside a database.

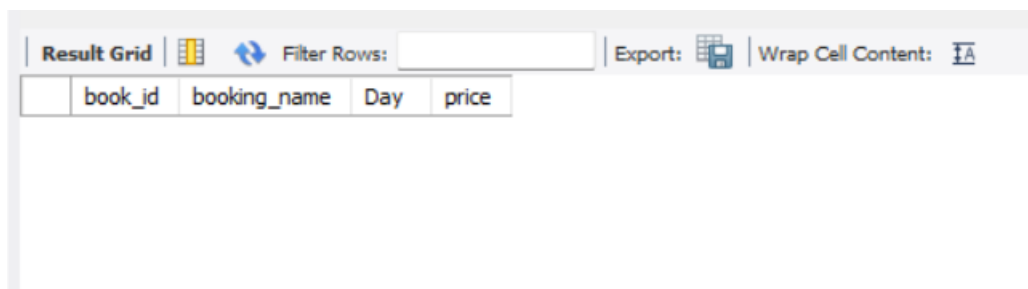

The screenshot shows a database management interface with a toolbar at the top containing 'Result Grid', 'Filter Rows', 'Export', and 'Wrap Cell Content'. Below the toolbar, a table structure is displayed with the following columns: book_id, booking_name, Day, and price.

book_id	booking_name	Day	price
---------	--------------	-----	-------

4.ALTER TABLE:

```
alter table BookingPro add column Destination varchar(60);
```

alter is used to modify the structure of an existing table. A new column called **Destination** is added to the existing BookingPro table.

5.INSERT TABLE:

```
insert into BookingPro values(1,'Porselvi','Wednesday',8200,'madurai');
```

```
insert into BookingPro values(2,'Karthi','Tuesday',1569,'coimbatore');
```

```
insert into BookingPro values(3,'Chitra','thursday',2500,'trichy');
```

```
insert into BookingPro values(4,'Elumalai','Sunday',6009,'chennai');
```

```
insert into BookingPro values(5,'vijaya','saturday',4780,'guindy');
```

```
insert into BookingPro values(6,'Gaja','Monday',8917,'salem');
```

	book_id	booking_name	Day	price	Destination
▶	1	Porselvi	Wednesday	8200	madurai
	2	Karthi	Tuesday	1569	coimbatore
	3	Chitra	thursday	2500	trichy
	4	Elumalai	Sunday	6009	chennai
	5	vijaya	saturday	4780	guindy

INSERT INTO is used to add new records or rows to a table. More booking record is added to the BookingPro table.

6.SELECT:

select *from BookingPro;

SELECT is used to retrieve or display data from a table. So, this command displays **all columns and all records** from the BookingPro table.

7.TRUNCATE:

truncate table BookingPro;

TRUNCATE TABLE is used to remove **all records** from a table. TRUNCATE removes **all rows**. We cannot use WHERE with TRUNCATE

8.UPDATE :

update BookingPro set Price =7860 where booking_name='Gaja';

	book_id	booking_name	Day	price	Destination
▶	1	Porselvi	Wednesday	8200	madurai
	2	Karthi	Tuesday	1569	coimbatore
	3	Chitra	thursday	2500	trichy
	4	Elumalai	Sunday	6009	chennai
	5	vijaya	saturday	4780	guindy
	6	Gaja	Monday	7860	salem

The price of the booking belonging to **Gaja** is changed to **7860**.

WHERE is very important because it identifies **which record should be updated**.

9.DELETE:

delete from BookingPro where Day='Wednesday';

book_id	booking_name	Day	price	Destination
2	Karthi	Tuesday	1569	coimbatore
3	Chitra	thursday	2500	trichy
4	Elumalai	Sunday	6009	chennai
5	vijaya	saturday	4780	guindy
6	Gaja	Monday	7860	salem

DELETE is used to remove existing records from a table. The record where the Day is **Wednesday** will be deleted.

10. AGGREGATE FUNCTIONS:

`select avg(Price) from BookingPro;`

`select sum(Price) from BookingPro;`

`Select min(Price) from BookingPro;`

`Select max(Price) from BookingPro;`

`select count(Destination) from BookingPro where booking_name='Chitra';`

Avg(), sum(), min(), max(), count() is an aggregate function used to calculate the **average, sum, min, max value** of a column

11. ORDER BY:


`select booking_name, Price from BookingPro order by Price desc;`

booking_name	Price
Gaja	7860
Elumalai	6009
vijaya	4780
Chitra	2500
Karthi	1569

ORDER BY is used to **sort the result** of a query. The booking names and prices are displayed from **highest price to lowest price**.

12.GROUP BY:

select Destination,count(*) from BookingPro group by Destination;

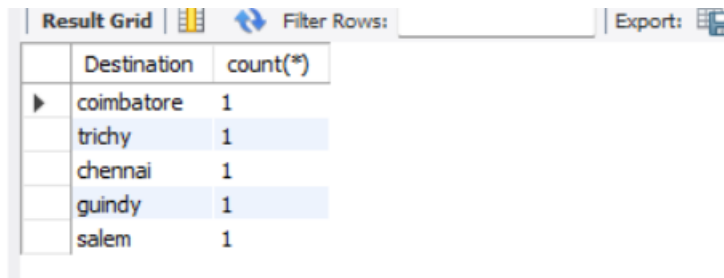


	Destination	count(*)
▶	coimbatore	1
	trichy	1
	chennai	1
	guindy	1
	salem	1

GROUP BY is used to group rows that have the same value. The records are grouped based on Destination, all records with madurai will form one group, all records with chennai another group, and so on. Then COUNT(*) counts how many records are present in each destination group

13.HAVING:

select Destination,Avg(Price)as average_Price from BookingPro group by destination having Avg(Price) >3000;

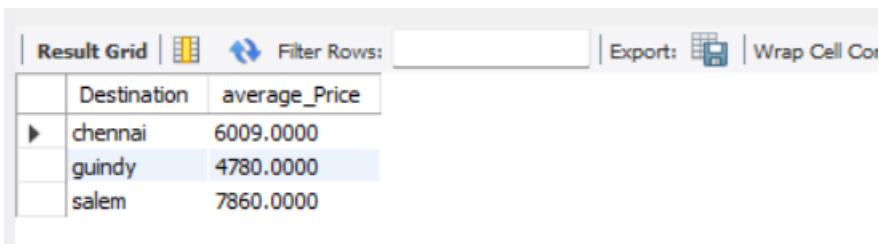

	Destination	average_Price
▶	chennai	6009.0000
	guindy	4780.0000
	salem	7860.0000

HAVING is used to filter grouped results. First, the records are grouped according to Destination.

Then the average price is calculated for each destination. Finally, only the destinations whose average price is greater than 3000 are displayed.