

ROZDZIAŁ 1


Zadanie 1

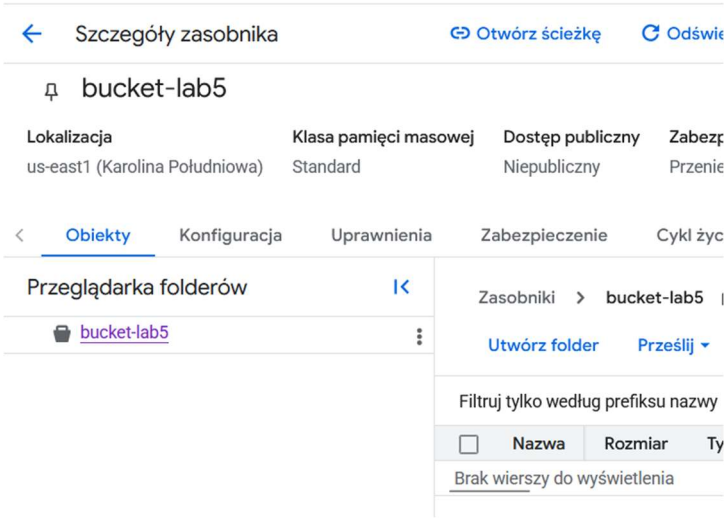

Zadanie 2

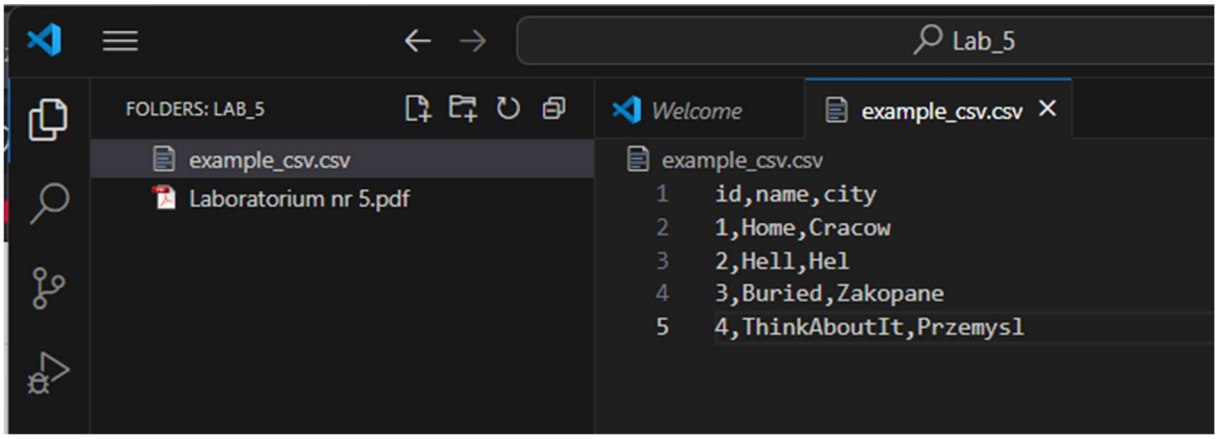

Zadanie 3

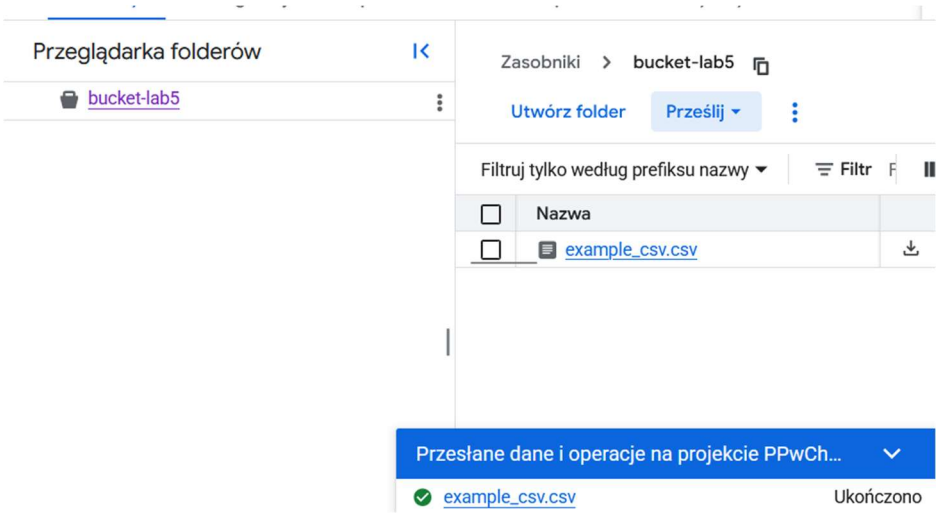


Zadanie 4


```
Use `gcloud config set project [PROJECT_ID]` to change to a different project.
ziggsu@cloudshell:~ (ppwch-lab5)$ gsutil iam ch allUsers:objectViewer gs://bucket-lab5
ziggsu@cloudshell:~ (ppwch-lab5)$
```

ROZDZIAŁ 2

Zadanie 1

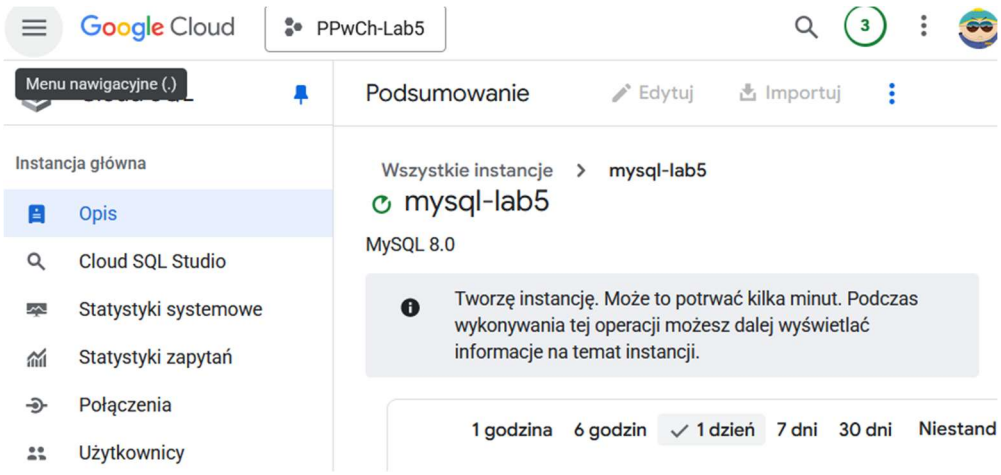

Zadanie 2

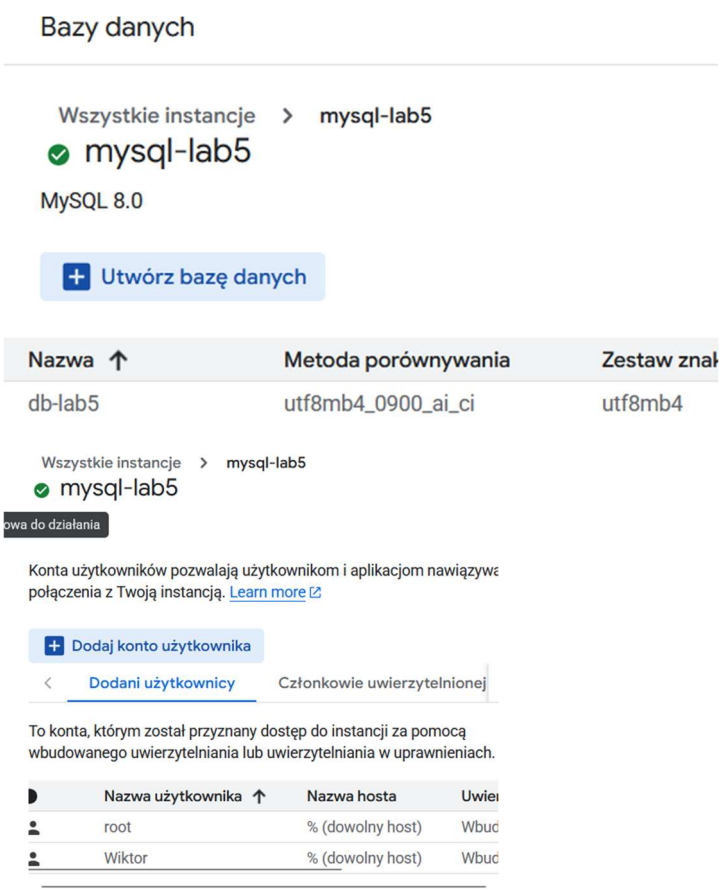

Zadanie 3

```
ziggsu@cloudshell:~ (ppwch-lab5)$ gcloud sql connect "$INSTANCE" --user=Wiktor --quiet
Allowlisting your IP for incoming connection for 5 minutes...done.
Connecting to database with SQL user [Wiktor].Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 96
Server version: 8.0.41-google (Google)

Copyright (c) 2000, 2025, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

```
mysql> USE lab5db;
Database changed
mysql> CREATE TABLE IF NOT EXISTS persons (
    ->   id   INT AUTO_INCREMENT PRIMARY KEY,
    ->   name VARCHAR(100),
    ->   city VARCHAR(100)
    -> );
Query OK, 0 rows affected (0.13 sec)

mysql> EXIT;
Bye
ziggsu@cloudshell:~ (ppwch-lab5)$
```

Zadanie 4

```
ziggsu@cloudshell:~ (ppwch-lab5)$ INSTANCE="mysql-lab5"
BUCKET="bucket-lab5"
CSV="example_csv.csv"
DB="lab5db"
TABLE="persons"

gcloud sql import csv "$INSTANCE" gs://${BUCKET}/${CSV} \
  --database="$DB" \
  --table="$TABLE" \
  --columns=id,name,city
Data from [gs://bucket-lab5/example_csv.csv] will be imported to [mysql-lab5].

Do you want to continue (Y/n)?  y


Importing data into Cloud SQL instance...done.
Imported data from [gs://bucket-lab5/example_csv.csv] into [https://sqladmin.googleapis.com/sq
l/v1beta4/projects/ppwch-lab5/instances/mysql-lab5].
ziggsu@cloudshell:~ (ppwch-lab5)$
```

Zadanie 5

```
mysql> select * from persons;
+----+--------------+-----------+
| id | name         | city      |
+----+--------------+-----------+
     | name         | city
      |Hell         | Hel
  | 3 | Buried       | Zakopane
|   4 | ThinkAboutIt | Przemysl  |
+----+--------------+-----------+
4 rows in set (0.10 sec)
```

ROZDZIAŁ 3

Zadanie 1

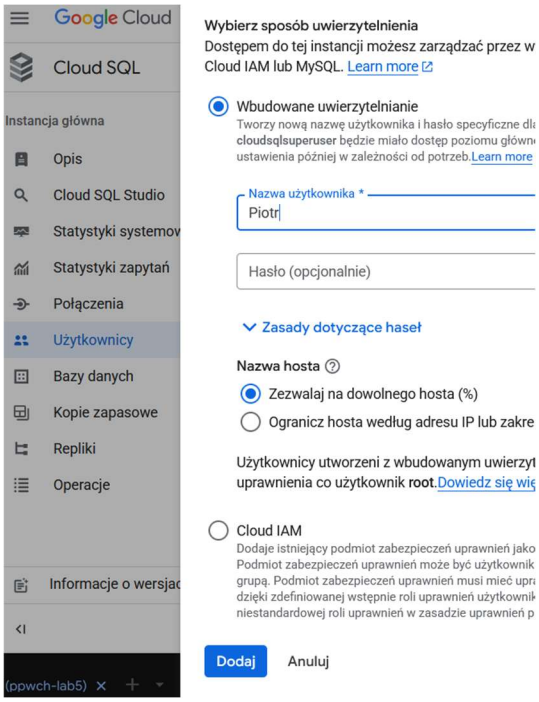

Zadanie 2

```
mysql> GRANT SELECT ON lab5db.* TO 'Piotr'
    -> ;
Query OK, 0 rows affected (0.10 sec)

mysql> flush privileges;
Query OK, 0 rows affected (0.10 sec)

mysql> show grants for 'Piotr';
+-------------------------------------------+
| Grants for Piotr@%                        |
+-------------------------------------------+
| GRANT USAGE ON *.* TO `Piotr`@`%`         |
| GRANT SELECT ON `lab5db`.* TO `Piotr`@`%` |
| GRANT `cloudsqlsuperuser`@`%` TO `Piotr`@`%` |
+-------------------------------------------+
3 rows in set (0.10 sec)
```

Zadanie 3

```
mysql> use lab5db;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> select * from persons;
+----+-------------+-----------+
| id | name        | city      |
+----+-------------+-----------+
     | name        | city
      |Hell        | Hel
  | 3 | Buried      | Zakopane
|  4 | ThinkAboutIt | Przemysl  |
|  5 | Nest        | Gniezno   |
+----+-------------+-----------+
5 rows in set (0.10 sec)

mysql> insert into persons (name, city) values ('new shop', 'Nowy Targ');
ERROR 1142 (42000): INSERT command denied to user 'Piotr'@'34.7.42.205' for table 'persons'
mysql>
```