



GUROBI
OPTIMIZATION



Gurobi Optimizer – Get the Software

Get the software

Gurobi Optimizer is the Gurobi optimization libraries. In addition to the software, the corresponding README file contains installation instructions. [Here is the list of bug fixes for each release.](#)

Current version		64-bit Windows	32-bit Windows	64-bit Linux	64-bit macOS	64-bit AIX
8.1.1	README	Gurobi-8.1.1-win64.msi		gurobi8.1.1_linux64.tar.gz	gurobi8.1.1_mac64.pkg	gurobi8.1.1_power64.tar.gz
md5 Checksum		17dfc21f0ed64daaa4bdf7634eab705b		05cbb96072e393bd4ebb1d8b9526ce01	d05a73cd0fd6622851b4371dc1d292579	3d1a756695d52065eeefc15516d9aac6
Old versions						
8.0.1	README	Gurobi-8.0.1-win64.msi		gurobi8.0.1_linux64.tar.gz	gurobi8.0.1_mac64.pkg	gurobi8.0.1_power64.tar.gz
md5 Checksum		d9363f13daa63b79c0cdaa37ad92e8b6		cfc595dd9482734bd0c268749093cc4	a02d04ef884e64e7091ef7a7439cfe68	877f94a02e602346ee767b9894df4030
7.5.2	README	Gurobi-7.5.2-win64.msi	Gurobi-7.5.2-win32.msi	gurobi7.5.2_linux64.tar.gz	gurobi7.5.2_mac64.pkg	gurobi7.5.2_power64.tar.gz
md5 Checksum		8216e812ff183a966210d9d8b3059626	9d3e10b408d4a83e5ca93359d7b26b49	01f6dbb8d165838cca1664a1a14e4a85	e42651aa319ee08c56f52c8532b7f458	f99ef512f0a8f97d3566b2c3dd136958
7.0.2	README	Gurobi-7.0.2-win64.msi	Gurobi-7.0.2-win32.msi	gurobi7.0.2_linux64.tar.gz	gurobi7.0.2_mac64.pkg	gurobi7.0.2_power64.tar.gz
md5 Checksum		0924e658882589fa2508e04381f50973	30e0b6f8b1fef6b018eee6b40c494eab	447a89f1bab64db4fc9ecc78f7b2f546	91a721ef5d6c41633dd01b5f8e97c8bc	f96300af4377320528e9cceb2e2e4fd



License Detail

License ID 106290

Information and installation instructions

License ID	106290
Date Issued	2015-10-28
Purpose	Trial
License Type	Free Trial
Key Type	TRIAL
Version	6
Distributed Limit	0
Expiration Date	2016-04-25
Host Name	
Host ID	

To install this license on a computer where Gurobi Optimizer is installed, copy and paste the following command to the Start/Run menu (Windows only) or a command/terminal prompt (any system):

```
grbgetkey 9f712a83-32db-0e10-8285-5630dfa56756
```

The `grbgetkey` command requires an active internet connection. If you get no response or an error message such as "Unable to contact key server", please [click here for additional instructions](#).



grbgetkey bba60259-a126-e14f-
dab2-580a56ac4d2e|



















Anaconda 2019.10 for Linux Installer

Python 3.7 version

[Download](#)

64-Bit (x86) Installer (506 MB)
64-Bit (Power8 and Power9) Installer (320 MB)

Python 2.7 version

[Download](#)

64-Bit (x86) Installer (477 MB)
64-Bit (Power8 and Power9) Installer (295 MB)

Get Started with Anaconda Distribution

Documentation

Installation and user guide for Anaconda Distribution 5

[Read More](#)

Anaconda Blog

News, software releases, and developer best practices

[Read More](#)

Community Support

Solutions and knowledge from the community

[Read More](#)

Anaconda Webinars

Industry trends and tutorials from Anaconda

[Read More](#)

Anaconda Training

Learn Python for Data Science with DataCamp

[Start Learning](#)

Anaconda 2019.10 for macOS Installer

Python 3.7 version

[Download](#)

64-Bit Graphical Installer (654 MB)
64-Bit Command Line Installer (424 MB)

Python 2.7 version

[Download](#)

64-Bit Graphical Installer (637 MB)
64-Bit Command Line Installer (409 MB)



Get Started with Anaconda Distribution

Documentation

Installation and user guide for Anaconda Distribution 5

[Read More](#)

Anaconda Blog

News, software releases, and developer best practices

[Read More](#)

Community Support

Solutions and knowledge from the community

[Read More](#)

Anaconda Webinars

Industry trends and tutorials from Anaconda

[Read More](#)

Anaconda Training

Learn Python for Data Science with DataCamp

[Start Learning](#)

Anaconda 2019.10 for Windows Installer

Python 3.7 version

[Download](#)

64-Bit Graphical Installer (462 MB)

32-Bit Graphical Installer (410 MB)

Python 2.7 version

[Download](#)

64-Bit Graphical Installer (413 MB)

32-Bit Graphical Installer (356 MB)

Get Started with Anaconda Distribution

Documentation

Installation and user guide for Anaconda Distribution 5

[Read More](#)

Anaconda Blog

News, software releases, and developer best practices

[Read More](#)

Community Support

Solutions and knowledge from the community

[Read More](#)

Anaconda Webinars

Industry trends and tutorials from Anaconda

[Read More](#)

Anaconda Training

Learn Python for Data Science with DataCamp

[Start Learning](#)



Editor - /home/daespin... IPython console

temp.py* Console 1/A

```
1#!/usr/bin/env python
2# -*- coding: utf-8
3"""
4Spyder Editor
5
6This is a temporary
7"""
8
9
```

```
In [1]: from gurobipy import *

In [2]: m = read('/opt/gurobi900/linux64/examples/data/p0033.mps')
Using license file /opt/gurobi900/gurobi.lic
Read MPS format model from file /opt/gurobi900/linux64/examples/data/p0033.mps
Reading time = 0.01 seconds
P0033: 16 rows, 33 columns, 98 nonzeros

In [3]: m.optimize()
Gurobi Optimizer version 9.0.0 build v9.0.0rc0 (linux64)
Optimize a model with 16 rows, 33 columns and 98 nonzeros
Model fingerprint: 0x0adb1647
Variable types: 0 continuous, 33 integer (0 binary)
Coefficient statistics:
  Matrix range    [1e+00, 4e+02]
  Objective range [5e+01, 5e+02]
  Bounds range    [1e+00, 1e+00]
  RHS range       [1e+00, 3e+03]
Found heuristic solution: objective 3828.0000000
Presolve removed 5 rows and 14 columns
Presolve time: 0.00s
Presolved: 11 rows, 19 columns, 71 nonzeros
Found heuristic solution: objective 3089.0000000
Variable types: 0 continuous, 19 integer (16 binary)

Root relaxation: objective 2.839492e+03, 10 iterations, 0.00 seconds

   Nodes      |   Current Node   |   Objective Bounds   |   Work
Expl Unexpl | Obj Depth IntInf | Incumbent   BestBd   Gap | It/Node Time
-----
    0     0 2839.49184    0   3 3089.00000 2839.49184  8.08%   -    0s
    0     0 2941.40000    0   1 3089.00000 2941.40000  4.78%   -    0s
    0     0 2952.00000    0   1 3089.00000 2952.00000  4.44%   -    0s
    0     0 3045.27500    0   5 3089.00000 3045.27500  1.42%   -    0s
    0     0 3089.00000    0   7 3089.00000 3089.00000  0.00%   -    0s

Cutting planes:
  Gomory: 3
  MIR: 1

Explored 1 nodes (24 simplex iterations) in 0.04 seconds
```

IPython console History log

File Edit Search Source Run Debug Consoles Projects Tools View Help

xamples/python

Editor - /opt/gurobi900/linux64/examples/python/mip1.py

IPython console

(mip1.py) x

Console 1/A x

```

1 #!/usr/bin/env python3.7
2
3 # Copyright 2019, Gurobi Optimization, LLC
4
5 # This example formulates and solves the following simple MIP model
6 # maximize
7 #      x + y + 2 z
8 # subject to
9 #      x + 2 y + 3 z <= 4
10 #      x + y >= 1
11 #      x, y, z binary
12
13 import gurobipy as gp
14 from gurobipy import GRB
15
16 try:
17
18     # Create a new model
19     m = gp.Model("mip1")
20
21     # Create variables
22     x = m.addVar(vtype=GRB.BINARY, name="x")
23     y = m.addVar(vtype=GRB.BINARY, name="y")
24     z = m.addVar(vtype=GRB.BINARY, name="z")
25
26     # Set objective
27     m.setObjective(x + y + 2 * z, GRB.MAXIMIZE)
28
29     # Add constraint: x + 2 y + 3 z <= 4
30     m.addConstr(x + 2 * y + 3 * z <= 4, "c0")
31
32     # Add constraint: x + y >= 1
33     m.addConstr(x + y >= 1, "c1")
34
35     # Optimize model
36     m.optimize()
37
38     for v in m.netVars():

```

```

In [4]: runfile('/opt/gurobi900/linux64/examples/python/mip1.py',
wdir='/opt/gurobi900/linux64/examples/python')
Gurobi Optimizer version 9.0.0 build v9.0.0rc0 (linux64)
Optimize a model with 2 rows, 3 columns and 5 nonzeros
Model fingerprint: 0xb2adf8c4
Variable types: 0 continuous, 3 integer (3 binary)
Coefficient statistics:
  Matrix range [1e+00, 3e+00]
  Objective range [1e+00, 2e+00]
  Bounds range [1e+00, 1e+00]
  RHS range [1e+00, 4e+00]
Found heuristic solution: objective 2.0000000
Presolve removed 2 rows and 3 columns
Presolve time: 0.00s
Presolve: All rows and columns removed

Explored 0 nodes (0 simplex iterations) in 0.02 seconds
Thread count was 1 (of 4 available processors)

Solution count 2: 3

Optimal solution found (tolerance 1.00e-04)
Best objective 3.000000000000e+00, best bound 3.000000000000e+00,
gap 0.0000%
x 1
y 0
z 1
Obj: 3

```

In [5]:

IPython console

History log

Permissions: R


End-of-lines: LF

Encoding: ASCII

Line: 1

Column: 1


Memory: 50 %

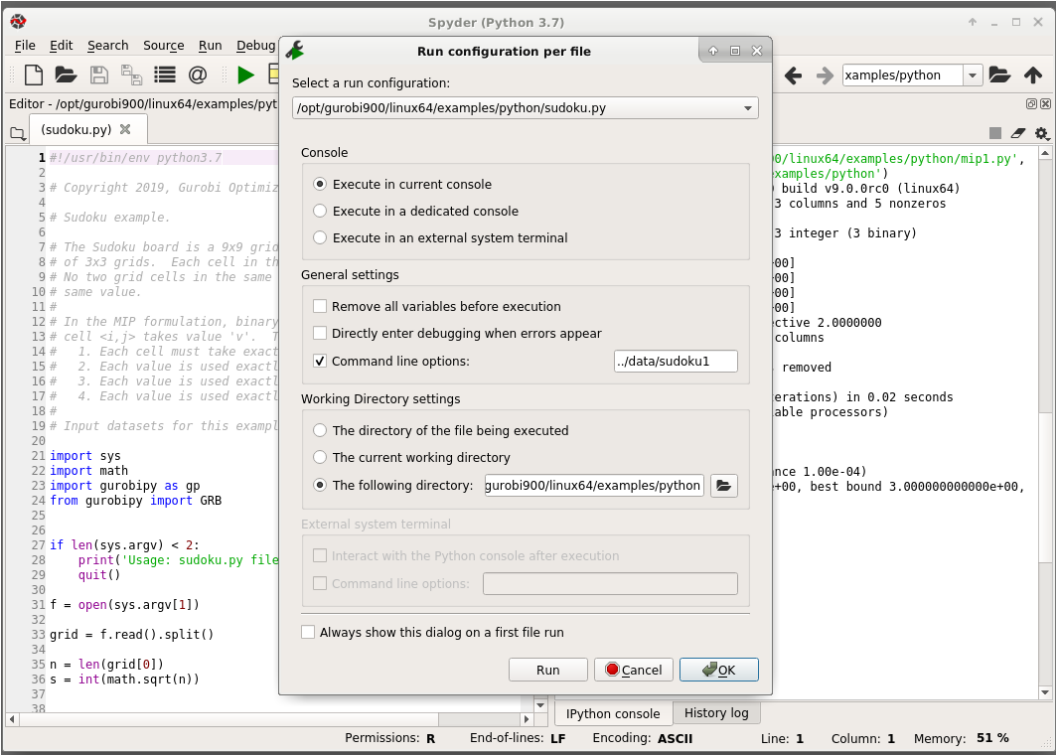

```
In [45]: from gurobipy import *
m = Model()
v0 = m.addVar()
v1 = m.addVar()
m.update()
m.addConstr(v0 - v1 <= 4) # Constraint 1
m.addConstr(v0 + v1 <= 4) # Constraint 2
m.addConstr(-0.25*v0 + v1 <= 1) # Constraint 3
m.setObjective(v1, GRB.MAXIMIZE) # Objective: maximize v1
m.params.outputflag = 0
m.optimize()
```

Plot the optimal solution...

```
In [46]: import matplotlib.pyplot as pyplot
pyplot.plot([0,4], [0,4]) # Constraint 1
pyplot.plot([4,0], [0,4]) # Constraint 2
pyplot.plot([0,4], [1,2]) # Constraint 3
pyplot.plot([v0.x], [v1.x], 'ro') # Plot the optimal vertex
pyplot.show()
```

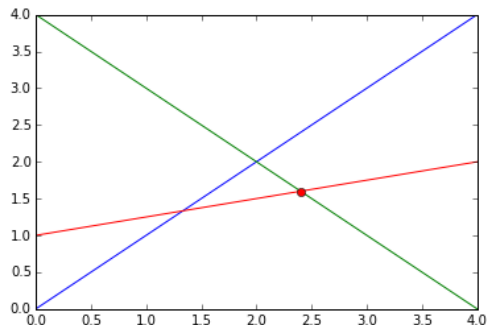

In []: