



- ① Train a speaker independent ASR system that outputs a sequence of phones corresponding to any speech file.

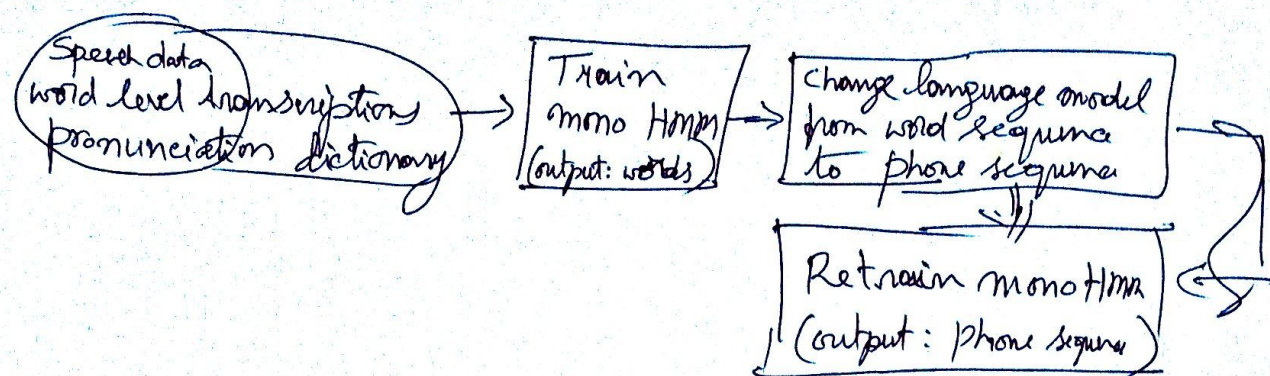

- ② For every speaker, feed his speech files to the mono HMM system trained above; ~~and~~ The ASR system outputs sequence of phones for each file. ~~By~~ Treat this output as the phone level transcription of that speaker's audio files. Then, train a speaker dependant phone recognition system. Repeat this for each speaker.

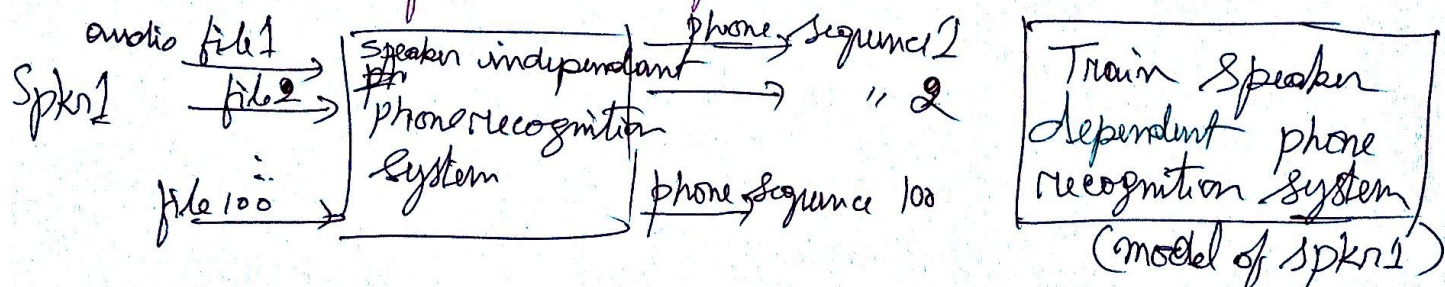

REPEAT :

Spkr 9

(model of spkr 9)

- ③ TESTING (Spkr recognition)

