




# Pakruddin. B

## Pakruddin.B - researchhh.pdf

-  Quick Submit
-  Quick Submit
-  Presidency University

### Document Details

#### Submission ID

trn:oid::1:3407742014

#### Submission Date

Nov 12, 2025, 2:46 PM GMT+5:30

#### Download Date

Nov 12, 2025, 2:49 PM GMT+5:30

#### File Name

researchhh.pdf

#### File Size

134.9 KB

3 Pages

1,594 Words

10,165 Characters

## \*% detected as AI

AI detection includes the possibility of false positives. Although some text in this submission is likely AI generated, scores below the 20% threshold are not surfaced because they have a higher likelihood of false positives.

**Caution: Review required.**

It is essential to understand the limitations of AI detection before making decisions about a student's work. We encourage you to learn more about Turnitin's AI detection capabilities before using the tool.

### Disclaimer

Our AI writing assessment is designed to help educators identify text that might be prepared by a generative AI tool. Our AI writing assessment may not always be accurate (i.e., our AI models may produce either false positive results or false negative results), so it should not be used as the sole basis for adverse actions against a student. It takes further scrutiny and human judgment in conjunction with an organization's application of its specific academic policies to determine whether any academic misconduct has occurred.

## Frequently Asked Questions

### How should I interpret Turnitin's AI writing percentage and false positives?

The percentage shown in the AI writing report is the amount of qualifying text within the submission that Turnitin's AI writing detection model determines was either likely AI-generated text from a large-language model or likely AI-generated text that was likely revised using an AI paraphrase tool or word spinner.

False positives (incorrectly flagging human-written text as AI-generated) are a possibility in AI models.


AI detection scores under 20%, which we do not surface in new reports, have a higher likelihood of false positives. To reduce the likelihood of misinterpretation, no score or highlights are attributed and are indicated with an asterisk in the report (\*%).

The AI writing percentage should not be the sole basis to determine whether misconduct has occurred. The reviewer/instructor should use the percentage as a means to start a formative conversation with their student and/or use it to examine the submitted assignment in accordance with their school's policies.

### What does 'qualifying text' mean?

Our model only processes qualifying text in the form of long-form writing. Long-form writing means individual sentences contained in paragraphs that make up a longer piece of written work, such as an essay, a dissertation, or an article, etc. Qualifying text that has been determined to be likely AI-generated will be highlighted in cyan in the submission, and likely AI-generated and then likely AI-paraphrased will be highlighted purple.

Non-qualifying text, such as bullet points, annotated bibliographies, etc., will not be processed and can create disparity between the submission highlights and the percentage shown.



# Computerized Cognitive Retraining for Home Training of Children with Disabilities

Pragathi M V

Department of Computer Science  
Presidency University  
Bangalore, India

Ruchira S P

Department of Computer Science  
Presidency University  
Bangalore, India

Venkata Hemanth N

Department of Computer Science  
Presidency University  
Bangalore, India

Dr. Abdul Majid

Professor

Computer Science and Engineering  
Presidency University  
Bangalore, India

**Abstract**—Cognitive training shows promise for improving memory, attention, and reasoning in children with developmental disabilities, yet prior studies frequently suffer from small samples, clinic-only delivery, short interventions, and limited transfer to daily life. We present COGNITRAIN, a home-based, adaptive cognitive retraining system delivered via web and mobile. COGNITRAIN combines game-based tasks that personalize difficulty in real time, built-in day/week progress analytics for caregivers, and optional, affordable EEG integration for engagement research. We also detail a pre-registered, parallel-group randomized controlled trial (RCT) with a minimum of 60 participants to evaluate efficacy on standardized cognitive and functional outcomes. Our contributions are: (1) a scalable, low-friction architecture for at-home cognitive training with caregiver dashboards and privacy-by-design data pipelines; (2) an adaptive learning engine that maintains target challenge by tracking accuracy and latency; and (3) an RCT protocol with outcomes, power rationale, and statistical analysis plan suitable for replication. We release an open implementation blueprint to facilitate reproducibility and real-world adoption.

**Index Terms**—Cognitive training, developmental disabilities, adaptive games, tele-rehabilitation, learning analytics, real-time progress, EEG, randomized controlled trial.

## I. INTRODUCTION

Cognitive impairment commonly accompanies developmental conditions such as autism spectrum disorder (ASD), attention-deficit/hyperactivity disorder (ADHD), and intellectual developmental disorder (IDD). Computerized cognitive training (CCT) has potential to support improvements in domains like working memory, selective attention, processing speed, and cognitive flexibility. However, typical limitations in prior work include: (i) delivery constrained to clinic settings, (ii) small, underpowered samples, (iii) limited personalization to an individual's moment-to-moment performance, and (iv) sparse caregiver-facing feedback that hinders sustained engagement at home.

To address these gaps, we propose COGNITRAIN, a home-deployable CCT platform with adaptive, game-based modules designed for short, frequent sessions (10–15 minutes), accessible on commodity devices. Caregivers can review daily/weekly

summaries, while clinicians and researchers (where applicable) can access de-identified aggregates. An optional, low-cost EEG stream may be used in research contexts to explore links between engagement and task performance. Finally, we specify an RCT protocol to evaluate COGNITRAIN against an active control, emphasizing real-world usage and generalization to daily functioning.

### A. Design Goals

- **Accessibility at scale:** frictionless onboarding, low bandwidth usage, offline-friendly sessions, and cross-platform support.
- **Personalization:** adapt difficulty using accuracy, reaction time, and error profiles to maintain a desired challenge zone.
- **Actionable feedback:** caregiver and clinician dashboards emphasize trends, adherence, and progress toward individualized goals.
- **Privacy and safety:** data minimization, role-based access, encryption in transit/at rest, and clear consent flows.
- **Evaluability:** instrumentation for reliable telemetry and pre-specified outcomes to enable reproducible trials.

## II. RELATED WORK

*Cognitive training and neurodevelopmental conditions:* Prior studies on CCT report mixed but encouraging effects on working memory and attention in pediatric populations, with heterogeneity attributable to sample size, task variety, and transfer measurement. Home-based digital interventions show improved adherence when parents receive clear progress feedback and schedules are flexible.

*Adaptive difficulty and engagement:* Dynamic difficulty adjustment (DDA) is well-studied in learning sciences and games research as a route to sustain engagement by keeping the user within a “challenge-skill” balance. In CCT, combining accuracy and latency signals helps estimate mastery and detect fatigue, enabling micro-adjustments to stimulus timing, set size, and interference levels.

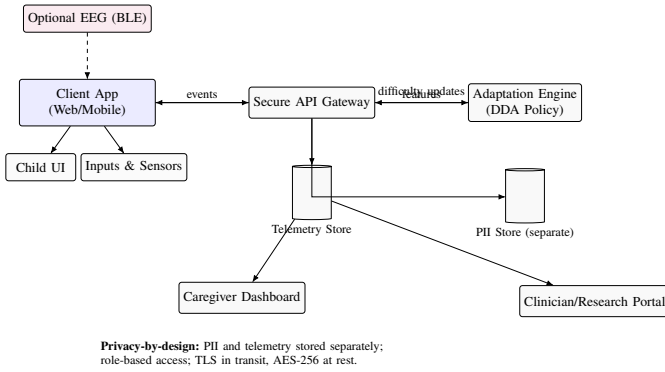


Fig. 1. System architecture

**Tele-rehabilitation platforms:** Telehealth solutions demonstrate feasibility for remote delivery, but many lack integrated caregiver dashboards, robust analytics, or clear trial protocols. Our work integrates these components and provides an RCT plan tailored to home settings.

### III. SYSTEM OVERVIEW

#### A. Architecture

Fig. 1 illustrates the modular, privacy-preserving architecture used by COGNITRAIN. TikZ is used so no external images are required.

#### B. Adaptive Game Modules

We include four core modules (examples):

- **WM-Span:** N-back / sequence recall with adaptive set size and inter-stimulus interval.
- **Focus-Shift:** Task-switching with congruent/incongruent trials; adjusts cue–target SOA and switch ratio.
- **Stop-Go:** Go/No-Go with adaptive stop-signal delay to maintain target inhibition rate.
- **Speed-Match:** Timed matching under distractors; increases item pool and visual interference.

#### C. Progress Analytics

Daily and weekly progress snapshots compute adherence, median latency, accuracy, and module mastery scores, highlighting actionable insights (e.g., “best time of day”, “benefits from shorter sessions”).

### IV. METHODS AND IMPLEMENTATION

#### A. Workflow

The end-to-end workflow from session start to analytics is visualized in Fig. 2.

#### B. Personalization Policy

We adopt a target-band controller. Let  $p_t$  be smoothed accuracy at time  $t$ ; the goal is  $p^* \in [0.70, 0.85]$ . The controller updates difficulty  $d_{t+1}$  using accuracy and response time ( $r_t$ ):

$$d_{t+1} = d_t + \eta_1 \cdot \text{sgn}(p^* - p_t) + \eta_2 \cdot \text{sgn}(\tilde{r}_t - r_t), \quad (1)$$

where  $\tilde{r}_t$  is a per-user latency baseline and  $\eta_{1,2}$  are small step sizes. Limits prevent abrupt jumps.

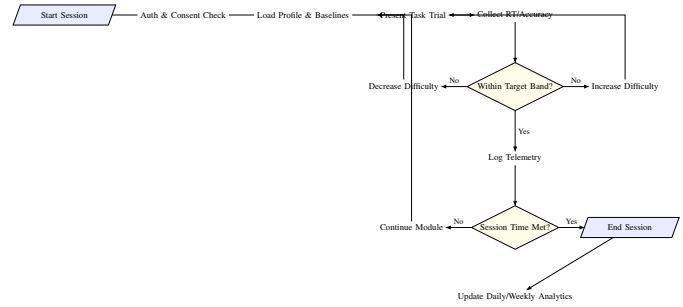


Fig. 2. End-to-end workflow

#### C. Adherence Scheduling

Families choose a schedule (e.g., 5 days/week, 10–15 minutes). The system sends gentle reminders to caregivers, and missed sessions trigger non-punitive prompts. Streaks are celebrated to encourage habit formation.

#### D. Data and Privacy

We separate personally identifiable information (PII) from telemetry using different stores and keys. All data in transit use TLS, and at rest use AES-256. Access is role-based, and research exports are strictly de-identified. Consent and data retention are clearly communicated.

#### E. Optional EEG Stream

When enabled in an IRB-approved research study, lightweight EEG features (e.g., theta/beta ratio) are synchronized with task events. These signals are not used for clinical decision-making; they are solely for exploratory engagement analyses.

### V. RANDOMIZED CONTROLLED TRIAL (RCT) PROTOCOL

#### A. Design

Parallel-group RCT with 1:1 allocation to COGNITRAIN or an *active control* (non-adaptive educational games). Minimum total sample size:  $N \geq 60$  children (age band to be specified), stratified by site and baseline cognitive score.

#### B. Eligibility

Inclusion: confirmed developmental disability diagnosis (e.g., ASD/ADHD/IDD), caregiver support for home sessions, ability to use a tablet/computer. Exclusion: uncontrolled epilepsy, major vision/hearing impairments preventing task use, or concurrent intensive CCT.

#### C. Intervention and Control

COGNITRAIN: adaptive modules, 10–15 minutes/session, 5 days/week, for 8–12 weeks. Control: time- and device-matched non-adaptive games without targeted cognitive load progression.

#### D. Outcomes

**Primary:** change from baseline in standardized working-memory composite at post-intervention. **Secondary:** attention/processing speed, caregiver-reported executive function, adherence, and transfer to daily functioning (e.g., BRIEF subscales). **Exploratory:** associations between optional EEG engagement markers and performance.

#### E. Sample Size and Power

Power analysis targets detection of a small-to-moderate effect (e.g.,  $d = 0.40$ ) on the primary outcome at  $\alpha = 0.05$ , two-sided, with 80–90% power, allowing for 15–20% attrition. Exact numbers depend on chosen instruments; final calculation to be provided in the pre-registration.

#### F. Randomization and Blinding

Randomization is computer-generated with concealed allocation. Outcome assessors are blinded to group; families are briefed not to disclose allocation during assessments.

#### G. Statistical Analysis Plan

Primary analysis uses ANCOVA with baseline score as covariate. Secondary outcomes are analyzed with mixed-effects models to account for repeated measures. Missing data are handled via multiple imputation under MAR assumptions; sensitivity analyses will be reported.

#### H. Ethics and Safety

The protocol will be IRB/ethics-approved. Adverse events (e.g., cybersickness, frustration) are logged; a data safety monitor reviews incidents. Families may pause or withdraw at any time without penalty.

### VI. PROTOTYPE EVALUATION (FEASIBILITY)

Prior to the RCT, we recommend a feasibility study to assess usability, adherence, and technical stability over 2–4 weeks with a small cohort (e.g., 10–15 families). Key metrics include session completion rate, median daily use, error reports per 100 sessions, and caregiver satisfaction. Results inform refinements to modules and dashboards.

### VII. DISCUSSION

COGNITRAIN is designed to balance personalization, caregiver visibility, and rigorous evaluation. By operating in the home, the platform addresses barriers to clinic attendance and supports learning in naturalistic contexts. The RCT protocol emphasizes clinically meaningful outcomes and transparent analysis. Limitations include reliance on device availability and potential variability in home environments; we mitigate these via offline support and robust telemetry.

### VIII. CONCLUSION AND FUTURE WORK

We presented the design of COGNITRAIN, an at-home adaptive cognitive retraining platform, along with a detailed RCT protocol. Future work will: (i) broaden language and accessibility supports, (ii) extend modules to target academic skills (e.g., numeracy under interference), (iii) incorporate federated learning to personalize models without centralizing raw data, and (iv) publish de-identified benchmarks to accelerate open research.

### REFERENCES

- [1] A. Marques, C. Queirós, and N. Rocha, “Virtual reality and neuropsychology: a cognitive rehabilitation approach for people with psychiatric disabilities,” in *Proc. 7th Intl. Conf. on Disability, Virtual Reality & Associated Technologies (ICDVRAT)*, 2008.
- [2] *Computerized Cognitive Training in Children With Autism and Intellectual Disabilities: Feasibility and Satisfaction Study*, internal analysis, 2025. [Unpublished/Technical Report].
- [3] X. Wu *et al.*, “Multi-Domain Computerized Cognitive Training for Children with Intellectual Developmental Disorder,” 2023.