ASSIGNMNET NO: 1

Title: Explain the Problem-Solving Life Cycle Steps, apply it to the following problem. Write down the algorithm (general stepwise execution) & draw the flowchart


Theory (As and When needed):

Steps in Computer-Based Problem Solving

- Problem Definition
    - Clearly understand and state the problem.
- Problem Analysis
    - Break the problem into smaller, manageable parts.
- Algorithm Design
    - Develop a step-by-step procedure (algorithm) to solve the problem.
- Pseudocode/Flowchart
    - Represent the algorithm in simple English-like steps or diagrams.
- Program Development
    - Translate the algorithm into a programming language (e.g., C).
- Compilation and Execution
    - Convert the program into machine code and run it.
- Testing and Debugging
    - Check for errors (syntax and logical) and fix them.
- Documentation and Maintenance
    - Record how the program works for future use and improvements.
- : Algorithm

1. Input the book title from the student.
2. If book is found → display the shelf number.
3. If not found → display a message to ask the librarian.

Flowchart:

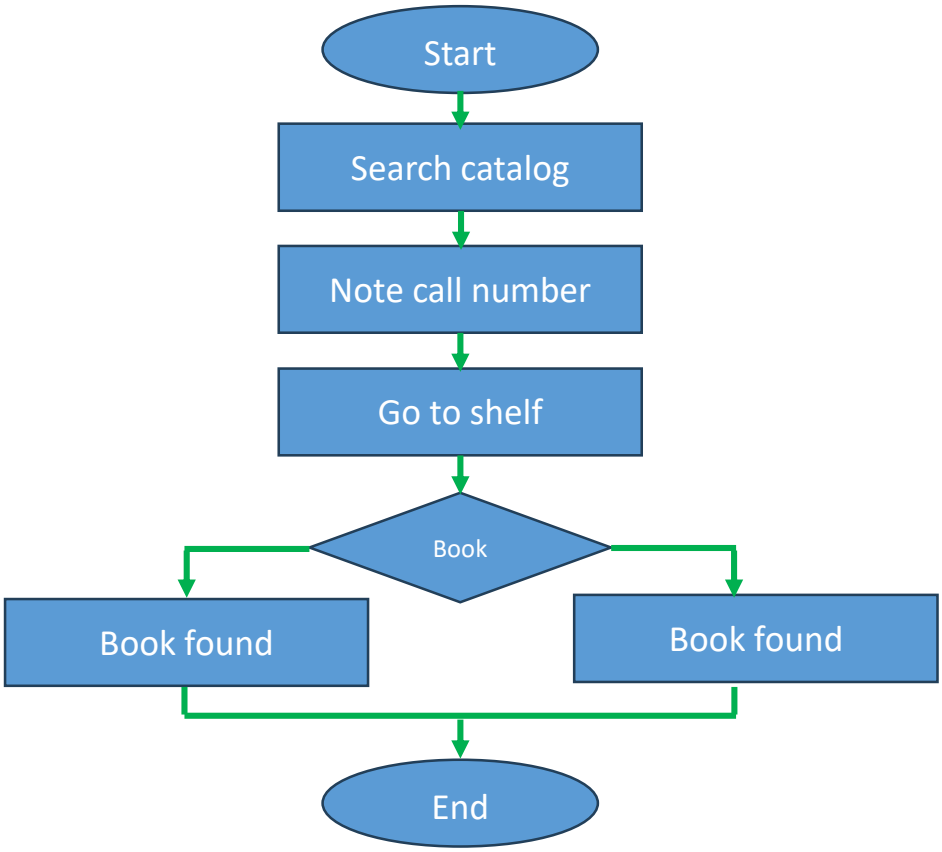

Source Code:

Output:

ASSIGNMNET NO: 2

Title: There is a goat, a tiger, a man and a bundle of grass on one side of a river. There's a boat which can only carry two at a time and can only be rowed manually by the man. How can they cross the river i) man goes across with goat ii) returns alone and takes the bundle of grass iii) returns back with the goat, leaves it at this end, takes the tiger to the other end iv) returns alone and goes back with the goat.

Theory (optional):

1. 1. Start
2. Man takes goat to another side
3. Man comes back to left and take grass to other side
4. Man comes back to Right Side with goat
5. Man takes tiger to other side and back to left
6. Everyone is on right Bank(Left:None||Right:Tiger,Goat,Grass,Man)
7. End

Source Code:

```
 #include<stdio.h>

int main()

{

clrscr();

printf("Intial state\n");

printf("Left:Tiger,Goat,Grass,Man||Right:none\n\n");

printf("Step1:Man takes goat to another side\n");

printf("Left:Tiger,Grass||Right:Goat, Man\n\n");

printf("Step 2:Man comes baack to left and take grass to other side\n");
```

```
printf("Left:Tiger||Right:Goat, Man, Grass\n\n");
printf("Step 3:Man comes back to Right Side with goat\n");
printf("Left:Tiger,Man,Goat ||Right:grass\n\n");
printf("Step 4:Man takes tiger to other side and back to left\n");
printf("Left:Man, Goat||Right:Tiger, Grass\n\n");
```

Output:

Dry-Run (Optional):

ASSIGNMNET NO: 3

Title: There are Four temples, one plant of flower and a pond. A boy goes there and before entering the first temple he plucks the flower and has to take a bath in the pond before entering into every temple. The specialty of the pond is that if a person is carrying flowers with him and he takes a dip in the pond the number of the flowers gets doubled. He takes a dip and offers some flowers in the first temple, then he again takes a dip and offers flowers in second temple , and again the same in the third temple. The boy offers EQUAL number of flowers in all the 3 temples and goes back with EMPTY hand

after offering flower in the third temple. How many flowers could he have offered in each temple?

Four Temples:

i. He starts with 15 flowers. And offers 16 flowers in each temple.

ii. Temple 1: dipping makes 15x2=30 flowers and he offers 16 flowers. He is left with 30 16=14 flowers.

iii. Temple 2: dipping makes 14x2=28 flowers. He offers 16 flowers again and is left with 28 16=12 flowers.

iv. Temple 3: dipping makes 12x2=24 flowers. He offers 16 flowers again and is left with 24 16=8 flowers.

v. Temple 4: dipping makes 8x2=16 flowers and he offers all 16 flowers. He is left with no flower now.

Theory (As and When needed):

Step 1: Start

Step 2: Start with 14 flowers;

Step 3: He Pass the river and flower becomes 28

Step 4: Offers 16 at first temple (28-16=12)

Source Code:

```
#include<stdio.h>
int main()
{
   int Flower=14, Offer=16 ,Temple=3;
   clrscr();
   printf("Start with Flowers:14\n");
   printf("Offer no. of flowers:16\n");
   printf("No. of temple:3\n\n\n");
   for(Temple=1;Temple<=3;Temple++)
   {
```

```
        printf("He goes from River %d\n",Temple);
        Flower=Flower*2;
        printf("No. of flowers=%d\n",Flower);
        printf("Offer 16 flowwer in Temple %d\n",Temple);
        Flower=Flower-Offer;
        printf("No. of flowers he has=%d\n\n\n",Flower);
    };
    getch();
    return 0;
}
```

Output:

Dry-Run (Optional):

ASSIGNMNET NO: 4


Title: Write a program to declare 2 boolean variables,assign values and perform all logical opearions on those variables(&&,||,!) and print results on ouptput screen.

Theory (optional):


```
 #include <stdio.h>       // Preprocessor directives
// Global Declarations (variables, constants, functions)
int main()          // Main function – starting point of the program
{
   // Local Declarations
   // Statements (logic of the program)
   return 0;           // Program termination
}
// User-defined Functions (if any)
```

Source Code:


1.Hello world

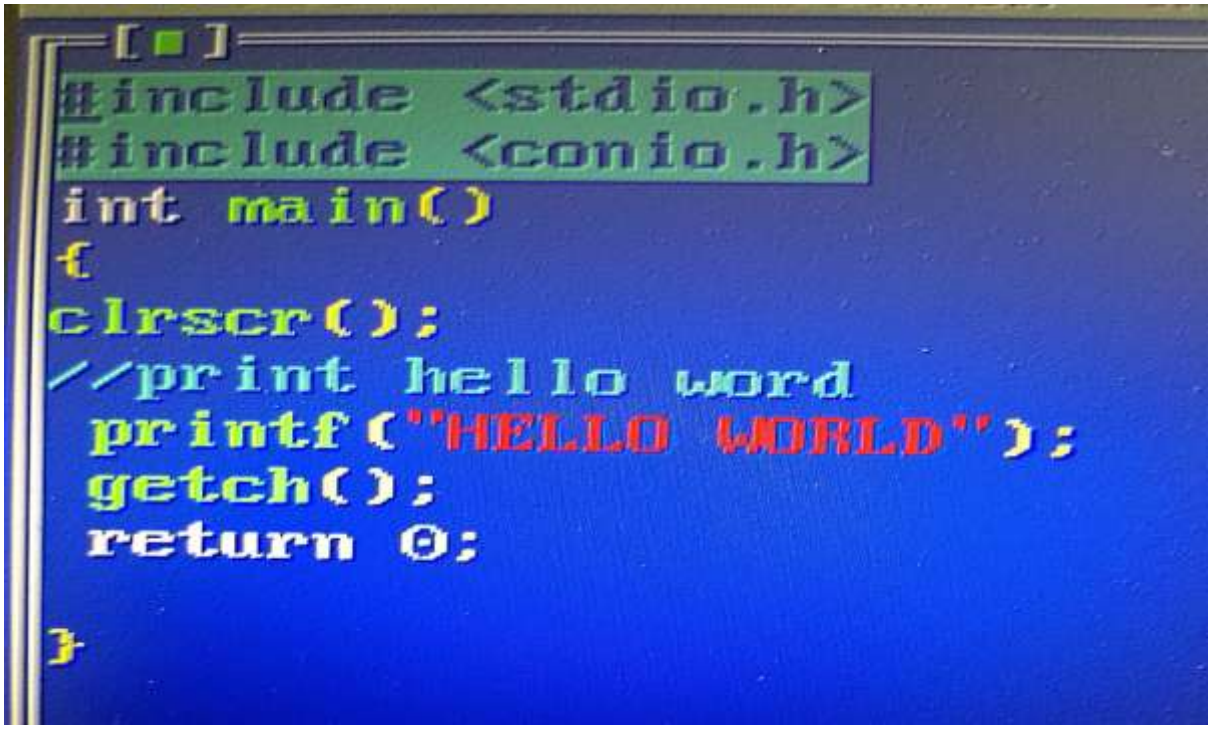

2. Sum of two numbers

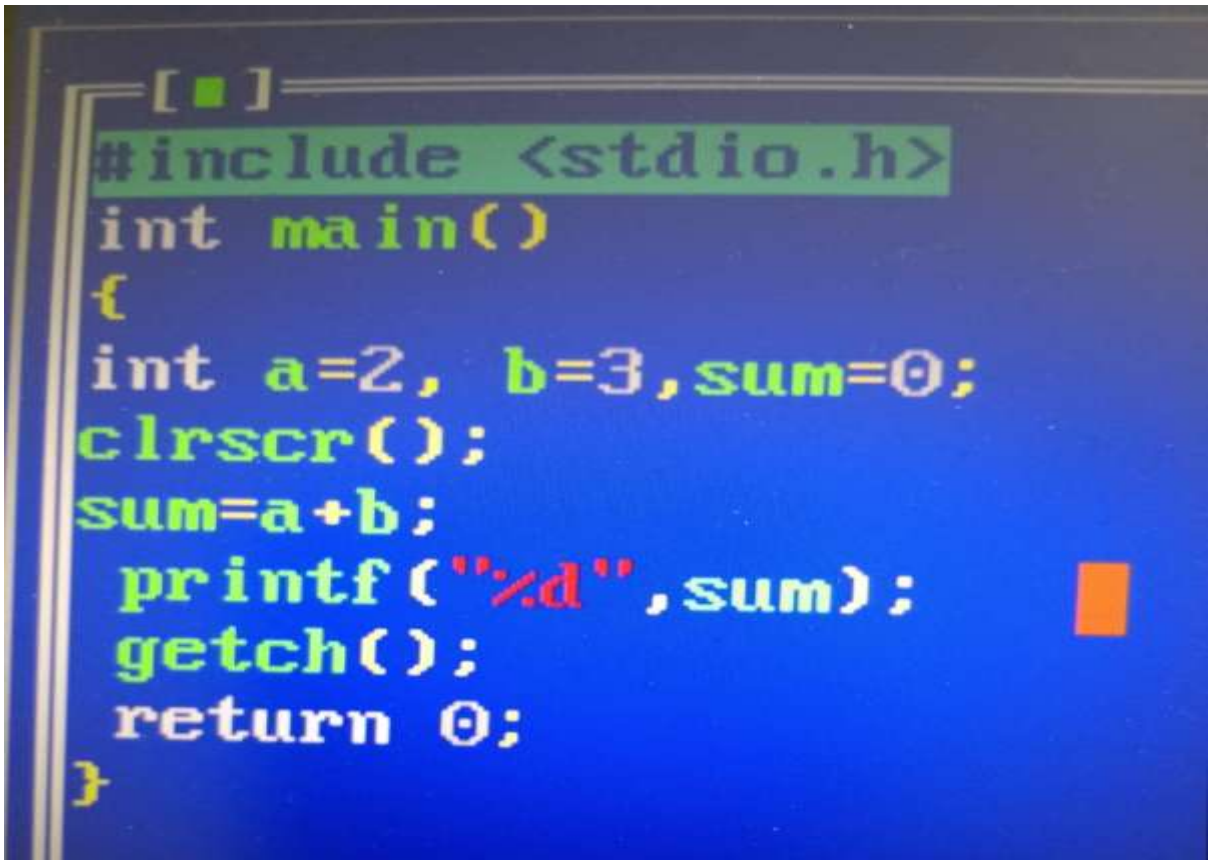


3.Greater number

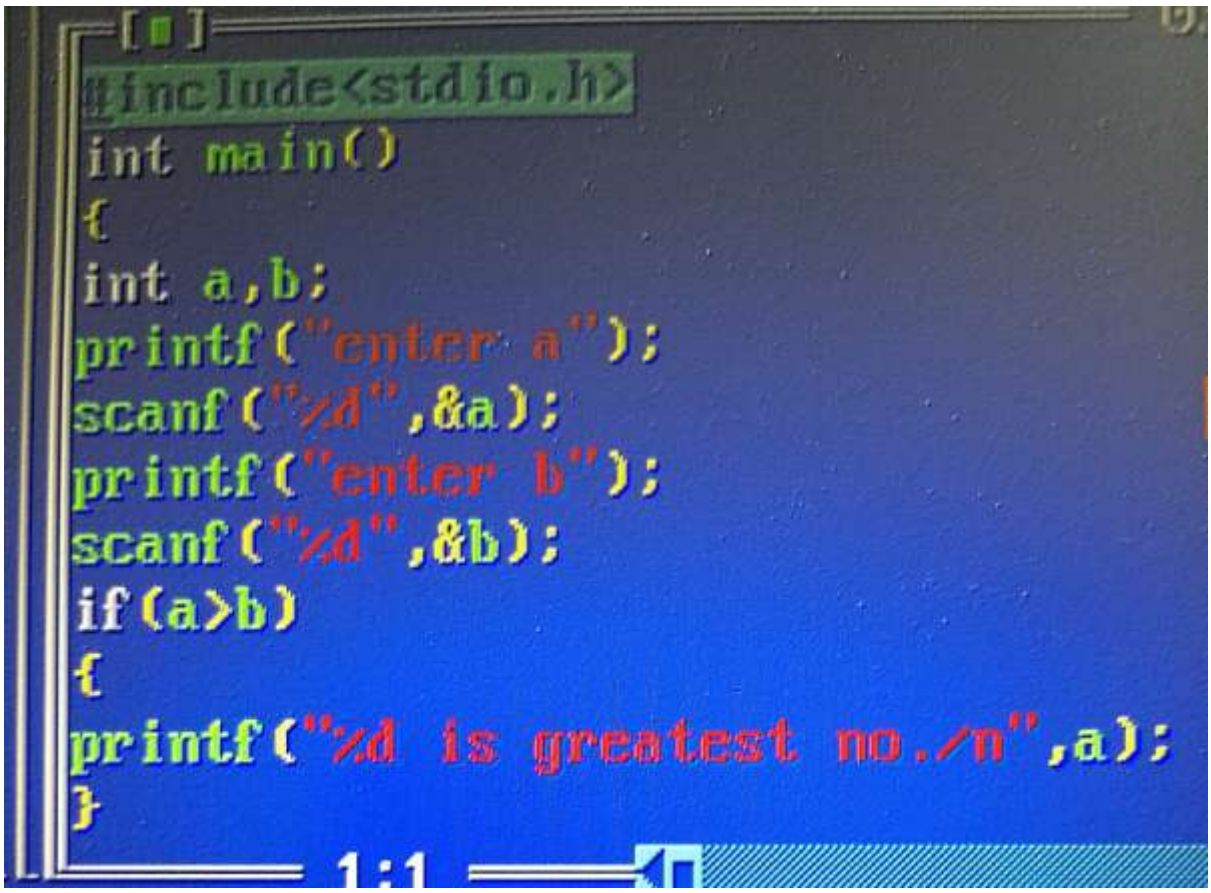


```
#include<stdio.h>
int main()
{
int a,b;
printf("enter a");
scanf("%d",&a);
printf("enter b");
scanf("%d",&b);
if(a>b)
{
printf("%d is greatest no./n",a);
}
```

Output:



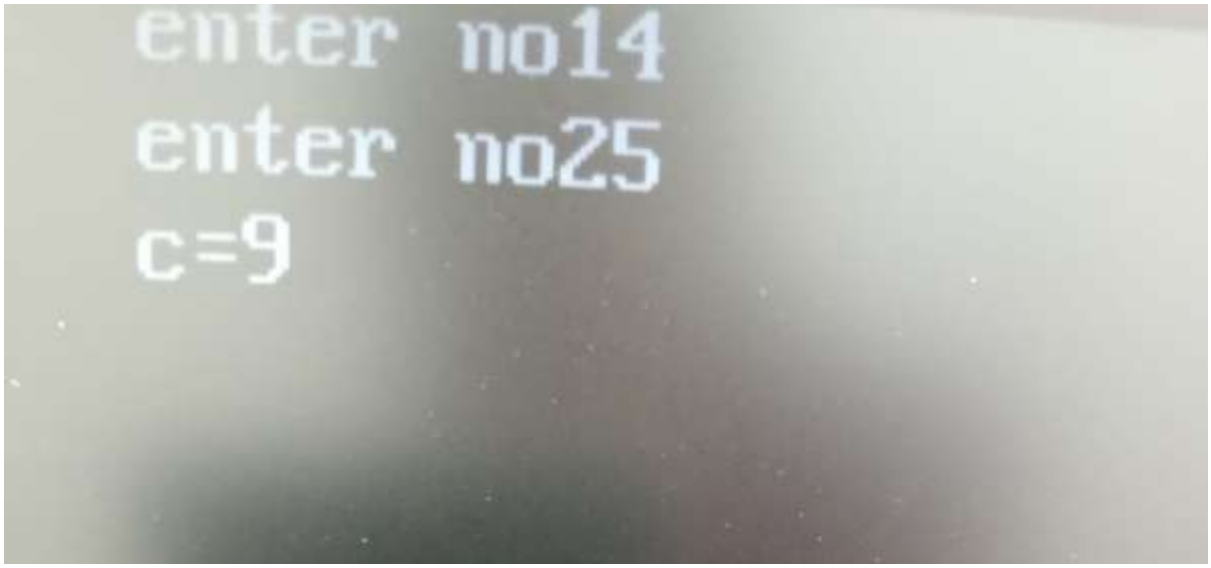

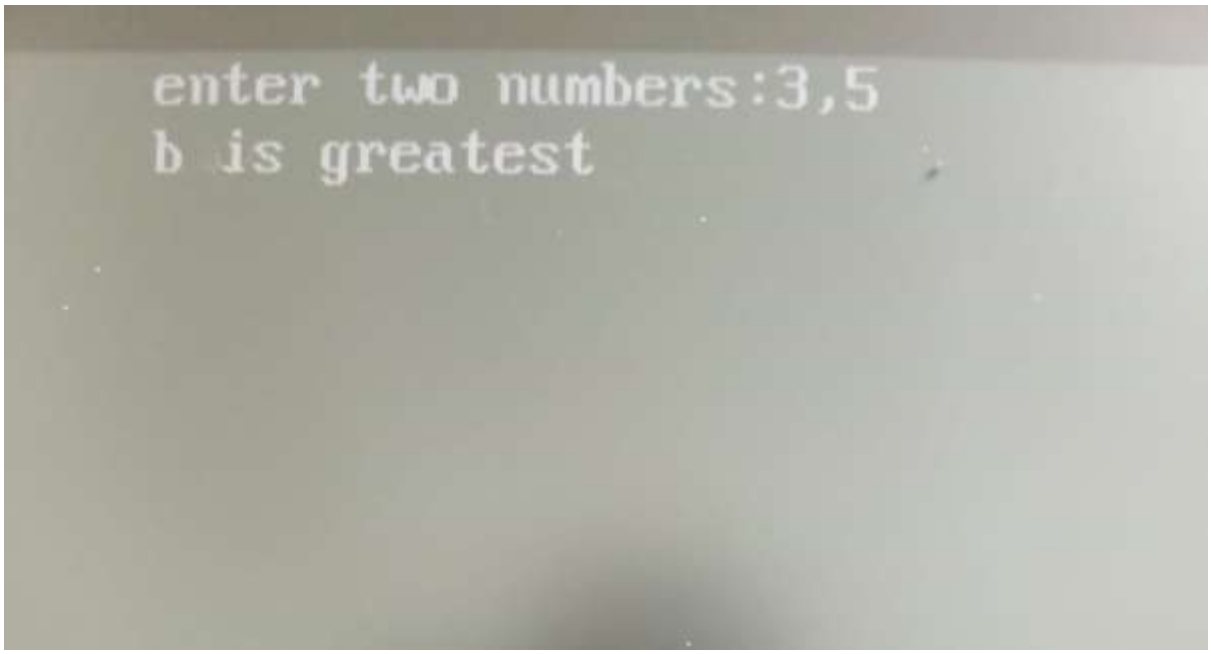

Dry-Run (Optional):

ASSIGNMNET NO: 5

Title: Write a program to add two integers

Theory (optional):

Header files are included in c program so each data type and function should execute for which they are made means the work which is to be done by any opreator or function of such as printf or scanf are saved in this header file.

Algorithm:

1. To print “Hello World”

Step 1: start

Step 2: Print(“Hello World”)

Step 3: End

2. To print sum of to number

Step 1: Start

Step 2: Enter both the number(a, b)

Step 3: Read both the number(a, b)

Step 4: c=a+b

Step 5: print value of c

Step 6: Stop

3. To Print greater number

Step 1: Start

Step 2: Enter both the number(a, b)

Step 3: Read both the number(a, b)

Step 4: c=a+b


Step 5: print value of c

Step 6: Stop

Source Code:

```
#include <stdio.h>
int main()
{
int a=2, b=3,sum=0;
clrscr();
sum=a+b;
 printf("%d",sum);
 getch();
 return 0;
}
```

Output:

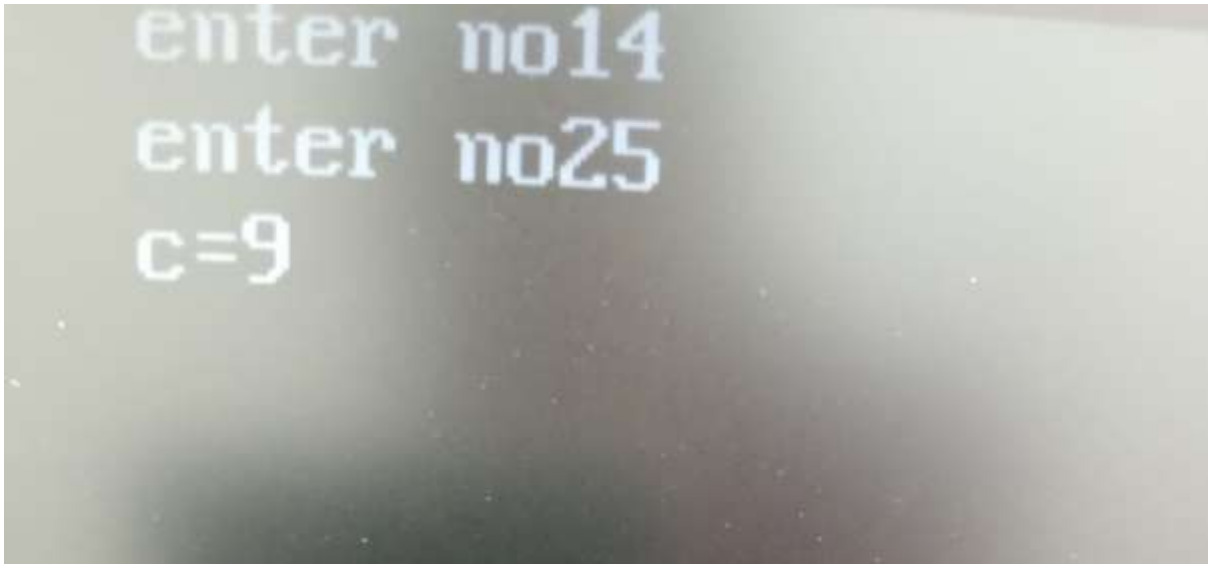

Dry-Run (Optional):

ASSIGNMNET NO: 5

Title: Write a program to declare 2 boolea variables ,assign values and perform all logical opearions on those variables(&&,||,!) and print results on ouptput screen.

Theory (As and When needed):

Step 1: Start

Step 2: Enter the 2 boolean variable

Step 3: Read the 2 Boolen Variable

Step 4: Perform logical operation And


Step 5: Perform logical operation OR

Step 6: Perform logical operation Not

Step 7: print the result of all three


Step 8: End

Source Code:

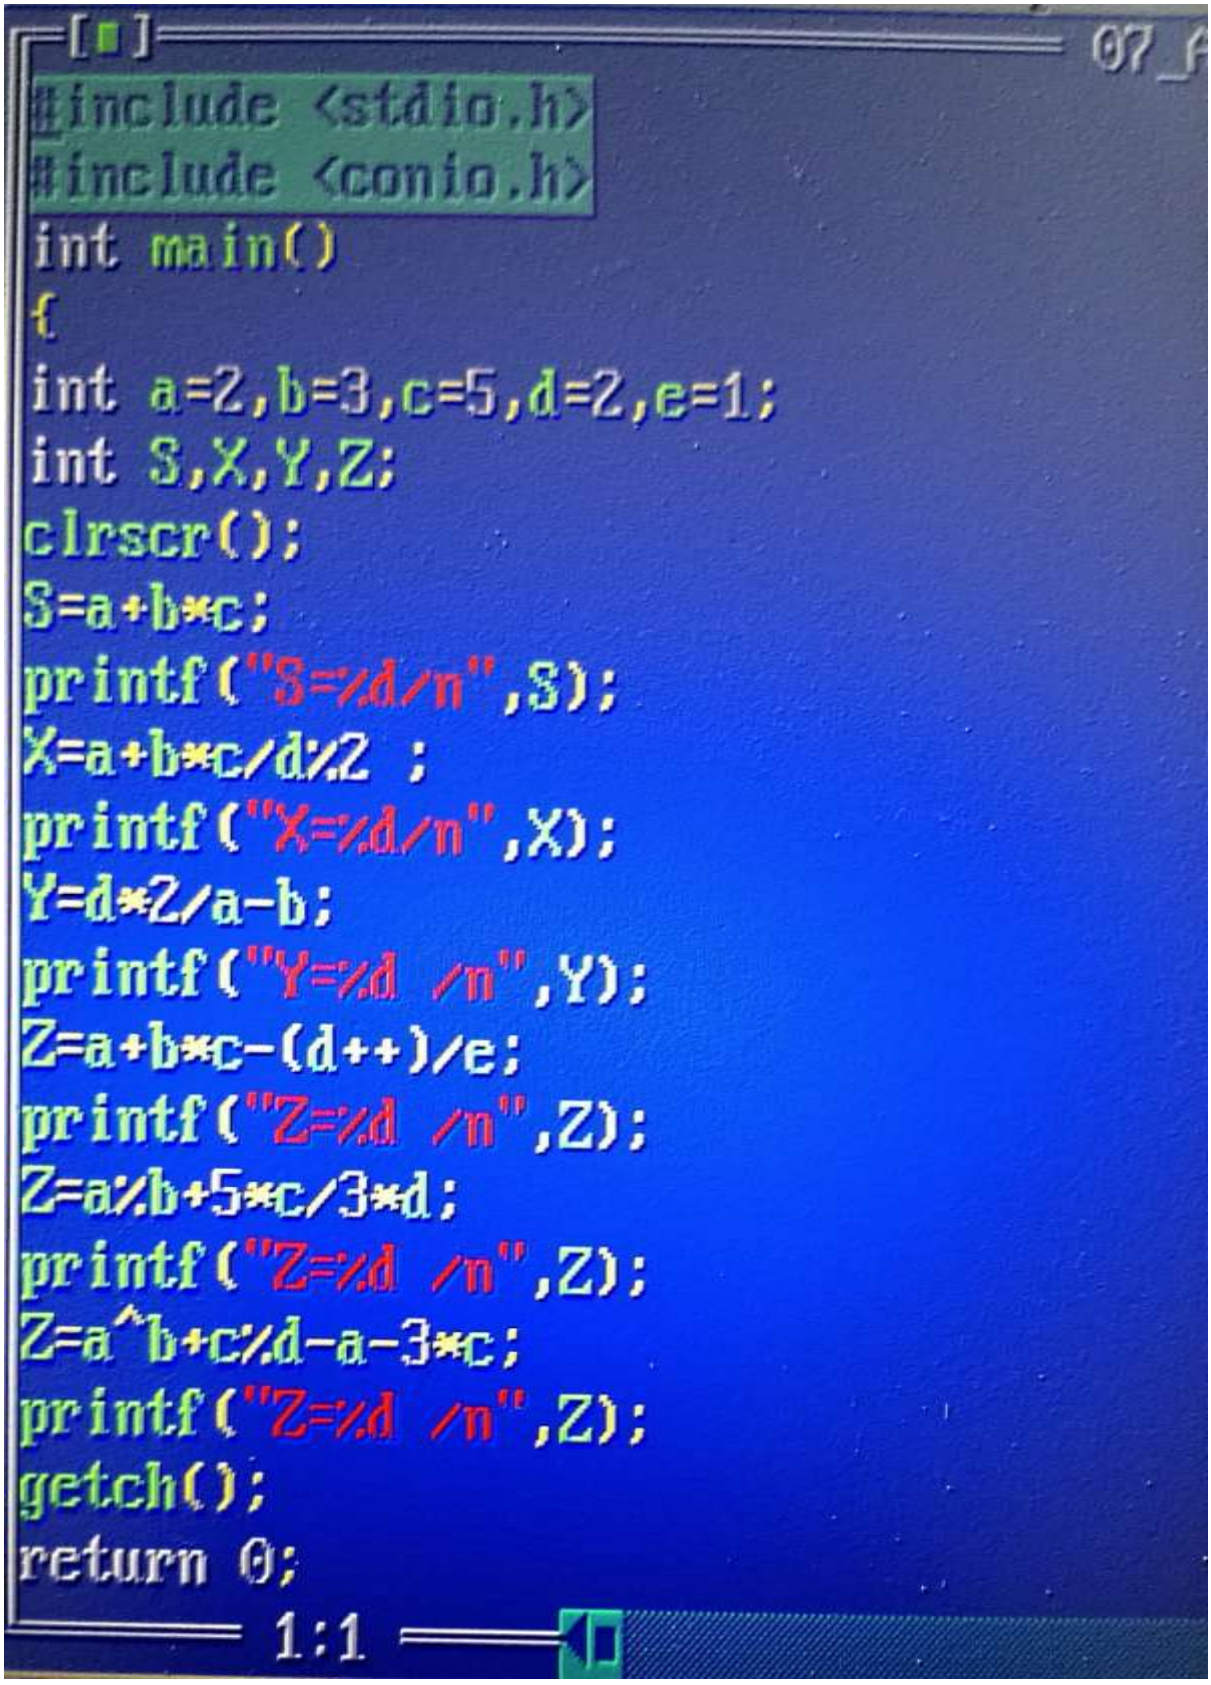

```
#include <stdio.h>
#include <conio.h>
int main()
{
int a=2,b=3,c=5,d=2,e=1;
int S,X,Y,Z;
clrscr();
S=a+b*c;
printf("S=%d/n",S);
X=a+b*c/d%2 ;
printf("X=%d/n",X);
Y=d*2/a-b;
printf("Y=%d /n",Y);
Z=a+b*c-(d++)/e;
printf("Z=%d /n",Z);
Z=a%b+5*c/3*d;
printf("Z=%d /n",Z);
Z=a^b+c%d-a-3*c;
printf("Z=%d /n",Z);
getch();
return 0;
```

Output :

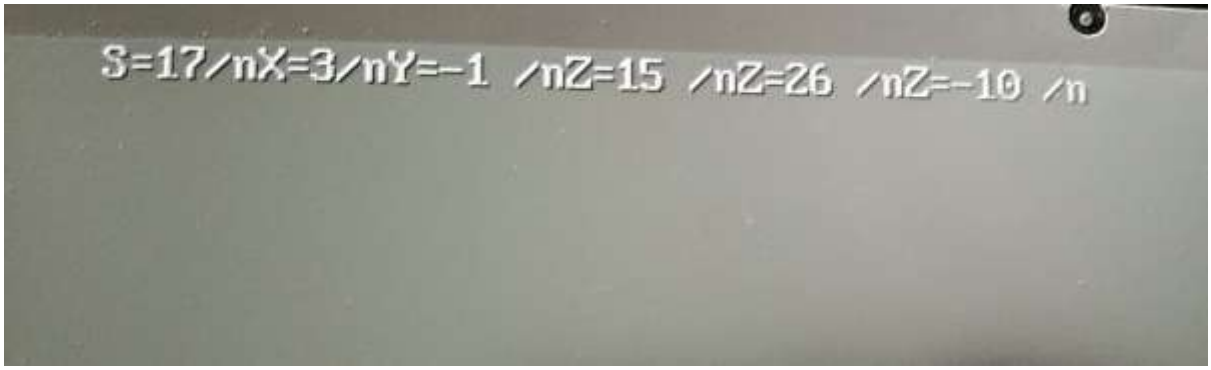

ASSIGNMNET NO: 6

Title: write a program to print average of five nos.

Theory (optional):

Step 1:Start

Step 2: Ask user for 5 number

Step 3: Read 5 numbers

Step 4: Add 5 number and divide it by 5

Step 5: print the Answer

Step 6: Stop

Source Code:

```
#include <stdio.h>
#include <conio.h>
int main()
{
int a,b,c,d,e, Ave;
clrscr();
printf("enter five numbers:");
scanf("%d,%d,%d,%d,%d",&a,&b,&c,&d,&e);
Ave=(a+b+c+d+e)/5;
printf("Ave=%d",Ave);
getch();
return 0;_
}
```

Output:

```
enter five numbers:1,3,5,2,4
Ave=3_
```

Assignment 7:

Title: rite a program to evaluate following expression Take needed integer variables as an input from keyboard

S=a+b*c

X=a+b*c/d%2,

Y=d*2/a-b

Z=a+b*c-(d++)/e

Z=a%b+5c/3*d

Z=a^b+c%d-a-3c

Theory (optional):

Step 1:Start

Step 2: Assign value to a,b,c

Step 3 : Assing S,X, Y, Z, W,E


Step 4: print S,X, Y, Z, W,E

Step 5: Stop

Source code :

```
#include <stdio.h>
#include <conio.h>
int main()
{
int S,X,Y,Z,W,T;
int a=2,b=3,c=1,d=4,e=5;
clrscr();
S=a+b*c;
X=a+b*c/d%2;
Y=d*2/a-b;
Z=a+b*c-(d++)/e;
W=a%b+5*c/3*d;
T=a^b+c%d-a-3*c;
printf("S=%d /n",S);
printf("X=%d /n",X);
printf("Y=%d /n",Y);
printf("Z=%d /n",Z);
printf("W=%d /n",W);
printf("T=%d /n",T);
getch();
return 0;
```

Output:

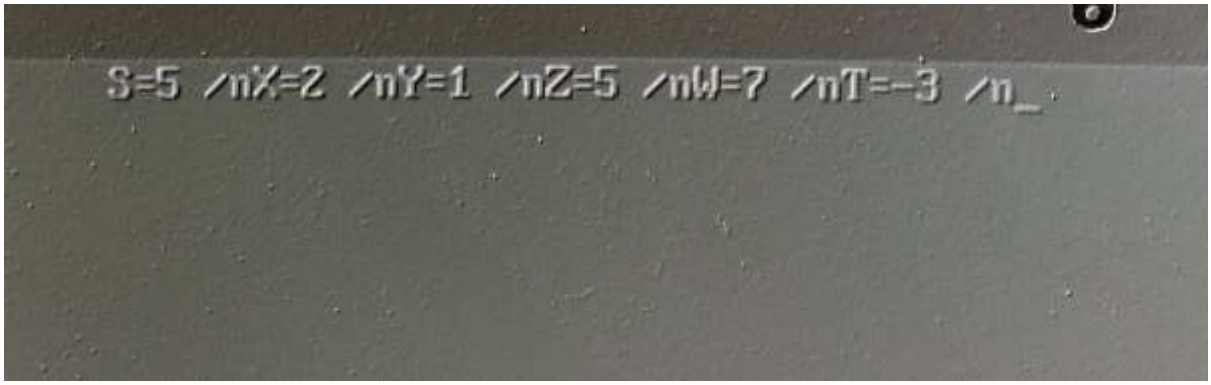

Assignment 8

Title: Write a program to demonstrate use of Ternary operator Solve (a>b)?a:b

Theory (optional):


Step 1: Start

Step 2: Apply ternary operator


Step 3 print result

Step 4: Stop

Source code:

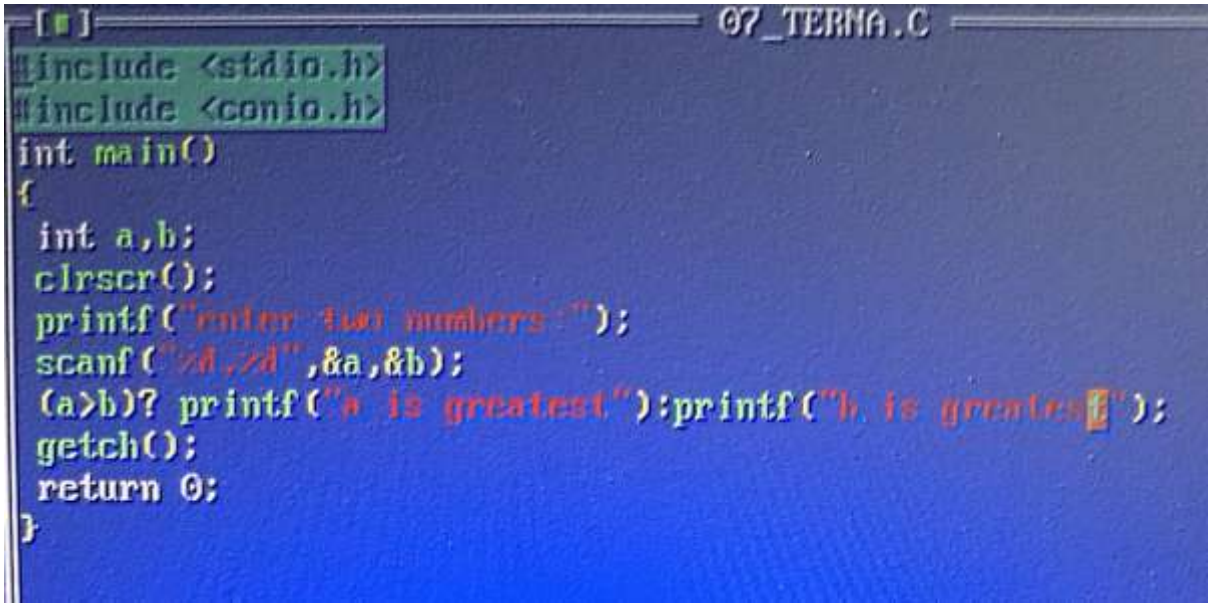

Output:

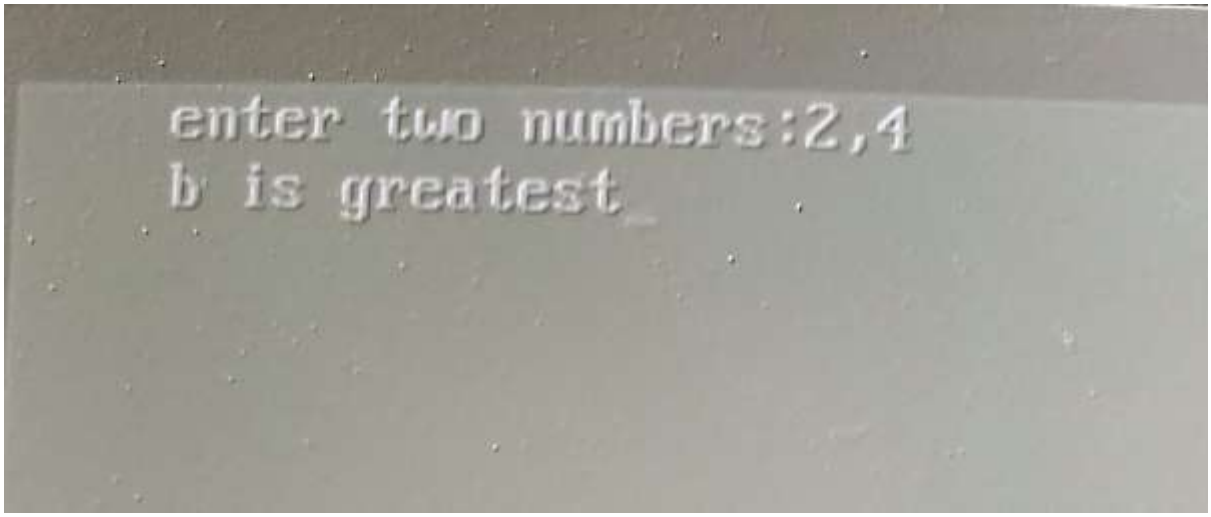

Assignment 9

Title : write a program to implement conditional branching

i.write a program to find largest number from given two numbers.

ii.write a program to find largest of three numbers using nested if else

iii.write a program to print percentage grade of a student using else if ladder

Theory (Optional):


Source code:


```c
#include<stdio.h>
int main()
{
int a,b;
printf("enter a");
scanf("%d",&a);
printf("enter b");
scanf("%d",&b);
if(a>b)
{
printf("%d is greatest no./n",a);
}
else
{
 printf("%d is greatest no./n",b);
}
return 0;
}
```


```c
#include  <stdio.h>
int main()
{
   int a,b,c;
   clrscr();
   printf("enter three numbers:\n");
   scanf("%d'%d'%d",&a,&b,&c);
   if(a>b)
   {
    if(a>c){
        printf("a is largest number\n",a);
    }
    else{
        printf("c is largest number\n",c);
    }
    }
    else{
        printf("b is largest number\n",b);
    }
    getch();
    return 0;
}
```

```c
#include  <stdio.h>
int main()
{
   int marks;
   printf("enter marks of the student:\n");
   scanf("%d",&marks);
   if(marks>90)
   {
    ptintf("'A' grade\n");
   }
   else if(marks>80)
   {
    printf("'B' grade\n");
   }
   else if(marks>70)
   {
    printf("'c' grade\n");
   }
   else if(marks>40)
   {
    printf("'d' grade\n");
   }
else{
    printf("student is fail\n");
}
    return 0;
}
```

Output:

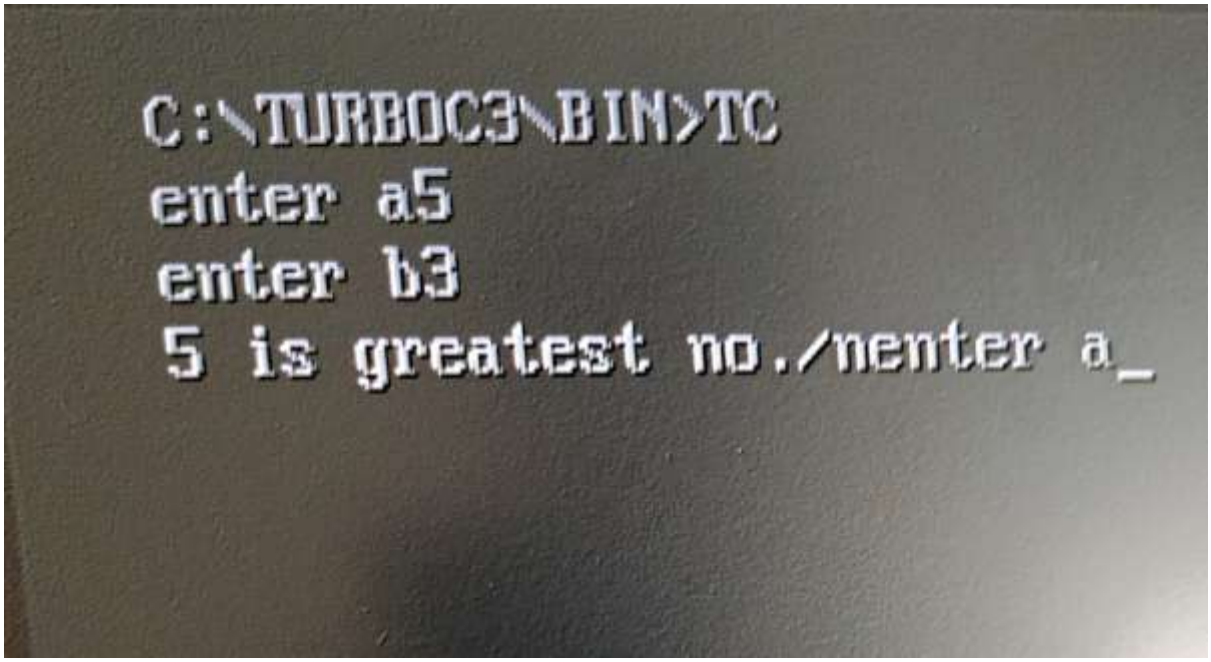

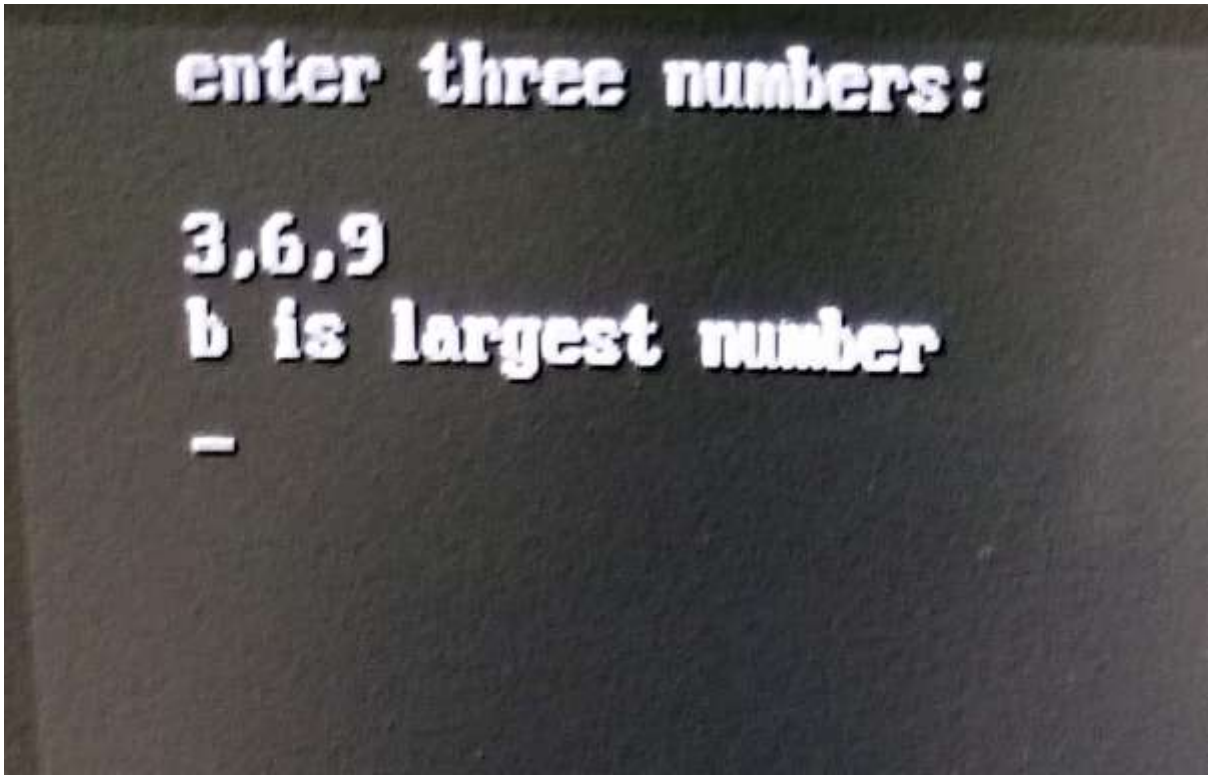
enter three numbers:
3,6,9
b is largest number
-

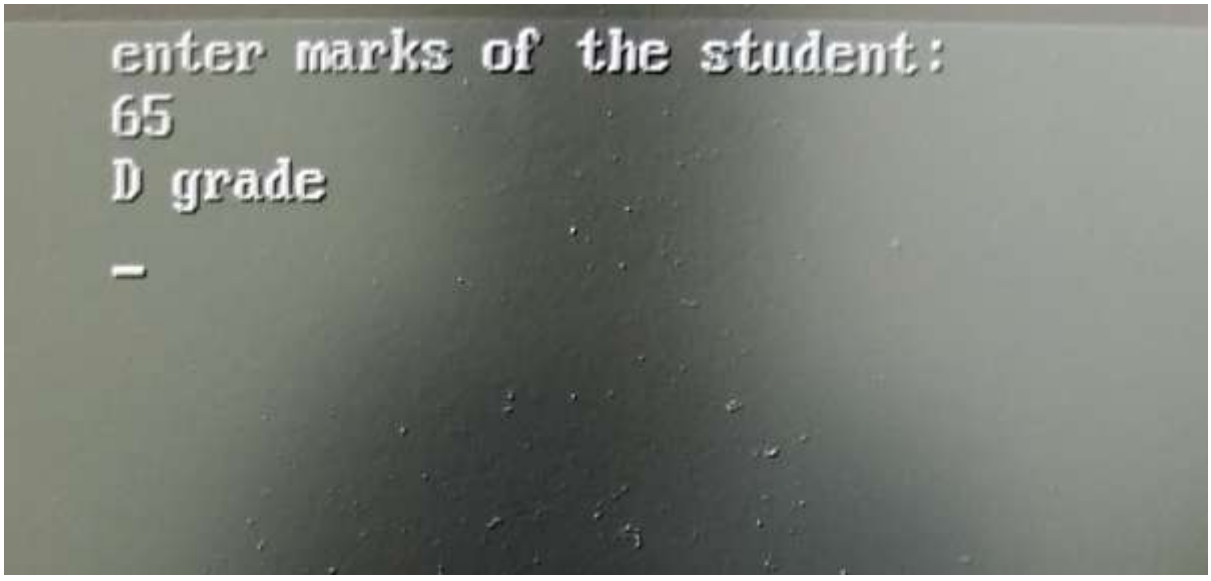
enter marks of the student:
65
D grade
-

Assignment 10:


Title: write a program to print percentage grade of a student using Switch case.

Theory(Optional):

Source code:

```
#include <stdio.h>
#include <conio.h>
int main()
{
int marks;
int Grade;
clrscr();
printf("Enter marks:");
scanf("%d",&marks);
switch(marks/10){
case 10:
printf("A++ Grade /n");
break;
case 9:
printf("A+ Grade /n");
break;
case 8:
printf("B+ Grade /n");
break;
case 7:
printf("B Grade /n");
break;
case 6:
printf("C Grade /n");
break;
default:
printf("fail /n");
}
getch();
```

Output:

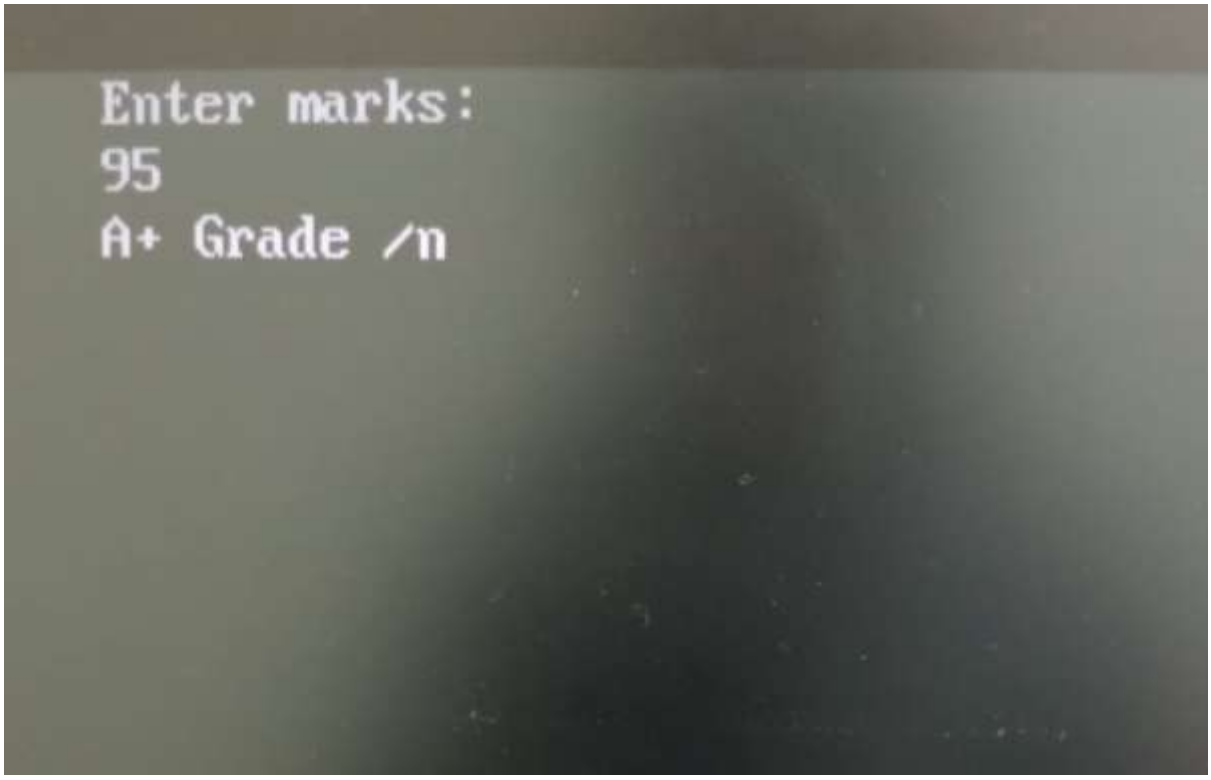

Assignment 11:

Title: write a program to implement Loops

i.write a program to print 10 numbers using for,while and do-while loop.
ii.write a menu driven program to print

a.print addition of 10 numbers using for loop

b.print avg of first 10 numbers using while loop

c.print square of first 10 numbers using do while loop.

Theory(Optional):

Source code:

```c
#include <stdio.h>
#include <conio.h>
int main()
{
    int i=1;
    clrscr();
    printf("Numbers using for loop:\n");
    for(i=1;i<=10;i++)
    {
    printf("%d\n",i);
    }
    printf("numbers using while loop:\n");
     i=1;
    while(i<=10)
    {
    printf("%d\n",i);
    i++;
    }
    printf("numbers using do while loop:\n");
     i=1;
    do {
printf("%d \n",i);
i++;
    }while(i<=10);
    getch();
    return 0;
}
```


```c
#include <stdio.h>
#include <conio.h>
int main()
{
int i=1,choice;
int sum=0,ave,square;


clrscr();
printf("****Menu**** \n");
printf("1.Addition of 10 numbers using for loop:\n");
printf("2.Avarage of first 10 numbers using while loop:\n");
printf("3.square of first 10 numbers using do while loop:\n");
printf("Enter your choice:\n");
scanf("%d",&choice);
switch(choice)
{
case 1:
printf("Addition of 10 numbers using for loop:\n");
for(i=1;i<=10;i++)
{
    sum=sum+i;
printf("%d \n",sum);
}
break;
case 2:
printf("Avarage of first 10 numbers using while loop:\n",i);
while(i<=10)
```


```
while(i<=10)
{
sum=55;
    ave=sum/10;
printf("%d \n",ave);
i++;
}
break;
case 3:
printf("square of first 10 numbers using do while loop:\n");
do{
    square=i*i;
printf("%d \n",i*i);
i++;
}while(i<=10);
break;
default:{
    printf("not valid\n");
}


}
getch();
return 0;
}
```

Output:

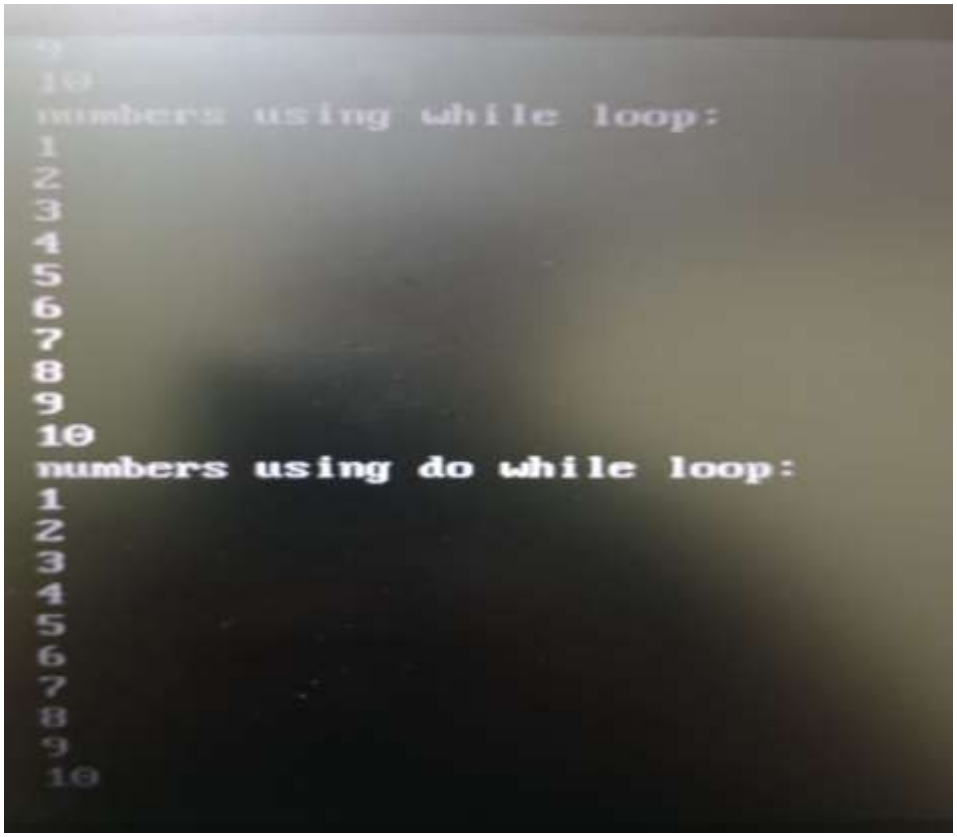

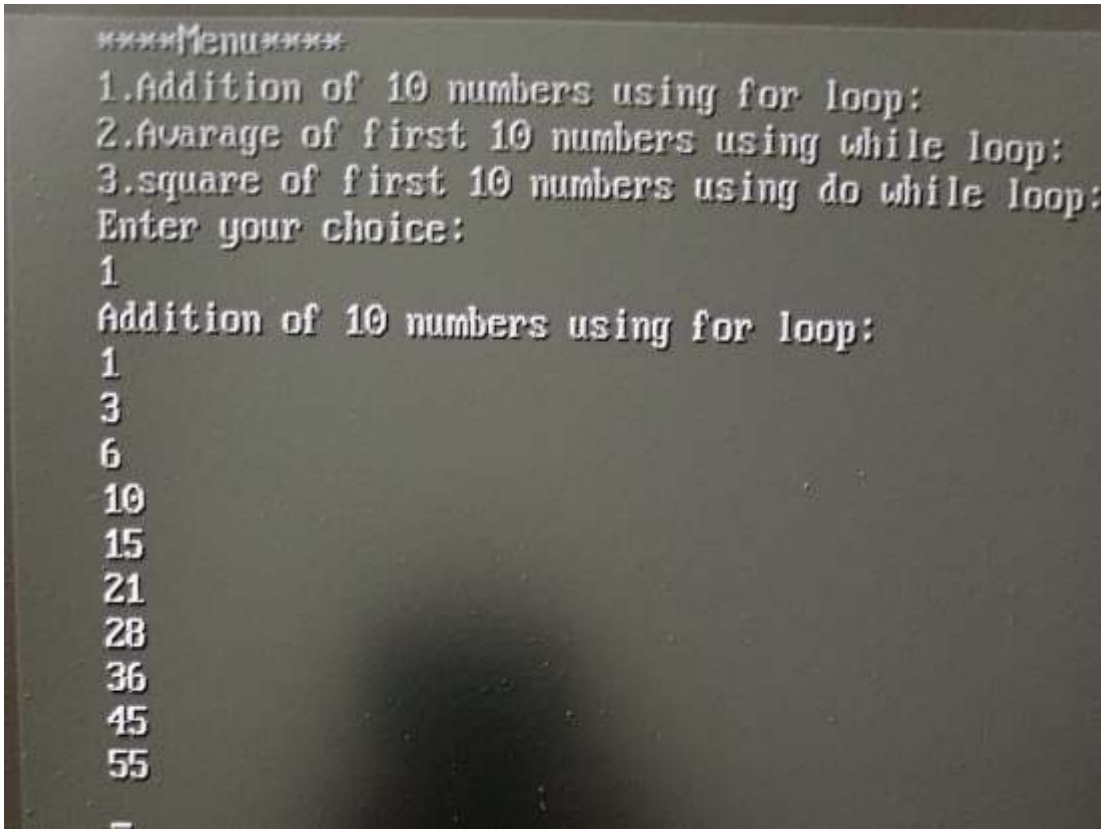
****Menu****
1.Addition of 10 numbers using for loop:
2.Avarage of first 10 numbers using while loop:
3.square of first 10 numbers using do while loop:
Enter your choice:
1
Addition of 10 numbers using for loop:
1
3
6
10
15
21
28
36
45
55

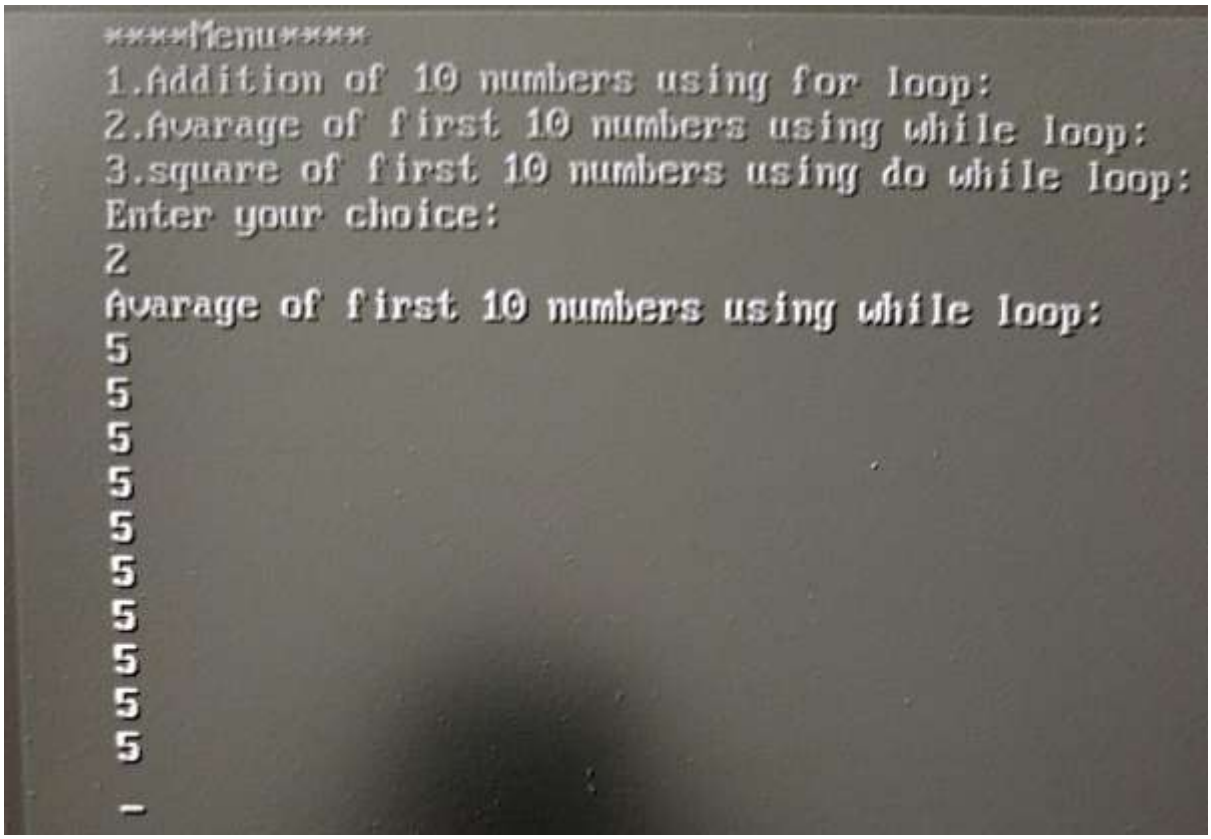
****Menu****
1.Addition of 10 numbers using for loop:
2.Avarage of first 10 numbers using while loop:
3.square of first 10 numbers using do while loop:
Enter your choice:
2
Avarage of first 10 numbers using while loop:
5
5
5
5
5
5
5
5
5
5

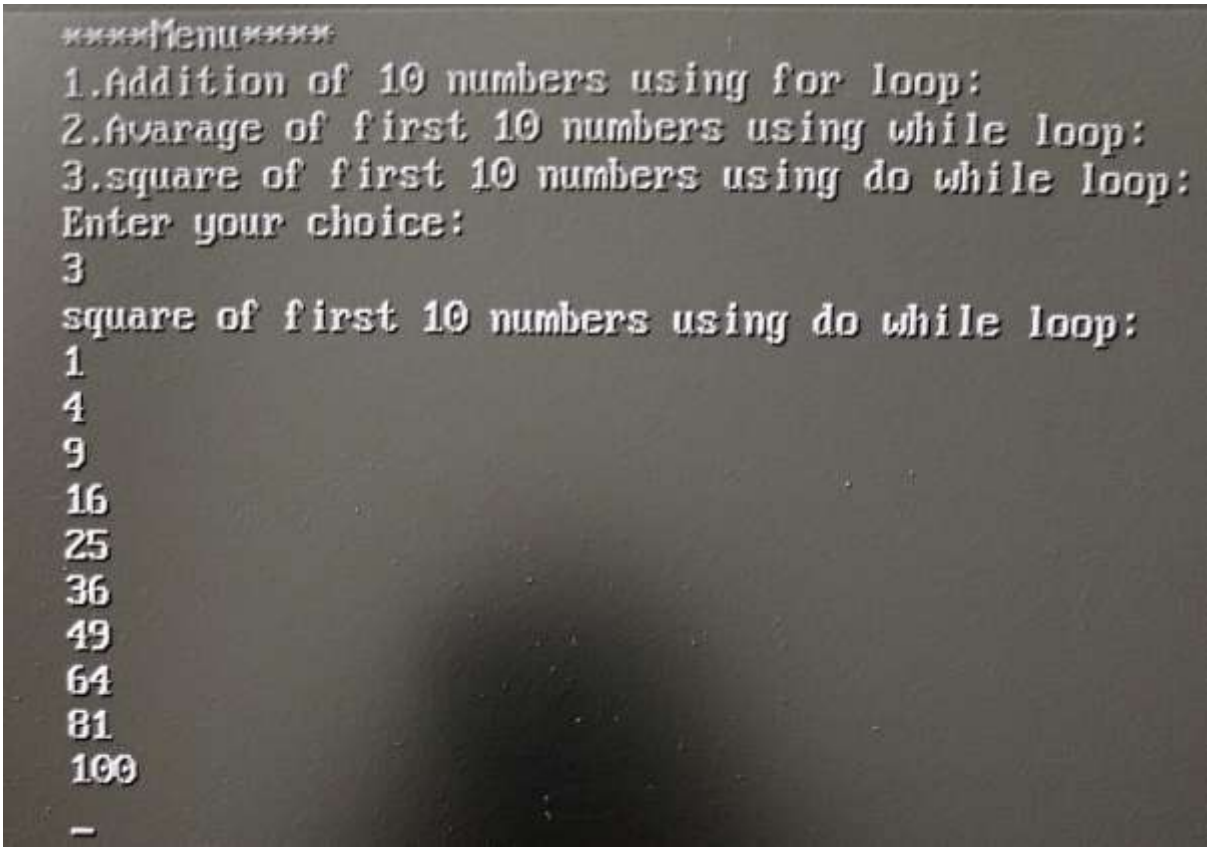

Assignment 12:


Title: .program to implement concept of continue and break Write a program to print even numbers from first 10 numbers except number 8 using continue.

Theory(Optional):

Source code:

```c
#include <stdio.h>
#include <conio.h>
int main()
{
    int i;
    clrscr();
    printf("print even numbers:\n");
    for(i=1;i<=10;i++)
    {
    if(i%2==0)
    {
        if(i==8)
        {
        continue;
        }
        printf("%d\n",i);
        }
    }
    getch();
    return 0;
}
```

Output:

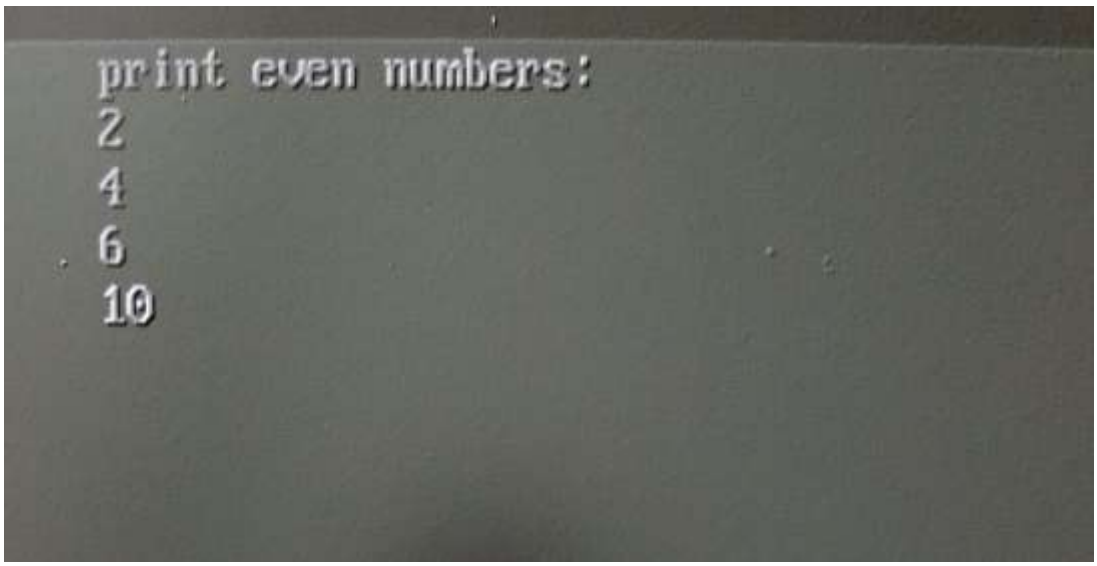

Assignment 13:


Title: To calculate electricity bill for domestic and commercial use. (input: No of units utilized, charge per unit. Charges will vary as per the utilized units(2 conditions: units100).

Theory:

Source code:

```c
#include <stdio.h>
#include <conio.h>
int main()
{
    int i,n;
    clrscr();
    printf("Enter type of electricity bill:\n");
    if(i==1)
    {
    printf("Type of electricity bill:Domestic=%d\n",i);
    }
    else{
    printf("Type of electricity bill:commercial=%d\n");
    }
    printf("Enter number of units utilized=%d\n");
    if(n<=100)
    {
    printf("Electricity bill=%d \n",n*5);
    }
    else{
    printf("Electricity bill=%d \n",n*15);
    }
    getch();
    return 0;
}
```

Output:

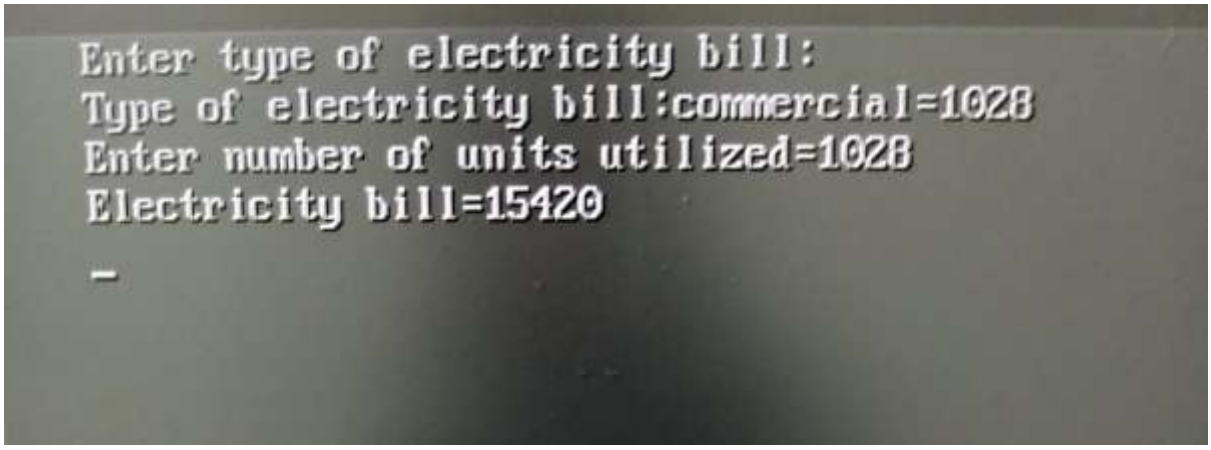

Assignment 14:

Title: Write a Menu Driven Program to perform the following operations on the array:

a. Read Array

b. Print Array

c. Print Addition of Array Elements

Theory (optional):

Source code:

```c
#include <stdio.h>

int main() {
    int array[9]={2,3,8,9,6,5,3,1,5};
    int choise,n=9,i,add=0;
    do{
    printf("*MENU DRIVEN*\n");

    printf("1.Print Array \n");
    printf("2.Print addition of array elements \n");
    printf("3.Exit\n");


    printf("Enter choise:\n");
    scanf("%d",&choise);
    switch(choise){


     case 1:
     printf("1.Print Array\n");
     for(i=0;i<n;i++)
     {
         printf("%d \n",array[i]);
     }
     break;
     case 2:
     printf("2.print Addition of array elements:\n");

     for(i=0;i<n;i++)
     {
         add=add+array[i];
     }
     printf("Addition of array elements=%d\n",add);
     break;

    case 3:
    printf("3.Exit\n");
    break;
default:
printf("Invalid choise \n");
}
}while(choise !=3);
    return 0;
}
```

Output:

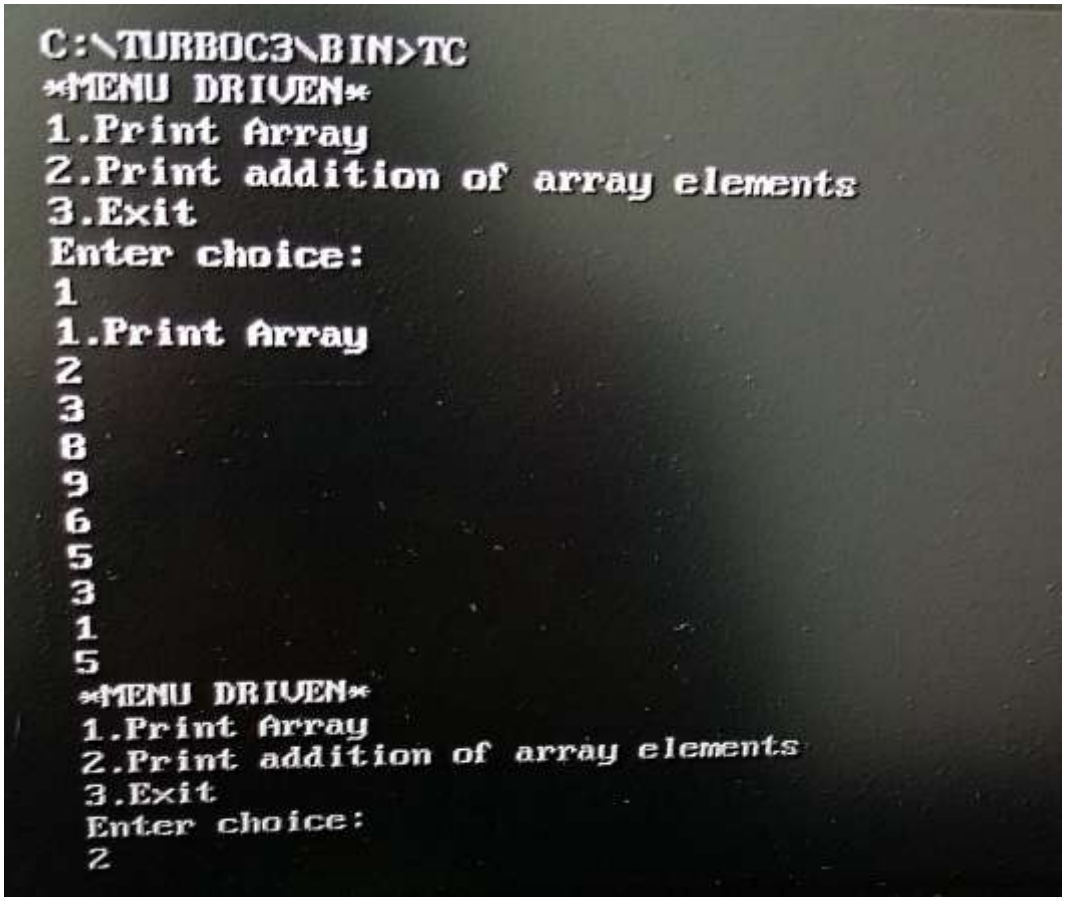
C:\TURBOC3\BIN>TC
MENU DRIVEN
1.Print Array
2.Print addition of array elements
3.Exit
Enter choice:
1
1.Print Array
2
3
8
9
6
5
3
1
5
MENU DRIVEN
1.Print Array
2.Print addition of array elements
3.Exit
Enter choice:
2

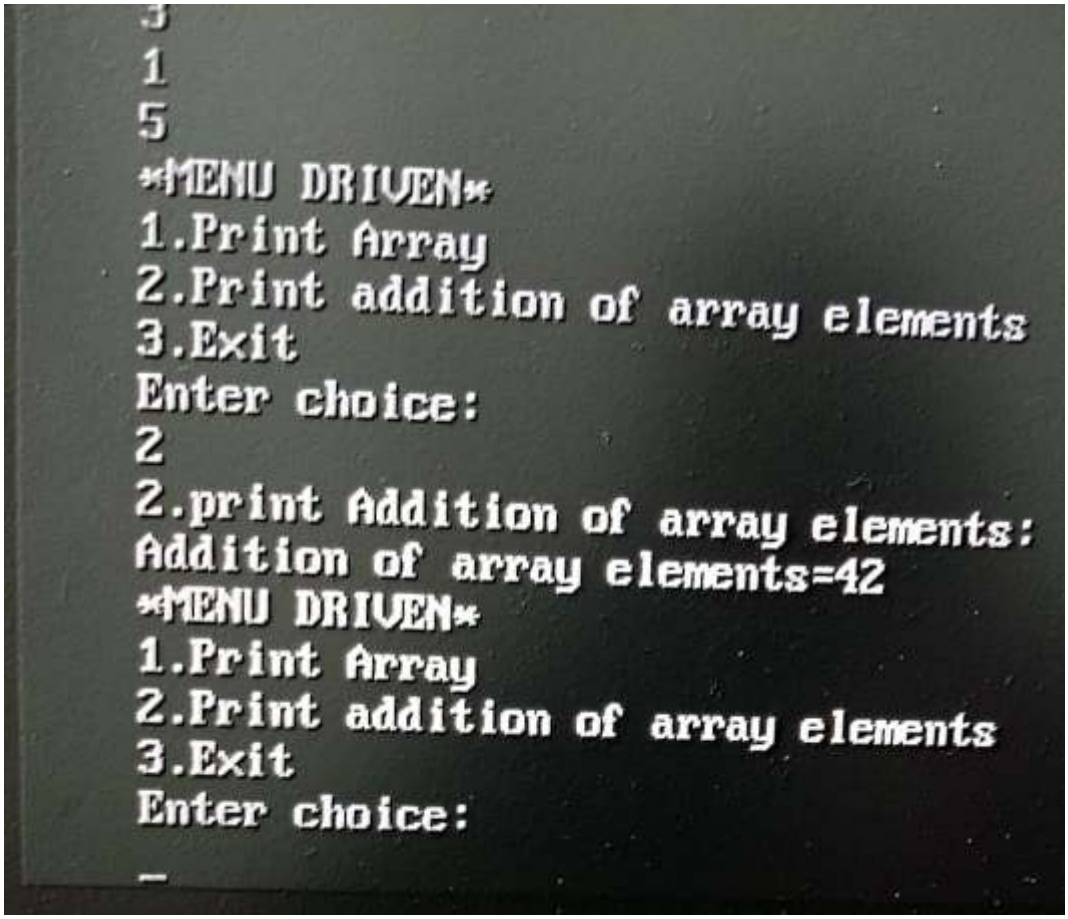
1
5
MENU DRIVEN
1.Print Array
2.Print addition of array elements
3.Exit
Enter choice:
2
2.print Addition of array elements:
Addition of array elements=42
MENU DRIVEN
1.Print Array
2.Print addition of array elements
3.Exit
Enter choice:

Assignment 15 :

Title : Write a Program to perform the following operations on the array:

a. Read Array

b. Print Array

c. Find Minimum Number from Array

d. Find Maximum Number from Array

Theory (Optional) :


Source Code :

```c
#include <stdio.h>
#include <conio.h>
int main()
{
int array[100];
int n,i,min,max;
clrscr();
printf("Enter number of elements in an array:\n");
scanf("%d",&n);
printf("Read array:\n");
for(i=0;i<n;i++)
{
scanf("%d\n",&array[i]);
}
printf("print array:\n");
for(i=0;i<n;i++)
{
printf("%d \n",array[i]);
}
min=array[0];
max=array[0];
for(i=0;i<n;i++)
{
if(array[i]<min)
{
min=array[i];
}
if(array[i]>max)
{
```

```
{
max=array[i];
}
}
printf("min value in an array=%d\n",min);
printf("max value in an array=%d\n",max);
getch();
return 0;

}
```

Output :

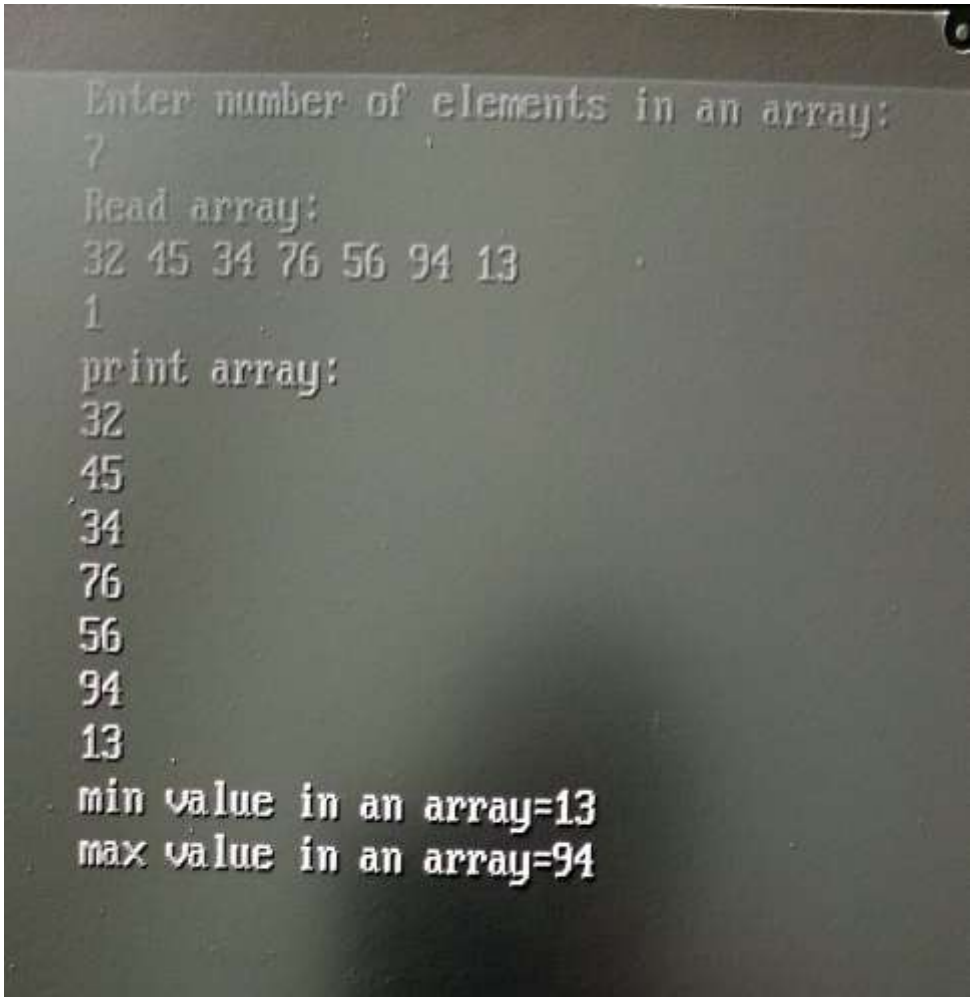

Assignment 16:

Title : Write a program to perform the following operations on the array:

a. Read Array

b. Print Array

c. Search an Element from given array using linear search. Print the location of the element.

Theory (Optional) :


Source code :

```
#include <stdio.h>
#include <conio.h>
int main()
{
int arr[100];
int n,i,key,flag=0;
clrscr();
printf("Enter number of elements in an array:\n");
scanf("%d",&n);
printf("Read array:\n");
for(i=0;i<n;i++){
scanf("%d",&arr[i]);
}
printf("Print array:\n");
for(i=0;i<n;i++)
{
printf("%d\n",arr[i]);
}
 printf("Enter element to search:\n");
 scanf("%d ",&key);
 for(i=0;i<n;i++)
 {
 if(arr[i]==key)
 {
 flag=1;
 break;
 }
}
 if(flag==1){
```

```
    if(flag==1){
    printf("key found at location=%d\n",i+1);
    }
    else{
    printf("key not found\n");
    }

    getch();
    return 0;
}
```

Output :

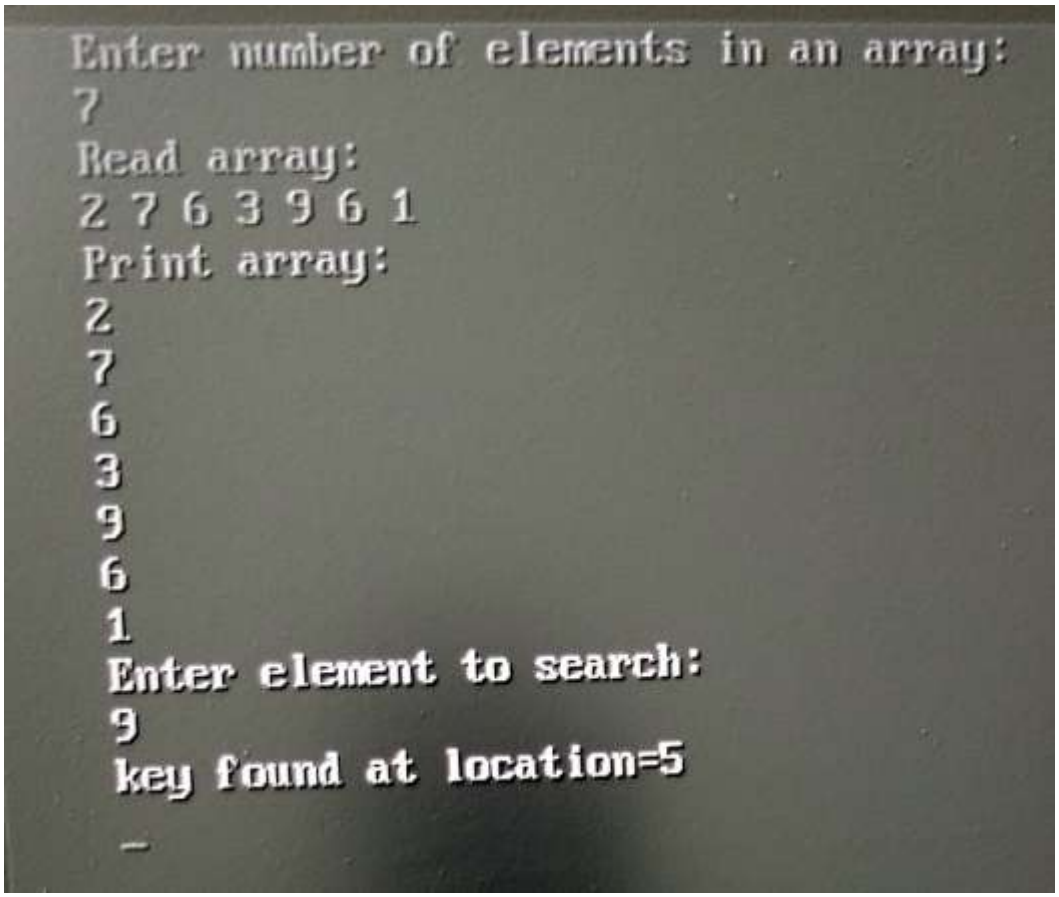

Assignment 17:

Title : Write a program to perform the following operations on the array:

a. Read Array

b. Print Array

c. Print sorted array using Selection and Bubble sort.

Theory (Optional) :

Source Code :

```c
#include <stdio.h>
#include <conio.h>
int main()
{
int arr[100];
int n,i,j,temp,flag=0;
clrscr();
printf("Enter number of element in an array:\n");
scanf("%d",&n);
printf("Read array:\n");
for(i=0;i<n;i++)
{
scanf("%d",&arr[i]);
}
printf("Print array:\n");
for(i=0;i<n;i++)
{
printf("%d\n",arr[i]);
}
printf("Sorted array using selection sorting:\n");
for(i=0;i<n-1;i++)
{
for(j=i;j<n;j++)
{
if(arr[i]>arr[j])
{
temp=arr[i] ;
arr[i]=arr[j];
arr[j]=temp;
```

```
}
}
}
for(i=0;i<n;i++){
printf("%d\n",arr[i]);
}
printf("Sorted array using bubble sorting:\n");
for(i=0;i<n-1;i++)
{
flag=0;
for(j=0;j<n-1;j++)
{
if(arr[j]>arr[j+1])
{
temp=arr[j];
arr[j]=arr[j+1];
arr[j+1]=temp;

}
}
}

for(i=0;i<n;i++){
printf("%d",arr[i]);
}
getch();
return 0;
}
```

Output :

```
Enter number of element in an array:
5
Read array:
3 5 4 6 7
Print array:
3
5
4
6
7
Sorted array using selection sorting:
3
4
5
6
7
Sorted array using bubble sorting:
34567_
```

Assignment 18:

Title : Write a Program to Accept String from the user. Perform the following operations on the String (Without Using Built in Functions):

a. Print String Length

b. Print String in reverse order

c. Copy given string into other string and print both strings.

d. Accept two strings from user and compare both. Print if they are equal. Or which one is greater or which one is small.

e. Accept two strings from user and print its concatenated string.

Theory (Optional) :

Source Code :


```
#include <stdio.h>
#include <conio.h>
int main() {
    char str1[100],str2[100],copy[100],concat[200];
    int i,length=0,j;
    clrscr();
    printf("Enter strings in an array:\n");
    fgets(str1,100,stdin);
    for(i=0;str1[i]!='\0';i++){
    length++;
    }
printf("length of str1=%d \n",length);
printf("string in reverse order:\n");
for(i=length-1;i>=0;i--){
    printf("%c",str1[i]);
}
printf("\ncopy string:\n");
for(i=0; str1[i] != '\0';i++)
{
    copy[i]=str1[i];
}
copy[i]='\0';
printf("str1=%s",str1);
printf("copy string=%s",copy);
printf("\n");
printf("Enter first string for comparison:\n");
fgets(str1,100,stdin);
printf("Enter second string for comparison:\n");
fgets(str2,100,stdin);
```

```
printf("Enter second string for comparison:\n");
fgets(str2,100,stdin);
i=0;
while(str1[i]!='\0'&& str2[i]!='\0'&& str1[i]==str2[i])
{
    i++;
}
    if(str1[i]==str2[i])
    {
    printf("strings are equal\n");
    }
    else if(str1[i]>str2[i])
    {
    printf("string 1 is greater\n");
    }
    else{
    printf("string 2 is greater\n");
    }

printf("Enter first string for concatination:\n");
fgets(str1,100,stdin);
printf("Enter second string for concatination:\n");
fgets(str2,100,stdin);
i=0;
while(str1[i] !='\0')
{
    concat[i]=str1[i];
    i++;
};
```

```
j=0;
while(str2[j] !='\0'){
    concat[i]=str2[j];
    i++;
    j++;
}
concat[i]='\0';
printf("Concatation of string=%s",concat);
getch();
    return 0;
}
```

Output :

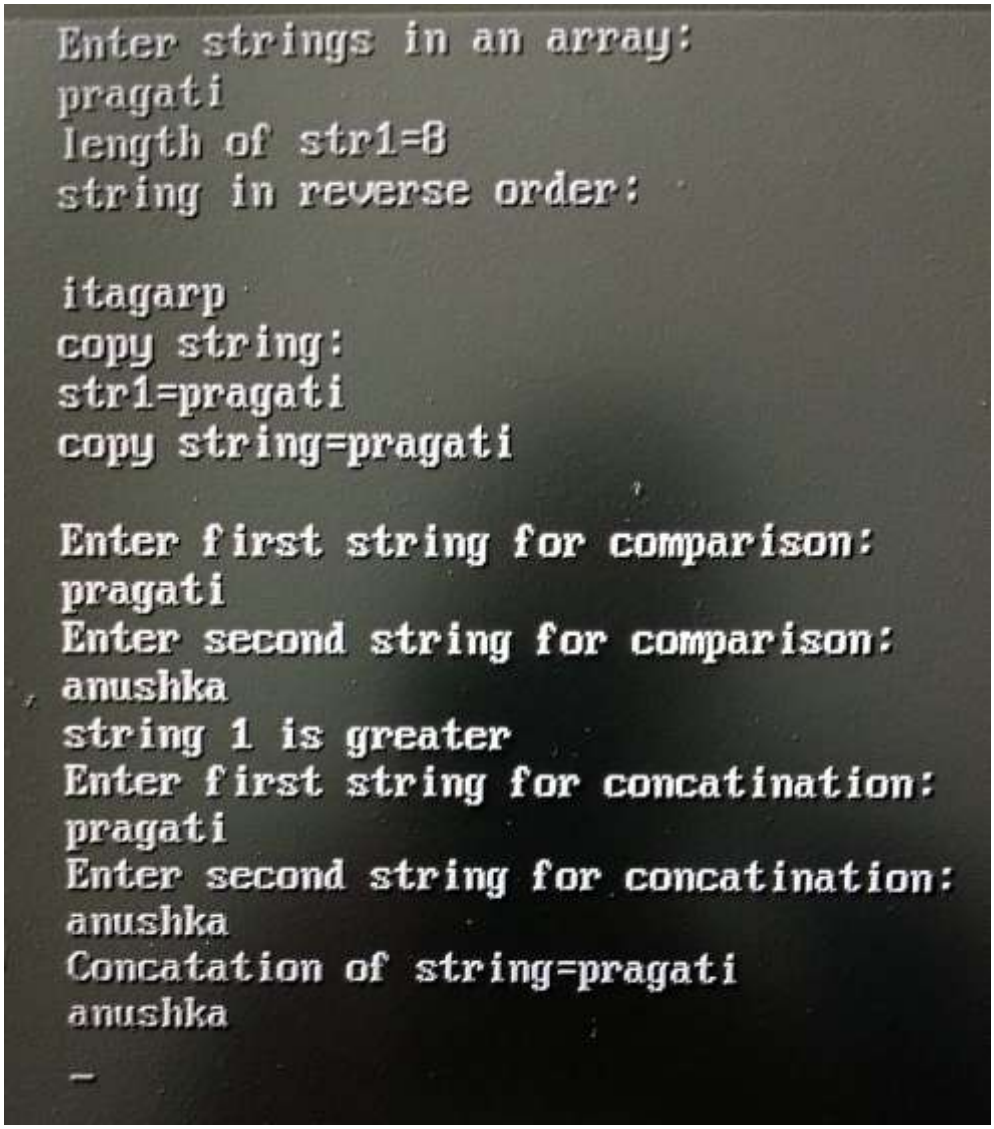

Assignment 19 :

Title : Write a Program to Perform the following operations on a 2D Array:

a. Addition of two matrices.

b. Transpose of a matrix.

(Hints: 1. Enter rows and columns of first matrix

2. Enter numbers

3. Enter rows and columns of second matrix

4. Enter numbers

5. Print both matrices.

6. Check for addition condition)

Theory (Optional) :

Source code :

```
#include <stdio.h>
#include <conio.h>
int main() {
    int r1,r2,c1,c2;
    int a[5][5],b[5][5],sum[5][5],trans[5][5];
    int i,j;
    clrscr();
    printf("Enter no. of rows and columns in first matrix:\n");
    scanf("%d %d",&r1,&c1);
    printf("Enter elements in first matrix:\n");
    for(i=0;i<r1;i++)
    {
        for(j=0;j<c1;j++){
            scanf("%d",&a[i][j]);
        }
    }
     printf("\nEnter no. of rows and columns in second matrix:\n");
    scanf("%d %d",&r2,&c2);
    printf("Enter elements in second matrix:\n");
    for(i=0;i<r2;i++)
    {
        for(j=0;j<c2;j++){
            scanf("%d",&b[i][j]);
        }
    }
     printf("print first matrix:\n");

    for(i=0;i<r1;i++)
    {
```

```
    {
        for(j=0;j<c1;j++){
            printf("a[i][j]=%d",a[i][j]);
        }
    }
     printf("print second matrix:\n");


    for(i=0;i<r2;i++)
    {
        for(j=0;j<c2;j++){
            printf("b[i][j]=%d\n",b[i][j]);
        }
    }
    if(r1==r2 && c1==c2){
printf("sum of two matrices:\n");
for(i=0;i<r1;i++)
    {
        for(j=0;j<c1;j++){
            sum[i][j]=a[i][j]+b[i][j];
            printf("sum[i][j]=%d\n",sum[i][j]);
        }

    }

    printf("transpose of matrix:\n");
    for(i=0;i<c1;i++)
    {
        for(j=0;j<r1;j++)
```

```
    {
        for(j=0;j<r1;j++)
        {
            trans[i][j]=sum[j][i];
            printf("trans[i][j]=%d\n",trans[i][j]);
        }
    }
    }
    else{
        ("addition not possible \n");
    }
    getch();
    return 0;
}
```

Output:

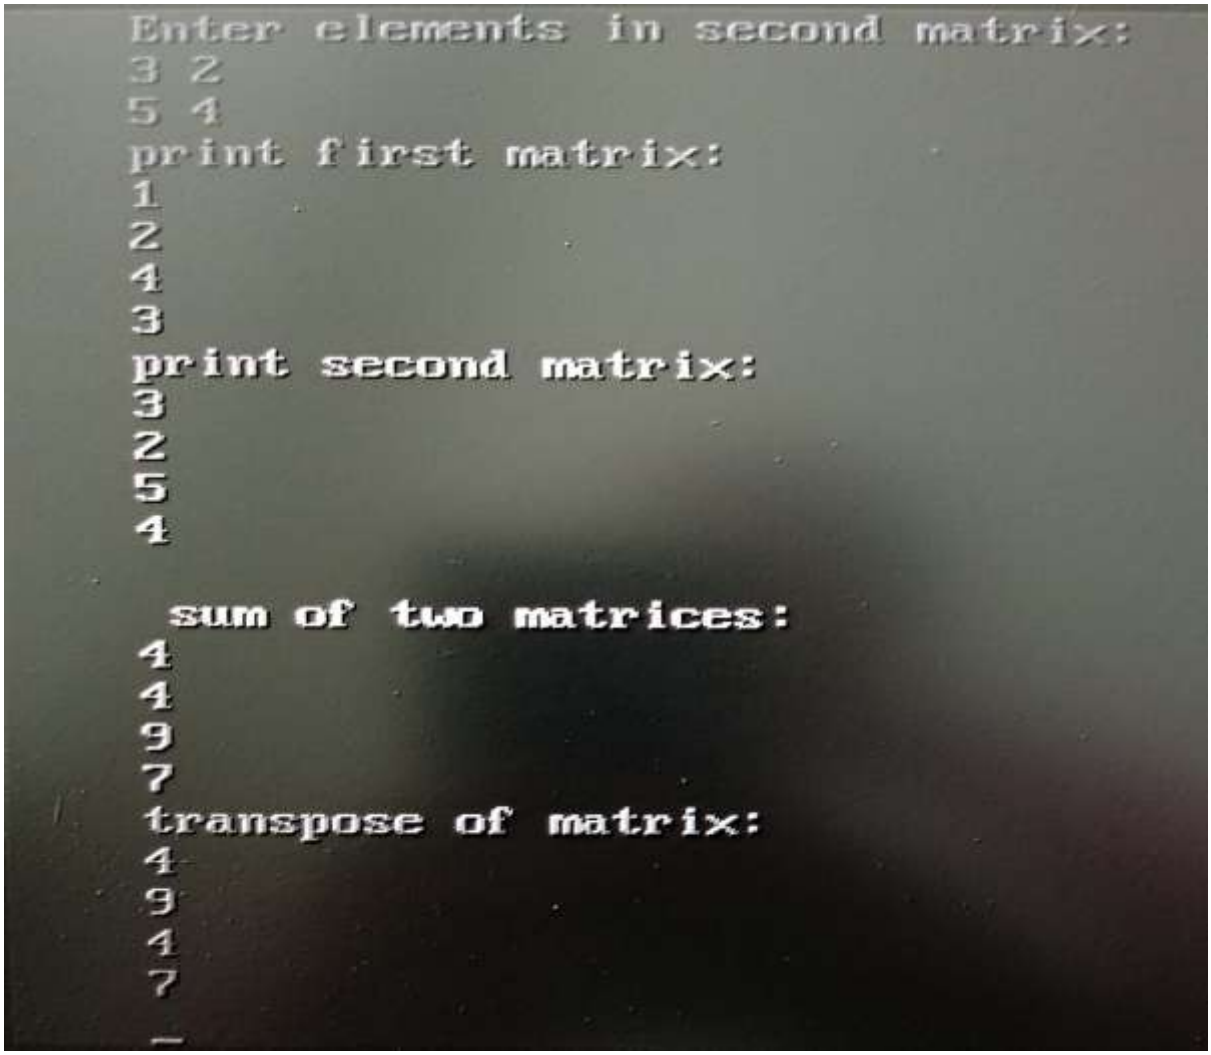

Assignment 20:

Title : Write a Menu Driven Program to perform the following operations on the array:

a. Read Array

b. Print Array

c. Search an Element from given array using Binary search.

Print the location of the element.

Theory (Optional) :

Source code :

Output :