

Module 2: Components Deep Dive


Assignment 2.2 – Inline vs Separate Template

Objective:

Understand template and style options.


Tasks:

1. Create one component using **inline template and inline styles**.

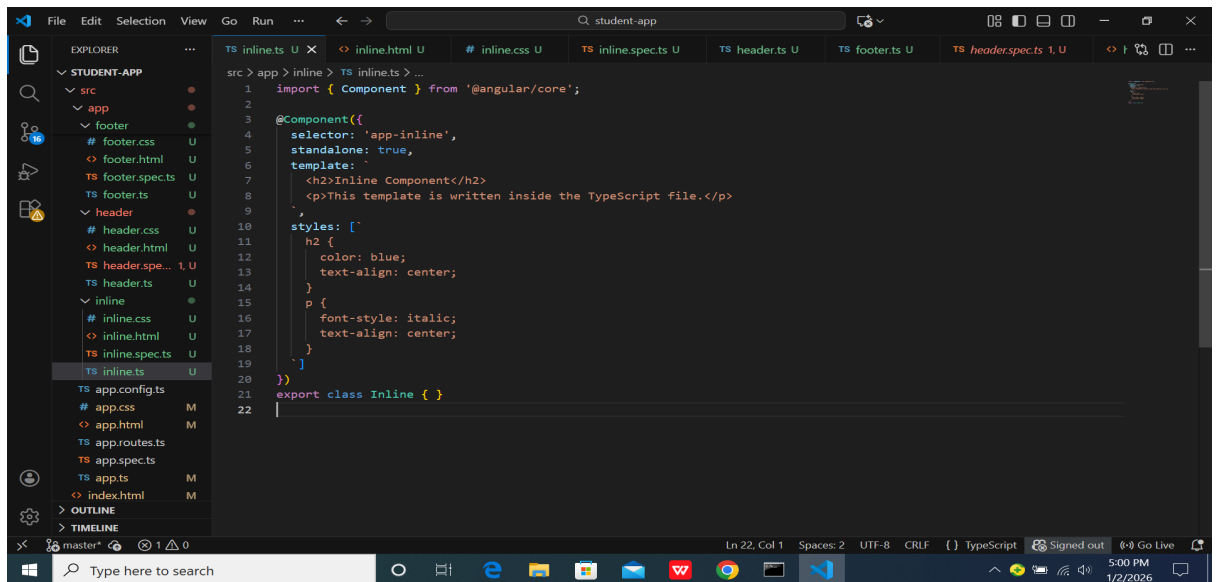


The screenshot shows the Visual Studio Code editor with a project named 'STUDENT-APP'. The Explorer panel on the left shows the file structure. The main editor window displays the 'inline.ts' file with the following code:

```
src > app > inline > TS inline.ts > ...
1 import { Component } from '@angular/core';
2
3 @Component({
4   selector: 'app-inline',
5   standalone: true,
6   template: `
7     <h2>Inline Component</h2>
8     <p>This template is written inside the TypeScript file.</p>
9   `,
10  styles: [
11    h2 {
12      color: blue;
13      text-align: center;
14    }
15    p {
16      font-style: italic;
17      text-align: center;
18    }
19  ]
20 })
21 export class Inline { }
22
```

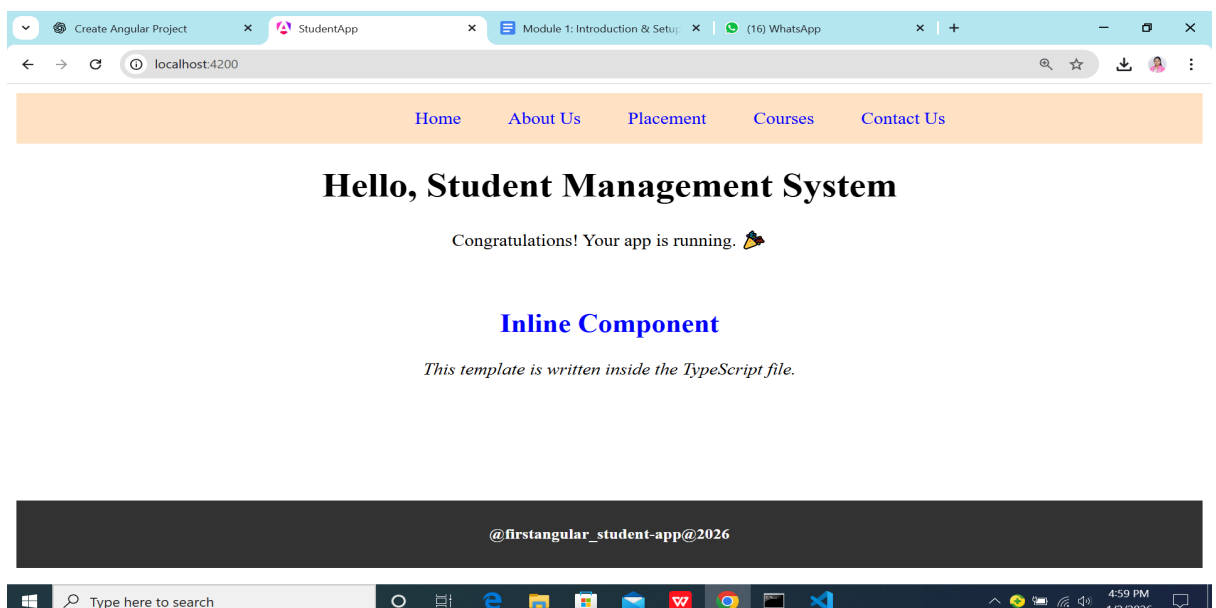

2. Create another component using **separate HTML and CSS files**.

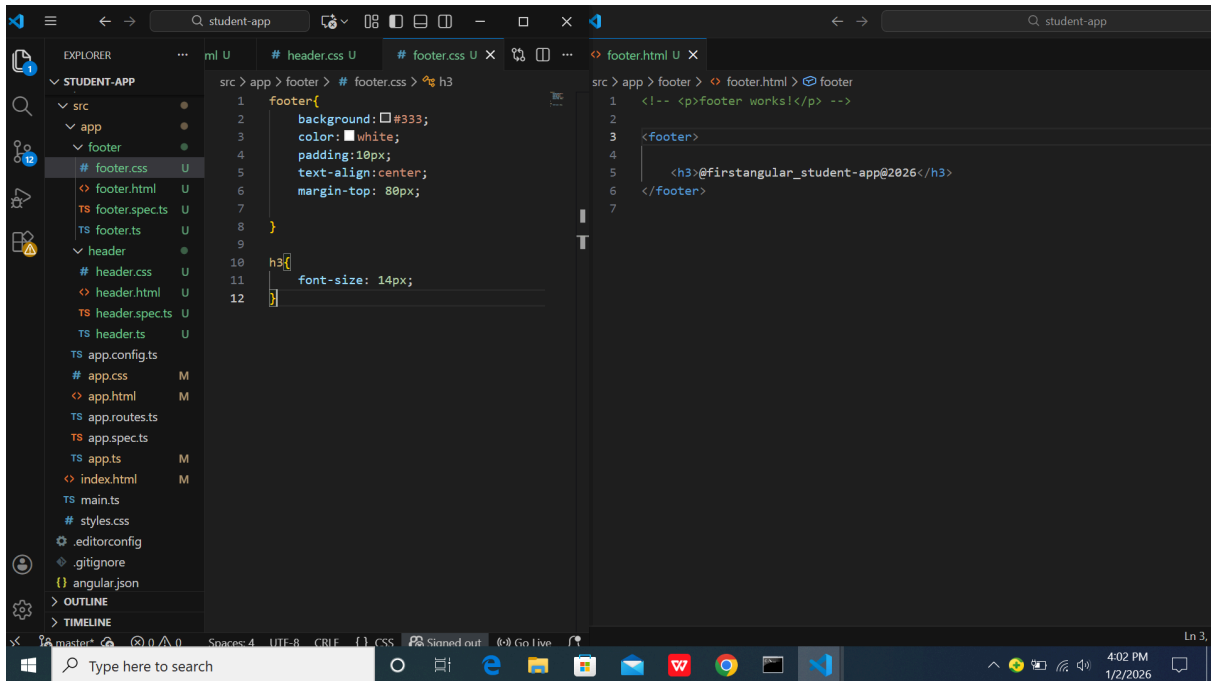


The screenshot shows the Visual Studio Code editor with the 'STUDENT-APP' project open. The Explorer sidebar on the left shows the file structure. The main editor area has two tabs open: '# footer.css' and '< footer.html'. The '# footer.css' tab is active, showing the following CSS code:

```
1 footer{
2   background-color: #333;
3   color: white;
4   padding: 10px;
5   text-align: center;
6   margin-top: 80px;
7 }
8
9
10
11
12 h3{
13   font-size: 14px;
14 }
```

The '< footer.html' tab shows the following HTML code:

```
1 <!-- <p>footer works!</p> -->
2
3 <footer>
4   <h3>@firstangular_student-app@2026</h3>
5 </footer>
6
7
```

The status bar at the bottom indicates the current file is 'Ln 3'.

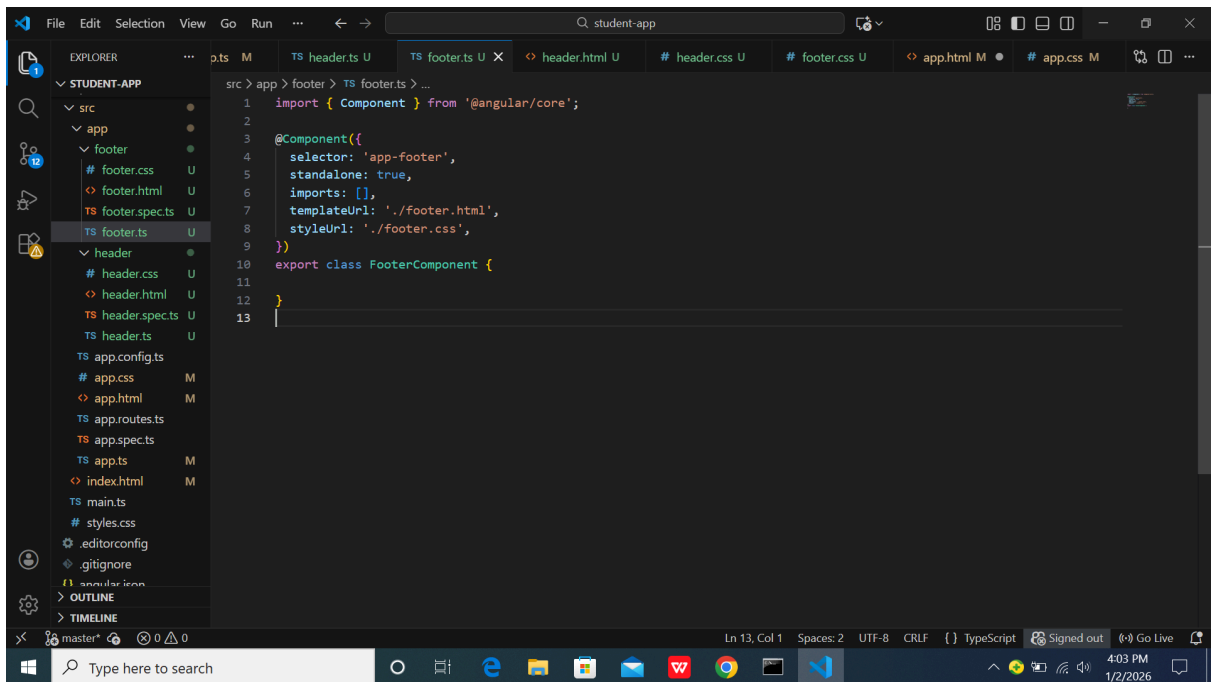

The screenshot shows the Visual Studio Code editor with the 'STUDENT-APP' project open. The Explorer sidebar on the left shows the file structure. The main editor area has a tab open for 'TS footer.ts'. The file is being created, and the following TypeScript code is visible:

```
1 import { Component } from '@angular/core';
2
3 @Component({
4   selector: 'app-footer',
5   standalone: true,
6   imports: [],
7   templateUrl: './footer.html',
8   styleUrls: ['./footer.css'],
9 })
10 export class FooterComponent {
11
12 }
13
```

The status bar at the bottom indicates the current file is 'Ln 13, Col 1'.



3. Write **3 differences** between inline and separate templates

Inline Template	Separate Template
Written inside .ts file using template	Written in .html file using templateUrl
Best for small/ Simple components	Best for large and complex UI
Harder to read for big HTML	Cleaner and more maintainable
Not designer-friendly	Designer-friendly (HTML/CSS can be edited separately)
Difficult to reuse styles	Styles can be reused or extended easily
Faster to create for quick demos	Better for real-world applications
Not recommended for production apps	Recommended for production apps
Debugging large templates is harder	Debugging is easier
Mixing logic and UI in one file	Clear separation of logic and UI

