

Module 2: Components Deep Dive


Assignment 2.3 – View Encapsulaon Demo

Objective:



Understand CSS scope in Angular.


Tasks:

1. Create two components:
 - a. Component A
 - b. Component B
2. Use `<h2>` in both components.

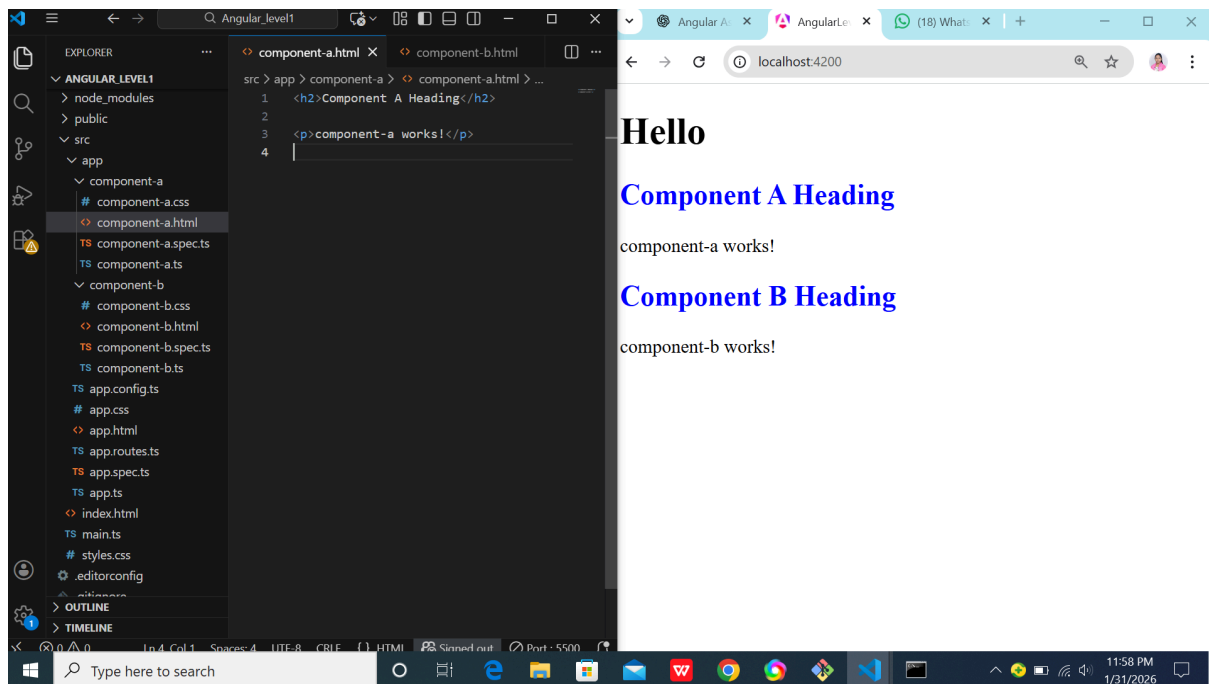

3. Apply ViewEncapsulation.None in one component.

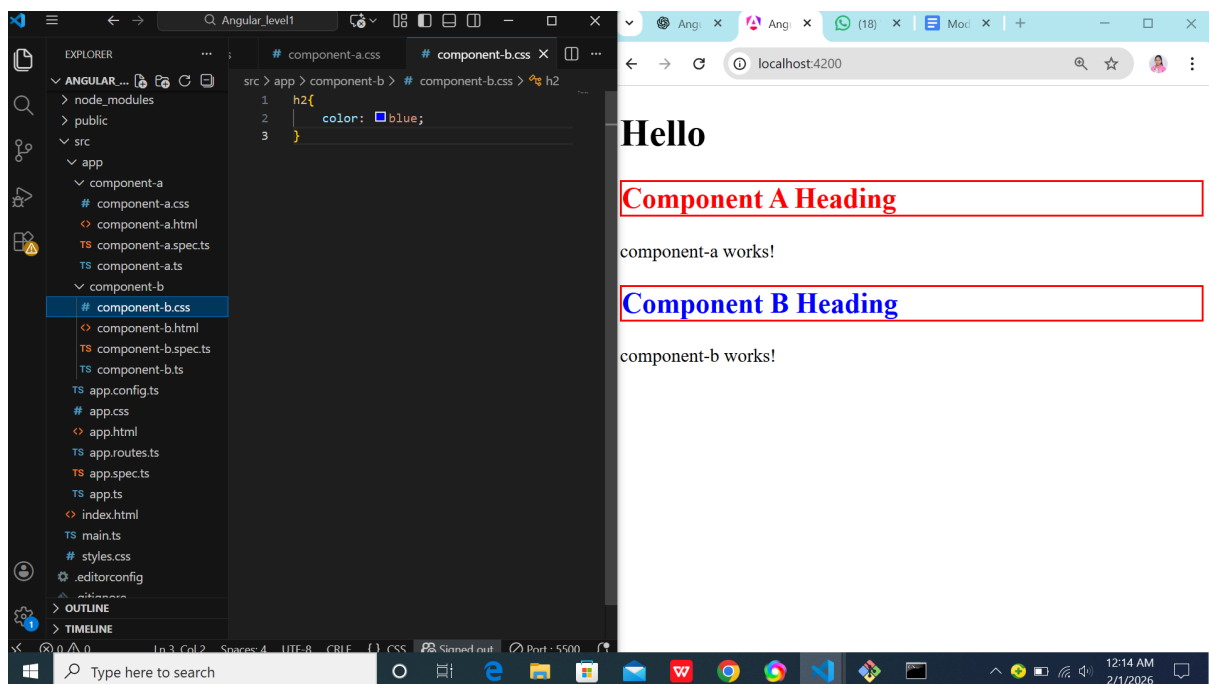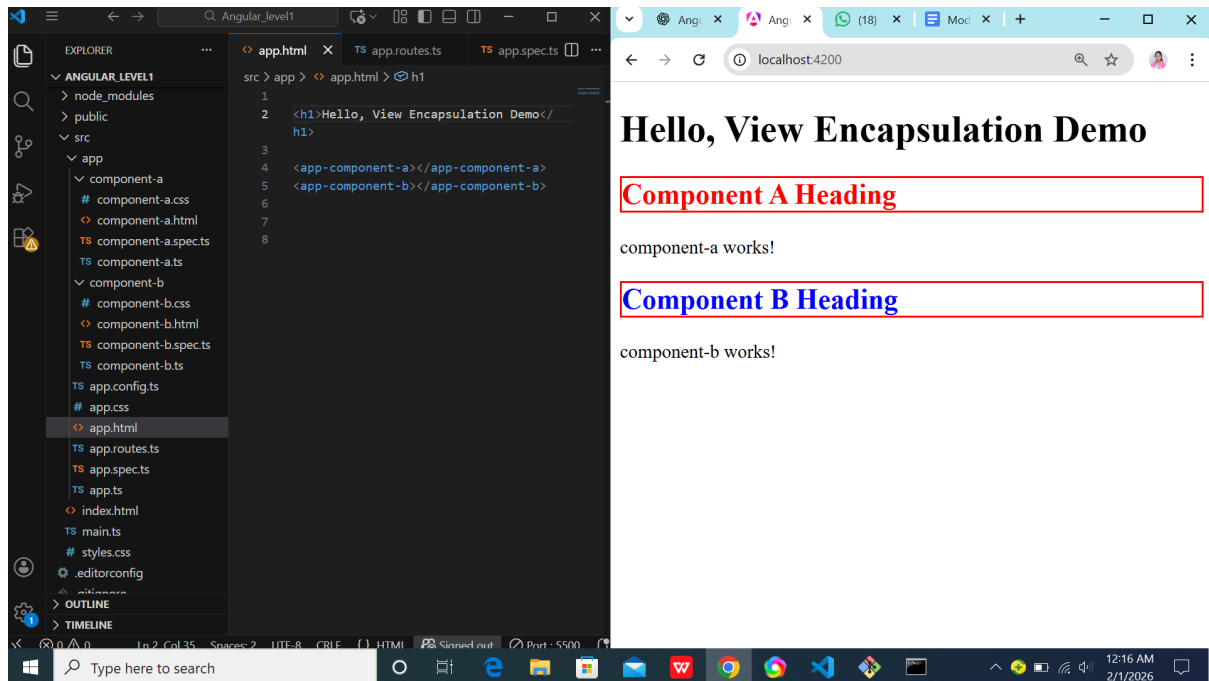

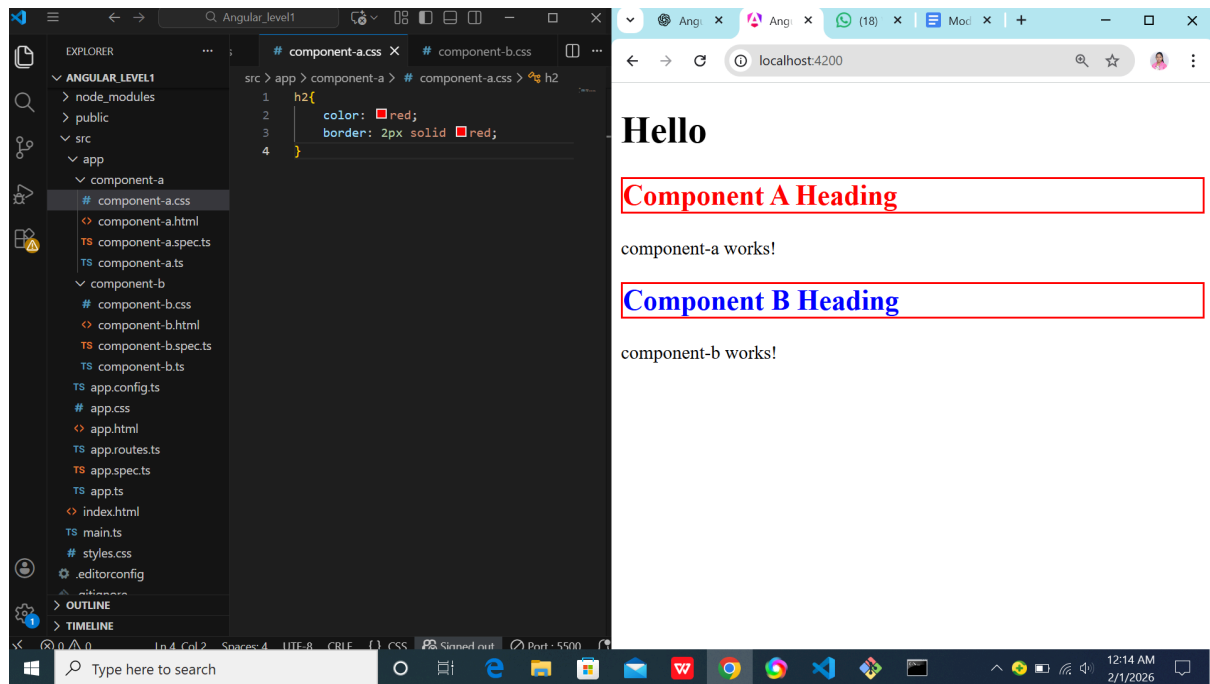

◆ What is View Encapsulation in Angular?

View Encapsulation defines how Angular scopes component styles so that CSS written in one component does not affect other components.

Angular provides three types:

1. Emulated (default)
2. None
3. ShadowDom

◆ What difference do you see in the UI when using ViewEncapsulation.None?

When ViewEncapsulation.None is applied to a component:

- The styles defined in that component are not scoped
- They are applied globally across the entire application
- As a result, elements in other components (e.g., `<h2>`) get affected even if they have their own styles

UI Observation:

- Component A and Component B both use <h2>
- Component A has ViewEncapsulation.None
- CSS of Component A overrides Component B styles
- Both headings appear the same (same color/style)

♦ Why is ViewEncapsulation.None risky in large projects?

Using ViewEncapsulation.None is risky because:

1. CSS Leakage

Styles unintentionally affect other components.

2. Hard to Debug

UI bugs occur in unrelated components.

3. Poor Maintainability

Changing one component may break many others.

4. Naming Conflicts

Common selectors like h1, h2, p, div cause global conflicts.

5. Not Scalable

Large teams working on different modules can break each other's UI.

Interview Conclusion:

ViewEncapsulation.None should be used only for global styles or themes, not regular components.