# Task 1 (AWS Cafe Challenge Portfolio)

## Challenge 1 - Creating a Static Website for the Café

| Academic Year | Module | Assessment Number | Assessment Type |
|---|---|---|---|
| 2026 | 5CS048 - Cloud Systems | Task 1 Challenge 1 | Portfolio |


Student ID: 2462250

Student Name: Praju Maharjan

Group: L5CG9

Module Leader: Mr. Deepson Shrestha

Tutor: Mr.Prabin Sapkota


Submitted On: March 31 2026

## Table of Contents

## Task 1: Extracting the files that you need for this lab – Show a screenshot of the extracted files.

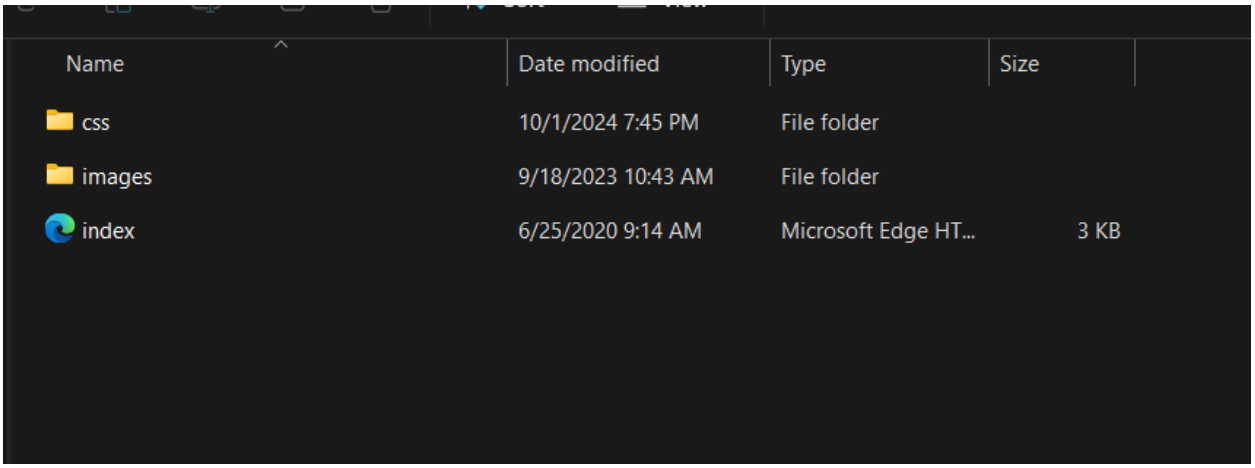

| Name | Date modified | Type | Size |
|---|---|---|---|
| css | 10/1/2024 7:45 PM | File folder | |
| images | 9/18/2023 10:43 AM | File folder | |
| index | 6/25/2020 9:14 AM | Microsoft Edge HT... | 3 KB |

## Task 2: Creating an S3 bucket to host your static website. Show a screenshot.

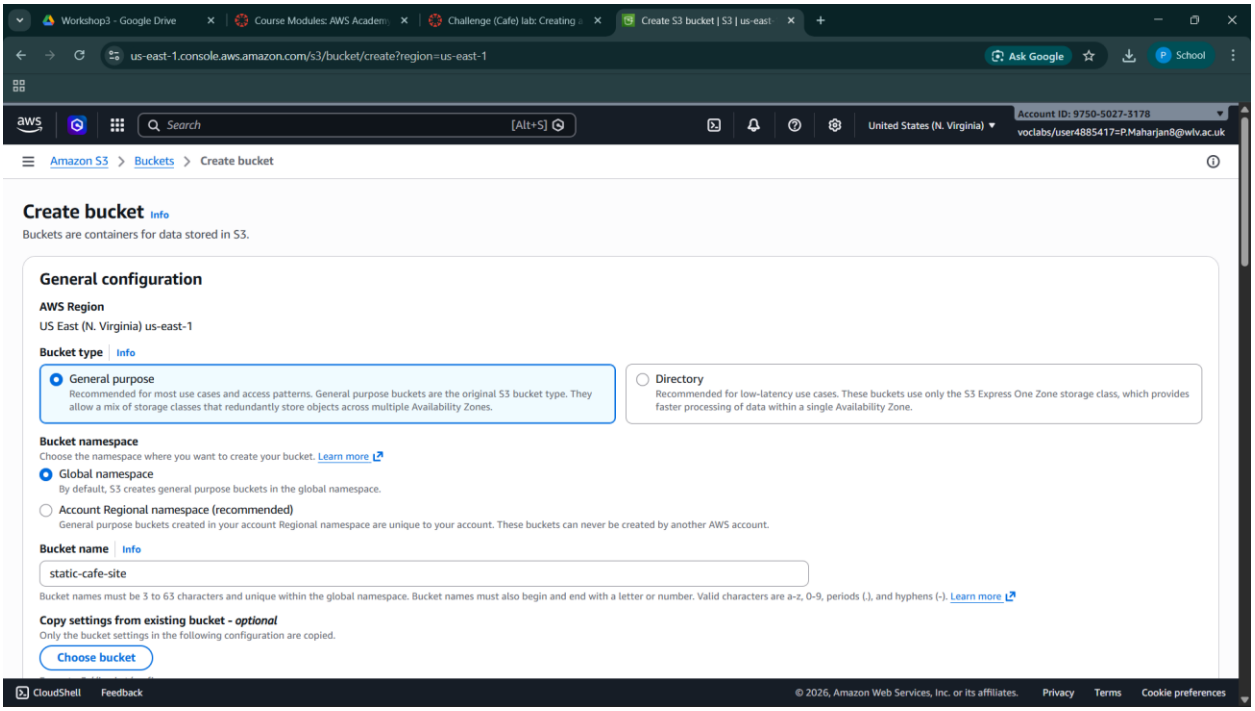

Workshop3 - Google Drive | Course Modules: AWS Academy | Challenge (Cafe) lab: Creating a | Create S3 bucket | S3 | us-east-1

us-east-1.console.aws.amazon.com/s3/bucket/create?region=us-east-1

Ask Google | School

aws | Search [Alt+S] | United States (N. Virginia) | Account ID: 9750-5027-3178 | voclabs/user4885417=P.Maharjan8@wlv.ac.uk

Amazon S3 > Buckets > Create bucket

Format: s3://bucket/prefix

## Object Ownership Info

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

**Object Ownership**

- ACLs disabled (recommended)
  All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
- ACLs enabled
  Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

⚠ We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

**Object Ownership**

- Bucket owner preferred
  If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.
- Object writer
  The object writer remains the object owner.

ⓘ If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploa

## Block Public Access settings for this bucket

Snipping Tool

Screenshot copied to clipboard
Automatically saved to screenshots folder.

Markup and share

CloudShell | Feedback | © 2026, Amazon Web Services, In

Workshop3 - Google Drive | Course Modules: AWS Academy | Challenge (Cafe) lab: Creating a | Create S3 bucket | S3 | us-east-1

us-east-1.console.aws.amazon.com/s3/bucket/create?region=us-east-1

Ask Google | School

aws | Search [Alt+S] | United States (N. Virginia) | Account ID: 9750-5027-3178 | voclabs/user4885417=P.Maharjan8@wlv.ac.uk

Amazon S3 > Buckets > Create bucket

## Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more

- [ ] **Block *all* public access**
  Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
  - [ ] **Block public access to buckets and objects granted through *new* access control lists (ACLs)**
    S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
  - [ ] **Block public access to buckets and objects granted through *any* access control lists (ACLs)**
    S3 will ignore all ACLs that grant public access to buckets and objects.
  - [ ] **Block public access to buckets and objects granted through *new* public bucket or access point policies**
    S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
  - [ ] **Block public and cross-account access to buckets and objects through *any* public bucket or access point policies**
    S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

⚠ **Turning off block all public access might result in this bucket and the objects within becoming public**
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

- [x] I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Snipping Tool

Screenshot copied to clipboard
Automatically saved to screenshots folder.

Markup and share

## Bucket Versioning

CloudShell | Feedback | © 2026, Amazon Web Services, In

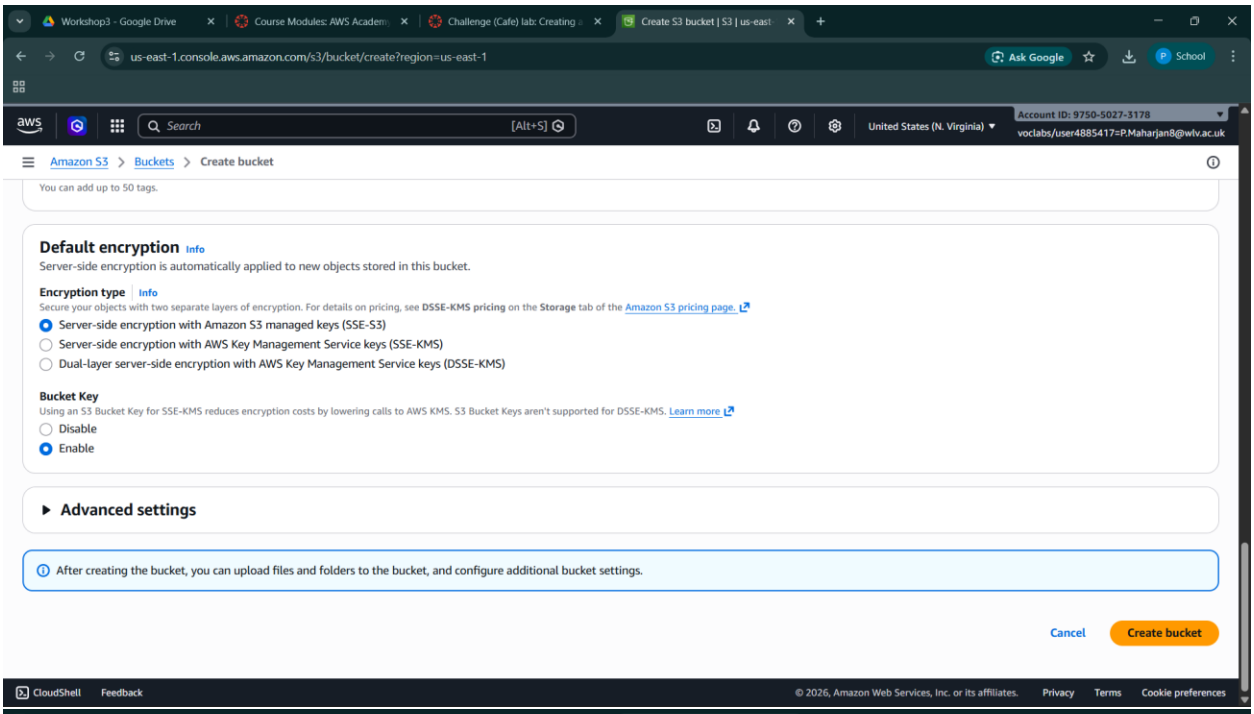


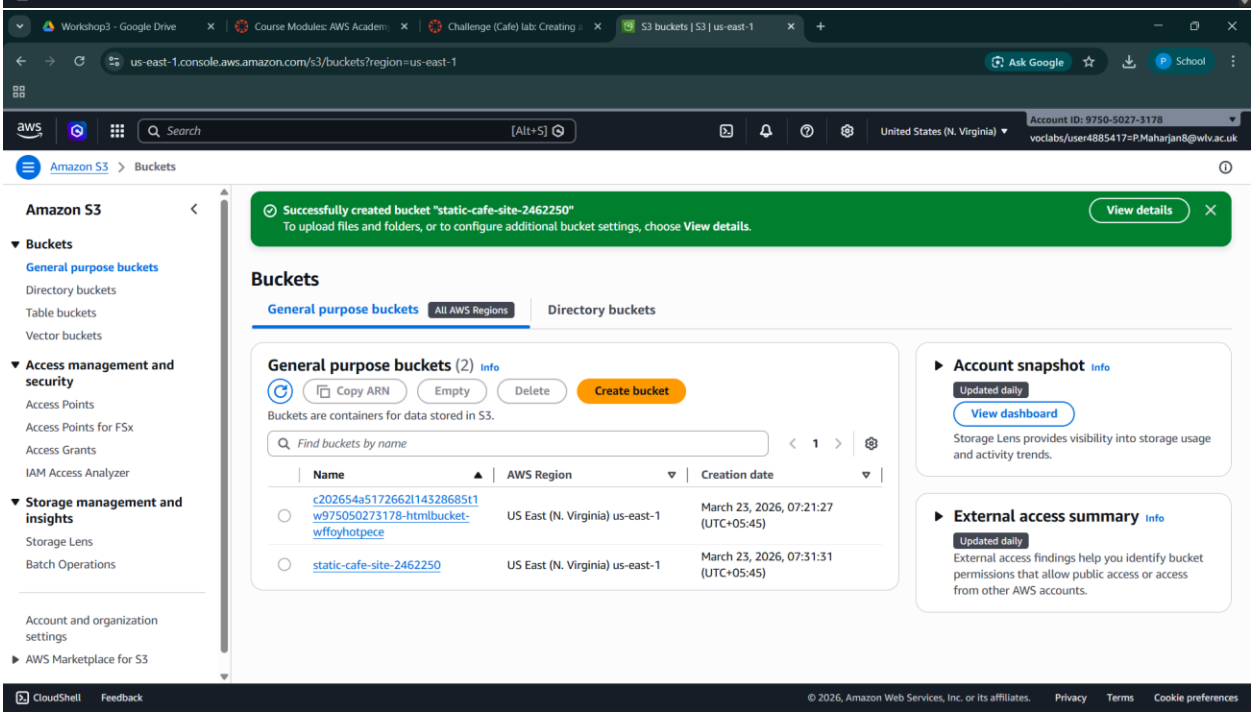


## Task 3: Uploading content to your S3 bucket. Show a screenshot.

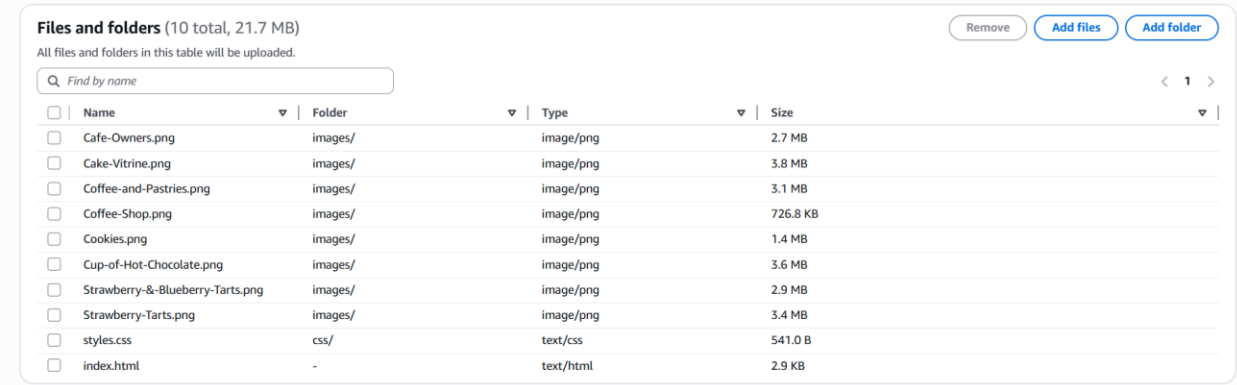

**Files and folders** (10 total, 21.7 MB)

All files and folders in this table will be uploaded.

Remove | Add files | Add folder

Find by name

1

| Name | Folder | Type | Size |
|---|---|---|---|
| Cafe-Owners.png | images/ | image/png | 2.7 MB |
| Cake-Vitrine.png | images/ | image/png | 3.8 MB |
| Coffee-and-Pastries.png | images/ | image/png | 3.1 MB |
| Coffee-Shop.png | images/ | image/png | 726.8 KB |
| Cookies.png | images/ | image/png | 1.4 MB |
| Cup-of-Hot-Chocolate.png | images/ | image/png | 3.6 MB |
| Strawberry-&-Blueberry-Tarts.png | images/ | image/png | 2.9 MB |
| Strawberry-Tarts.png | images/ | image/png | 3.4 MB |
| styles.css | css/ | text/css | 541.0 B |
| index.html | - | text/html | 2.9 KB |

## Task 4: Creating a bucket policy to grant public read access. Show a screenshot.

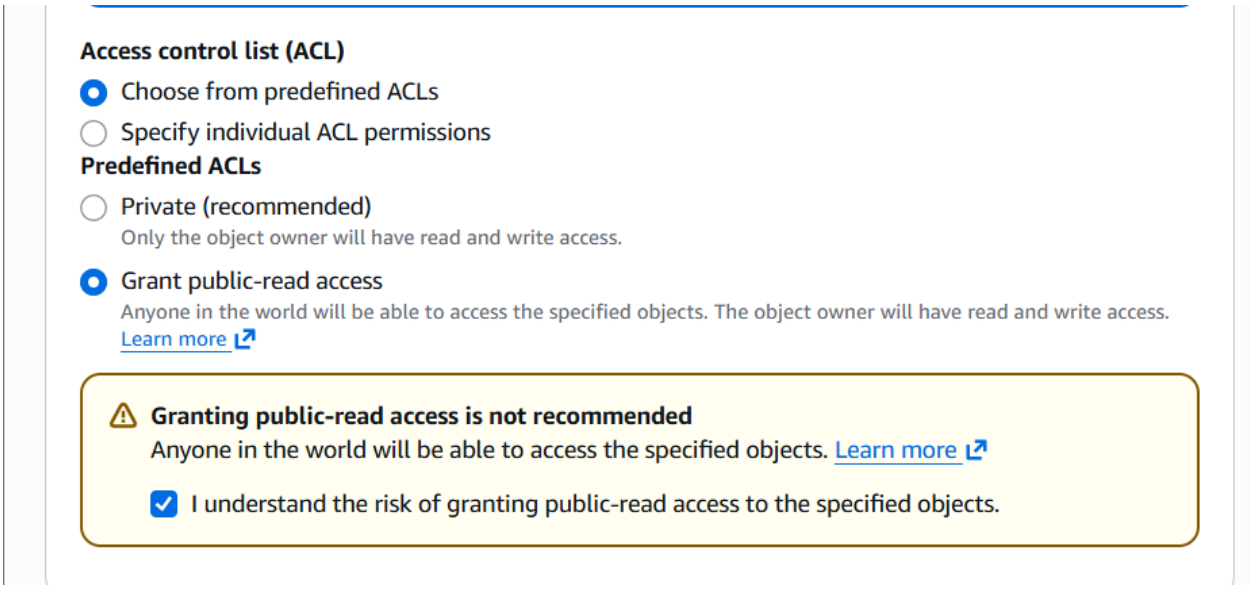

**Access control list (ACL)**

- (●) Choose from predefined ACLs
- ( ) Specify individual ACL permissions

**Predefined ACLs**

- ( ) Private (recommended)
  Only the object owner will have read and write access.
- (●) Grant public-read access
  Anyone in the world will be able to access the specified objects. The object owner will have read and write access.
  Learn more

⚠ **Granting public-read access is not recommended**
Anyone in the world will be able to access the specified objects. Learn more

☑ I understand the risk of granting public-read access to the specified objects.

## New business requirement: Protecting website data (challenge 2)

## Task 5: Enabling versioning on the S3 bucket. Show a screenshot.

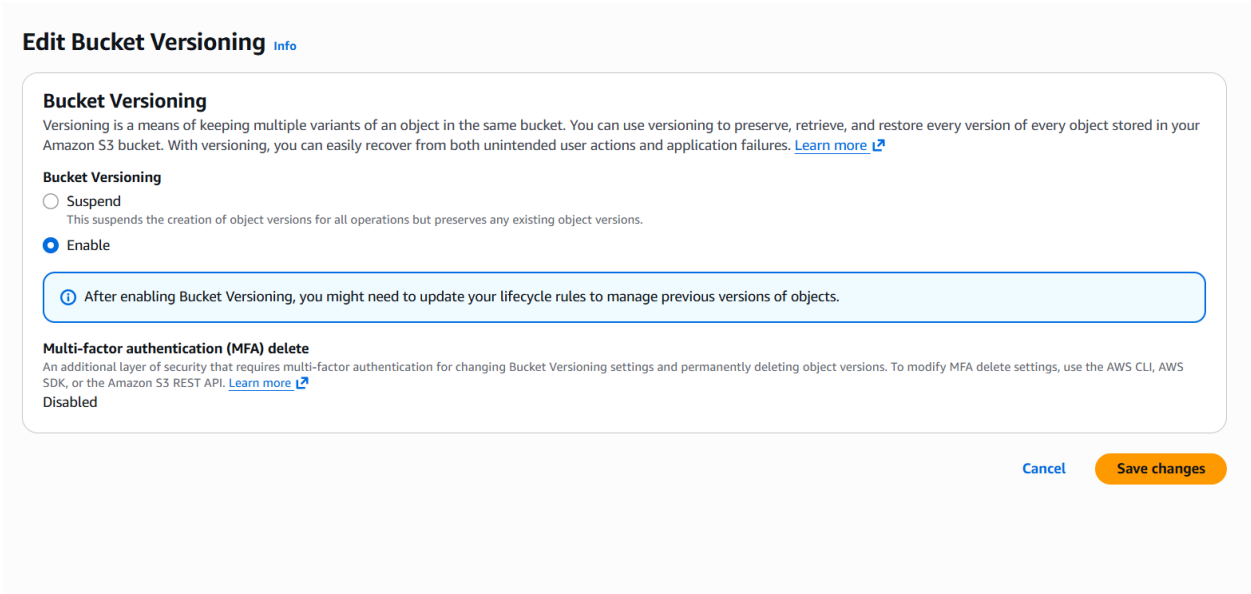


## New business requirement: Optimizing costs of Amazon S3 object storage (challenge 3)

## Task 6: Setting lifecycle policies. Show a screenshot.

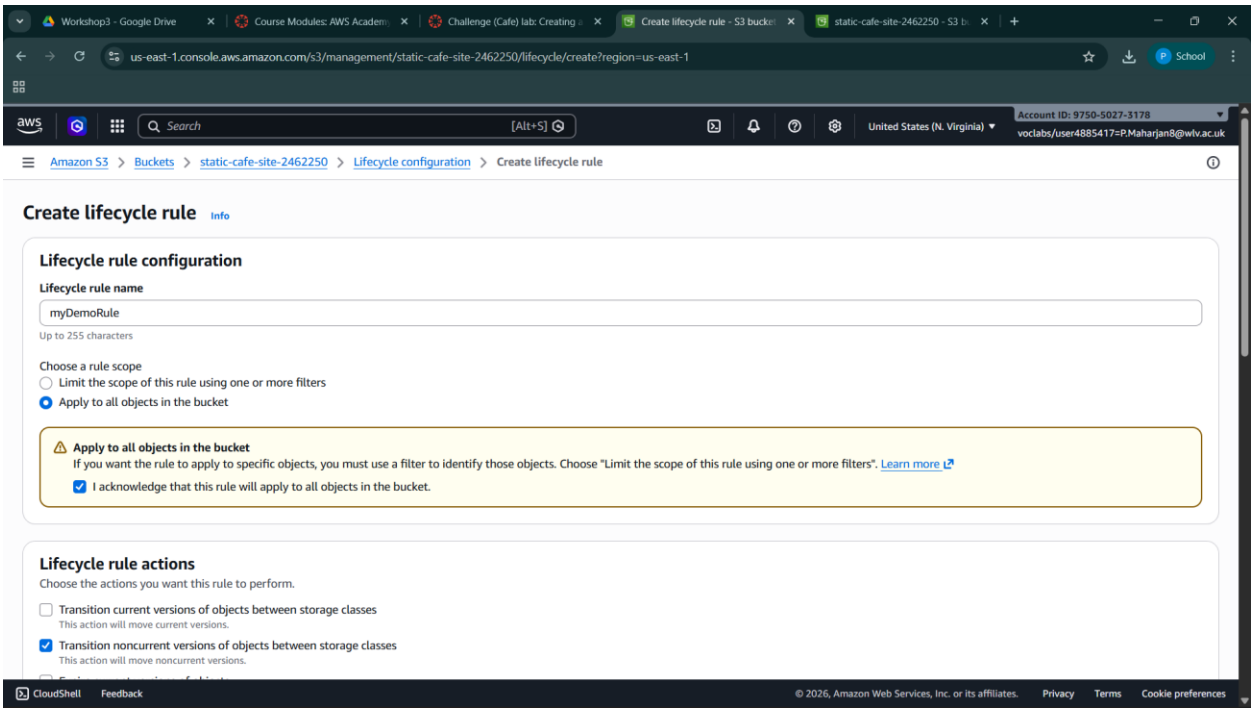

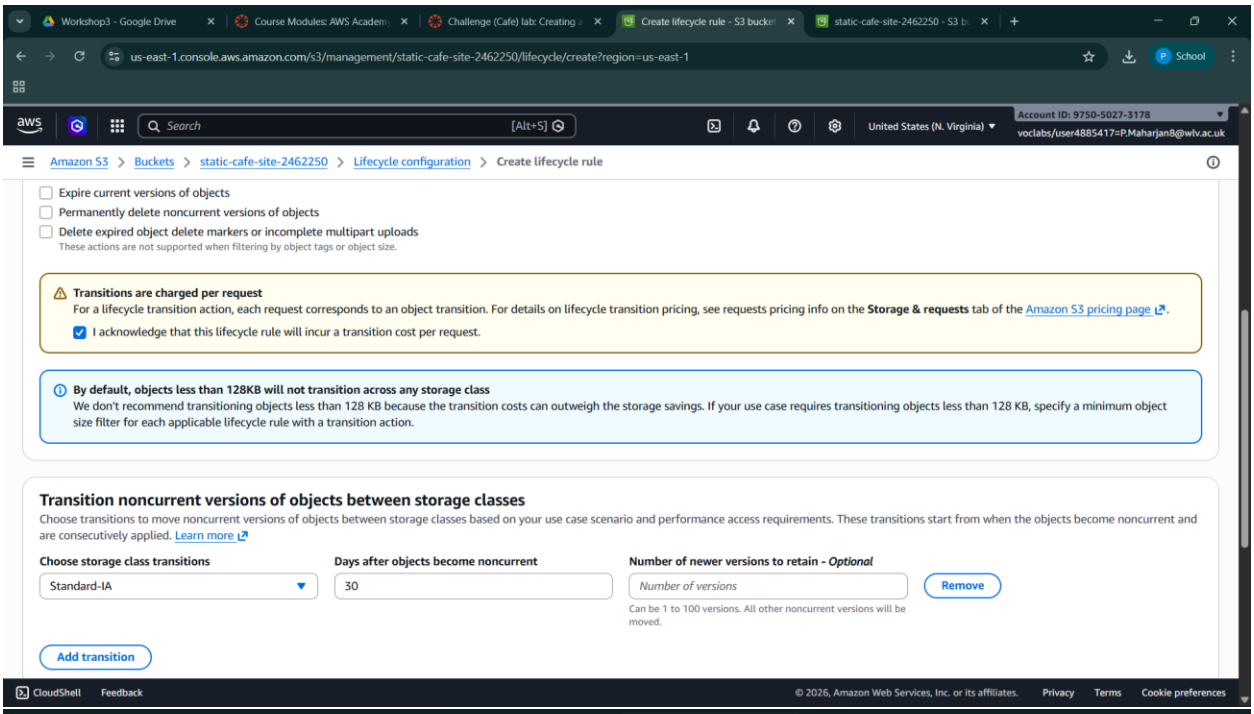


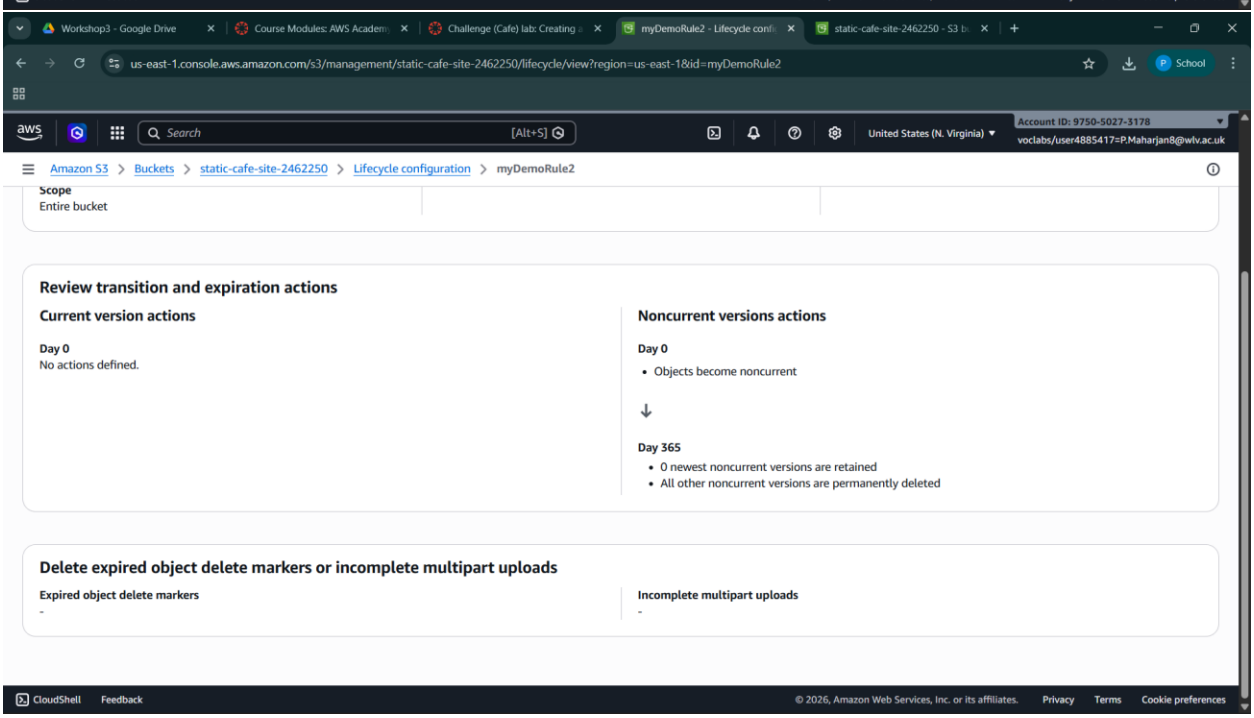


## New business requirement: Enhancing durability and planning for DR (challenge 4)

---

## Task 7: Enabling cross-Region replication. Show a screenshot.

Workshop3 - Google Drive | Course Modules: AWS Aca | Challenge (Cafe) lab: Creat | Replication rule list - S3 bu | static-cafe-website-246225 | New Tab

us-east-1.console.aws.amazon.com/s3/management/static-cafe-site-2462250/replication?region=us-east-1

aws | Search [Alt+S] | United States (N. Virginia) | Account ID: 9750-5027-3178 | voclabs/user4885417=P.Maharjan8@wlv.ac.uk

Amazon S3 > Buckets > static-cafe-site-2462250 > Replication rules

**Replication configuration successfully updated**
If changes to the configuration aren't displayed, choose the refresh button. Changes apply only to new objects. To replicate existing objects with this configuration, choose **Create replication job**.

Create replication job

## Replication rules Info

Replication enables automatic and asynchronous copying of objects a that define what options should be applied to a group of objects during replication.

### Replication configuration settings

Configuration settings affect all replication rules in the bucket.

Create replication job | Edit

**Source bucket**
static-cafe-site-2462250

**Source Region**
US East (N. Virginia) us-east-1

### Replication rules (1)

View details | Edit rule | Delete | Actions | Create replication rule

Use replication rules to define options you want Amazon S3 to apply during replication such as server-side encryption, replica ownership, transitioning replicas to another storage class, and more. Learn more

1

| Replication | KMS-encrypted | Replica |
|---|---|---|

### Replicate existing objects?

You can enable a one-time Batch Operations job from this replication configuration to replicate objects that already exist in the bucket and to synchronize the source and destination buckets. Learn more or see pricing

**Existing objects**

- (●) No, do not replicate existing objects.
- ( ) Yes, replicate existing objects.

Cancel | Submit

CloudShell | Feedback | © 2026, Amazon Web Services, Inc. or its affiliates. | Privacy | Terms | Cookie preferences

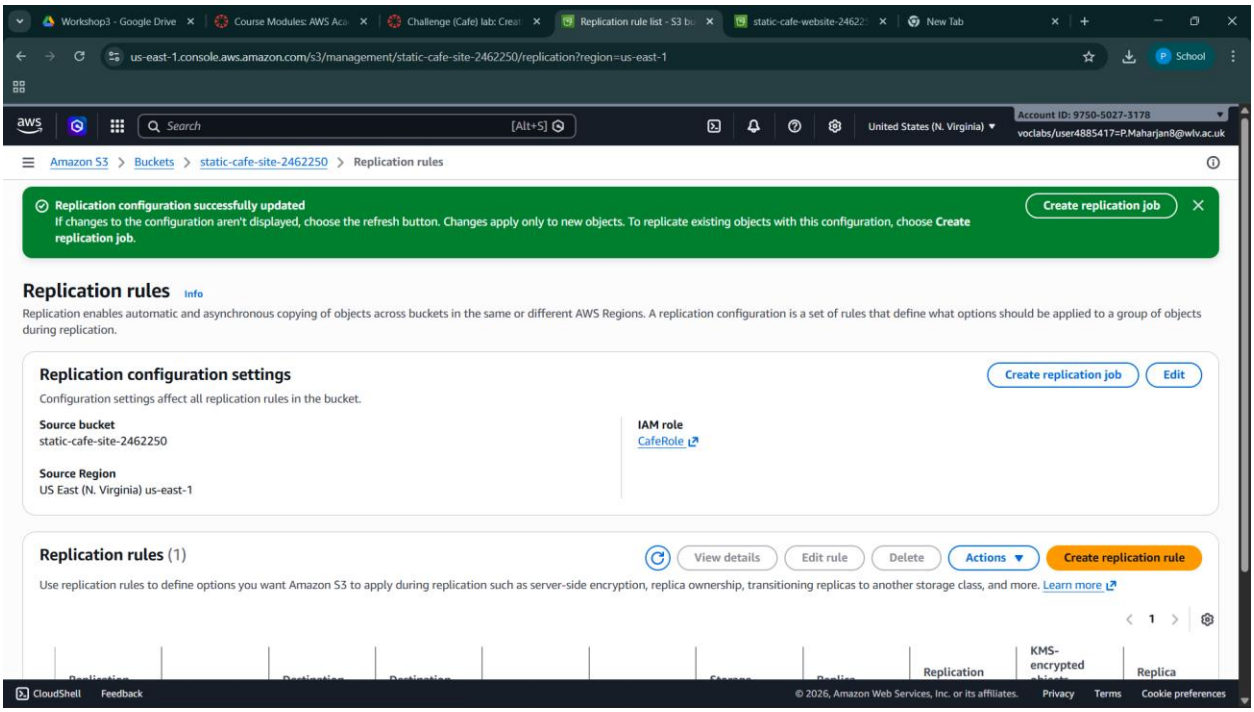


## Description

Write in your own wording and clearly cover all of the following (about 250 to 450 words):

1. what you built and what you did in that lab
2. one security control you used and why it matters
3. one performance or reliability feature that is present and how it helps
4. one issue you had and how you fixed it (or one likely issue and how you would fix it)

Your explanation must be specific and must match your screenshots.

Ans:

**In this lab,** I built a fully functional static website for the café using AWS's S3(Simple Storage Service) service .

As visible in the above screenshots, the given (index.html, css folder, and images folder) files were extracted and  a general-purpose bucket named **static-cafe-site-2462250** was created in the US East (N. Virginia) region where the extracted files were uploaded. After that static website hosting was enabled with index.html as the index document, lifecycle policies (transition to S3 Standard-IA after 30 days, delete after 365 days) were set, and cross-Region replication to a secondary bucket was configured.

As shown in the Task 4 screenshot, I selected "Grant public-read access" under Predefined ACLs and acknowledged the risk warning. This matters because S3 objects are private by default and without it, the static website URL would return an access-denied error. I also enabled ACLs on the bucket to allow object-level permissions.

As shown in the Task 5 screenshot, bucket versioning keeps a full history of every file uploaded. This means if the modified index.html (with changed background colors) introduced any errors, I could restore the previous working version instantly, without any external backup.

An issue that was faced while completing this lab was that the bucket name "static-cafe-site" was already taken globally. This issue was resolved by appending the student ID to the bucket name to create "static-cafe-site-2462250," confirmed by the green success banner in the Task 2 screenshot.