

***Go Lang***

## ***Is go interpreted or compile language***

Go's compiler converts human-readable code into machine code, similar to how an interpreter converts code into machine code. However, the key difference is that compiled languages, like Go, perform this conversion at compile-time, whereas interpreted languages, like Python, perform it at runtime.

Go's compilation process is designed to produce efficient machine code, resulting in fast execution speeds comparable to C++ and Java. In fact, Go is about 40 times faster than Python.

Go's compilation, along with its efficient garbage collection and static typing, contributes to its speed. Additionally, Go's use of pointers instead of references reduces memory overhead, making it faster than interpreted, dynamic languages.

Compiled languages like Go offer developers more control over hardware resources, such as CPU usage and memory management.

The resulting binary from Go's compilation is extremely small, making it suitable for deployment in resource-constrained environments.

*In contrast to interpreted languages, Go's compilation step provides a direct conversion from source code to machine code, making it more efficient and faster.*

*Here's a summary in bullet points:*

- *Go is a compiled language, not an interpreted one.*
- *Go's compiler converts source code to machine code at compile-time.*
- *Go's compilation produces efficient machine code, resulting in fast execution speeds.*
- *Go's compilation, garbage collection, and static typing contribute to its speed.*
- *Go's use of pointers reduces memory overhead,*

*making it faster than interpreted languages. • Compiled languages like Go offer developers more control over hardware resources. • The resulting binary from Go's compilation is extremely small.*

*(Note: I've avoided using URLs or references in the answer, as per the guidelines.)*

## Can we directly execute go without exe file?

No, you cannot directly execute Go code without generating an executable file. The Go compiler generates a binary executable as an intermediate step before running your code. This executable can then be run independently of the Go compiler.

*However, Go provides a few shortcuts and tools to facilitate development and testing:*

- 1. `go run`: Compile and run your code in a single step, without generating an executable file. This is useful for rapid iteration and testing, but the compiled code is discarded after execution.*
- 2. `go build`: Compile your code into an executable, but does not install it. You'll need to specify the executable's path to run it.*
- 3. `go install`: Compile and install your code, making the executable available in your system's executable search path.*

*package main*

```
import "fmt"

func main() {
    fmt.Println("Hello, Go!")
}
```

*To run this code without generating an executable file:*

```
$ go run main.go
Hello, Go!
```

*To compile and generate an executable file:*

```
$ go build main.go
$ ./main
Hello, Go!
```

*Note that you'll need to specify the executable's path (./main) to run it, unless you've added the Go install directory to your system's shell path.*

*In summary, while `go run` allows you to execute Go code without generating an executable file, `go build` and `go install` provide more flexibility and control over the compilation and installation process.*

## **Compiled vs Interpreted**

*Compiled programs can be run without access to the original source code, and without access to a compiler.*

*For example, when your browser executes the code you write in this course, it doesn't use the original code, just the compiled result. Note how this is different than interpreted languages like Python and JavaScript.*

*With Python and JavaScript, the code is interpreted at [runtime](#) by a separate program known as the "interpreter". Distributing code for users to run can be a pain because they need to have an interpreter installed, and they need access to the original source code.*

### **Examples of compiled languages**

- Go
- C
- C++
- Rust

### **Examples of interpreted languages**

- JavaScript
- Python
- Ruby



### Go is Strongly Typed

Go enforces strong and static typing, meaning variables can only have a single type. A string variable like "hello world" can not be changed to an int, such as the number 3.

### Example for Strongly TYPed

```
package main

import f "fmt"
```

```
func main() {  
  
    var s="Amin"  
  
    var n=10  
  
    f.Println(s+n)  
  
}
```

```
[Running] go run "d:\GIT\GO LANG\Exaple of strongly typed.go"
```

```
# command-line-arguments
```

```
.\Exaple of strongly typed.go:8:12: invalid operation: s + n (mismatched  
types string and int)
```

## Go programs are lightweight


Go programs are fairly lightweight. Each program includes a small amount of "extra" code that's included in the executable binary. This extra code is called the [Go Runtime](#). One of the purposes of the Go runtime is to clean up unused memory at runtime.

In other words, the Go compiler includes a small amount of extra logic in every Go program to make it easier for developers to write code that's memory efficient.

As a general rule, Java programs use *more* memory than comparable Go programs because Go doesn't use an entire virtual machine to run its programs, just a small runtime. The Go runtime is small enough that it is included directly in each Go program's compiled machine code.

As another general rule, Rust and C++ programs use slightly *less* memory than Go programs because more control is given to the developer to optimize memory usage of the program. The Go runtime just handles it for us automatically.



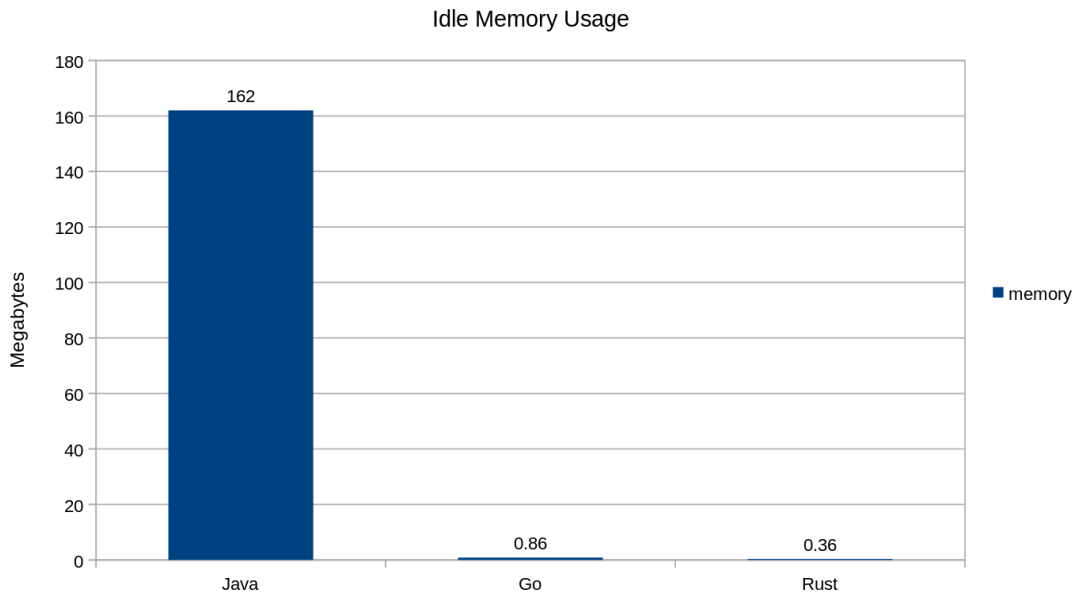

- Chart showing idle memory usage comparison between Java (162MB), Go (.86MB) and Rust (.36MB)
- In the chart above, of three very simple programs written in Java, Go, and Rust. As you can see, Go and Rust use very little memory when compared to Java.

## Variables in Go

Go's basic variable types are:

- `complex64 complex128 bool`
- `string`
- `int int8 int16 int32 int64`
- `uint uint8 uint16 uint32 uint64 uintptr`
- `byte` // alias for `uint8`

- `rune` // alias for `int32` // represents a Unicode code point
- `float32` `float64`

- A `bool` is a boolean variable, meaning it has a value of `true` or `false`.
- The [floating point](#) types ( `float32` and `float64`) are used for numbers that are not integers – that is, they have digits to the right of the decimal place, such as `3.14159`.
- The `float32` type uses 32 bits of precision, while the `float64` type uses 64 bits to be able to more precisely store more digits.

## How to declare a variable

Variables are declared using the `var` keyword. For example, to declare a variable called `number` of type `int`, you would write:

```
var number int
```

To declare a variable called `pi` to be of type `float64` with a value of `3.14159`, you would write:

```
var pi float64 = 3.14159
```

## Short Variable Declaration:

Inside a function (even the main function), the `:=` short assignment statement can be used in place of a `var` declaration. The `:=` operator infers the type of the new variable based on the value.

```
var empty string is same as    empty := ""
```

Outside of a function (in the [global/package scope](#)), every statement begins with a keyword ( `var`, `func`, and so on) and so the `:=` construct is not available.

## Type Inference

- To declare a variable without specifying an explicit type (either by using the `:=` syntax or `var = expression` syntax), the variable's type is *inferred* from the value on the right hand side.

When the right hand side of the declaration is typed, the new variable is of that same type:

```
var i int
```

```
j := i // j is also an int
```

However, when the right hand side is a literal value (an untyped numeric constant like 42 or 3.14), the new variable will be an `int`, `float64`, or `complex128` depending on its precision:

```
i := 42           // int

f := 3.14         // float64

g := 0.867 + 0.5i // complex128
```

### Same Line Declarations

We can declare multiple variables on the same line:

```
mileage, company := 80276, "Tesla" // is the same as

mileage := 80276

company := "Tesla"
```

### Type Sizes

Ints, [uints](#), [floats](#), and [complex](#) numbers all have type sizes.

- `int int8 int16 int32 int64` // whole numbers
- `uint uint8 uint16 uint32 uint64 uintptr` // positive whole numbers
- `float32 float64` // decimal numbers
- `complex64 complex128` // imaginary numbers (rare)

The size (8, 16, 32, 64, 128, and so on) indicates how many bits in memory will be used to store the variable. The default `int` and `uint` types are just aliases that refer to their respective 32 or 64 bit sizes depending on the environment of the user.

The standard sizes that unless you have a specific need are:

- `int`
- `uint`
- `float64`
- `complex128`

Some types can be converted the following way:

- `temperatureInt := 88`
- `temperatureFloat := float64(temperatureInt)`

Casting a float to an integer in this way [truncates](#) the floating point portion.

Unless you have a good reason to, stick to the following types:

- `bool`
- `string`
- `int`
- `uint`
- `byte`
- `rune`
- `float64`
- `Complex128`

### **Constants :**

- Constants are declared like variables but use the `const` keyword. Constants can't use the `:=` short declaration syntax.
- Constants can be character, string, boolean, or numeric values. They *can not* be more complex types like slices, maps and structs, which are types I will explain later.
- As the name implies, the value of a constant can't be changed after it has been declared.

Constants *must* be known at compile time. More often than not they will be declared with a static value:

```
const myInt = 15
```

However, constants *can be computed* so long as the computation can happen at compile time. For example, this is valid:

```
const firstName = "Lane"
```

```
const lastName = "Wagner"
```

```
const fullName = firstName + " " + lastName
```

That said, you can't declare a constant that can only be computed at run-time.

## How to Format Strings in Go

Go follows the [printf tradition](#) from the C language. In my opinion, string formatting/interpolation in Go is currently *less* elegant than JavaScript and Python.

- [fmt.Printf](#) – Prints a formatted string to [standard out](#)
- [fmt.Sprintf\(\)](#) – Returns the formatted string

## Examples

These formatting verbs work with both `fmt.Printf` and `fmt.Sprintf`.

### **%v** - Interpolate the default representation

The `%v` variant prints the Go syntax representation of a value. You can usually use this if you're unsure what else to use. That said, it's better to use the type-specific variant if you can.

```
s := fmt.Sprintf("I am %v years old", 10)

// I am 10 years old

s := fmt.Sprintf("I am %v years old", "way too many")

// I am way too many years old
```

### **%s** - Interpolate a string

```
s := fmt.Sprintf("I am %s years old", "way too many")

// I am way too many years old
```

### **%d** - Interpolate an integer in decimal form

```
s := fmt.Sprintf("I am %d years old", 10)

// I am 10 years old
```



## %f - Interpolate a decimal

```
s := fmt.Sprintf("I am %f years old", 10.523)

// I am 10.523000 years old

// The ".2" rounds the number to 2 decimal places

s := fmt.Sprintf("I am %.2f years old", 10.523)

// I am 10.53 years old
```

## Conditionals

if statements in Go don't use parentheses around the condition:

```
if height > 4 {

    fmt.Println("You are tall enough!")

}
```

**else if** and **else** are supported as you would expect:

```
if height > 6 {

    fmt.Println("You are super tall!")

} else if height > 4 {

    fmt.Println("You are tall enough!")

} else {

    fmt.Println("You are not tall enough!")

}
```

### The initial statement of an if block

An **if** conditional can have an "initial" statement. The variable(s) created in the initial statement are only defined within the scope of the **if** body.

```
if INITIAL_STATEMENT; CONDITION {

}
```

This is just some syntactic sugar that Go offers to shorten up code in some cases. For example, instead of writing:

```
length := getLength(email)

if length < 1 {

    fmt.Println("Email is invalid")

}
```

We can do:

```
if length := getLength(email); length < 1 {

    fmt.Println("Email is invalid")

}
```

Not only is this code a bit shorter, but it also removes `length` from the parent scope. This is convenient because we don't need it there – we only need access to it while checking a condition.

## Functions in Go

Functions in Go can take zero or more arguments.

To make Go code easier to read, the variable type comes *after* the variable name.

```
func sub(x int, y int) int {

    return x-y

}
```

Accepts two integer parameters and returns another integer.

Here, `func sub(x int, y int) int` is known as the **"function signature"**.

## Multiple Parameters

When multiple arguments are of the same type, the type only needs to be declared after the last one, assuming they are in order.

```
func add(x, y int) int {

    return x + y

}
```

**If they are not in order they need to be defined separately.**

## Function Declaration Syntax

Developers often wonder why the declaration syntax in Go is different from the tradition established in the C family of languages.

### C-Style syntax

The C language describes types with an expression including the name to be declared, and states what type that expression will have.

```
int y;
```

The code above declares **y** as an **int**. In general, the type goes on the left and the expression on the right.

Interestingly, the creators of the **Go language** agreed that the **C-style** of declaring types in signatures gets confusing really fast – take a look at this nightmare.

```
int (*fp)(int (*ff)(int x, int y), int b)
```

### Go-style syntax

Go's declarations are clear, you just read them left to right, just like you would in English.

```
x int
```

```
p *int
```

```
a [3]int
```

It's nice for more complex signatures, as it makes them easier to read.

```
f func(func(int,int) int, int) int
```

## How to Pass Variables by Value:

- Variables in Go are passed by value (except for a few data types we haven't covered yet). "Pass by value" means that when a variable is passed into a function, that function receives a *copy* of the variable. The function is unable to mutate the caller's original data.

```
package main

import f "fmt"

func main(){x:=5

    f.Println(x)//Here we can say That pass by value so x won't change
here

    f.Println(inc(x))// here It's returning function value

    f.Println(x)//here it won't change so we can say pass by value only
sends its cop

}func inc(x int)int{

    return x+2

}
```

## How to Ignore Return Values

A function can return a value that the caller doesn't care about. We can explicitly ignore variables by using an **underscore**: `_`

```
func getPoint() (x int, y int) {

    return 3, 4

}

// ignore y value

x, _ := getPoint()
```

Even though `getPoint()` returns two values, we can capture the first one and ignore the second.

## Why would you ignore a return value?

- There could be many reasons. For example, maybe a function called `getCircle` returns the center point and the radius, but you really only need the radius for your calculation. In that case, you would ignore the center point variable.
- This is crucial to understand because the Go compiler will throw an error if you have unused variable declarations in your code, so you *need* to ignore anything you don't intend to use.

## Named Return Values

Return values may be given names, and if they are, then they are treated the same as if they were new variables defined at the top of the function.

Named return values are best thought of as a way to document the purpose of the returned values.

According to the [tour of go](#):

*"A return statement without arguments returns the named return values. This is known as a "naked" return. Naked return statements should be used only in short functions. They can harm readability in longer functions."*

```
func getCoords() (x, y int) {

    // x and y are initialized with zero values

    return // automatically returns x and y

}
```

**Is the same as:**

```
func getCoords() (int, int){
    var x int
    var y int
    return x, y
}
```

In the first example, `x` and `y` are the return values. At the end of the function, we could simply write `return` to return the values of those two variables, rather than writing `return x,y`.



## Explicit Returns

Even though a function has named return values, we can still explicitly return values if we want to.

```
func getCoords() (x, y int){
    return x, y // this is explicit
}
```

Using this explicit pattern we can even overwrite the return values:

```
func getCoords() (x, y int){
    return 5, 6 // this is explicit, x and y are NOT returned
}
```

Otherwise, if we want to return the values defined in the function signature we can just use a naked return (blank return):

```
func getCoords() (x, y int){
    return // implicitly returns x and y
}
```

## The Benefits of Named Returns

### Good For Documentation (Understanding)

- Named return parameters are great for documenting a function. We know what the function is returning directly from its signature, no need for a comment.
- Named return parameters are particularly important in longer functions with many return values.

```
func calculator(a, b int) (mul, div int, err error) {
    if b == 0 {
        return 0, 0, errors.New("Can't divide by zero")
    }
    mul = a * b
    div = a / b
    return mul, div, nil
}
```

Which is easier to understand than:

```
func calculator(a, b int) (int, int, error) {
    if b == 0 {
        return 0, 0, errors.New("Can't divide by zero")
    }
    mul := a * b
    div := a / b
    return mul, div, nil
}
```

We know *the meaning* of each return value just by looking at the function signature: **func calculator(a, b int) (mul, div int, err error)**

## Less Code (Sometimes)

- If there are multiple return statements in a function, you don't need to write all the return values each time, though you probably should.
- When you choose to omit return values, it's called a *naked* return. Naked returns should only be used in short and simple functions.

## Early Returns

- Go supports the ability to return early from a function. This is a powerful feature that can clean up code, especially when used as guard clauses.
- Guard Clauses leverage the ability to return early from a function (or continue through a loop) to make nested conditionals one-dimensional. Instead of using if/else chains, we just return early from the function at the end of each conditional block.

```
func divide(dividend, divisor int) (int, error) {  
    if divisor == 0 {  
        return 0, errors.New("Can't divide by zero")  
    }  
    return dividend/divisor, nil  
}
```

Error handling in Go naturally encourages developers to make use of guard clauses. When I started writing more JavaScript, I was disappointed to see how many nested conditionals existed in the code I was working on.

Let's take a look at an exaggerated example of nested conditional logic:

```
func getInsuranceAmount(status insuranceStatus) int {  
    amount := 0  
    if !status.hasInsurance(){  
        amount = 1  
    } else {  
        if status.isTotalled(){  
            amount = 10000  
        } else {  
            if status.isDented(){  
                amount = 160  
                if status.isBigDent(){  
                    amount = 270  
                }  
            } else {  
                amount = 0  
            }  
        }  
    }  
    return amount  
}
```

This could be written with guard clauses instead:

```
func getInsuranceAmount(status insuranceStatus) int {  
  
    if !status.hasInsurance(){  
        return 1  
    }  
    if status.isTotalled(){  
        return 10000  
    }  
    if !status.isDented(){  
        return 0  
    }  
    if status.isBigDent(){  
        return 270  
    }  
    return 160  
}
```

- The example above is much easier to read and understand. When writing code, it's important to try to reduce the cognitive load on the reader by reducing the number of entities they need to think about at any given time.
- In the first example, if the developer is trying to figure out when 270 is returned, they need to think about each branch in the logic tree and try to remember which cases matter and which cases don't.
- With the one-dimensional structure offered by guard clauses, it's as simple as stepping through each case in order.

## Structs in Go

We use structs in Go to represent structured data. It's often convenient to group different types of variables together. For example, if we want to represent a car we could do the following:

```
type car struct {
    Make string
    Model string
    Height int
    Width int
}
```

This creates a new struct type called car. All cars have a **Make**, **Model**, **Height** and **Width**.

In Go, you will often use a struct to represent information that you would have used a **dictionary** for in **Python**, or an **object literal** in **JavaScript**.

## Nested Structs in Go

Structs can be nested to represent more complex entities:

```
type car struct {
    Make string
    Model string
    Height int
    Width int
    FrontWheel Wheel
    BackWheel Wheel
}

type Wheel struct {
    Radius int
    Material string
}
```

The fields of a struct can be accessed using the dot . operator.

```
myCar := car{}
```

```
myCar.FrontWheel.Radius = 5
```