

DSA IN PYTHON

1.Explain arrays in Python with example


A [Python Array](#) is a collection of a common type of data structures having elements with the same data type. It is used to store collections of data. In Python programming, arrays are handled by the “array” module. If you create arrays using the array module, elements of the array must be of the same numeric type

Syntax to Create an Array in Python

You can declare an array in Python while initializing it using the following syntax.

```
arrayName = array.array(type code for data type,  
[array,items])
```

The following image explains the syntax.

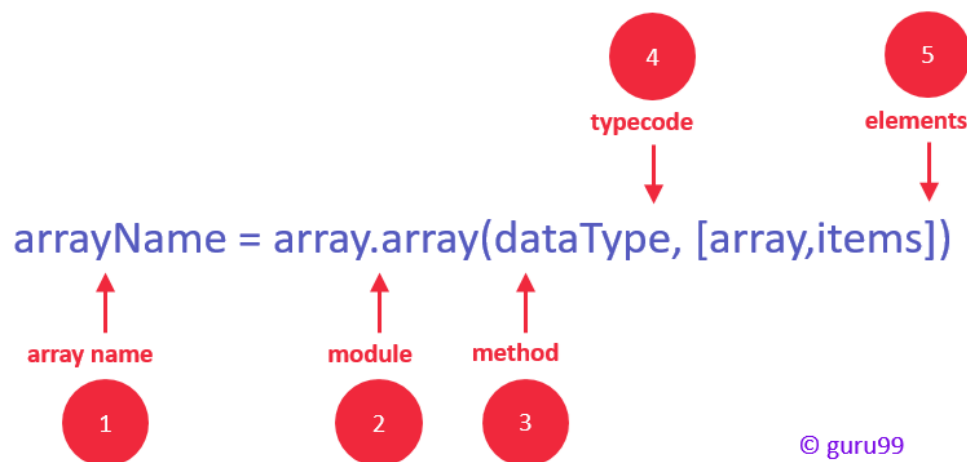

1. **Identifier**: specify a name like usually, you do for variables
2. **Module**: Python has a special module for creating array in Python, called “array” – you must import it before using it
3. **Method**: the array module has a method for initializing the array. It takes two arguments, type code, and elements.
4. **Type Code**: specify the data type using the type codes available (see list below)

5. **Elements:** specify the array elements within the square brackets, for example [130,450,103]

```
import array as myarray  
abc = myarray.array('d', [2.5, 4.9, 6.7])
```

2.How can you access array elements?

You can access any array item by using its index.

The syntax is

```
arrayName[indexNum]
```

Example

```
import array  
  
balance = array.array('i', [300,200,100])  
  
print(balance[1])
```

3.How can you insert elements in array?

Python array insert operation enables you to insert one or more items into an array at the beginning, end, or any given index of the array. This method expects two arguments index and value.

The syntax is

```
arrayName.insert(index, value)
```

Example

Let us add a new value right after the second item of the array. Currently, our balance array has three items: 300, 200, and 100. Consider the second array item with a value of 200 and index 1.

In order to insert the new value right “after” index 1, you need to reference index 2 in your insert method, as shown in the below Python array example:

```
import array
balance = array.array('i', [300,200,100])
balance.insert(2, 150)
print(balance)
```

4.How can you insert elements in array?

Python array insert operation enables you to insert one or more items into an array at the beginning, end, or any given index of the array.

This method expects two arguments index and value.

The syntax is

```
arrayName.insert(index, value)
```

Example

Let us add a new value right after the second item of the array.

Currently, our balance array has three items: 300, 200, and 100.

Consider the second array item with a value of 200 and index 1.

In order to insert the new value right “after” index 1, you need to reference index 2 in your insert method, as shown in the below Python array example:

```
import array
balance = array.array('i', [300,200,100])
balance.insert(2, 150)
print(balance)
```

5.How can you delete elements in array?

With this operation, you can delete one item from an array by value.

This method accepts only one argument, value. After running this method, the array items are re-arranged, and indices are re-assigned.

The syntax is

```
arrayName.remove(value)
```

Example

Let's remove the value of "3" from the array

```
import array as myarray
first = myarray.array('b', [2, 3, 4])
first.remove(3)
print(first)
```

6.How can you search and get the index of a value in an array?

With this operation, you can search for an item in an array based on its value. This method accepts only one argument, value. It is a non-destructive method, which means it does not affect the array values.

The syntax is

```
arrayName.index(value)
```

Example

Let's find the value of "3" in the array. This method returns the index of the searched value.

```
import array as myarray
number = myarray.array('b', [2, 3, 4, 5, 6])
print(number.index(3))
```

7.How can you reverse array in Python?

You can use reverse() to reverse array in Python.

Example:

```
import array as myarray
number = myarray.array('b', [1,2, 3])
number.reverse()
print(number)
```

8.Give example to convert array to Unicode

The Example to convert array to Unicode is:

```
from array import array
p =
array('u', [u'\u0050',u'\u0059',u'\u0054',u'\u0048',u'\
u004F',u'\u004E'])
print(p)
q = p.tounicode()
print(q)
```

Methods For Performing Operations on Arrays in Python

Arrays are mutable, which means they are changeable. You can change the value of the different items, add new ones, or remove any you don't want in your program anymore.

Let's see some of the most commonly used methods which are used for performing operations on arrays.

How to Change the Value of an Item in an Array

You can change the value of a specific element by specifying its position and assigning it a new value:

```
import array as arr
#original array
numbers = arr.array('i',[10,20,30])
#change the first element
#change it from having a value of 10 to having a value of 40
numbers[0] = 40
print(numbers)
#output
#array('i', [40, 20, 30])
```

How to Add a New Value to an Array

To add one single value at the end of an array, use the `append()` method:

```
import array as arr
#original array
numbers = arr.array('i',[10,20,30])
#add the integer 40 to the end of numbers
numbers.append(40)
print(numbers)
#output
#array('i', [10, 20, 30, 40])
```

Be aware that the new item you add needs to be the same data type as the rest of the items in the array. Look what happens when I try to add a float to an array of integers:

```
import array as arr
```

```
#original array
```

```
numbers = arr.array('i',[10,20,30])
```

```
#add the float 40.0 to the end of numbers
```

```
numbers.append(40.0)
```

```
print(numbers)
```

```
#output
```

```
#Traceback (most recent call last):
```

```
# File "/Users/dionysialemonaki/python_articles/demo.py", line 19, in  
<module>
```

```
# numbers.append(40.0)
```

```
#TypeError: 'float' object cannot be interpreted as an integer
```

But what if you want to add more than one value to the end an array?

Use the `extend()` method, which takes an iterable (such as a list of items) as an argument. Again, make sure that the new items are all the same data type.

```
import array as arr
```

```
#original array
```

```
numbers = arr.array('i',[10,20,30])
```

```
#add the integers 40,50,60 to the end of numbers
```



```
#The numbers need to be enclosed in square brackets
numbers.extend([40,50,60])
print(numbers)
#output
#array('i', [10, 20, 30, 40, 50, 60])
```

And what if you don't want to add an item to the end of an array? Use the `insert()` method, to add an item at a specific position.

The `insert()` function takes two arguments: the index number of the position the new element will be inserted, and the value of the new element.

```
import array as arr
#original array
numbers = arr.array('i',[10,20,30])
#add the integer 40 in the first position
#remember indexing starts at 0
numbers.insert(0,40)
print(numbers)
#output
#array('i', [40, 10, 20, 30])
```

How to Remove a Value from an Array

To remove an element from an array, use the `remove()` method and include the value as an argument to the method.

```
import array as arr
#original array
numbers = arr.array('i',[10,20,30])
numbers.remove(10)
print(numbers)
#output
#array('i', [20, 30])
```

With `remove()`, only the first instance of the value you pass as an argument will be removed.

See what happens when there are more than one identical values:

```
import array as arr
#original array
numbers = arr.array('i',[10,20,30,10,20])
numbers.remove(10)
print(numbers)
#output
#array('i', [20, 30, 10, 20])
```

Only the first occurrence of 10 is removed.

You can also use the `pop()` method, and specify the position of the element to be removed:

```
import array as arr
#original array
numbers = arr.array('i',[10,20,30,10,20])
#remove the first instance of 10
numbers.pop(0)

print(numbers)
#output
#array('i', [20, 30, 10, 20])
```

Array operations

Some of the basic operations supported by an array are as follows:

- Traverse - It prints all the elements one by one.
- Insertion - It adds an element at the given index.
- Deletion - It deletes an element at the given index.
- Search - It searches an element using the given index or by the value.
- Update - It updates an element at the given index.

`append()` Adds an element at the end of the list

`clear()` Removes all the elements from the list

`copy()` Returns a copy of the list

`count()` Returns the number of elements with the specified value

`extend()` Add the elements of a list (or any iterable), to the end of the current list

`index()` Returns the index of the first element with the specified value

`insert()` Adds an element at the specified position

`pop()` Removes the element at the specified position

`remove()` Removes the first item with the specified value

`reverse()` Reverses the order of the list


`sort()` Sorts the list

Linked List

A linear data structure called a linked list has elements that are not kept in consecutive locations in memory. A linked list's elements are connected via pointers.

A pointer to the first node of the linked list serves as the representation of a linked list. The head refers to the top node. The head's value is NULL if the linked list is empty. In a list, each node has at least two components:

- Data
- ◀ • Pointer (Or Reference) to the next node

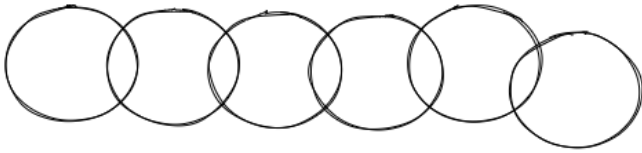

A chain :)

Advantages of Linked Lists:

1. Because of the chain-like system of linked lists, you can add and remove elements quickly. This also doesn't require reorganizing the data structure unlike arrays or lists. Linear data structures are often easier to implement using linked lists.
2. Linked lists also don't require a fixed size or initial size due to their chainlike structure.

Disadvantages of a Linked Lists:

1. More memory is required when compared to an array. This is because you need a pointer (which takes up its own memory) to point you to the next element.
2. Search operations on a linked list are very slow. Unlike an array, you don't have the option of random access.

When Should You Use a Linked List?

You should use a linked list over an array when:

1. You don't know how many items will be in the list (that is one of the advantages - ease of adding items).
2. You don't need random access to any elements (unlike an array, you cannot access an element at a particular index in a linked list).
3. You want to be able to insert items in the middle of the list.
4. You need constant time insertion/deletion from the list (unlike an array, you don't have to shift every other item in the list first).

These are a few things you should consider before trying to implement a linked list.

Now with all the theory out of the way, it's time to implement one. We'll do this using Python, but most of what we learn here applies to any language you are using. The most important thing is to understand how it works.


How to Use Linked Lists in Python

Here's a trick when creating a Linked List. It's something that helped me understand it much better.

You just have to realize that every item that you will be adding to the list is just a node (similar to a ring in a chain). What differentiates the head (which is the first node in the list) is that you gave it the title head, and then you started adding other nodes to it.

Remember that a Linked List is similar to how a chain is coupled together.

Joe is here with some rings, and he is going to help us.

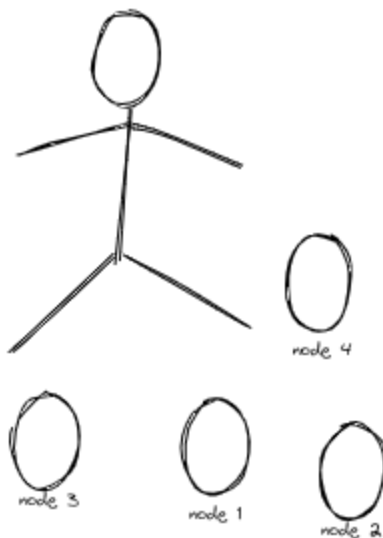

I will be using this to illustrate as we go...so you can think along these lines (this is not an art class – I repeat, this is not an art class :)) .

So let's create the nodes first:

```
class Node:
    def __init__(self,value):
        self.value = value
        self.next = None
```

That is it. We add the value because for anything to be added to the linked list, it should at least have some value (for example, except in rare situations, you don't add an empty string to an array, right?).

The next means that it is possible we want to chain other nodes – I mean, that is the major aim of a linked list.

Next we are going to define some basic functions:

```
class LinkedList:
    def __init__(self,head=None):
        self.head = head
```



```
def append(self, new_node):  
    current = self.head  
    if current:  
        while current.next:  
            current = current.next  
        current.next = new_node  
    else:  
        self.head = new_node
```