

AMENDMENT NO. 1 JANUARY 2023

TO

IS 208 : 2020 DOOR HANDLES — SPECIFICATION (Sixth Revision)

[Page 1, Table 1, Sl No. (x) and (xi)] — Substitute the following for the existing:

(1)	(2)	(3)
x)	Stainless steel plate, sheet and strip	Grade 202, 304 or 316 of IS 6911
xi)	Stainless steel wire rods	Grade X07Cr18Ni9 or X04Cr18Ni10 or X02Cr17Ni12Mo2 of IS 6527

(Page 3, Fig. 4) — Substitute the following for the existing figure:

NOTE — M5 × 20 mm GI Countersunk machine screw or any other suitable fixing arrangement may be used

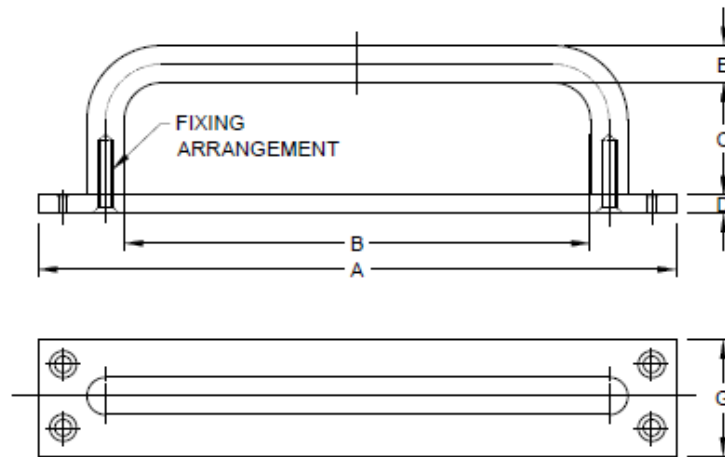


FIG. 4 TYPICAL DOOR HANDLE (TYPE 4)

(Page 1, clause 6.2) — Insert the following at the end:

‘The tolerances on thicknesses if not specified, it shall be as given in the relevant Indian standards for the concerned raw material.’

(Page 5, Table 2B, col 7 and col 12) — Substitute the following for the existing:

(7)		(12)
For aluminium	For mild steel, stainless steel, brass	For mild steel, stainless steel, brass and aluminium
2.8	2.0	5
2.8	2.0	5
2.8	2.5	6
2.8	2.5	6

(Page 5, Table 2B, footnote 1) — Substitute ‘increased’ for ‘interested’.


Amendment No. 1 to IS 208 : 2020

(Page 6, Table 2C, title) — Substitute ‘Dimensions of Doors Handles’ for ‘Dimensions of SS Door Handles’.

(Page 6, Table 2C, col 1, 5, 6, 8 and 10) — Substitute the following for the existing:

(1)	(5)	(6)	(8)	(10)
4	75	25	1	10 × 0.6
(for mild steel, stainless steel, brass and aluminium)	100	30	1	10 × 0.6
	125	35	1.2	12 × 0.8
	150	35	1.2	12 × 0.8

(Page 7, Fig. 5) — Substitute the following for the existing figure:

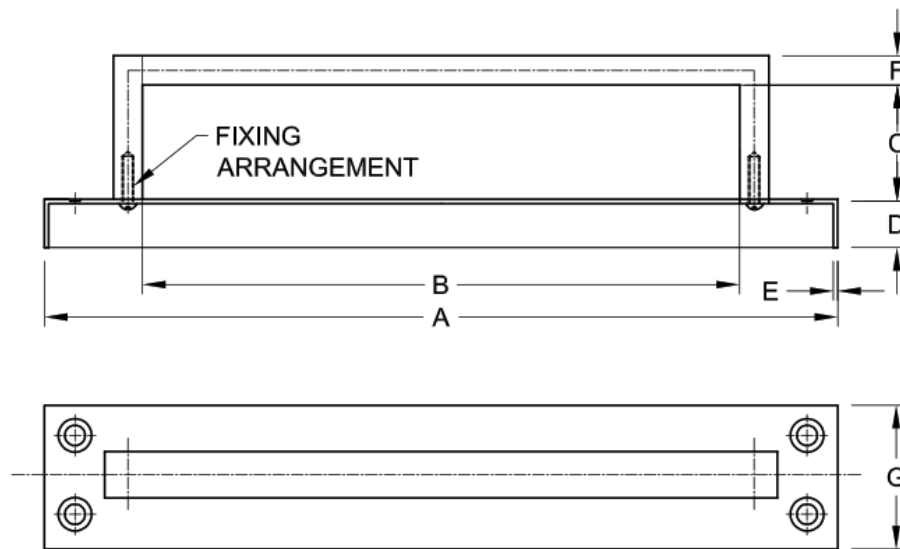

NOTE — M5 × 15 mm SS machine screw or any other suitable fixing arrangement may be used

FIG. 5 TYPICAL DOOR HANDLE (TYPE 4)

[Page 8, clause 7.1 a)] — Substitute the following for the existing:

- ‘a) Type 1 — Bright satin finish, nickel chromium plated as per Grade I of IS 1068 or copper oxidized as per IS 1378 or bronze finish for cast brass and zinc die cast handles. Stove enamelled black or copper oxidized for cast iron and malleable cast iron handles. Aluminium anodized to a bright natural, mat or satin finish or dyed.’

[Page 8, clause 7.1 c)] — Substitute the following for the existing:

- ‘c) Type 4 — Bright satin finish, nickel plated or copper oxidized, bronze finish for mild steel, stainless steel and brass handles. Bright, satin or dyed for aluminium handles.’

(Page 8, clause 8.1) — Delete.

(Page 8, clause 8.2) — Substitute the following for the existing:

‘8.2 Corrosion Test

Door handles shall not show any sign of corrosion, when subjected to test as per IS 9844 for 96 h. This test is not applicable for aluminium door handles.’

(Page 8, clause 8.3) — Substitute the following for the existing:

‘8.3 Anodizing Test

Anodizing test for aluminium door handle shall be tested for anodic coating grade AC-5 as per IS 1868.’

[Page 8, clause **10.1 b)**] — Delete.

(Page 8, clause **11**) — Substitute the following for the existing:

‘Door handles shall be suitably packed in cartons. Each carton shall be legibly and indelibly marked with the following:

- a) Manufacturer’s name and registered trademark, if any;
- b) Address of the manufacturer;
- c) Type, size, material (grade and corresponding Indian Standard) and finish;
- d) Quantity; and
- e) Batch number/lot number and month and year of manufacture.’

(Page 9, Annex A) — Insert the following at the end of the list:

‘IS 9844 : 1981	Methods of testing corrosion resistance of electroplated and anodized aluminium coatings by neutral salt spray test’
-----------------	--