

Aplikasi Mobile



Oleh

Bima Prakasa

2211533001

Dosen Pengampu

Nurfiah, S.ST, M.Kom

DEPARTEMEN INFORMATIKA
FAKULTAS TEKNOLOGI INFORMASI
UNIVERSITAS ANDALAS

2024

DataBase SQLite

A. Model

- Model Pelanggan

```
• package com.example.apaloundry.model;

public class ModelPelanggan {
    String id, nama, email, hp;

    public String getId() {
        return id;
    }

    public void setId(String id) {
        this.id = id;
    }

    public String getNama() {
        return nama;
    }

    public void setNama(String nama) {
        this.nama = nama;
    }

    public String getEmail() {
        return email;
    }

    public void setEmail(String email) {
        this.email = email;
    }

    public String getHp() {
        return hp;
    }

    public void setHp(String hp) {
        this.hp = hp;
    }
}
```

- Model Layanan

```
• package com.example.apaloundry.model;

public class ModelLayanan {
    String id, namaLayanan, harga;

    public String getId() {
        return id;
    }

    public void setId(String id) {
        this.id = id;
    }

    public String getNamaLayanan() {
        return namaLayanan;
    }
}
```

```

        public void setNamaLayanan(String namaLayanan) {
            this.namaLayanan = namaLayanan;
        }

        public String getHarga() {
            return harga;
        }

        public void setHarga(String harga) {
            this.harga = harga;
        }
    }
}

```

B. SQLiteHelper

```

C. package com.example.apaloundry.database;

import android.content.ContentValues;
import android.content.Context;
import android.database.Cursor;
import android.database.sqlite.SQLiteDatabase;
import android.database.sqlite.SQLiteOpenHelper;
import android.util.Log;

import com.example.apaloundry.model.ModelLayanan;
import com.example.apaloundry.model.ModelPelanggan;

import java.util.ArrayList;
import java.util.List;

public class SQLiteHelper extends SQLiteOpenHelper {
    public static String DATABASE_NAME = "my_laundry.db";
    public static final int DATABASE_VERSION = 2;

    // Tabel Pelanggan
    public static final String TABLE_PELANGGAN = "pelanggan";
    public static final String KEY_PELANGGAN_ID = "pelanggan_id";
    public static final String KEY_PELANGGAN_NAMA = "nama";
    public static final String KEY_PELANGGAN_EMAIL = "email";
    public static final String KEY_PELANGGAN_HP = "hp";

    // Tabel Layanan
    public static final String TABLE_LAYANAN = "layanan";
    public static final String KEY_LAYANAN_ID = "layanan_id"; // Tambahkan
ID layanan
    public static final String KEY_LAYANAN_NAMA = "nama_layanan";
    public static final String KEY_LAYANAN_HARGA = "harga";

    // Query untuk membuat tabel pelanggan
    private static final String CREATE_TABLE_PELANGGAN = "CREATE TABLE " +
        TABLE_PELANGGAN + "("
        + KEY_PELANGGAN_ID + " TEXT PRIMARY KEY, "
        + KEY_PELANGGAN_NAMA + " TEXT, "
        + KEY_PELANGGAN_EMAIL + " TEXT, "
        + KEY_PELANGGAN_HP + " TEXT )";

    // Query untuk membuat tabel layanan
    private static final String CREATE_TABLE_LAYANAN = "CREATE TABLE IF NOT
EXISTS "
        + TABLE_LAYANAN + "("
        + KEY_LAYANAN_ID + " TEXT PRIMARY KEY, "
        + KEY_LAYANAN_NAMA + " TEXT, "
        + KEY_LAYANAN_HARGA + " TEXT)";

    public SQLiteHelper(Context context) {
        super(context, DATABASE_NAME, null, DATABASE_VERSION);
    }
}

```

```

    }

    @Override
    public void onCreate(SQLiteDatabase db) {
        Log.d("SQLiteHelper", "onCreate called");
        db.execSQL(CREATE_TABLE_PELANGGAN);
        db.execSQL(CREATE_TABLE_LAYANAN); // Pastikan ini dipanggil
    }

    @Override
    public void onUpgrade(SQLiteDatabase db, int oldVersion, int newVersion)
    {
        db.execSQL("DROP TABLE IF EXISTS " + TABLE_PELANGGAN);
        db.execSQL("DROP TABLE IF EXISTS " + TABLE_LAYANAN);
        onCreate(db); // Buat tabel kembali setelah dihapus
    }

    // Method untuk menambahkan pelanggan
    public boolean insertPelanggan(ModelPelanggan mp) {
        SQLiteDatabase database = this.getWritableDatabase();
        ContentValues contentValues = new ContentValues();
        contentValues.put(KEY_PELANGGAN_ID, mp.getId());
        contentValues.put(KEY_PELANGGAN_NAMA, mp.getNama());
        contentValues.put(KEY_PELANGGAN_EMAIL, mp.getEmail());
        contentValues.put(KEY_PELANGGAN_HP, mp.getHp());
        long id = database.insert(TABLE_PELANGGAN, null, contentValues);
        database.close();
        return id != -1;
    }

    // Method untuk menambahkan layanan
    public boolean insertLayanan(ModelLayanan layanan) {
        SQLiteDatabase database = this.getWritableDatabase();
        ContentValues contentValues = new ContentValues();
        contentValues.put(KEY_LAYANAN_ID, layanan.getId()); // Pastikan ada
        id layanan
        contentValues.put(KEY_LAYANAN_NAMA, layanan.getNamaLayanan());
        contentValues.put(KEY_LAYANAN_HARGA, layanan.getHarga());
        Log.d("InsertLayanan", "Mencoba untuk memasukkan data layanan: " +
        layanan.getNamaLayanan());
        long id = database.insert(TABLE_LAYANAN, null, contentValues);
        database.close();
        return id != -1;
    }

    //method untuk menghapus pelanggan
    public boolean deletePelanggan(String id) {
        SQLiteDatabase db = this.getWritableDatabase();
        return db.delete(TABLE_PELANGGAN, KEY_PELANGGAN_ID + "=?", new
        String[]{id}) > 0;
    }

    //method untuk menghapus layanan
    public boolean deleteLayanan(String id) {
        SQLiteDatabase db = this.getWritableDatabase();
        return db.delete(TABLE_LAYANAN, KEY_LAYANAN_ID + " = ?", new
        String[]{id}) > 0;
    }

    public ModelPelanggan getPelangganById(String pelangganId) {
        SQLiteDatabase db = this.getReadableDatabase();
        return null;
    }

    public ModelLayanan getLayananById(String LayananId) {
        SQLiteDatabase db = this.getReadableDatabase();
        return null;
    }
}

```

```

    public boolean updatePelanggan(ModelPelanggan mp) {
        SQLiteDatabase db = this.getWritableDatabase();
        return false;
    }

    public boolean updateLayanan(ModelLayanan ml) {
        SQLiteDatabase db = this.getWritableDatabase();
        return false;
    }

    // Method untuk mengambil data pelanggan
    public List<ModelPelanggan> getPelanggan() {
        List<ModelPelanggan> pel = new ArrayList<>();
        String query = "SELECT * FROM " + TABLE_PELANGGAN;
        SQLiteDatabase db = this.getWritableDatabase();
        Cursor cursor = db.rawQuery(query, null);
        if (cursor.moveToFirst()) {
            do {
                ModelPelanggan k = new ModelPelanggan();
                k.setId(cursor.getString(0));
                k.setNama(cursor.getString(1));
                k.setEmail(cursor.getString(2));
                k.setHp(cursor.getString(3));
                pel.add(k);
            } while (cursor.moveToNext());
        }
        cursor.close();
        return pel;
    }

    // Method untuk mengambil data layanan
    public List<ModelLayanan> getLayanan() {
        List<ModelLayanan> layananList = new ArrayList<>();
        String query = "SELECT * FROM " + TABLE_LAYANAN;
        SQLiteDatabase db = this.getWritableDatabase();
        Cursor cursor = db.rawQuery(query, null);
        if (cursor.moveToFirst()) {
            do {
                ModelLayanan l = new ModelLayanan();
                l.setId(cursor.getString(0));
                l.setNamaLayanan(cursor.getString(1));
                l.setHarga(cursor.getString(2));
                layananList.add(l);
            } while (cursor.moveToNext());
        }
        cursor.close();
        return layananList;
    }
}

```

D. Adapter

- Adapter Pelanggan

```

• package com.example.apaloundry.adapter;

import android.content.Context;
import android.view.LayoutInflater;
import android.view.View;
import android.view.ViewGroup;
import android.widget.TextView;

import androidx.recyclerview.widget.RecyclerView;

```

```

import com.example.apaloundry.R;
import com.example.apaloundry.model.ModelPelanggan;

import java.util.List;
public class AdapterPelanggan extends
    RecyclerView.Adapter<AdapterPelanggan.ViewHolder> {
    private static final String TAG =
        AdapterPelanggan.class.getSimpleName();
    private Context context;
    private List<ModelPelanggan> list;
    private View.OnClickListener onItemClick;
    public void setOnItemClickListener(View.OnClickListener
        itemClickListener) {
        onItemClick = itemClickListener;
    }
    public AdapterPelanggan(Context context, List<ModelPelanggan>
list) {
        this.context = context;
        this.list = list;
    }
    @Override
    public ViewHolder onCreateViewHolder(ViewGroup parent, int
viewType) {
        View view =
LayoutInflater.from(parent.getContext()).inflate(R.layout.item_pelangg
an,
        parent, false);
        return new ViewHolder(view);
    }
    @Override
    public void onBindViewHolder(ViewHolder holder, int position) {
        ModelPelanggan item = list.get(position);
        holder.tvNama.setText(item.getNama());
        holder.tvHp.setText(item.getHp());
    }
    @Override
    public int getItemCount() {
        return list.size();
    }
    public void clear() {
        int size = this.list.size();
        this.list.clear();
        notifyItemRangeRemoved(0, size);
    }
    public class ViewHolder extends RecyclerView.ViewHolder {
        TextView tvNama, tvHp;
        public ViewHolder(View itemView) {
            super(itemView);
            tvNama = (TextView)
itemView.findViewById(R.id.tvItemPelNama);
            tvHp = (TextView) itemView.findViewById(R.id.tvItemPelHp);
            itemView.setTag(this);
            itemView.setOnClickListener(onItemClick);
        }
    }
}

```

- Adapter Layanan

```

package com.example.apaloundry.adapter;

import android.content.Context;

```

```

import android.view.LayoutInflater;
import android.view.View;
import android.view.ViewGroup;
import android.widget.TextView;

import androidx.recyclerview.widget.RecyclerView;

import com.example.apaloundry.R;
import com.example.apaloundry.model.ModelLayanan;

import java.util.List;

public class AdapterLayanan extends
RecyclerView.Adapter<AdapterLayanan.ViewHolder> {
    private static final String TAG =
AdapterLayanan.class.getSimpleName();
    private Context context;
    private List<ModelLayanan> list;
    private View.OnClickListener onItemClick;

    public void setOnItemClickListener(View.OnClickListener
itemClickListener) {
        onItemClick = itemClickListener;
    }

    public AdapterLayanan(Context context, List<ModelLayanan> list) {
        this.context = context;
        this.list = list;
    }

    @Override
    public ViewHolder onCreateViewHolder(ViewGroup parent, int viewType)
{
        View view =
LayoutInflater.from(parent.getContext()).inflate(R.layout.item_layanan,
parent, false);
        return new ViewHolder(view);
    }

    @Override
    public void onBindViewHolder(ViewHolder holder, int position) {
        ModelLayanan item = list.get(position);
        holder.tvNamaLayanan.setText(item.getNamaLayanan());
        holder.tvHarga.setText(item.getHarga());
    }

    @Override
    public int getItemCount() {
        return list.size();
    }

    public void clear() {
        int size = this.list.size();
        this.list.clear();
        notifyItemRangeRemoved(0, size);
    }

    public class ViewHolder extends RecyclerView.ViewHolder {
        TextView tvNamaLayanan, tvHarga;

        public ViewHolder(View itemView) {
            super(itemView);
            tvNamaLayanan = itemView.findViewById(R.id.tvNamaLayanan);
            tvHarga = itemView.findViewById(R.id.tvHarga);
            itemView.setTag(this);
            itemView.setOnClickListener(onItemClick);
        }
    }
}

```

```
}  
}
```

E. Pelanggan

- PelangganActivity

- Java

```
- package com.example.apaloundry.pelanggan;  
  
import android.annotation.SuppressLint;  
import android.app.ProgressDialog;  
import android.content.Intent;  
import android.os.Bundle;  
import android.view.View;  
import android.view.animation.AlphaAnimation;  
import android.widget.Button;  
import android.widget.Toast;  
  
import androidx.activity.EdgeToEdge;  
import androidx.appcompat.app.AppCompatActivity;  
import androidx.core.graphics.Insets;  
import androidx.core.view.ViewCompat;  
import androidx.core.view.WindowInsetsCompat;  
import androidx.recyclerview.widget.LinearLayoutManager;  
import androidx.recyclerview.widget.RecyclerView;  
  
import com.example.apaloundry.adapter.AdapterPelanggan;  
import com.example.apaloundry.R;  
import com.example.apaloundry.database.SQLiteHelper;  
import com.example.apaloundry.model.ModelPelanggan;  
  
import java.util.ArrayList;  
import java.util.List;  
  
public class PelangganActivity extends AppCompatActivity {  
    SQLiteHelper db;  
    Button btnPelAdd;  
    RecyclerView rvPelanggan;  
    AdapterPelanggan adapterPelanggan;  
    ArrayList<ModelPelanggan> list;  
    ProgressDialog progressDialog;  
    AlphaAnimation btnAnimasi = new AlphaAnimation(1F, 0.5F);  
    @SuppressWarnings("MissingInflatedId")  
    @Override  
    protected void onCreate(Bundle savedInstanceState) {  
        super.onCreate(savedInstanceState);  
        EdgeToEdge.enable(this);  
        setContentView(R.layout.activity_pelanggan);  
  
        ViewCompat.setOnApplyWindowInsetsListener(findViewById(R.id.main),  
            (v, insets) -> {  
                Insets systemBars =  
  
                insets.getInsets(WindowInsetsCompat.Type.systemBars());  
                v.setPadding(systemBars.left, systemBars.top,  
                    systemBars.right,  
                        systemBars.bottom);  
                return insets;  
            });  
        setContentView();  
        eventHandling();  
        getData();  
    }  
}
```



```

        private View.OnClickListener onClickListener = new
            View.OnClickListener() {
                @Override
                public void onClick(View v) {
                    v.startAnimation(btnAnimasi);
                    RecyclerView.ViewHolder viewHolder =
                        (RecyclerView.ViewHolder)
                            v.getTag();
                    int position =
                        viewHolder.getAdapterPosition();
                    ModelPelanggan mp = list.get(position);
                    Intent intent = new
                        Intent(com.example.apaloundry.pelanggan.PelangganActivity.this, Pel
                            angganEditActivity.class);
                    intent.putExtra("ID", mp.getId());
                    intent.putExtra("NAMA", mp.getNama());
                    intent.putExtra("EMAIL", mp.getEmail());
                    intent.putExtra("HP", mp.getHp());
                    startActivity(intent);
                    Toast.makeText(PelangganActivity.this, ""
                        +mp.getNama(),
                            Toast.LENGTH_SHORT).show();
                }
            };
        private void getData() {
            list.clear();
            showMsg();
            try {
                List<ModelPelanggan> p = db.getPelanggan();
                if (p.size() > 0){
                    list.addAll(p); // Simplified adding all data
                    adapterPelanggan = new AdapterPelanggan(this,
                        list);
                    rvPelanggan.setAdapter(adapterPelanggan);

                    adapterPelanggan.setOnItemClickListener(onClickListener); //
                        Handle click event
                    adapterPelanggan.notifyDataSetChanged();
                }else{
                    Toast.makeText(this, "Data tidak ditemukan",
                        Toast.LENGTH_SHORT).show();
                }
            } catch (Exception e){
                e.printStackTrace();
            } finally{
                progressDialog.dismiss();
            }
        }
        private void eventHandling() {
            btnPelAdd.setOnClickListener(v -> {
                v.startAnimation(btnAnimasi);
                startActivity(new Intent(PelangganActivity.this,
                    PelangganAddActivity.class));
            });
        }
        private void setView() {
            db = new SQLiteHelper(this);
            progressDialog = new ProgressDialog(this);
            btnPelAdd = (Button) findViewById(R.id.btnPelAdd);
            rvPelanggan = (RecyclerView)
                findViewById(R.id.rvPelanggan);
            list = new ArrayList<>();

            LinearLayoutManager llm = new LinearLayoutManager(this);
            llm.setOrientation(LinearLayoutManager.VERTICAL);
            rvPelanggan.setHasFixedSize(true);
            rvPelanggan.setLayoutManager(llm);
        }
    }

```

```

private void showMsg() {
    progressDialog.setTitle("Informasi");
    progressDialog.setMessage("Loading Data..");
    progressDialog.setCancelable(false);
    progressDialog.show();
}
@Override
protected void onResume() {
    super.onResume();
    getData(); // Memuat ulang data setelah penghapusan atau
pembaruan
}
}

```

- XML
- Tampilan

TAMBAH PELANGGAN

Item 0
Item 1
Item 2
Item 3
Item 4
Item 5
Item 6
Item 7
Item 8
Item 9

- PelangganAddActivity

- Java

```

- package com.example.apaloundry.pelanggan;

import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;

```

```

import android.widget.Toast;

import androidx.activity.EdgeToEdge;
import androidx.appcompat.app.AppCompatActivity;
import androidx.core.graphics.Insets;
import androidx.core.view.ViewCompat;
import androidx.core.view.WindowInsetsCompat;

import com.example.apaloundry.R;
import com.example.apaloundry.database.SQLiteHelper;
import com.example.apaloundry.model.ModelPelanggan;

import java.util.UUID;

public class PelangganAddActivity extends AppCompatActivity {
    EditText nama, email, hp;
    Button btnSimpan, btnBatal;

    SQLiteHelper db;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        EdgeToEdge.enable(this);
        setContentView(R.layout.activity_addpelanggan);

        ViewCompat.setOnApplyWindowInsetsListener(findViewById(R.id.main),
            (v, insets) -> {
                Insets systemBars =
                    insets.getInsets(WindowInsetsCompat.Type.systemBars());
                v.setPadding(systemBars.left, systemBars.top,
                    systemBars.right, systemBars.bottom);
                return insets;
            });

        nama = (EditText) findViewById(R.id.edPelAddNama);
        email = (EditText) findViewById(R.id.edPelAddEmail);
        hp = (EditText) findViewById(R.id.edPelAddHp);
        btnSimpan = (Button) findViewById(R.id.btnPelAddSimpan);
        btnBatal = (Button) findViewById(R.id.btnPelAddBatal);

        db = new SQLiteHelper(PelangganAddActivity.this);

        btnSimpan.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick (View v) {
                ModelPelanggan mp = new ModelPelanggan();
                String uniqueID = UUID.randomUUID().toString();
                mp.setId(uniqueID);
                mp.setNama(nama.getText().toString());
                mp.setEmail(email.getText().toString());
                mp.setHp(hp.getText().toString());

                Toast.makeText(PelangganAddActivity.this, "" +
                    mp.getId() + mp.getNama() + mp.getEmail() + mp.getHp(),
                    Toast.LENGTH_SHORT).show();

                boolean cek = db.insertPelanggan(mp);
                if (cek == true) {
                    Toast.makeText(PelangganAddActivity.this, "Data
                    berhasil disimpan" , Toast.LENGTH_SHORT).show();
                    startActivity(new
                        Intent(PelangganAddActivity.this , PelangganActivity.class));
                    finish();
                } else {
                    Toast.makeText(PelangganAddActivity.this,

```

```

        "Data Gagal Disimpan", Toast.LENGTH_SHORT).show();
    }

    });

    btnBatal.setOnClickListener(new View.OnClickListener() {
        @Override
        public void onClick(View view) {
            finish();
        }
    });
}

}

```

- XML
- Tampilan

EDIT PELANGGAN

Nama



Email



HP



Simpan

Hapus

Batal

- Item_Pelanggan
 - XML
 - Tampilan



F. Layanan

- LayananActivity
 - Java

```
- package com.example.apaloundry.Layanan;

import android.annotation.SuppressLint;
import android.app.ProgressDialog;
import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.view.animation.AlphaAnimation;
import android.widget.Button;
import android.widget.Toast;

import androidx.activity.EdgeToEdge;
```

```

import androidx.appcompat.app.AppCompatActivity;
import androidx.core.graphics.Insets;
import androidx.core.view.ViewCompat;
import androidx.core.view.WindowInsetsCompat;
import androidx.recyclerview.widget.LinearLayoutManager;
import androidx.recyclerview.widget.RecyclerView;

import com.example.apaloundry.R;
import com.example.apaloundry.adapter.AdapterLayanan;
import com.example.apaloundry.database.SQLiteHelper;
import com.example.apaloundry.model.ModelLayanan;

import java.util.ArrayList;
import java.util.List;

public class LayananActivity extends AppCompatActivity {
    SQLiteHelper db;
    Button btnLayAdd;
    RecyclerView rvLayanan;
    AdapterLayanan adapterLayanan;
    ArrayList<ModelLayanan> list;
    ProgressDialog progressDialog;
    AlphaAnimation btnAnimasi = new AlphaAnimation(1F, 0.5F);
    @SuppressWarnings("MissingInflatedId")
    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        EdgeToEdge.enable(this);
        setContentView(R.layout.activity_layanan);

        ViewCompat.setOnApplyWindowInsetsListener(findViewById(R.id.main),
            (v, insets) -> {
                Insets systemBars =

insets.getInsets(WindowInsetsCompat.Type.systemBars());
                v.setPadding(systemBars.left,
                    systemBars.top, systemBars.right, systemBars.bottom);
                return insets;
            });
        setContentView();
        eventHandling();
        getData();
    }

    private View.OnClickListener onClickListener = new
    View.OnClickListener() {
        @Override
        public void onClick(View v) {
            v.startAnimation(btnAnimasi);
            RecyclerView.ViewHolder viewHolder =
            (RecyclerView.ViewHolder) v.getTag();
            int position = viewHolder.getAdapterPosition();
            ModelLayanan ml = list.get(position);
            Intent intent = new
            Intent(com.example.apaloundry.Layanan.LayananActivity.this,
            LayananEditActivity.class);
            intent.putExtra("ID", ml.getId());
            intent.putExtra("TIPE", ml.getNamaLayanan());
            intent.putExtra("HARGA", ml.getHarga());
            startActivity(intent);
            Toast.makeText(LayananActivity.this, ""
            +ml.getNamaLayanan(),
                Toast.LENGTH_SHORT).show();
        }
    };
};

```

```

        private void getData() {
            list.clear();
            showMsg();
            progressDialog.dismiss();
            try {
                List<ModelLayanan> layananList = db.getLayanan();
                if (layananList.size() > 0) {
                    list.addAll(layananList);
                    adapterLayanan = new AdapterLayanan(this,
list);
                    adapterLayanan.notifyDataSetChanged();
                    rvLayanan.setAdapter(adapterLayanan);

                adapterLayanan.setOnItemClickListener(onClickListener);
                } else {
                    Toast.makeText(this, "Data layanan tidak
ditemukan", Toast.LENGTH_SHORT).show();
                }
            } catch (Exception e) {
                e.printStackTrace();
            } finally{
                progressDialog.dismiss();
            }
        }

        private void eventHandling() {
            btnLayAdd.setOnClickListener(new View.OnClickListener()
{
                @Override
                public void onClick(View v) {
                    v.startAnimation(btnAnimasi);
                    startActivity(new Intent(LayananActivity.this,
LayananAddActivity.class));
                }
            });
        }


        private void setView() {
            db = new SQLiteHelper(this);
            progressDialog = new ProgressDialog(this);
            btnLayAdd = (Button) findViewById(R.id.btnLayAdd);
            rvLayanan = (RecyclerView)
findViewById(R.id.rvlayanan);
            list = new ArrayList<>();
            LinearLayoutManager llm = new
LinearLayoutManager(this);
            llm.setOrientation(LinearLayoutManager.VERTICAL);
            rvLayanan.setHasFixedSize(true);
            rvLayanan.setLayoutManager(llm);
        }

        private void showMsg() {
            progressDialog.setTitle("Informasi");
            progressDialog.setMessage("Loading Data..");
            progressDialog.setCancelable(false);
            progressDialog.show();
        }

        @Override
        protected void onResume() {
            super.onResume();
            getData(); // Memuat ulang data setelah penghapusan
atau pembaruan
        }
    }

```

- XML layout

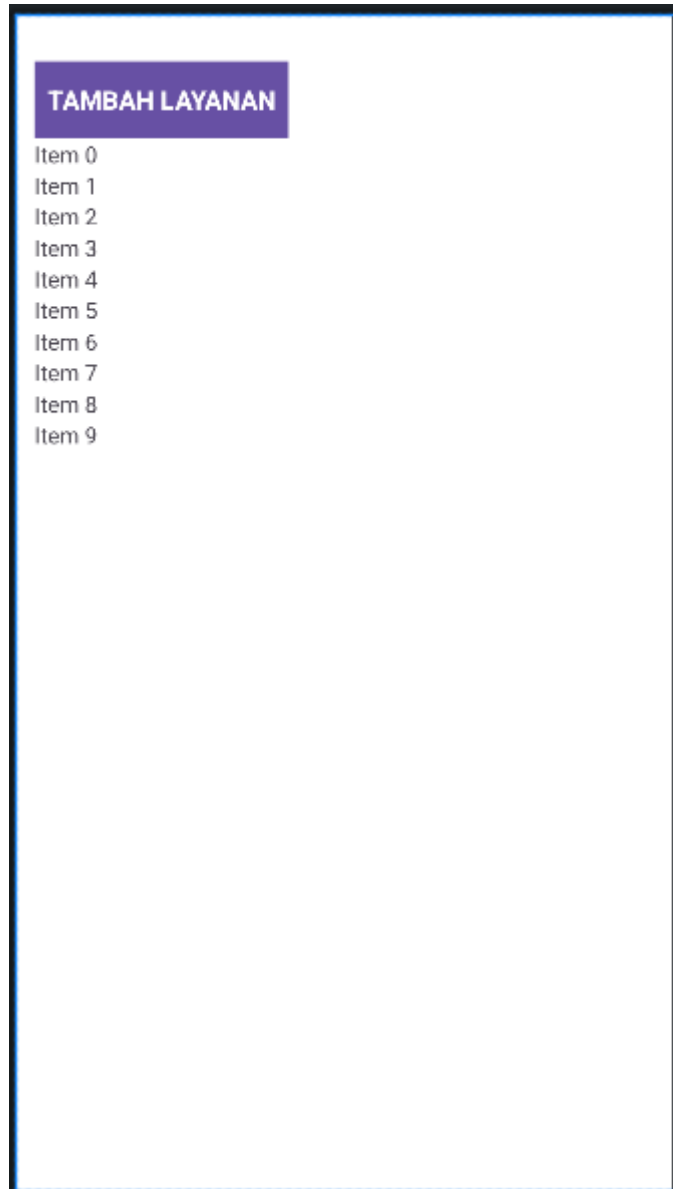

- LayananAddActivity

- Java

```
- package com.example.apaloundry.Layanan;

import android.content.Intent;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.Toast;

import androidx.activity.EdgeToEdge;
```



```

import androidx.appcompat.app.AppCompatActivity;
import androidx.core.graphics.Insets;
import androidx.core.view.ViewCompat;
import androidx.core.view.WindowInsetsCompat;

import com.example.apaloundry.R;
import com.example.apaloundry.database.SQLiteHelper;
import com.example.apaloundry.model.ModelLayanan;

import java.util.UUID;

public class LayananAddActivity extends AppCompatActivity {
    EditText layanan, harga;
    Button btnSimpan, btnBatal;

    SQLiteHelper db;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        EdgeToEdge.enable(this);
        setContentView(R.layout.activity_addlayanan);

        ViewCompat.setOnApplyWindowInsetsListener(findViewById(R.id.main), (v, insets) -> {
            Insets systemBars =
insets.getInsets(WindowInsetsCompat.Type.systemBars());
            v.setPadding(systemBars.left, systemBars.top,
systemBars.right, systemBars.bottom);
            return insets;
        });

        layanan = (EditText)
findViewById(R.id.edLayAddLayanan);
        harga = (EditText) findViewById(R.id.edLayAddHarga);
        btnSimpan = (Button)
findViewById(R.id.btnLayAddSimpan);
        btnBatal = (Button) findViewById(R.id.btnLayAddBatal);

        db = new SQLiteHelper(LayananAddActivity.this);

        btnSimpan.setOnClickListener(new
View.OnClickListener() {
            @Override
            public void onClick(View v) {
                ModelLayanan lm = new ModelLayanan();
                String uniqueID = UUID.randomUUID().toString();
                lm.setId("'" + uniqueID);

                lm.setNamaLayanan(layanan.getText().toString());
                lm.setHarga(harga.getText().toString());

                Toast.makeText(LayananAddActivity.this, "'" +
lm.getId() + lm.getNamaLayanan() + lm.getHarga(),
Toast.LENGTH_SHORT).show();

                boolean cek = db.insertLayanan(lm);
                if (cek == true) {
                    Toast.makeText(LayananAddActivity.this,
"Data berhasil disimpan", Toast.LENGTH_SHORT).show();
                    startActivity(new
Intent(LayananAddActivity.this, LayananActivity.class));
                    finish();
                } else {
                    Toast.makeText(LayananAddActivity.this,

```

```

        "Data gagal disimpan", Toast.LENGTH_SHORT).show();
    }
}

});

btnBatal.setOnClickListener(new View.OnClickListener()
{
    @Override
    public void onClick(View view) {
        finish();
    }
});
}
}

```

- XML layout

EDIT LAYANAN

Layanan

Masukkan layanan terbaru

Harga

Masukkan harga barang

Simpan Hapus Batal

- Item_layanan

- XML layout



G. Manifest

```
<uses-permission  
android:name="android.permission.READ_EXTERNAL_STORAGE" />
```

Tambahkan kode diatas untuk mengizinkan aplikasi membaca atau mengakses penyimpanan internal.