


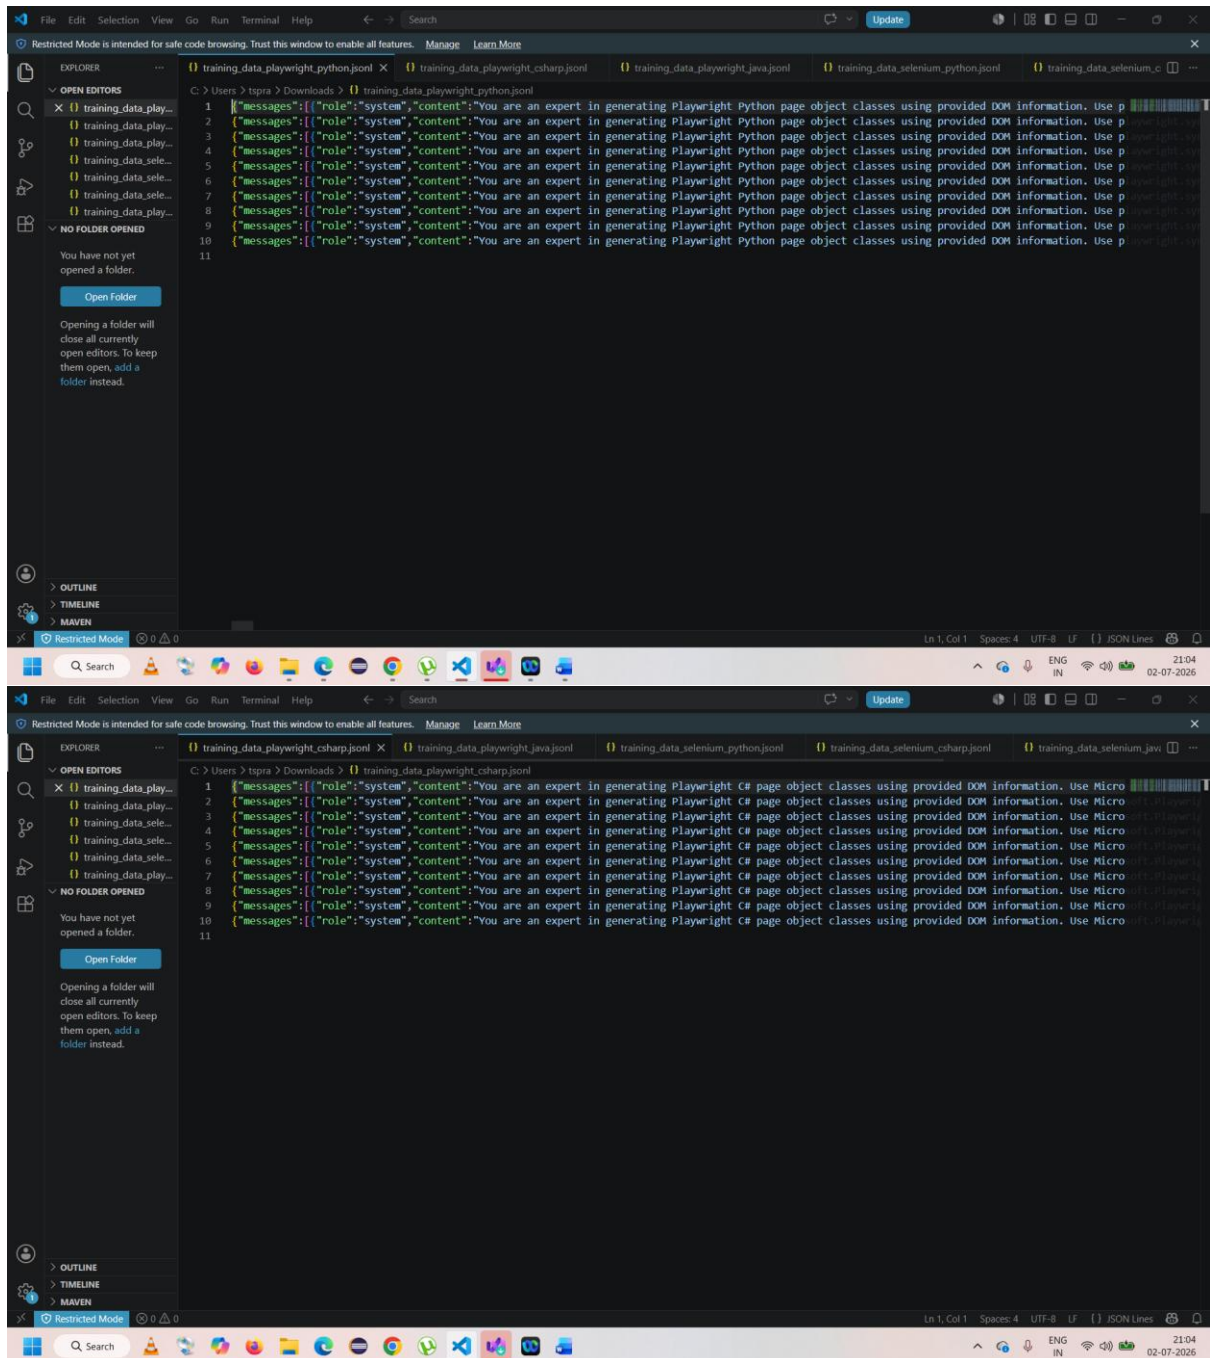
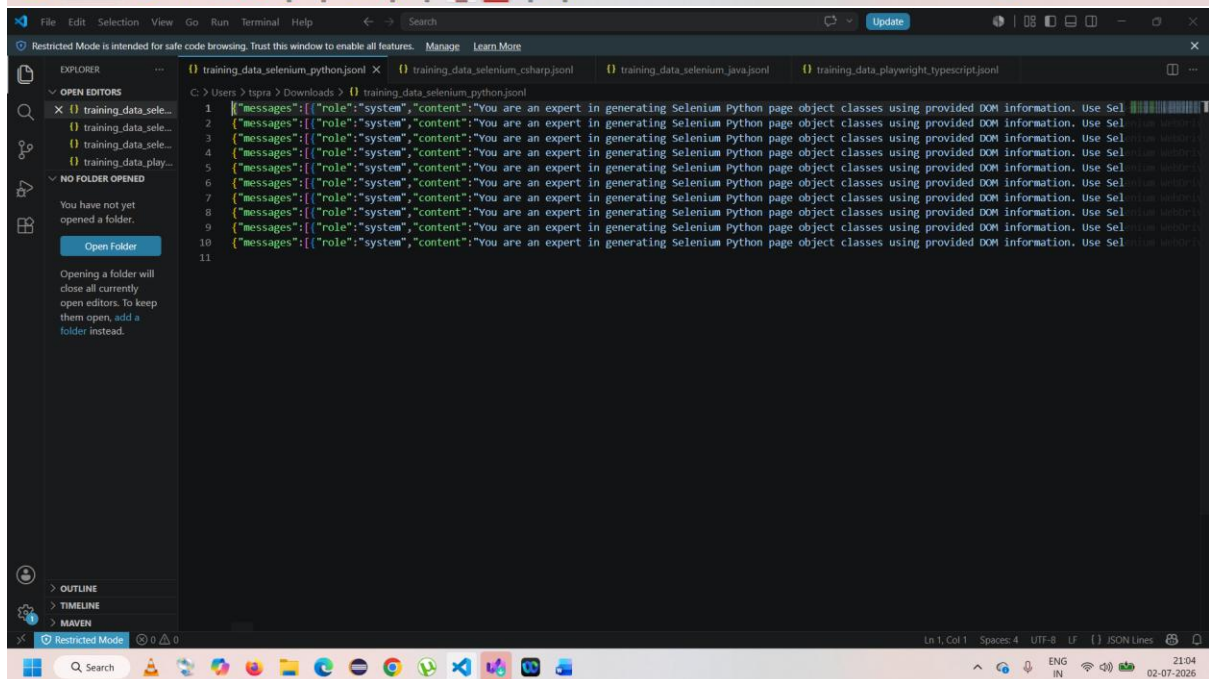



training_data_seleniu_m_java.jsonl training_data_seleniu_m_csharp.jsonl training_data_seleniu_m_python.jsonl training_data_playwri_gh_t_java.jsonl training_data_playwri_gh_t_csharp.jsonl

training_data_playwri_gh_t_python.jsonl training_data_playwri_gh_t_typescript.jsonl

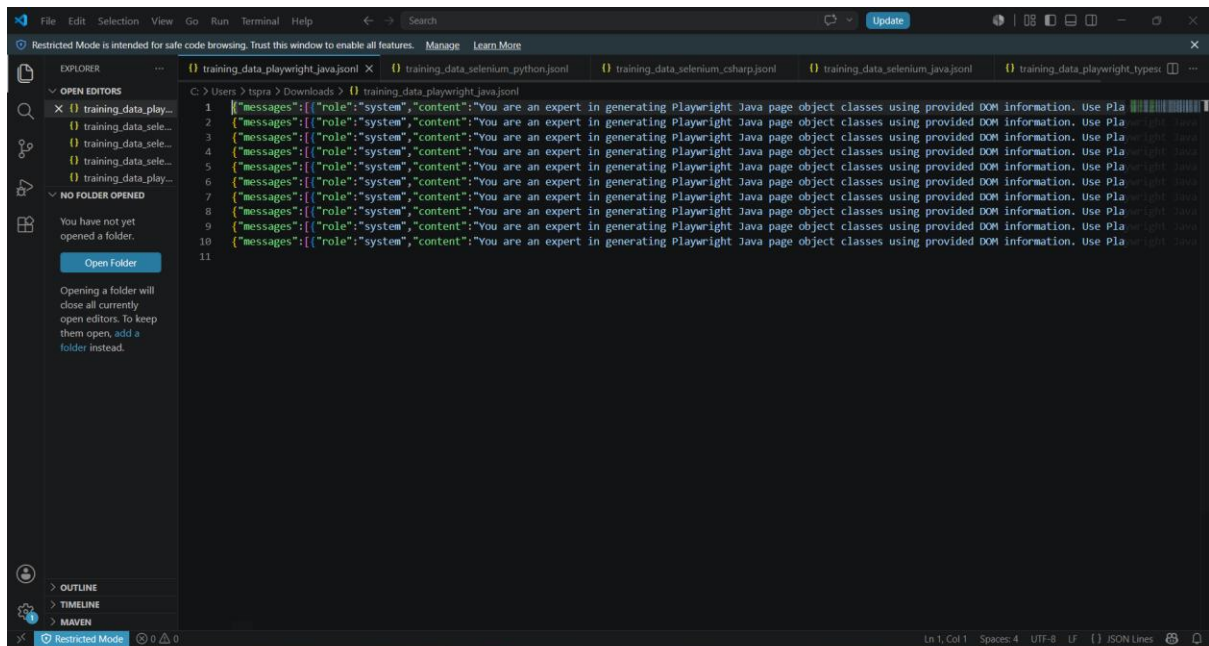

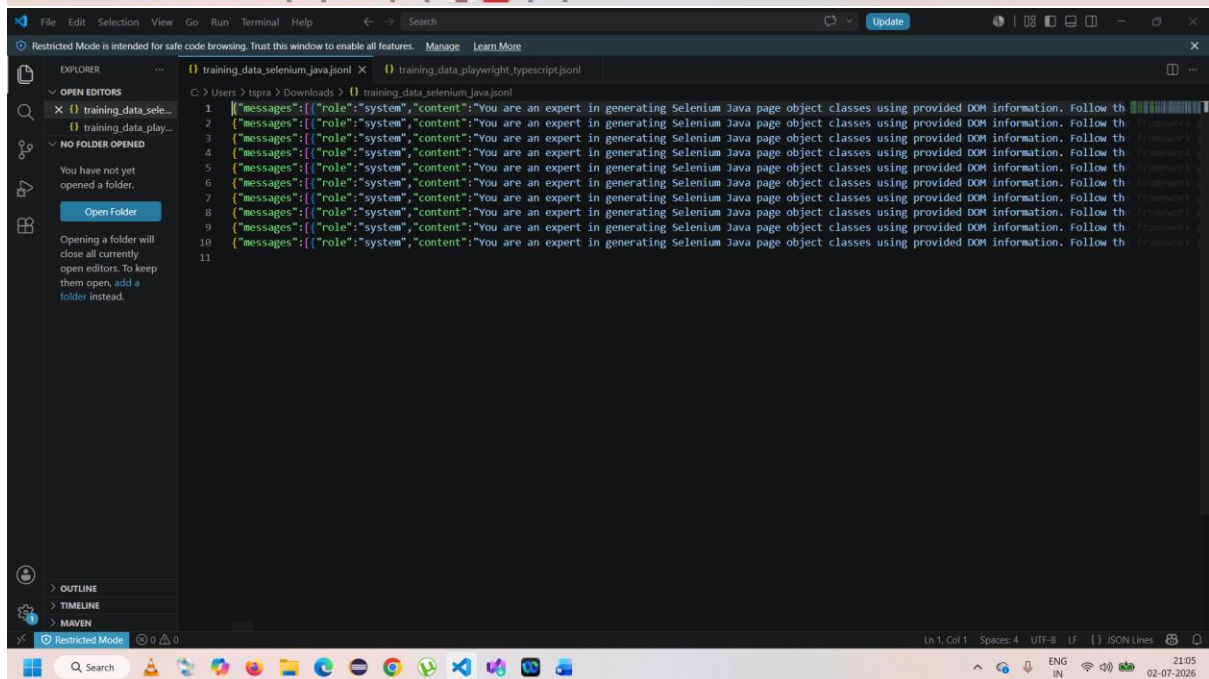

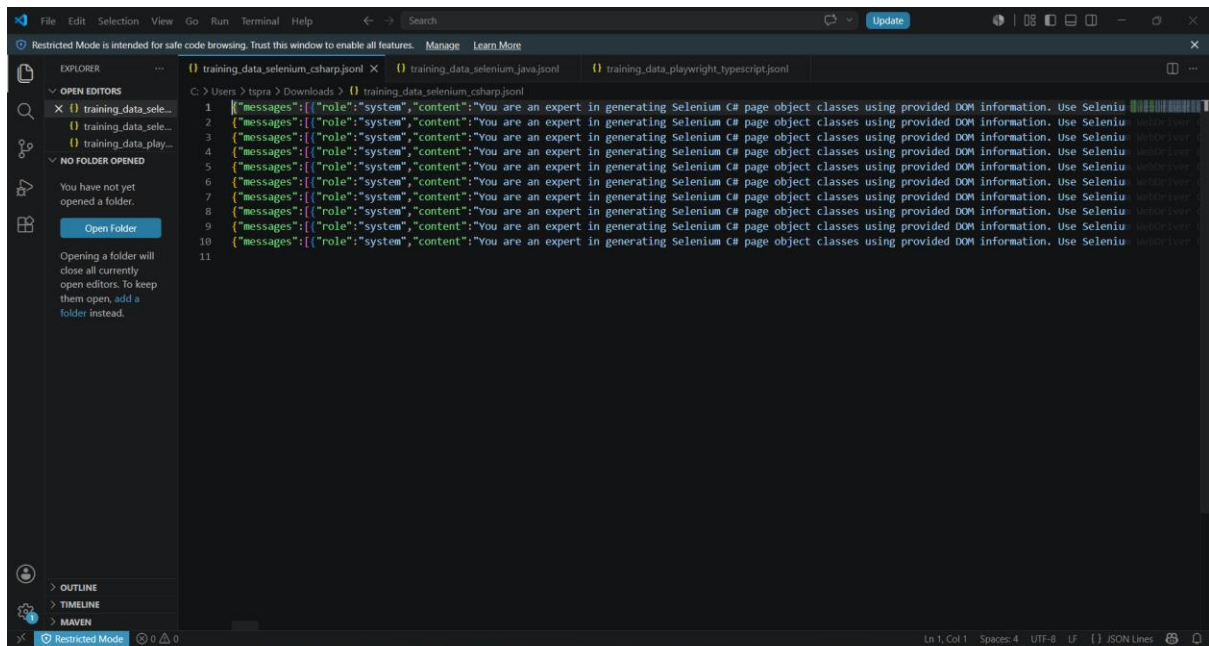

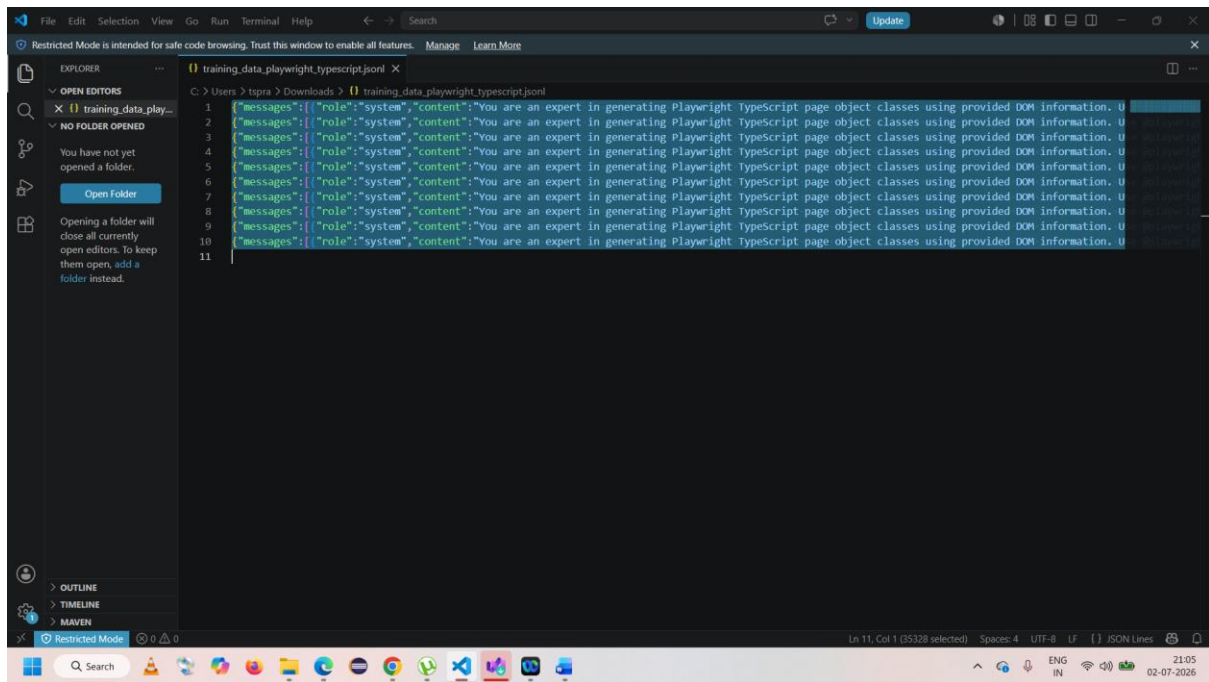

```
{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Playwright Python page object classes using provided DOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator usage, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."
    },
    {
      "role": "user",
      "content": "Given the following DOM structure:\n`html\n<input type=\"text\" class=\"inputBox\" name=\"companyName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_companyName\">\n<input type=\"text\" class=\"inputBox\" name=\"firstName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_firstName\">\n<input type=\"text\" class=\"inputBox\" name=\"lastName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_lastName\">\n<input type=\"submit\" class=\"smallSubmit\" name=\"submitButton\" value=\"Create Lead\" id=\"ext-gen652\">\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for EditLeadPage.\n    /// </summary>\n    public class EditLeadPage\n    {\n        private readonly IWebDriver driver;\n        public EditLeadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n        private IWebElement CompanyNameInput =>
```



```

driver.FindElement(By.Id(\"createLeadForm_companyName\"));\n    private IWebElement
FirstNameInput => driver.FindElement(By.Id(\"createLeadForm_firstName\"));\n    private
IWebElement LastNameInput => driver.FindElement(By.Id(\"createLeadForm_lastName\"));\n
private IWebElement CreateLeadButton => driver.FindElement(By.XPath(\"//input[@value='Create
Lead']\"));\n\n    /// <summary>\n    /// Enters a value in the companyName field.\n    ///
</summary>\n    public EditLeadPage EnterCompanyName(string companyName)\n    {\n
CompanyNameInput.Clear();\n    CompanyNameInput.SendKeys(companyName);\n    return
this;\n    }\n\n    /// <summary>\n    /// Enters a value in the firstName field.\n    ///
</summary>\n    public EditLeadPage EnterFirstName(string firstName)\n    {\n
FirstNameInput.Clear();\n    FirstNameInput.SendKeys(firstName);\n    return this;\n
}\n\n    /// <summary>\n    /// Enters a value in the lastName field.\n    /// </summary>\n
public EditLeadPage EnterLastName(string lastName)\n    {\n    LastNameInput.Clear();\n
LastNameInput.SendKeys(lastName);\n    return this;\n    }\n\n    /// <summary>\n    ///
Clicks the Create Lead element.\n    /// </summary>\n    public EditLeadPage ClickCreateLead()\n
{\n    CreateLeadButton.Click();\n    return this;\n    }\n}\n}\n}\n\nGenerate a Playwright
Python page object class for this DOM."

```

```

},

```

```

{

```

```

    "role": "assistant",

```

```

    "content": "from playwright.sync_api import Page, Locator\n\nclass GeneratedPage:\n
\\\"\\\"Page Object for the Generated page.\\\"\\\"\\n\n    def __init__(self, page: Page) -> None:\n
self.page = page\n    self.company_name_input =\n
page.locator(\"#createLeadForm_companyName\")\n    self.first_name_input =\n
page.locator(\"#createLeadForm_firstName\")\n    self.last_name_input =\n
page.locator(\"#createLeadForm_lastName\")\n    self.submit_button_button =\n
page.locator(\"#ext-gen652\")\n\n    def enter_company_name(self, company_name: str) -> None:\n
\\\"\\\"Fill the companyName field.\\\"\\\"\\n    self.company_name_input.fill(company_name)\n\n
def enter_first_name(self, first_name: str) -> None:\n    \\\"\\\"Fill the firstName field.\\\"\\\"\\n
self.first_name_input.fill(first_name)\n\n    def enter_last_name(self, last_name: str) -> None:\n
\\\"\\\"Fill the lastName field.\\\"\\\"\\n    self.last_name_input.fill(last_name)\n\n    def
click_submit_button(self) -> None:\n    \\\"\\\"Click the submitButton.\\\"\\\"\\n
self.submit_button_button.click()\"

```

```

}

```

```

]

```

```

}

```

```

{

```

```

    "messages": [

```

```

    {

```

```

        "role": "system",

```

"content": "You are an expert in generating Playwright Python page object classes using provided DOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator usage, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."

},

{

"role": "user",

"content": "Given the following DOM structure:\n`html<input type='text' size='20' autocomplete='off' id='ext-gen246' name='id' class='x-form-text x-form-field ' style='width: 214px;'> <input type='text' size='20' autocomplete='off' id='ext-gen248' name='firstName' class='x-form-text x-form-field ' style='width: 214px;'> <input type='text' size='20' autocomplete='off' id='ext-gen250' name='lastName' class='x-form-text x-form-field ' style='width: 214px;'> <input type='text' size='20' autocomplete='off' id='ext-gen252' name='companyName' class='x-form-text x-form-field ' style='width: 214px;'> <button class='x-btn-text' type='button' id='ext-gen334'>Find Leads</button>\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for FindLeadsPage.\n /// </summary>\n public class FindLeadsPage\n {\n private readonly IWebDriver driver;\n public FindLeadsPage(IWebDriver driver)\n {\n this.driver = driver;\n }\n private IWebElement IdInput => driver.FindElement(By.Name(\"id\"));\n private IWebElement FirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n private IWebElement LastNameInput => driver.FindElement(By.Name(\"lastName\"));\n private IWebElement CompanyNameInput => driver.FindElement(By.Name(\"companyName\"));\n private IWebElement FindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-space()='Find Leads']\"));\n \n /// <summary>\n /// Enters a value in the id field.\n /// </summary>\n public FindLeadsPage EnterId(string id)\n {\n IdInput.Clear();\n IdInput.SendKeys(id);\n return this;\n }\n \n /// <summary>\n /// Enters a value in the firstName field.\n /// </summary>\n public FindLeadsPage EnterFirstName(string firstName)\n {\n FirstNameInput.Clear();\n FirstNameInput.SendKeys(firstName);\n return this;\n }\n \n /// <summary>\n /// Enters a value in the lastName field.\n /// </summary>\n public FindLeadsPage EnterLastName(string lastName)\n {\n LastNameInput.Clear();\n LastNameInput.SendKeys(lastName);\n return this;\n }\n \n /// <summary>\n /// Enters a value in the companyName field.\n /// </summary>\n public FindLeadsPage EnterCompanyName(string companyName)\n {\n CompanyNameInput.Clear();\n CompanyNameInput.SendKeys(companyName);\n return this;\n }\n \n /// <summary>\n /// Clicks the Find Leads element.\n /// </summary>\n public FindLeadsPage ClickFindLeads()\n {\n FindLeadsButton.Click();\n return this;\n }\n }\n}\n\nGenerate a Playwright Python page object class for this DOM."

},

{

"role": "assistant",

"content": "from playwright.sync_api import Page, Locator\n\nclass GeneratedPage:\n \"\"\"Page Object for the Generated page.\"\"\"\n def __init__(self, page: Page) -> None:\n

```

self.page = page\n    self.id_input = page.locator("#ext-gen246")\n    self.first_name_input =
page.locator("#ext-gen248")\n    self.last_name_input = page.locator("#ext-gen250")\n
self.company_name_input = page.locator("#ext-gen252")\n    self.ext_gen334_button =
page.locator("#ext-gen334")\n\n    def enter_id(self, id: str) -> None:\n        \"\"\"Fill the id
field.\"\"\"\n        self.id_input.fill(id)\n\n    def enter_first_name(self, first_name: str) -> None:\n
        \"\"\"Fill the firstName field.\"\"\"\n        self.first_name_input.fill(first_name)\n\n    def
enter_last_name(self, last_name: str) -> None:\n        \"\"\"Fill the lastName field.\"\"\"\n
self.last_name_input.fill(last_name)\n\n    def enter_company_name(self, company_name: str) ->
None:\n        \"\"\"Fill the companyName field.\"\"\"\n
self.company_name_input.fill(company_name)\n\n    def click_ext_gen334(self) -> None:\n
        \"\"\"Click the ext-gen334.\"\"\"\n        self.ext_gen334_button.click()

}

]

}

```

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Playwright Python page object classes using provided
DOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator
usage, and insert TODO comments only when a mapping is missing. Make sure every page method
includes docstrings in the generated code. Generate only code grounded in the supplied DOM."
    },

```

```

    {
      "role": "user",

      "content": "Given the following DOM structure:\n`html<input type='text' size='20'
autocomplete='off' id='ext-gen253' name='id' class='x-form-text x-form-field'
style='width: 214px;'>\n<input type='text' size='20' autocomplete='off' id='ext-gen255'
name='firstName' class='x-form-text x-form-field' style='width: 214px;'>\n<input
type='text' size='20' autocomplete='off' id='ext-gen253' name='id' class='x-form-text
x-form-field' style='width: 214px;'>\n<input type='text' size='20' autocomplete='off'
id='ext-gen253' name='id' class='x-form-text x-form-field' style='width:
214px;'>\n<button class='x-btn-text' type='button' id='ext-gen341'>Find
Leads</button>\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n
/// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for
FindLeadsUpdatedPage.\n    /// </summary>\n    public class FindLeadsUpdatedPage\n    {\n
        private readonly IWebDriver driver;\n\n        public FindLeadsUpdatedPage(IWebDriver driver)\n
        {\n            this.driver = driver;\n        }\n\n        private IWebElement IdInput =>
driver.FindElement(By.XPath("//input[@name='id'])[1]")); \n        private IWebElement
FirstNameInput => driver.FindElement(By.Name("firstName")); \n        private IWebElement IdInput2

```



```

    },
    {
        "role": "user",

        "content": "Given the following DOM structure:\n```\nhtml\n<a style='color: black;'\nhref='/crmsfa/control/main?externalLoginKey=EL601288709152'\n>\nCRM/SFA\n</a>\n<input\nclass='decorativeSubmit'\n style='width:65px; margin-left:1px;'\n type='submit'\nvalue='Logout'\n>\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace\nLeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML\n    DOM for HomePage.\n    /// </summary>\n    public class HomePage\n    {\n        private readonly\n        IWebDriver driver;\n\n        public HomePage(IWebDriver driver)\n        {\n            this.driver =\ndriver;\n        }\n\n        private IWebElement CRMSFALink =>\ndriver.FindElement(By.LinkText(\"CRM/SFA\"));\n        private IWebElement LogoutButton =>\ndriver.FindElement(By.XPath(\"//input[@value='Logout']\"));\n\n        /// <summary>\n        /// Clicks\n        the CRM/SFA element.\n        /// </summary>\n        public HomePage ClickCRMSFA()\n        {\n            CRMSFALink.Click();\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Logout\n        element.\n        /// </summary>\n        public HomePage ClickLogout()\n        {\n            LogoutButton.Click();\n            return this;\n        }\n    }\n}\n```\nGenerate a Playwright Python page\nobject class for this DOM."

    },
    {
        "role": "assistant",

        "content": "from playwright.sync_api import Page, Locator\n\nclass GeneratedPage:\n\n    \"\"\"Page Object for the Generated page.\"\"\"\n\n    def __init__(self, page: Page) -> None:\n        self.page = page\n        self.c_r_m_s_f_a_button = page.locator(\"a\")\n        self.logout_button =\n        page.locator(\"input[type='submit']\")\n\n    def click_c_r_m_s_f_a(self) -> None:\n        \"\"\"Click the CRMSFA.\"\"\"\n        self.c_r_m_s_f_a_button.click()\n\n    def click_logout(self) ->\n        None:\n        \"\"\"Click the Logout.\"\"\"\n        self.logout_button.click()

    }

]

}

{
    "messages": [
        {
            "role": "system",

            "content": "You are an expert in generating Playwright Python page object classes using provided\nDOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator\nusage, and insert TODO comments only when a mapping is missing. Make sure every page method\nincludes docstrings in the generated code. Generate only code grounded in the supplied DOM."
        }
    ]
}

```

```

    },
    {
        "role": "user",

        "content": "Given the following DOM structure:\n```html\n<input class=\"inputLogin\" type=\"text\" id=\"username\" name=\"USERNAME\" size=\"50\">\n<input class=\"inputLogin\" type=\"password\" id=\"password\" name=\"PASSWORD\" size=\"50\">\n<input class=\"decorativeSubmit\" type=\"submit\" value=\"Login\">\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for LoginPage.\n    /// </summary>\n    public class LoginPage\n    {\n        private readonly IWebDriver driver;\n\n        public LoginPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement USERNAMEInput => driver.FindElement(By.Id(\"username\"));\n        private IWebElement PASSWORDPasswordInput => driver.FindElement(By.Id(\"password\"));\n        private IWebElement LoginButton => driver.FindElement(By.XPath(\"//input[@value='Login']\"));\n\n        /// <summary>\n        /// Enters a value in the USERNAME field.\n        /// </summary>\n        public LoginPage EnterUSERNAME(string USERNAME)\n        {\n            USERNAMEInput.Clear();\n            USERNAMEInput.SendKeys(USERNAME);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the PASSWORD field.\n        /// </summary>\n        public LoginPage EnterPASSWORD(string pASSWORD)\n        {\n            PASSWORDPasswordInput.Clear();\n            PASSWORDPasswordInput.SendKeys(pASSWORD);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Login element.\n        /// </summary>\n        public LoginPage ClickLogin()\n        {\n            LoginButton.Click();\n            return this;\n        }\n    }\n}\n\nGenerate a Playwright Python page object class for this DOM."

    },
    {
        "role": "assistant",

        "content": "from playwright.sync_api import Page, Locator\n\nclass GeneratedPage:\n    \"\"\"Page Object for the Generated page.\"\"\"\n\n    def __init__(self, page: Page) -> None:\n        self.page = page\n        self.username_input = page.locator(\"#username\")\n        self.password_input = page.locator(\"#password\")\n        self.login_button = page.locator(\"input[type='submit']\")\n\n    def enter_username(self, username: str) -> None:\n        \"\"\"Fill the username field.\"\"\"\n        self.username_input.fill(username)\n\n    def enter_password(self, password: str) -> None:\n        \"\"\"Fill the password field.\"\"\"\n        self.password_input.fill(password)\n\n    def click_login(self) -> None:\n        \"\"\"Click the Login.\"\"\"\n        self.login_button.click()

    }

]

}

{

    "messages": [

```

```

{
  "role": "system",

  "content": "You are an expert in generating Playwright Python page object classes using provided DOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator usage, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."

},
{
  "role": "user",

  "content": "Given the following DOM structure:\n```html\n<a href=\"/crmsfa/control/leadsMain\" id=\"ext-gen614\">Leads</a>\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for MyHomePage.\n    /// </summary>\n    public class MyHomePage\n    {\n        private readonly IWebDriver driver;\n        public MyHomePage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n        private IWebElement LeadsLink => driver.FindElement(By.LinkText(\"Leads\"));\n        /// <summary>\n        /// Clicks the Leads element.\n        /// </summary>\n        public MyHomePage ClickLeads()\n        {\n            LeadsLink.Click();\n            return this;\n        }\n    }\n}\n```\nGenerate a Playwright Python page object class for this DOM."

},
{
  "role": "assistant",

  "content": "from playwright.sync_api import Page, Locator\n\nclass GeneratedPage:\n    \"\"\"Page Object for the Generated page.\"\"\"\n    def __init__(self, page: Page) -> None:\n        self.page = page\n        self.ext_gen614_button = page.locator(\"#ext-gen614\")\n    def click_ext_gen614(self) -> None:\n        \"\"\"Click the ext-gen614.\"\"\"\n        self.ext_gen614_button.click()

}

]

}

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Playwright Python page object classes using provided DOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator"
    }
  ]
}

```

usage, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."

```
    },  
    {  
        "role": "user",  
        "content": "Given the following DOM structure:\n```html\n<a href=\"/crmsfa/control/createLeadForm\" id=\"ext-gen876\">Create Lead</a>\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for MyLeadsPage.\n    /// </summary>\n    public class MyLeadsPage\n    {\n        private readonly IWebDriver driver;\n\n        public MyLeadsPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement CreateLeadLink => driver.FindElement(By.LinkText(\"Create Lead\"));\n\n        /// <summary>\n        /// Clicks the Create Lead element.\n        /// </summary>\n        public MyLeadsPage ClickCreateLead()\n        {\n            CreateLeadLink.Click();\n            return this;\n        }\n    }\n}\n```\nGenerate a Playwright Python page object class for this DOM." ,  
    },  
    {  
        "role": "assistant",  
        "content": "from playwright.sync_api import Page, Locator\n\nclass GeneratedPage:\n    \"\"\"Page Object for the Generated page.\"\"\"\n    def __init__(self, page: Page) -> None:\n        self.page = page\n        self.ext_gen876_button = page.locator(\"#ext-gen876\")\n    def click_ext_gen876(self) -> None:\n        \"\"\"Click the ext-gen876.\"\"\"\n        self.ext_gen876_button.click() ,  
    }  
]  
}
```

```
{  
    "messages": [  
        {  
            "role": "system",  
            "content": "You are an expert in generating Playwright Python page object classes using provided DOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator usage, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM." ,  
        },  
        {
```

"role": "user",

"content": "Given the following DOM structure:\n```\nhtml\n<input class=\"XdijitInputField dijitInputFieldValidationNormal\" type=\"text\" autocomplete=\"off\" name=\"ComboBox_productId\" dojoattachevent=\"onkeypress, onkeyup, onfocus, onblur, compositionend\" dojoattachpoint=\"textbox, focusNode\" id=\"ComboBox_productId\" tabindex=\"1\" size=\"15\" maxlength=\"50\" wairole=\"combobox\" role=\"wairole:combobox\" value=\"\" valuenow=\"\" invalid=\"false\" disabled=\"false\">\n<input id=\"quantity\" name=\"quantity\" type=\"text\" size=\"10\" maxlength=\"\" class=\"inputBox\" value=\"1\" onchange=\"\" tabindex=\"2\">\nUpdate\n\n=== CSHARP ===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for OrderEntryHeaderPage.\n /// </summary>\n public class OrderEntryHeaderPage\n {\n private readonly IWebDriver driver;\n public OrderEntryHeaderPage(IWebDriver driver)\n {\n this.driver = driver;\n }\n private IWebElement ProductIdInput => driver.FindElement(By.Id(\"ComboBox_productId\"));\n private IWebElement QuantityInput => driver.FindElement(By.Id(\"quantity\"));\n private IWebElement UpdateLink => driver.FindElement(By.LinkText(\"Update\"));\n\n /// <summary>\n /// Enters a value in the productId field.\n /// </summary>\n public OrderEntryHeaderPage EnterProductId(string productId)\n {\n ProductIdInput.Clear();\n ProductIdInput.SendKeys(productId);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the quantity field.\n /// </summary>\n public OrderEntryHeaderPage EnterQuantity(string quantity)\n {\n QuantityInput.Clear();\n QuantityInput.SendKeys(quantity);\n return this;\n }\n\n /// <summary>\n /// Clicks the Update element.\n /// </summary>\n public OrderEntryHeaderPage ClickUpdate()\n {\n UpdateLink.Click();\n return this;\n }\n }\n}\n```\nGenerate a Playwright Python page object class for this DOM."

},

{

"role": "assistant",

"content": "from playwright.sync_api import Page, Locator\n\nclass GeneratedPage:\n \"\"\"Page Object for the Generated page.\"\"\"\n def __init__(self, page: Page) -> None:\n self.page = page\n self.combo_box_product_id_input =\n page.locator(\"#ComboBox_productId\")\n self.quantity_input = page.locator(\"#quantity\")\n self.ext_gen173_button = page.locator(\"#ext-gen173\")\n\n def\n enter_combo_box_product_id(self, combo_box_product_id: str) -> None:\n \"\"\"Fill the\n ComboBox_productId field.\"\"\"\n self.combo_box_product_id_input.fill(combo_box_product_id)\n\n def enter_quantity(self,\n quantity: str) -> None:\n \"\"\"Fill the quantity field.\"\"\"\n self.quantity_input.fill(quantity)\n\n def click_ext_gen173(self) -> None:\n \"\"\"Click the ext-\n gen173.\"\"\"\n self.ext_gen173_button.click()"

}

]

}

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Playwright Python page object classes using provided DOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator usage, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."

    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n```\nhtml\n<input id=\"uploadedFile\" name=\"uploadedFile\" type=\"file\" size=\"30\" maxlength=\"\" class=\"inputBox\" onchange=\"\">\n<input type=\"submit\" value=\"Upload and Import\" class=\"smallSubmit\" onclick=\"submitFormAndReplaceButtonTextWithSingleClick(this, 'Uploading... Please Wait');\" id=\"ext-gen593\">\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for UploadPage.\n    /// </summary>\n    public class UploadPage\n    {\n        private readonly IWebDriver driver;\n\n        public UploadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement FileFileInput =>\n        driver.FindElement(By.Id(\"uploadedFile\"));\n        private IWebElement UploadAndImportButton =>\n        driver.FindElement(By.XPath(\"//input[@value='Upload and Import']\"));\n\n        /// <summary>\n        /// Uploads a file using the File field.\n        /// </summary>\n        public UploadPage UploadFile(string filePath)\n        {\n            FileFileInput.SendKeys(filePath);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Upload and Import element.\n        /// </summary>\n        public UploadPage ClickUploadAndImport()\n        {\n            UploadAndImportButton.Click();\n            return this;\n        }\n    }\n}\n\nGenerate a Playwright Python page object class for this DOM."

    },
    {
      "role": "assistant",

      "content": "from playwright.sync_api import Page, Locator\n\nclass GeneratedPage:\n    \"\"\"Page Object for the Generated page.\"\"\"\n\n    def __init__(self, page: Page) -> None:\n        self.page = page\n        self.uploaded_file_input = page.locator(\"#uploadedFile\")\n        self.ext_gen593_button = page.locator(\"#ext-gen593\")\n\n    def enter_uploaded_file(self, uploaded_file: str) -> None:\n        \"\"\"Fill the uploadedFile field.\"\"\"\n        self.uploaded_file_input.fill(uploaded_file)\n\n    def click_ext_gen593(self) -> None:\n        \"\"\"Click the ext-gen593.\"\"\"\n        self.ext_gen593_button.click()

    }
  ]
}

```



```
]
}
```

```
{
```

```
  "messages": [
```

```
    {
```

```
      "role": "system",
```

"content": "You are an expert in generating Playwright Python page object classes using provided DOM information. Use playwright.sync_api or playwright.async_api conventions, proper Locator usage, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."

```
    },
```

```
    {
```

```
      "role": "user",
```

"content": "Given the following DOM structure:\n```html\n<div class=\"x-grid3-cell-inner x-grid3-col-partyId\" unselectable=\"on\" id=\"ext-gen781\">10196</div>\n<div class=\"x-grid3-cell-inner x-grid3-col-firstName\" unselectable=\"on\" id=\"ext-gen840\">TCS</div>\n<div class=\"x-grid3-cell-inner x-grid3-col-lastName\" unselectable=\"on\" id=\"ext-gen842\">Abd</div>\n<div class=\"x-grid3-cell-inner x-grid3-col-companyName\" unselectable=\"on\" id=\"ext-gen857\">MS</div>\n\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for ViewLeadPage.\n /// </summary>\n public class ViewLeadPage\n {\n private readonly IWebDriver driver;\n\n public ViewLeadPage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement PartyIdText => driver.FindElement(By.Id(\"ext-gen781\"));\n private IWebElement Value10196Link => driver.FindElement(By.LinkText(\"10196\"));\n private IWebElement FirstNameText => driver.FindElement(By.Id(\"ext-gen840\"));\n private IWebElement TCSLink => driver.FindElement(By.LinkText(\"TCS\"));\n private IWebElement LastNameText => driver.FindElement(By.Id(\"ext-gen842\"));\n private IWebElement AbdLink => driver.FindElement(By.LinkText(\"Abd\"));\n private IWebElement CompanyNameText => driver.FindElement(By.Id(\"ext-gen857\"));\n private IWebElement MSLink => driver.FindElement(By.LinkText(\"M S\"));\n\n /// <summary>\n /// Gets the visible text from the partyId element.\n /// </summary>\n public string GetPartyIdText()\n {\n return PartyIdText.Text;\n }\n\n /// <summary>\n /// Checks whether the partyId element is displayed.\n /// </summary>\n public bool IsPartyIdVisible()\n {\n return PartyIdText.Displayed;\n }\n\n /// <summary>\n /// Clicks the 10196 element.\n /// </summary>\n public ViewLeadPage ClickValue10196()\n {\n

```

Value10196Link.Click();\n        return this;\n    }\n\n    /// <summary>\n    /// Gets the visible text from the firstName element.\n    /// </summary>\n    public string GetFirstNameText()\n    {\n        return FirstNameText.Text;\n    }\n\n    /// <summary>\n    /// Checks whether the firstName element is displayed.\n    /// </summary>\n    public bool IsFirstNameVisible()\n    {\n        return FirstNameText.Displayed;\n    }\n\n    /// <summary>\n    /// Clicks the TCS element.\n    /// </summary>\n    public ViewLeadPage ClickTCS()\n    {\n        TCSLink.Click();\n        return this;\n    }\n\n    /// <summary>\n    /// Gets the visible text from the lastName element.\n    /// </summary>\n    public string GetLastNameText()\n    {\n        return LastNameText.Text;\n    }\n\n    /// <summary>\n    /// Checks whether the lastName element is displayed.\n    /// </summary>\n    public bool IsLastNameVisible()\n    {\n        return LastNameText.Displayed;\n    }\n\n    /// <summary>\n    /// Clicks the Abd element.\n    /// </summary>\n    public ViewLeadPage ClickAbd()\n    {\n        AbdLink.Click();\n        return this;\n    }\n\n    /// <summary>\n    /// Gets the visible text from the companyName element.\n    /// </summary>\n    public string GetCompanyNameText()\n    {\n        return CompanyNameText.Text;\n    }\n\n    /// <summary>\n    /// Checks whether the companyName element is displayed.\n    /// </summary>\n    public bool IsCompanyNameVisible()\n    {\n        return CompanyNameText.Displayed;\n    }\n\n    /// <summary>\n    /// Clicks the M S element.\n    /// </summary>\n    public ViewLeadPage ClickMS()\n    {\n        MSLink.Click();\n        return this;\n    }\n}\n\nGenerate a Playwright Python page object class for this DOM."

```

```

},

```

```

{

```

```

    "role": "assistant",

```

```

    "content": "from playwright.sync_api import Page, Locator\n\nclass GeneratedPage:\n\n    \"\"\"Page Object for the Generated page.\"\"\"\n\n    def __init__(self, page: Page) -> None:\n        self.page = page\n        self.ext_gen839_button = page.locator(\"#ext-gen839\")\n        self.ext_gen841_button = page.locator(\"#ext-gen841\")\n        self.ext_gen874_button = page.locator(\"#ext-gen874\")\n        self.ext_gen858_button = page.locator(\"#ext-gen858\")\n\n    def click_ext_gen839(self) -> None:\n        \"\"\"Click the ext-gen839.\"\"\"\n        self.ext_gen839_button.click()\n\n    def click_ext_gen841(self) -> None:\n        \"\"\"Click the ext-gen841.\"\"\"\n        self.ext_gen841_button.click()\n\n    def click_ext_gen874(self) -> None:\n        \"\"\"Click the ext-gen874.\"\"\"\n        self.ext_gen874_button.click()\n\n    def click_ext_gen858(self) -> None:\n        \"\"\"Click the ext-gen858.\"\"\"\n        self.ext_gen858_button.click()

```

```

    }

```

```

}

```

```

}

```

```

{

```

```

    "messages": [

```

```

    {

```

```

        "role": "system",

```

"content": "You are an expert in generating Playwright C# page object classes using provided DOM information. Use Microsoft.Playwright conventions with IPage and ILocator, async/await patterns, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."

```
},
```

```
{
```

```
    "role": "user",
```

```
    "content": "Given the following DOM structure:\n```html\n<input type='text' \nclass='inputBox' name='companyName' size='30' maxlength='100' \nid='createLeadForm_companyName'>\n<input type='text' class='inputBox' \nname='firstName' size='30' maxlength='100' id='createLeadForm_firstName'>\n<input \ntype='text' class='inputBox' name='lastName' size='30' maxlength='100' \nid='createLeadForm_lastName'>\n<input type='submit' class='smallSubmit' \nname='submitButton' value='Create Lead' id='ext-gen652'>\n```\nGenerate a Playwright C# \npage object class for this DOM."
```

```
},
```

```
{
```

```
    "role": "assistant",
```

```
    "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for EditLeadPage.\n    /// </summary>\n    public class EditLeadPage\n    {\n        private readonly IWebDriver driver;\n\n        public EditLeadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private \n        IWebElement CompanyNameInput =>\n        driver.FindElement(By.Id(\"createLeadForm_companyName\"));\n        private IWebElement \n        FirstNameInput => driver.FindElement(By.Id(\"createLeadForm_firstName\"));\n        private \n        IWebElement LastNameInput => driver.FindElement(By.Id(\"createLeadForm_lastName\"));\n        private IWebElement CreateLeadButton => driver.FindElement(By.XPath(\"//input[@value='Create \n        Lead']\"));\n\n        /// <summary>\n        /// Enters a value in the companyName field.\n        /// </summary>\n        public EditLeadPage EnterCompanyName(string companyName)\n        {\n            CompanyNameInput.Clear();\n            CompanyNameInput.SendKeys(companyName);\n            return \n            this;\n        }\n\n        /// <summary>\n        /// Enters a value in the firstName field.\n        /// </summary>\n        public EditLeadPage EnterFirstName(string firstName)\n        {\n            FirstNameInput.Clear();\n            FirstNameInput.SendKeys(firstName);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the lastName field.\n        /// </summary>\n        public EditLeadPage EnterLastName(string lastName)\n        {\n            LastNameInput.Clear();\n            LastNameInput.SendKeys(lastName);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Create Lead element.\n        /// </summary>\n        public EditLeadPage ClickCreateLead()\n        {\n            CreateLeadButton.Click();\n            return this;\n        }\n    }\n}
```

```
}
```

```
]
```

```
}
```

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Playwright C# page object classes using provided
DOM information. Use Microsoft.Playwright conventions with IPage and ILocator, async/await
patterns, and insert TODO comments only when a mapping is missing. Make sure every page method
includes XML doc comments in the generated code. Generate only code grounded in the supplied
DOM."

    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n```html\n<input type=\"text\" size=\"20\"
autocomplete=\"off\" id=\"ext-gen246\" name=\"id\" class=\" x-form-text x-form-field \"
style=\"width: 214px;\"> \n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen248\"
name=\"firstName\" class=\" x-form-text x-form-field \" style=\"width: 214px;\"> \n<input
type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen250\" name=\"lastName\" class=\" x-
form-text x-form-field \" style=\"width: 214px;\"> \n<input type=\"text\" size=\"20\"
autocomplete=\"off\" id=\"ext-gen252\" name=\"companyName\" class=\" x-form-text x-form-field
\" style=\"width: 214px;\"> \n<button class=\"x-btn-text\" type=\"button\" id=\"ext-gen334\">Find
Leads</button>\n```\nGenerate a Playwright C# page object class for this DOM."

    },
    {
      "role": "assistant",

      "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for FindLeadsPage.\n    /// </summary>\n    public class FindLeadsPage\n    {\n        private readonly IWebDriver driver;\n\n        public FindLeadsPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement IdInput => driver.FindElement(By.Name(\"id\"));\n        private IWebElement
        FirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n        private IWebElement
        LastNameInput => driver.FindElement(By.Name(\"lastName\"));\n        private IWebElement
        CompanyNameInput => driver.FindElement(By.Name(\"companyName\"));\n        private
        IWebElement FindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-space()='Find
        Leads']\"));\n\n        /// <summary>\n        /// Enters a value in the id field.\n        /// </summary>\n        public FindLeadsPage EnterId(string id)\n        {\n            IdInput.Clear();\n            IdInput.SendKeys(id);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in
        the firstName field.\n        /// </summary>\n        public FindLeadsPage EnterFirstName(string
        firstName)\n        {\n            FirstNameInput.Clear();\n            FirstNameInput.SendKeys(firstName);\n
            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the lastName field.\n        ///
        </summary>\n        public FindLeadsPage EnterLastName(string lastName)\n        {\n

```

```

LastNameInput.Clear();\n        LastNameInput.SendKeys(lastName);\n        return this;\n    }\n\n    /// <summary>\n    /// Enters a value in the companyName field.\n    ///\n    </summary>\n    public FindLeadsPage EnterCompanyName(string companyName)\n    {\n        CompanyNameInput.Clear();\n        CompanyNameInput.SendKeys(companyName);\n        return this;\n    }\n\n    /// <summary>\n    /// Clicks the Find Leads element.\n    ///\n    </summary>\n    public FindLeadsPage ClickFindLeads()\n    {\n        FindLeadsButton.Click();\n        return this;\n    }\n}\n}

```

```

{
    "messages": [
        {
            "role": "system",

            "content": "You are an expert in generating Playwright C# page object classes using provided DOM information. Use Microsoft.Playwright conventions with IPage and ILocator, async/await patterns, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."
        },

```

```

        {
            "role": "user",

            "content": "Given the following DOM structure:\n```html\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen255\" name=\"firstName\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<button class=\"x-btn-text\" type=\"button\" id=\"ext-gen341\">Find Leads</button>\n```\nGenerate a Playwright C# page object class for this DOM."
        },

```

```

        {
            "role": "assistant",

            "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for FindLeadsUpdatedPage.\n    ///\n    </summary>\n    public class FindLeadsUpdatedPage\n    {\n        private readonly IWebDriver

```

```

driver;\n\n    public FindLeadsUpdatedPage(IWebDriver driver)\n    {\n        this.driver =\n        driver;\n    }\n\n    private IWebElement IdInput =>\n    driver.FindElement(By.XPath(\"//input[@name='id']\")[1]);\n\n    private IWebElement\n    FirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n\n    private IWebElement IdInput2\n    => driver.FindElement(By.XPath(\"//input[@name='id']\")[2]);\n\n    private IWebElement IdInput3\n    => driver.FindElement(By.XPath(\"//input[@name='id']\")[3]);\n\n    private IWebElement\n    FindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-space()='Find Leads']\"));\n\n    /// <summary>\n    /// Enters a value in the id field.\n    /// </summary>\n    public\n    FindLeadsUpdatedPage EnterId(string id)\n    {\n        IdInput.Clear();\n        IdInput.SendKeys(id);\n        return this;\n    }\n\n    /// <summary>\n    /// Enters a value in\n    the firstName field.\n    /// </summary>\n    public FindLeadsUpdatedPage\n    EnterFirstName(string firstName)\n    {\n        FirstNameInput.Clear();\n        FirstNameInput.SendKeys(firstName);\n        return this;\n    }\n\n    /// <summary>\n    ///\n    Enters a value in the id field.\n    /// </summary>\n    public FindLeadsUpdatedPage\n    EnterId2(string id)\n    {\n        IdInput2.Clear();\n        IdInput2.SendKeys(id);\n        return\n        this;\n    }\n\n    /// <summary>\n    /// Enters a value in the id field.\n    /// </summary>\n    public FindLeadsUpdatedPage EnterId3(string id)\n    {\n        IdInput3.Clear();\n        IdInput3.SendKeys(id);\n        return this;\n    }\n\n    /// <summary>\n    /// Clicks the Find\n    Leads element.\n    /// </summary>\n    public FindLeadsUpdatedPage ClickFindLeads()\n    {\n        FindLeadsButton.Click();\n        return this;\n    }\n\n}\n\n]\n\n}

```

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Playwright C# page object classes using provided\nDOM information. Use Microsoft.Playwright conventions with IPage and ILocator, async/await\npatterns, and insert TODO comments only when a mapping is missing. Make sure every page method\nincludes XML doc comments in the generated code. Generate only code grounded in the supplied\nDOM."
    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n<html>\n<a style='color: black;'\nhref='/crmsfa/control/main?externalLoginKey=EL601288709152'\n>\nCRM/SFA\n</a>\n<input\nclass='decorativeSubmit'\nstyle='width:65px; margin-left:1px;'\ntype='submit'\nvalue='Logout'\n>\n\nGenerate a Playwright C# page object class for this DOM."
    }
  ]
}

```

```

    },
    {
        "role": "assistant",

        "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for HomePage.\n    /// </summary>\n    public class HomePage\n    {\n        private readonly IWebDriver driver;\n\n        public HomePage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private\n        IWebElement CRMSFALink => driver.FindElement(By.LinkText(\"CRM/SFA\"));\n        private\n        IWebElement LogoutButton => driver.FindElement(By.XPath(\"//input[@value='Logout']\"));\n\n        /// <summary>\n        /// Clicks the CRM/SFA element.\n        /// </summary>\n        public HomePage\n        ClickCRMSFA()\n        {\n            CRMSFALink.Click();\n            return this;\n        }\n\n        ///\n        <summary>\n        /// Clicks the Logout element.\n        /// </summary>\n        public HomePage\n        ClickLogout()\n        {\n            LogoutButton.Click();\n            return this;\n        }\n    }\n}

```

```

{
    "messages": [
        {
            "role": "system",

            "content": "You are an expert in generating Playwright C# page object classes using provided DOM information. Use Microsoft.Playwright conventions with IPage and ILocator, async/await patterns, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."
        }
    ]
}

```

```

    },
    {
        "role": "user",

        "content": "Given the following DOM structure:\n`html<input class=\"inputLogin\" type=\"text\" id=\"username\" name=\"USERNAME\" size=\"50\">\n<input class=\"inputLogin\" type=\"password\" id=\"password\" name=\"PASSWORD\" size=\"50\">\n<input class=\"decorativeSubmit\" type=\"submit\" value=\"Login\">\n`\nGenerate a Playwright C# page object class for this DOM."

        },
        {
            "role": "assistant",

```

```

"content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for LoginPage.\n    /// </summary>\n    public class LoginPage\n    {\n        private readonly IWebDriver driver;\n\n        public LoginPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement USERNAMEInput => driver.FindElement(By.Id(\"username\"));\n        private IWebElement PASSWORDPasswordInput => driver.FindElement(By.Id(\"password\"));\n        private IWebElement LoginButton => driver.FindElement(By.XPath(\"//input[@value='Login']\"));\n\n        /// <summary>\n        /// Enters a value in the USERNAME field.\n        /// </summary>\n        public LoginPage EnterUSERNAME(string uUSERNAME)\n        {\n            USERNAMEInput.Clear();\n            USERNAMEInput.SendKeys(uUSERNAME);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the PASSWORD field.\n        /// </summary>\n        public LoginPage EnterPASSWORD(string pPASSWORD)\n        {\n            PASSWORDPasswordInput.Clear();\n            PASSWORDPasswordInput.SendKeys(pPASSWORD);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Login element.\n        /// </summary>\n        public LoginPage ClickLogin()\n        {\n            LoginButton.Click();\n            return this;\n        }\n    }\n}

```

```

{
    "messages": [
        {
            "role": "system",

            "content": "You are an expert in generating Playwright C# page object classes using provided DOM information. Use Microsoft.Playwright conventions with IPage and ILocator, async/await patterns, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."
        },

```

```

    },
    {
        "role": "user",

        "content": "Given the following DOM structure:\n<html>\n<a href='/crmsfa/control/leadsMain' id='ext-gen614'>Leads</a>\n</html>\nGenerate a Playwright C# page object class for this DOM."
    },

```

```

    },
    {
        "role": "assistant",

```



```

    "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for MyHomePage.\n    /// </summary>\n    public class MyHomePage\n    {\n        private readonly IWebDriver driver;\n        public MyHomePage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n        private IWebElement LeadsLink => driver.FindElement(By.LinkText(\"Leads\"));\n        /// <summary>\n        /// Clicks the Leads element.\n        /// </summary>\n        public MyHomePage ClickLeads()\n        {\n            LeadsLink.Click();\n            return this;\n        }\n    }\n}

```

```

{
    "messages": [
        {
            "role": "system",

```

"content": "You are an expert in generating Playwright C# page object classes using provided DOM information. Use Microsoft.Playwright conventions with IPage and ILocator, async/await patterns, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."

```

    },
    {
        "role": "user",

```

"content": "Given the following DOM structure:\n```html\nCreate Lead\n```\nGenerate a Playwright C# page object class for this DOM."

```

    },
    {
        "role": "assistant",

```

```

    "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for MyLeadsPage.\n    /// </summary>\n    public class MyLeadsPage\n    {\n        private readonly IWebDriver driver;\n        public MyLeadsPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n        private IWebElement CreateLeadLink => driver.FindElement(By.LinkText(\"Create Lead\"));\n        /// <summary>\n        /// Clicks the Create Lead element.\n        /// </summary>\n        public MyLeadsPage ClickCreateLead()\n        {\n            CreateLeadLink.Click();\n            return this;\n        }\n    }\n}

```

```

    }

```

```

]
}

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Playwright C# page object classes using provided
DOM information. Use Microsoft.Playwright conventions with IPage and ILocator, async/await
patterns, and insert TODO comments only when a mapping is missing. Make sure every page method
includes XML doc comments in the generated code. Generate only code grounded in the supplied
DOM."

    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n```html\n<input class=\"XdijitInputField
dijitInputFieldValidationNormal\" type=\"text\" autocomplete=\"off\"
name=\"ComboBox_productId\" dojoattachevent=\"onkeypress, onkeyup, onfocus, onblur,
compositionend\" dojoattachpoint=\"textbox, focusNode\" id=\"ComboBox_productId\"
tabindex=\"1\" size=\"15\" maxlength=\"50\" wairole=\"combobox\" role=\"wairole:combobox\"
value=\"\" valuenow=\"\" invalid=\"false\" disabled=\"false\">\n<input id=\"quantity\"
name=\"quantity\" type=\"text\" size=\"10\" maxlength=\"\" class=\"inputBox\" value=\"1\"
onchange=\"\" tabindex=\"2\">\n<a class=\"subMenuButton\"
href=\"javascript:document.cartform.submit();\" id=\"ext-gen173\">Update</a>\n```\nGenerate a
Playwright C# page object class for this DOM."

    },
    {
      "role": "assistant",

      "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for OrderEntryHeaderPage.\n    /// </summary>\n    public class OrderEntryHeaderPage\n    {\n        private readonly IWebDriver
driver;\n\n        public OrderEntryHeaderPage(IWebDriver driver)\n        {\n            this.driver =
driver;\n        }\n\n        private IWebElement ProductIdInput =>
driver.FindElement(By.Id(\"ComboBox_productId\"));\n        private IWebElement QuantityInput =>
driver.FindElement(By.Id(\"quantity\"));\n        private IWebElement UpdateLink =>
driver.FindElement(By.LinkText(\"Update\"));\n\n        /// <summary>\n        /// Enters a value in the
productId field.\n        /// </summary>\n        public OrderEntryHeaderPage EnterProductId(string
productId)\n        {\n            ProductIdInput.Clear();\n            ProductIdInput.SendKeys(productId);\n
return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the quantity field.\n        ///

```

```

</summary>\n    public OrderEntryHeaderPage EnterQuantity(string quantity)\n    {\n    QuantityInput.Clear();\n    QuantityInput.SendKeys(quantity);\n    return this;\n    }\n\n    /// <summary>\n    /// Clicks the Update element.\n    /// </summary>\n    public\n    OrderEntryHeaderPage ClickUpdate()\n    {\n    UpdateLink.Click();\n    return this;\n    }\n}\n}\n}

```

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Playwright C# page object classes using provided DOM information. Use Microsoft.Playwright conventions with IPage and ILocator, async/await patterns, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."
    },

```

```

    {
      "role": "user",

      "content": "Given the following DOM structure:\n```html\n<input id=\"uploadedFile\" name=\"uploadedFile\" type=\"file\" size=\"30\" maxlength=\"\" class=\"inputBox\" onchange=\"\">\n<input type=\"submit\" value=\"Upload and Import\" class=\"smallSubmit\" onclick=\"submitFormAndReplaceButtonTextWithSingleClick(this, 'Uploading... Please Wait');\" id=\"ext-gen593\">\n```\nGenerate a Playwright C# page object class for this DOM."
    },

```

```

    },
    {
      "role": "assistant",

      "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for UploadPage.\n    /// </summary>\n    public class UploadPage\n    {\n        private readonly IWebDriver driver;\n\n        public UploadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement FileFileInput => driver.FindElement(By.Id(\"uploadedFile\"));\n        private IWebElement UploadAndImportButton => driver.FindElement(By.XPath(\"//input[@value='Upload and Import']\"));\n\n        /// <summary>\n        /// Uploads a file using the File field.\n        /// </summary>\n        public UploadPage UploadFile(string filePath)\n        {\n            FileFileInput.SendKeys(filePath);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks

```

```

the Upload and Import element.\n    /// </summary>\n    public UploadPage
ClickUploadAndImport()\n    {\n        UploadAndImportButton.Click();\n        return this;\n    }\n}

```

```

}
]
}

```

```

{
    "messages": [
        {
            "role": "system",
            "content": "You are an expert in generating Playwright C# page object classes using provided DOM information. Use Microsoft.Playwright conventions with IPage and ILocator, async/await patterns, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."
        },

```

```

        {
            "role": "user",
            "content": "Given the following DOM structure:\n```html\n<div class=\"x-grid3-cell-inner x-grid3-col-partyId\" unselectable=\"on\" id=\"ext-gen781\"><a class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen839\">10196</a></div>\n<div class=\"x-grid3-cell-inner x-grid3-col-firstName\" unselectable=\"on\" id=\"ext-gen840\"><a class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen841\">TCS</a></div>\n<div class=\"x-grid3-cell-inner x-grid3-col-lastName\" unselectable=\"on\" id=\"ext-gen842\"><a class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen874\">Abd</a></div>\n<div class=\"x-grid3-cell-inner x-grid3-col-companyName\" unselectable=\"on\" id=\"ext-gen857\"><a class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen858\">MS</a></div>\n```\nGenerate a Playwright C# page object class for this DOM."
        },

```

```

    },
    {
        "role": "assistant",
        "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for ViewLeadPage.\n    /// </summary>\n    public class ViewLeadPage\n    {\n        private readonly IWebDriver driver;\n        public ViewLeadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n        private IWebElement PartyIdText => driver.FindElement(By.Id(\"ext-gen781\"));\n        private IWebElement

```

```

Value10196Link => driver.FindElement(By.LinkText("\10196\")); \n    private IWebElement
FirstNameText => driver.FindElement(By.Id("\ext-gen840\")); \n    private IWebElement TCSLink =>
driver.FindElement(By.LinkText("\TCS\")); \n    private IWebElement LastNameText =>
driver.FindElement(By.Id("\ext-gen842\")); \n    private IWebElement AbdLink =>
driver.FindElement(By.LinkText("\Abd\")); \n    private IWebElement CompanyNameText =>
driver.FindElement(By.Id("\ext-gen857\")); \n    private IWebElement MSLink =>
driver.FindElement(By.LinkText("\M S\")); \n \n    /// <summary>\n    /// Gets the visible text from
the partyId element.\n    /// </summary>\n    public string GetPartyIdText()\n    {\n
return PartyIdText.Text;\n    }\n \n    /// <summary>\n    /// Checks whether the partyId
element is displayed.\n    /// </summary>\n    public bool IsPartyIdVisible()\n    {\n
return PartyIdText.Displayed;\n    }\n \n    /// <summary>\n    /// Clicks the 10196 element.\n
/// </summary>\n    public ViewLeadPage ClickValue10196()\n    {\n
Value10196Link.Click();\n    return this;\n    }\n \n    /// <summary>\n    /// Gets the visible
text from the firstName element.\n    /// </summary>\n    public string GetFirstNameText()\n
{\n    return FirstNameText.Text;\n    }\n \n    /// <summary>\n    /// Checks whether the
firstName element is displayed.\n    /// </summary>\n    public bool IsFirstNameVisible()\n
{\n    return FirstNameText.Displayed;\n    }\n \n    /// <summary>\n    /// Clicks the TCS
element.\n    /// </summary>\n    public ViewLeadPage ClickTCS()\n    {\n
TCSLink.Click();\n    return this;\n    }\n \n    /// <summary>\n    /// Gets the visible text
from the lastName element.\n    /// </summary>\n    public string GetLastNameText()\n    {\n
return LastNameText.Text;\n    }\n \n    /// <summary>\n    /// Checks whether the lastName
element is displayed.\n    /// </summary>\n    public bool IsLastNameVisible()\n    {\n
return LastNameText.Displayed;\n    }\n \n    /// <summary>\n    /// Clicks the Abd element.\n
/// </summary>\n    public ViewLeadPage ClickAbd()\n    {\n    AbdLink.Click();\n
return this;\n    }\n \n    /// <summary>\n    /// Gets the visible text from the companyName
element.\n    /// </summary>\n    public string GetCompanyNameText()\n    {\n    return
CompanyNameText.Text;\n    }\n \n    /// <summary>\n    /// Checks whether the
companyName element is displayed.\n    /// </summary>\n    public bool
IsCompanyNameVisible()\n    {\n    return CompanyNameText.Displayed;\n    }\n \n    ///
<summary>\n    /// Clicks the M S element.\n    /// </summary>\n    public ViewLeadPage
ClickMS()\n    {\n    MSLink.Click();\n    return this;\n    }\n }\n
}

]

}

```

```

{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Playwright Java page object classes using provided
DOM information. Use Playwright Java conventions with Page and Locator classes, proper selectors,
and insert TODO comments only when a mapping is missing. Make sure every page method includes
Javadoc comments in the generated code. Generate only code grounded in the supplied DOM."
    }
  ]
}

```

```

},

{

    "role": "user",

    "content": "Given the following DOM structure:\n```html\n<input type=\"text\" class=\"inputBox\" name=\"companyName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_companyName\">\n<input type=\"text\" class=\"inputBox\" name=\"firstName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_firstName\">\n<input type=\"text\" class=\"inputBox\" name=\"lastName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_lastName\">\n<input type=\"submit\" class=\"smallSubmit\" name=\"submitButton\" value=\"Create Lead\" id=\"ext-gen652\">\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for EditLeadPage.\n    /// </summary>\n    public class EditLeadPage\n    {\n        private readonly IWebDriver driver;\n        public EditLeadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n        private IWebElement CompanyNameInput => driver.FindElement(By.Id(\"createLeadForm_companyName\"));\n        private IWebElement FirstNameInput => driver.FindElement(By.Id(\"createLeadForm_firstName\"));\n        private IWebElement LastNameInput => driver.FindElement(By.Id(\"createLeadForm_lastName\"));\n        private IWebElement CreateLeadButton => driver.FindElement(By.XPath(\"//input[@value='Create Lead']\"));\n        \n        /// <summary>\n        /// Enters a value in the companyName field.\n        /// </summary>\n        public EditLeadPage EnterCompanyName(string companyName)\n        {\n            CompanyNameInput.Clear();\n            CompanyNameInput.SendKeys(companyName);\n            return this;\n        }\n        \n        /// <summary>\n        /// Enters a value in the firstName field.\n        /// </summary>\n        public EditLeadPage EnterFirstName(string firstName)\n        {\n            FirstNameInput.Clear();\n            FirstNameInput.SendKeys(firstName);\n            return this;\n        }\n        \n        /// <summary>\n        /// Enters a value in the lastName field.\n        /// </summary>\n        public EditLeadPage EnterLastName(string lastName)\n        {\n            LastNameInput.Clear();\n            LastNameInput.SendKeys(lastName);\n            return this;\n        }\n        \n        /// <summary>\n        /// Clicks the Create Lead element.\n        /// </summary>\n        public EditLeadPage ClickCreateLead()\n        {\n            CreateLeadButton.Click();\n            return this;\n        }\n    }\n}\n```\nGenerate a Playwright Java page object class for this DOM."

    },

    {

        "role": "assistant",

        "content": "import com.microsoft.playwright.Page;\nimport com.microsoft.playwright.Locator;\n\npublic class GeneratedPage {\n    private final Page page;\n    private final Locator companyNameLocator;\n    private final Locator firstNameLocator;\n    private final Locator lastNameLocator;\n    private final Locator submitButton;\n\n    public GeneratedPage(Page page) {\n        this.page = page;\n        companyNameLocator = page.locator(By.id(\"createLeadForm_companyName\"));\n        firstNameLocator = page.locator(By.id(\"createLeadForm_firstName\"));\n        lastNameLocator = page.locator(By.id(\"createLeadForm_lastName\"));\n        submitButton = page.locator(By.id(\"ext-gen652\"));\n    }\n\n    /** Fill the companyName field */\n    public void enterCompanyName(String companyName) {\n        companyNameLocator.fill(companyName);\n    }\n\n    /** Fill

```

```

the firstName field */\n public void enterFirstName(String firstName) {
firstNameLocator.fill(firstName); }\n /** Fill the lastName field */\n public void
enterLastName(String lastName) { lastNameLocator.fill(lastName); }\n /** Click the submitButton
*/\n public void clickSubmitButton() { submitButton.click(); }\n}"

```

```

}

]

}

```

```

{
  "messages": [

```

```

    {
      "role": "system",

```

"content": "You are an expert in generating Playwright Java page object classes using provided DOM information. Use Playwright Java conventions with Page and Locator classes, proper selectors, and insert TODO comments only when a mapping is missing. Make sure every page method includes Javadoc comments in the generated code. Generate only code grounded in the supplied DOM."

```

    },

```

```

    {
      "role": "user",

```

"content": "Given the following DOM structure:\n```\nhtml\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen246\" name=\"id\" class=\"x-form-text x-form-field \" style=\"width: 214px;\"> \n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen248\" name=\"firstName\" class=\"x-form-text x-form-field \" style=\"width: 214px;\"> \n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen250\" name=\"lastName\" class=\"x-form-text x-form-field \" style=\"width: 214px;\"> \n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen252\" name=\"companyName\" class=\"x-form-text x-form-field \" style=\"width: 214px;\"> \n<button class=\"x-btn-text\" type=\"button\" id=\"ext-gen334\">Find Leads</button>\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for FindLeadsPage.\n /// </summary>\n public class FindLeadsPage\n {\n private readonly IWebDriver driver;\n\n public FindLeadsPage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement IdInput => driver.FindElement(By.Name(\"id\"));\n private IWebElement FirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n private IWebElement LastNameInput => driver.FindElement(By.Name(\"lastName\"));\n private IWebElement CompanyNameInput => driver.FindElement(By.Name(\"companyName\"));\n private IWebElement FindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-space()='Find Leads']\"));\n\n /// <summary>\n /// Enters a value in the id field.\n /// </summary>\n public FindLeadsPage EnterId(string id)\n {\n IdInput.Clear();\n IdInput.SendKeys(id);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the firstName field.\n /// </summary>\n public FindLeadsPage EnterFirstName(string firstName)\n {\n FirstNameInput.Clear();\n FirstNameInput.SendKeys(firstName);\n }\n }\n}


```

{
    "role": "user",

    "content": "Given the following DOM structure:\n```\nhtml\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen255\" name=\"firstName\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<button class=\"x-btn-text\" type=\"button\" id=\"ext-gen341\">Find Leads</button>\n\n===C#===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for FindLeadsUpdatedPage.\n    /// </summary>\n    public class FindLeadsUpdatedPage\n    {\n        private readonly IWebDriver driver;\n\n        public FindLeadsUpdatedPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement IdInput => driver.FindElement(By.XPath(\"//input[@name='id']\"));\n        private IWebElement FirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n        private IWebElement IdInput2 => driver.FindElement(By.XPath(\"//input[@name='id']\"));\n        private IWebElement IdInput3 => driver.FindElement(By.XPath(\"//input[@name='id']\"));\n        private IWebElement FindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-space()='Find Leads']\"));\n\n        /// <summary>\n        /// Enters a value in the id field.\n        /// </summary>\n        public FindLeadsUpdatedPage EnterId(string id)\n        {\n            IdInput.Clear();\n            IdInput.SendKeys(id);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the firstName field.\n        /// </summary>\n        public FindLeadsUpdatedPage EnterFirstName(string firstName)\n        {\n            FirstNameInput.Clear();\n            FirstNameInput.SendKeys(firstName);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the id field.\n        /// </summary>\n        public FindLeadsUpdatedPage EnterId2(string id)\n        {\n            IdInput2.Clear();\n            IdInput2.SendKeys(id);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the id field.\n        /// </summary>\n        public FindLeadsUpdatedPage EnterId3(string id)\n        {\n            IdInput3.Clear();\n            IdInput3.SendKeys(id);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Find Leads element.\n        /// </summary>\n        public FindLeadsUpdatedPage ClickFindLeads()\n        {\n            FindLeadsButton.Click();\n            return this;\n        }\n    }\n}\n```\n\nGenerate a Playwright Java page object class for this DOM."

    },

    {
        "role": "assistant",

        "content": "import com.microsoft.playwright.Page;\nimport com.microsoft.playwright.Locator;\n\npublic class GeneratedPage {\n    private final Page page;\n    private final Locator idLocator;\n    private final Locator firstNameLocator;\n    private final Locator extGen341Button;\n\n    public GeneratedPage(Page page) {\n        this.page = page;\n        idLocator = page.locator(By.id(\"ext-gen253\"));\n        firstNameLocator = page.locator(By.id(\"ext-gen255\"));\n        extGen341Button = page.locator(By.id(\"ext-gen341\"));\n    }\n\n    /** Fill the id field */\n    public void enterId(String id) { idLocator.fill(id); }\n\n    /** Fill the firstName field */\n    public void enterFirstName(String firstName) { firstNameLocator.fill(firstName); }\n\n    /** Clicks the Find Leads button */\n    public void clickFindLeads() { extGen341Button.click(); }\n}\n"
    }
}

```

```
public void enterFirstName(String firstName) { firstNameLocator.fill(firstName); }\n /** Click the  
ext-gen341 */\n public void clickExtGen341() { extGen341Button.click(); }\n}"
```

```
}  
]  
}
```

```
{  
  "messages": [  
    {  
      "role": "system",
```

"content": "You are an expert in generating Playwright Java page object classes using provided DOM information. Use Playwright Java conventions with Page and Locator classes, proper selectors, and insert TODO comments only when a mapping is missing. Make sure every page method includes Javadoc comments in the generated code. Generate only code grounded in the supplied DOM."

```
  },  
  {  
    "role": "user",  
    "content": "Given the following DOM structure:\n```html\n<a style=\"color: black;\"  
href=\"\n/crmsfa/control/main?externalLoginKey=EL601288709152\">\nCRM/SFA\n</a>\n<input  
class=\"decorativeSubmit\" style=\"width:65px; margin-left:1px;\" type=\"submit\"  
value=\"Logout\">\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace  
LeafTaps.Pages{\n  /// <summary>\n  /// Page object generated strictly from the supplied HTML  
DOM for HomePage.\n  /// </summary>\n  public class HomePage\n  {\n    private readonly  
IWebDriver driver;\n\n    public HomePage(IWebDriver driver)\n    {\n      this.driver =  
driver;\n    }\n\n    private IWebElement CRMSFALink =>  
driver.FindElement(By.LinkText(\"CRM/SFA\"));\n    private IWebElement LogoutButton =>  
driver.FindElement(By.XPath(\"//input[@value='Logout']\"));\n\n    /// <summary>\n    /// Clicks  
the CRM/SFA element.\n    /// </summary>\n    public HomePage ClickCRMSFA()\n    {\n      CRMSFALink.Click();\n      return this;\n    }\n\n    /// <summary>\n    /// Clicks the Logout  
element.\n    /// </summary>\n    public HomePage ClickLogout()\n    {\n      LogoutButton.Click();\n      return this;\n    }\n  }\n}\n```\nGenerate a Playwright Java page  
object class for this DOM."
```

```
  },  
  {  
    "role": "assistant",  
    "content": "import com.microsoft.playwright.Page;\nimport  
com.microsoft.playwright.Locator;\n\npublic class GeneratedPage {\n  private final Page page;\n  private final Locator cRMSFAButton;\n  private final Locator logoutButton;\n\n  public
```

```
GeneratedPage(Page page) {\n    this.page = page;\n    cRMSFAButton =  
page.locator(By.cssSelector(\"a\"));\n    logoutButton =  
page.locator(By.cssSelector(\"input[type=\"submit\"]\"));\n    }\n\n    /** Click the CRMSFA */\n    public void clickCRMSFA() { cRMSFAButton.click(); }\n    /** Click the Logout */\n    public void  
clickLogout() { logoutButton.click(); }\n}
```

```
}  
]  
}
```

```
{  
    "messages": [  
        {  
            "role": "system",  
            "content": "You are an expert in generating Playwright Java page object classes using provided  
DOM information. Use Playwright Java conventions with Page and Locator classes, proper selectors,  
and insert TODO comments only when a mapping is missing. Make sure every page method includes  
Javadoc comments in the generated code. Generate only code grounded in the supplied DOM."  
        },  
        {  
            "role": "user",  
            "content": "Given the following DOM structure:\n<html>\n<input class=\"inputLogin\"  
type=\"text\" id=\"username\" name=\"USERNAME\" size=\"50\">\n<input class=\"inputLogin\"  
type=\"password\" id=\"password\" name=\"PASSWORD\" size=\"50\">\n<input  
class=\"decorativeSubmit\" type=\"submit\" value=\"Login\">\n\n===CSHARP===\nusing  
OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object  
generated strictly from the supplied HTML DOM for LoginPage.\n    /// </summary>\n    public class  
LoginPage\n    {\n        private readonly IWebDriver driver;\n\n        public LoginPage(IWebDriver  
driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement USERNAMEInput =>  
driver.FindElement(By.Id(\"username\"));\n        private IWebElement PASSWORDPasswordInput =>  
driver.FindElement(By.Id(\"password\"));\n        private IWebElement LoginButton =>  
driver.FindElement(By.XPath(\"//input[@value='Login']\"));\n\n        /// <summary>\n        /// Enters  
a value in the USERNAME field.\n        /// </summary>\n        public LoginPage  
EnterUSERNAME(string uUSERNAME)\n        {\n            USERNAMEInput.Clear();\n            USERNAMEInput.SendKeys(uUSERNAME);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the PASSWORD field.\n        /// </summary>\n        public LoginPage  
EnterPASSWORD(string pPASSWORD)\n        {\n            PASSWORDPasswordInput.Clear();\n            PASSWORDPasswordInput.SendKeys(pPASSWORD);\n            return this;\n        }\n\n        ///  
<summary>\n        /// Clicks the Login element.\n        /// </summary>\n        public LoginPage  
ClickLogin()\n        {\n            LoginButton.Click();\n            return this;\n        }\n    }\n}\n\nGenerate a  
Playwright Java page object class for this DOM."
```

```
        {  
            "role": "system",
```

"content": "You are an expert in generating Playwright Java page object classes using provided DOM information. Use Playwright Java conventions with Page and Locator classes, proper selectors, and insert TODO comments only when a mapping is missing. Make sure every page method includes Javadoc comments in the generated code. Generate only code grounded in the supplied DOM."

```
        },
```

```
        {
```

```
            "role": "user",
```

```
            "content": "Given the following DOM structure:\n<html>\n<input class=\"inputLogin\"  
type=\"text\" id=\"username\" name=\"USERNAME\" size=\"50\">\n<input class=\"inputLogin\"  
type=\"password\" id=\"password\" name=\"PASSWORD\" size=\"50\">\n<input  
class=\"decorativeSubmit\" type=\"submit\" value=\"Login\">\n\n===CSHARP===\nusing  
OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object  
generated strictly from the supplied HTML DOM for LoginPage.\n    /// </summary>\n    public class  
LoginPage\n    {\n        private readonly IWebDriver driver;\n\n        public LoginPage(IWebDriver  
driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement USERNAMEInput =>  
driver.FindElement(By.Id(\"username\"));\n        private IWebElement PASSWORDPasswordInput =>  
driver.FindElement(By.Id(\"password\"));\n        private IWebElement LoginButton =>  
driver.FindElement(By.XPath(\"//input[@value='Login']\"));\n\n        /// <summary>\n        /// Enters  
a value in the USERNAME field.\n        /// </summary>\n        public LoginPage  
EnterUSERNAME(string uUSERNAME)\n        {\n            USERNAMEInput.Clear();\n            USERNAMEInput.SendKeys(uUSERNAME);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the PASSWORD field.\n        /// </summary>\n        public LoginPage  
EnterPASSWORD(string pPASSWORD)\n        {\n            PASSWORDPasswordInput.Clear();\n            PASSWORDPasswordInput.SendKeys(pPASSWORD);\n            return this;\n        }\n\n        ///  
<summary>\n        /// Clicks the Login element.\n        /// </summary>\n        public LoginPage  
ClickLogin()\n        {\n            LoginButton.Click();\n            return this;\n        }\n    }\n}\n\nGenerate a  
Playwright Java page object class for this DOM."
```

```

    },
    {
        "role": "assistant",

        "content": "import com.microsoft.playwright.Page;\nimport
com.microsoft.playwright.Locator;\n\npublic class GeneratedPage {\n    private final Page page;\n
private final Locator usernameLocator;\n    private final Locator passwordLocator;\n    private final
Locator loginButton;\n\n    public GeneratedPage(Page page) {\n        this.page = page;\n
usernameLocator = page.locator(By.id(\"username\"));\n        passwordLocator =
page.locator(By.id(\"password\"));\n        loginButton =
page.locator(By.cssSelector(\"input[type=\"submit\"]\"));\n    }\n\n    /** Fill the username field */\n
public void enterUsername(String username) { usernameLocator.fill(username); }\n    /** Fill the
password field */\n    public void enterPassword(String password) { passwordLocator.fill(password);
}\n    /** Click the Login */\n    public void clickLogin() { loginButton.click(); }\n}"

    }
}
}

```

```

{
    "messages": [

        {

            "role": "system",

            "content": "You are an expert in generating Playwright Java page object classes using provided
DOM information. Use Playwright Java conventions with Page and Locator classes, proper selectors,
and insert TODO comments only when a mapping is missing. Make sure every page method includes
Javadoc comments in the generated code. Generate only code grounded in the supplied DOM."

        },

        {

            "role": "user",

            "content": "Given the following DOM structure:\n`html\n<a
href=\"/crmsfa/control/leadsMain\" id=\"ext-gen614\">Leads</a>\n\n===CSHARP===\nusing
OpenQA.Selenium;\n\nnamespace LeafTaps.Pages{\n    /// <summary>\n    /// Page object
generated strictly from the supplied HTML DOM for MyHomePage.\n    /// </summary>\n    public
class MyHomePage\n    {\n        private readonly IWebDriver driver;\n\n        public
MyHomePage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private
IWebElement LeadsLink => driver.FindElement(By.LinkText(\"Leads\"));\n\n        /// <summary>\n        /// Clicks the Leads element.\n        /// </summary>\n        public MyHomePage ClickLeads()\n        {\n
LeadsLink.Click();\n            return this;\n        }\n    }\n}\n`Generate a Playwright Java page object
class for this DOM."

        },

        {

            "role": "assistant",

            "content": "import com.microsoft.playwright.Page;\nimport
com.microsoft.playwright.Locator;\n\npublic class GeneratedPage {\n    private final Page page;\n
private final Locator usernameLocator;\n    private final Locator passwordLocator;\n    private final
Locator loginButton;\n\n    public GeneratedPage(Page page) {\n        this.page = page;\n
usernameLocator = page.locator(By.id(\"username\"));\n        passwordLocator =
page.locator(By.id(\"password\"));\n        loginButton =
page.locator(By.cssSelector(\"input[type=\"submit\"]\"));\n    }\n\n    /** Fill the username field */\n
public void enterUsername(String username) { usernameLocator.fill(username); }\n    /** Fill the
password field */\n    public void enterPassword(String password) { passwordLocator.fill(password);
}\n    /** Click the Login */\n    public void clickLogin() { loginButton.click(); }\n}"

            }
        }
    ]
}

```

```

    },
    {
        "role": "assistant",

        "content": "import com.microsoft.playwright.Page;\nimport
com.microsoft.playwright.Locator;\n\npublic class GeneratedPage {\n    private final Page page;\n
private final Locator extGen614Button;\n\n    public GeneratedPage(Page page) {\n        this.page =
page;\n        extGen614Button = page.locator(By.id(\"ext-gen614\"));\n    }\n\n    /** Click the ext-
gen614 */\n    public void clickExtGen614() { extGen614Button.click(); }\n}"

    }
}

{
    "messages": [

        {
            "role": "system",

            "content": "You are an expert in generating Playwright Java page object classes using provided
DOM information. Use Playwright Java conventions with Page and Locator classes, proper selectors,
and insert TODO comments only when a mapping is missing. Make sure every page method includes
Javadoc comments in the generated code. Generate only code grounded in the supplied DOM."

        },

        {
            "role": "user",

            "content": "Given the following DOM structure:\n```html\n<a
href=\"/crmsfa/control/createLeadForm\" id=\"ext-gen876\">Create
Lead</a>\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    ///
<summary>\n    /// Page object generated strictly from the supplied HTML DOM for MyLeadsPage.\n
    /// </summary>\n    public class MyLeadsPage\n    {\n        private readonly IWebDriver driver;\n\n
        public MyLeadsPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private
IWebElement CreateLeadLink => driver.FindElement(By.LinkText(\"Create Lead\"));\n\n        ///
<summary>\n        /// Clicks the Create Lead element.\n        /// </summary>\n        public
MyLeadsPage ClickCreateLead()\n        {\n            CreateLeadLink.Click();\n            return this;\n        }\n
    }\n}\n```\nGenerate a Playwright Java page object class for this DOM."

        },

        {
            "role": "assistant",

```

```

"content": "import com.microsoft.playwright.Page;\nimport
com.microsoft.playwright.Locator;\n\npublic class GeneratedPage {\n  private final Page page;\n  private final Locator extGen876Button;\n\n  public GeneratedPage(Page page) {\n    this.page =
page;\n    extGen876Button = page.locator(By.id(\"ext-gen876\"));\n  }\n\n  /** Click the ext-
gen876 */\n  public void clickExtGen876() { extGen876Button.click(); }\n}

}

]

}

```

```

{
  "messages": [
    {
      "role": "system",

```

"content": "You are an expert in generating Playwright Java page object classes using provided DOM information. Use Playwright Java conventions with Page and Locator classes, proper selectors, and insert TODO comments only when a mapping is missing. Make sure every page method includes Javadoc comments in the generated code. Generate only code grounded in the supplied DOM."

```

},
{
  "role": "user",

```

```

"content": "Given the following DOM structure:\n```html\n<input class=\"XdijitInputField
dijitInputFieldValidationNormal\" type=\"text\" autocomplete=\"off\"
name=\"ComboBox_productId\" dojoattachevent=\"onkeypress, onkeyup, onfocus, onblur,
compositionend\" dojoattachpoint=\"textbox, focusNode\" id=\"ComboBox_productId\"
tabindex=\"1\" size=\"15\" maxlength=\"50\" wairole=\"combobox\" role=\"wairole:combobox\"
value=\"\" valuenow=\"\" invalid=\"false\" disabled=\"false\">\n<input id=\"quantity\"
name=\"quantity\" type=\"text\" size=\"10\" maxlength=\"\" class=\"inputBox\" value=\"1\"
onchange=\"\" tabindex=\"2\">\n<a class=\"subMenuButton\"
href=\"javascript:document.cartform.submit();\" id=\"ext-
gen173\">Update</a>\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace
LeafTaps.Pages{\n  /// <summary>\n  /// Page object generated strictly from the supplied HTML
DOM for OrderEntryHeaderPage.\n  /// </summary>\n  public class OrderEntryHeaderPage\n  {\n    private readonly IWebDriver driver;\n\n    public OrderEntryHeaderPage(IWebDriver driver)\n    {\n      this.driver = driver;\n    }\n\n    private IWebElement ProductIdInput =>
driver.FindElement(By.Id(\"ComboBox_productId\"));\n    private IWebElement QuantityInput =>
driver.FindElement(By.Id(\"quantity\"));\n    private IWebElement UpdateLink =>
driver.FindElement(By.LinkText(\"Update\"));\n\n    /// <summary>\n    /// Enters a value in the
productId field.\n    /// </summary>\n    public OrderEntryHeaderPage EnterProductId(string
productId)\n    {\n      ProductIdInput.Clear();\n      ProductIdInput.SendKeys(productId);\n
return this;\n    }\n\n    /// <summary>\n    /// Enters a value in the quantity field.\n    ///
</summary>\n    public OrderEntryHeaderPage EnterQuantity(string quantity)\n    {\n

```

```

QuantityInput.Clear();\n      QuantityInput.SendKeys(quantity);\n      return this;\n  }\n\n  /// <summary>\n  /// Clicks the Update element.\n  /// </summary>\n  public\n  OrderEntryHeaderPage ClickUpdate()\n  {\n      UpdateLink.Click();\n      return this;\n  }\n}\n}\n```\nGenerate a Playwright Java page object class for this DOM."

```

```

},

```

```

{

```

```

    "role": "assistant",

```

```

    "content": "import com.microsoft.playwright.Page;\nimport\ncom.microsoft.playwright.Locator;\n\npublic class GeneratedPage {\n    private final Page page;\n    private final Locator comboBoxProductIdLocator;\n    private final Locator quantityLocator;\n    private final Locator extGen173Button;\n\n    public GeneratedPage(Page page) {\n        this.page =\npage;\n        comboBoxProductIdLocator = page.locator(By.id(\"ComboBox_productId\"));\n        quantityLocator = page.locator(By.id(\"quantity\"));\n        extGen173Button =\npage.locator(By.id(\"ext-gen173\"));\n    }\n\n    /** Fill the ComboBox_productId field */\n    public\nvoid enterComboBoxProductId(String comboBoxProductId) {\n\ncomboBoxProductIdLocator.fill(comboBoxProductId);\n}\n\n    /** Fill the quantity field */\n    public\nvoid enterQuantity(String quantity) {\n    quantityLocator.fill(quantity);\n}\n\n    /** Click the ext-gen173\n*/\n    public void clickExtGen173() {\n    extGen173Button.click();\n}\n}"

```

```

}

```

```

]

```

```

}

```

```

{

```

```

    "messages": [

```

```

    {

```

```

        "role": "system",

```

```

        "content": "You are an expert in generating Playwright Java page object classes using provided\nDOM information. Use Playwright Java conventions with Page and Locator classes, proper selectors,\nand insert TODO comments only when a mapping is missing. Make sure every page method includes\nJavadoc comments in the generated code. Generate only code grounded in the supplied DOM."

```

```

    },

```

```

    {

```

```

        "role": "user",

```

```

        "content": "Given the following DOM structure:\n```\nhtml\n<input id=\"uploadedFile\"\nname=\"uploadedFile\" type=\"file\" size=\"30\" maxlength=\"\" class=\"inputBox\"\nonchange=\"\">\n<input type=\"submit\" value=\"Upload and Import\" class=\"smallSubmit\"\nonclick=\"submitFormAndReplaceButtonTextWithSingleClick(this, 'Uploading... Please Wait');\"\nid=\"ext-gen593\">\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace

```

```
LeafTaps.Pages\n{\n  /// <summary>\n  /// Page object generated strictly from the supplied HTML
DOM for UploadPage.\n  /// </summary>\n  public class UploadPage\n  {\n    private readonly
IWebDriver driver;\n    public UploadPage(IWebDriver driver)\n    {\n      this.driver =
driver;\n    }\n    private IWebElement FileFileInput =>
driver.FindElement(By.Id(\"uploadedFile\"));\n    private IWebElement UploadAndImportButton =>
driver.FindElement(By.XPath(\"//input[@value='Upload and Import']\"));\n    \n    /// <summary>\n    /// Uploads a file using the File field.\n    /// </summary>\n    public UploadPage
UploadFile(string filePath)\n    {\n      FileFileInput.SendKeys(filePath);\n      return this;\n    }\n    \n    /// <summary>\n    /// Clicks the Upload and Import element.\n    /// </summary>\n    public UploadPage ClickUploadAndImport()\n    {\n      UploadAndImportButton.Click();\n      return this;\n    }\n  }\n}\n```\nGenerate a Playwright Java page object class for this DOM."
```

```
},
```

```
{
```

```
  "role": "assistant",
```

```
  "content": "import com.microsoft.playwright.Page;\nimport
com.microsoft.playwright.Locator;\n\npublic class GeneratedPage {\n  private final Page page;\n  private final Locator uploadedFileLocator;\n  private final Locator extGen593Button;\n\n  public
GeneratedPage(Page page) {\n    this.page = page;\n    uploadedFileLocator =
page.locator(By.id(\"uploadedFile\"));\n    extGen593Button = page.locator(By.id(\"ext-
gen593\"));\n  }\n\n  /** Fill the uploadedFile field */\n  public void enterUploadedFile(String
uploadedFile) { uploadedFileLocator.fill(uploadedFile); }\n  /** Click the ext-gen593 */\n  public
void clickExtGen593() { extGen593Button.click(); }\n}"
```

```
}
```

```
]
```

```
}
```

```
{
```

```
  "messages": [
```

```
  {
```

```
    "role": "system",
```

```
    "content": "You are an expert in generating Playwright Java page object classes using provided
DOM information. Use Playwright Java conventions with Page and Locator classes, proper selectors,
and insert TODO comments only when a mapping is missing. Make sure every page method includes
Javadoc comments in the generated code. Generate only code grounded in the supplied DOM."
```

```
  },
```

```
  {
```

```
    "role": "user",
```



```

"content": "Given the following DOM structure:\n```html\n<div class=\"x-grid3-cell-inner x-grid3-col-partyId\" unselectable=\"on\" id=\"ext-gen781\"><a class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen839\">10196</a></div>\n<div class=\"x-grid3-cell-inner x-grid3-col-firstName\" unselectable=\"on\" id=\"ext-gen840\"><a class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen841\">TCS</a></div>\n<div class=\"x-grid3-cell-inner x-grid3-col-lastName\" unselectable=\"on\" id=\"ext-gen842\"><a class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen874\">Abd</a></div>\n<div class=\"x-grid3-cell-inner x-grid3-col-companyName\" unselectable=\"on\" id=\"ext-gen857\"><a class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen858\">M S</a></div>\n\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for ViewLeadPage.\n    /// </summary>\n    public class ViewLeadPage\n    {\n        private readonly IWebDriver driver;\n\n        public ViewLeadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement PartyIdText => driver.FindElement(By.Id(\"ext-gen781\"));\n        private IWebElement Value10196Link => driver.FindElement(By.LinkText(\"10196\"));\n        private IWebElement FirstNameText => driver.FindElement(By.Id(\"ext-gen840\"));\n        private IWebElement TCSLink => driver.FindElement(By.LinkText(\"TCS\"));\n        private IWebElement LastNameText => driver.FindElement(By.Id(\"ext-gen842\"));\n        private IWebElement AbdLink => driver.FindElement(By.LinkText(\"Abd\"));\n        private IWebElement CompanyNameText => driver.FindElement(By.Id(\"ext-gen857\"));\n        private IWebElement MSLink => driver.FindElement(By.LinkText(\"M S\"));\n\n        /// <summary>\n        /// Gets the visible text from the partyId element.\n        /// </summary>\n        public string GetPartyIdText()\n        {\n            return PartyIdText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the partyId element is displayed.\n        /// </summary>\n        public bool IsPartyIdVisible()\n        {\n            return PartyIdText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the 10196 element.\n        /// </summary>\n        public ViewLeadPage ClickValue10196()\n        {\n            Value10196Link.Click();\n            return this;\n        }\n\n        /// <summary>\n        /// Gets the visible text from the firstName element.\n        /// </summary>\n        public string GetFirstNameText()\n        {\n            return FirstNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the firstName element is displayed.\n        /// </summary>\n        public bool IsFirstNameVisible()\n        {\n            return FirstNameText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the TCS element.\n        /// </summary>\n        public ViewLeadPage ClickTCS()\n        {\n            TCSLink.Click();\n            return this;\n        }\n\n        /// <summary>\n        /// Gets the visible text from the lastName element.\n        /// </summary>\n        public string GetLastNameText()\n        {\n            return LastNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the lastName element is displayed.\n        /// </summary>\n        public bool IsLastNameVisible()\n        {\n            return LastNameText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the Abd element.\n        /// </summary>\n        public ViewLeadPage ClickAbd()\n        {\n            AbdLink.Click();\n            return this;\n        }\n\n        /// <summary>\n        /// Gets the visible text from the companyName element.\n        /// </summary>\n        public string GetCompanyNameText()\n        {\n            return CompanyNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the companyName element is displayed.\n        /// </summary>\n        public bool IsCompanyNameVisible()\n        {\n            return CompanyNameText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the M S element.\n        /// </summary>\n        public ViewLeadPage ClickMS()\n        {\n            MSLink.Click();\n            return this;\n        }\n    }\n}\n```\nGenerate a Playwright Java page object class for this DOM."

```

```

},
{
  "role": "assistant",
  "content": "import com.microsoft.playwright.Page;\nimport\ncom.microsoft.playwright.Locator;\n\npublic class GeneratedPage {\n  private final Page page;\n  private final Locator extGen839Button;\n  private final Locator extGen841Button;\n  private final\nLocator extGen874Button;\n  private final Locator extGen858Button;\n\n  public\nGeneratedPage(Page page) {\n    this.page = page;\n    extGen839Button =\npage.locator(By.id(\"ext-gen839\"));\n    extGen841Button = page.locator(By.id(\"ext-gen841\"));\n    extGen874Button = page.locator(By.id(\"ext-gen874\"));\n    extGen858Button =\npage.locator(By.id(\"ext-gen858\"));\n  }\n\n  /** Click the ext-gen839 */\n  public void\nclickExtGen839() { extGen839Button.click(); }\n  /** Click the ext-gen841 */\n  public void\nclickExtGen841() { extGen841Button.click(); }\n  /** Click the ext-gen874 */\n  public void\nclickExtGen874() { extGen874Button.click(); }\n  /** Click the ext-gen858 */\n  public void\nclickExtGen858() { extGen858Button.click(); }\n}"
}
]
}

```

```

{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Selenium Python page object classes using provided\nDOM information. Use Selenium WebDriver Python conventions with proper By locators, and insert\nTODO comments only when a mapping is missing. Make sure every page method includes docstrings\nin the generated code. Generate only code grounded in the supplied DOM."
    },
    {
      "role": "user",
      "content": "Given the following DOM structure:\n`html<\n<input type=\"text\"\n  class=\"inputBox\" name=\"companyName\" size=\"30\" maxlength=\"100\"\nid=\"createLeadForm_companyName\">\n<input type=\"text\" class=\"inputBox\"\n  name=\"firstName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_firstName\">\n<input\n  type=\"text\" class=\"inputBox\" name=\"lastName\" size=\"30\" maxlength=\"100\"\nid=\"createLeadForm_lastName\">\n<input type=\"submit\" class=\"smallSubmit\"\n  name=\"submitButton\" value=\"Create Lead\" id=\"ext-gen652\">\n\n===CSHARP===\nusing\nOpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n  /// <summary>\n  /// Page object\n  generated strictly from the supplied HTML DOM for EditLeadPage.\n  /// </summary>\n  public

```

```

class EditLeadPage\n {\n     private readonly IWebDriver driver;\n     public
EditLeadPage(IWebDriver driver)\n     {\n         this.driver = driver;\n     }\n     private
IWebElement CompanyNameInput =>
driver.FindElement(By.Id(\"createLeadForm_companyName\"));\n     private IWebElement
FirstNameInput => driver.FindElement(By.Id(\"createLeadForm_firstName\"));\n     private
IWebElement LastNameInput => driver.FindElement(By.Id(\"createLeadForm_lastName\"));\n
private IWebElement CreateLeadButton => driver.FindElement(By.XPath(\"//input[@value='Create
Lead']\"));\n     /// <summary>\n     /// Enters a value in the companyName field.\n     ///
</summary>\n     public EditLeadPage EnterCompanyName(string companyName)\n     {\n
CompanyNameInput.Clear();\n         CompanyNameInput.SendKeys(companyName);\n         return
this;\n     }\n     /// <summary>\n     /// Enters a value in the firstName field.\n     ///
</summary>\n     public EditLeadPage EnterFirstName(string firstName)\n     {\n
FirstNameInput.Clear();\n         FirstNameInput.SendKeys(firstName);\n         return this;\n
}\n     /// <summary>\n     /// Enters a value in the lastName field.\n     /// </summary>\n
public EditLeadPage EnterLastName(string lastName)\n     {\n         LastNameInput.Clear();\n
LastNameInput.SendKeys(lastName);\n         return this;\n     }\n     /// <summary>\n     ///
Clicks the Create Lead element.\n     /// </summary>\n     public EditLeadPage ClickCreateLead()\n
{\n         CreateLeadButton.Click();\n         return this;\n     }\n }\n }\n\nGenerate a Selenium
Python page object class for this DOM."

```

```

},

```

```

{

```

```

    "role": "assistant",

```

```

    "content": "from selenium.webdriver.common.by import By\nfrom
selenium.webdriver.remote.webdriver import WebDriver\n\nclass GeneratedPage:\n    \"\"\"Page
Object for the Generated page.\"\"\"\n    COMPANY_NAME_INPUT = (By.ID,
\"createLeadForm_companyName\")\n    FIRST_NAME_INPUT = (By.ID,
\"createLeadForm_firstName\")\n    LAST_NAME_INPUT = (By.ID, \"createLeadForm_lastName\")\n
SUBMIT_BUTTON_BUTTON = (By.ID, \"ext-gen652\")\n\n    def __init__(self, driver: WebDriver) ->
None:\n        self.driver = driver\n\n    def enter_company_name(self, company_name: str) ->
None:\n        \"\"\"Enter companyName into the field.\"\"\"\n
self.driver.find_element(*self.COMPANY_NAME_INPUT).send_keys(company_name)\n\n    def
enter_first_name(self, first_name: str) -> None:\n        \"\"\"Enter firstName into the field.\"\"\"\n
self.driver.find_element(*self.FIRST_NAME_INPUT).send_keys(first_name)\n\n    def
enter_last_name(self, last_name: str) -> None:\n        \"\"\"Enter lastName into the field.\"\"\"\n
self.driver.find_element(*self.LAST_NAME_INPUT).send_keys(last_name)\n\n    def
click_submit_button(self) -> None:\n        \"\"\"Click the submitButton.\"\"\"\n
self.driver.find_element(*self.SUBMIT_BUTTON_BUTTON).click()

```

```

    }

```

```

]

```

```

}

```

```

{

```

"messages": [

{

"role": "system",

"content": "You are an expert in generating Selenium Python page object classes using provided DOM information. Use Selenium WebDriver Python conventions with proper By locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."

},

{

"role": "user",

"content": "Given the following DOM structure:\n```\nhtml\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen246\" name=\"id\" class=\"x-form-text x-form-field \" style=\"width: 214px;\"> \n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen248\" name=\"firstName\" class=\"x-form-text x-form-field \" style=\"width: 214px;\"> \n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen250\" name=\"lastName\" class=\"x-form-text x-form-field \" style=\"width: 214px;\"> \n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen252\" name=\"companyName\" class=\"x-form-text x-form-field \" style=\"width: 214px;\"> \n<button class=\"x-btn-text\" type=\"button\" id=\"ext-gen334\">Find Leads</button>\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for FindLeadsPage.\n /// </summary>\n public class FindLeadsPage\n {\n private readonly IWebDriver driver;\n\n public FindLeadsPage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement IdInput => driver.FindElement(By.Name(\"id\"));\n private IWebElement FirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n private IWebElement LastNameInput => driver.FindElement(By.Name(\"lastName\"));\n private IWebElement CompanyNameInput => driver.FindElement(By.Name(\"companyName\"));\n private IWebElement FindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-space()='Find Leads']\"));\n\n /// <summary>\n /// Enters a value in the id field.\n /// </summary>\n public FindLeadsPage EnterId(string id)\n {\n IdInput.Clear();\n IdInput.SendKeys(id);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the firstName field.\n /// </summary>\n public FindLeadsPage EnterFirstName(string firstName)\n {\n FirstNameInput.Clear();\n FirstNameInput.SendKeys(firstName);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the lastName field.\n /// </summary>\n public FindLeadsPage EnterLastName(string lastName)\n {\n LastNameInput.Clear();\n LastNameInput.SendKeys(lastName);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the companyName field.\n /// </summary>\n public FindLeadsPage EnterCompanyName(string companyName)\n {\n CompanyNameInput.Clear();\n CompanyNameInput.SendKeys(companyName);\n return this;\n }\n\n /// <summary>\n /// Clicks the Find Leads element.\n /// </summary>\n public FindLeadsPage ClickFindLeads()\n {\n FindLeadsButton.Click();\n return this;\n }\n }\n}\n```\nGenerate a Selenium Python page object class for this DOM."

},

{

"role": "assistant",

```
"content": "from selenium.webdriver.common.by import By\nfrom\nselenium.webdriver.remote.webdriver import WebDriver\n\nclass GeneratedPage:\n    \"\"\"Page\n    Object for the Generated page.\"\"\"\n    ID_INPUT = (By.ID, \"ext-gen246\")\n    FIRST_NAME_INPUT = (By.ID, \"ext-gen248\")\n    LAST_NAME_INPUT = (By.ID, \"ext-gen250\")\n    COMPANY_NAME_INPUT = (By.ID, \"ext-gen252\")\n    EXT_GEN334_BUTTON = (By.ID, \"ext-\ngen334\")\n    def __init__(self, driver: WebDriver) -> None:\n        self.driver = driver\n    def\n    enter_id(self, id: str) -> None:\n        \"\"\"Enter id into the field.\"\"\"\n        self.driver.find_element(*self.ID_INPUT).send_keys(id)\n    def enter_first_name(self, first_name:\n    str) -> None:\n        \"\"\"Enter firstName into the field.\"\"\"\n        self.driver.find_element(*self.FIRST_NAME_INPUT).send_keys(first_name)\n    def\n    enter_last_name(self, last_name: str) -> None:\n        \"\"\"Enter lastName into the field.\"\"\"\n        self.driver.find_element(*self.LAST_NAME_INPUT).send_keys(last_name)\n    def\n    enter_company_name(self, company_name: str) -> None:\n        \"\"\"Enter companyName into the\n        field.\"\"\"\n        self.driver.find_element(*self.COMPANY_NAME_INPUT).send_keys(company_name)\n    def\n    click_ext_gen334(self) -> None:\n        \"\"\"Click the ext-gen334.\"\"\"\n        self.driver.find_element(*self.EXT_GEN334_BUTTON).click()
```

}

]

}

{

"messages": [

{

"role": "system",

"content": "You are an expert in generating Selenium Python page object classes using provided DOM information. Use Selenium WebDriver Python conventions with proper By locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."

},

{

"role": "user",

"content": "Given the following DOM structure:\n<html>\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen255\" name=\"firstName\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width:

```

214px;">\n<button class="x-btn-text" type="button" id="ext-gen341">Find
Leads</button>\n\n===C#===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n
/// <summary>\n /// Page object generated strictly from the supplied HTML DOM for
FindLeadsUpdatedPage.\n /// </summary>\n public class FindLeadsUpdatedPage\n {\n
private readonly IWebDriver driver;\n\n public FindLeadsUpdatedPage(IWebDriver driver)\n
{\n this.driver = driver;\n }\n\n private IWebElement IdInput =>
driver.FindElement(By.XPath("//input[@name='id'])[1]")); \n private IWebElement
FirstNameInput => driver.FindElement(By.Name("firstName")); \n private IWebElement IdInput2
=> driver.FindElement(By.XPath("//input[@name='id'])[2]")); \n private IWebElement IdInput3
=> driver.FindElement(By.XPath("//input[@name='id'])[3]")); \n private IWebElement
FindLeadsButton => driver.FindElement(By.XPath("//button[normalize-space()='Find Leads']")); \n\n
/// <summary>\n /// Enters a value in the id field.\n /// </summary>\n public
FindLeadsUpdatedPage EnterId(string id)\n {\n IdInput.Clear();\n
IdInput.SendKeys(id);\n return this;\n }\n\n /// <summary>\n /// Enters a value in
the firstName field.\n /// </summary>\n public FindLeadsUpdatedPage
EnterFirstName(string firstName)\n {\n FirstNameInput.Clear();\n
FirstNameInput.SendKeys(firstName);\n return this;\n }\n\n /// <summary>\n ///
Enters a value in the id field.\n /// </summary>\n public FindLeadsUpdatedPage
EnterId2(string id)\n {\n IdInput2.Clear();\n IdInput2.SendKeys(id);\n return
this;\n }\n\n /// <summary>\n /// Enters a value in the id field.\n /// </summary>\n
public FindLeadsUpdatedPage EnterId3(string id)\n {\n IdInput3.Clear();\n
IdInput3.SendKeys(id);\n return this;\n }\n\n /// <summary>\n /// Clicks the Find
Leads element.\n /// </summary>\n public FindLeadsUpdatedPage ClickFindLeads()\n
{\n FindLeadsButton.Click();\n return this;\n }\n }\n}\n\nGenerate a Selenium
Python page object class for this DOM."

```

```

},

```

```

{

```

```

    "role": "assistant",

```

```

    "content": "from selenium.webdriver.common.by import By\nfrom
selenium.webdriver.remote.webdriver import WebDriver\n\n\nclass GeneratedPage:\n    \"\"\"Page
Object for the Generated page.\"\"\"\n\n    ID_INPUT = (By.ID, \"ext-gen253\")\n
FIRST_NAME_INPUT = (By.ID, \"ext-gen255\")\n    EXT_GEN341_BUTTON = (By.ID, \"ext-
gen341\")\n\n    def __init__(self, driver: WebDriver) -> None:\n        self.driver = driver\n\n    def
enter_id(self, id: str) -> None:\n        \"\"\"Enter id into the field.\"\"\"\n
self.driver.find_element(*self.ID_INPUT).send_keys(id)\n\n    def enter_first_name(self, first_name:
str) -> None:\n        \"\"\"Enter firstName into the field.\"\"\"\n
self.driver.find_element(*self.FIRST_NAME_INPUT).send_keys(first_name)\n\n    def
click_ext_gen341(self) -> None:\n        \"\"\"Click the ext-gen341.\"\"\"\n
self.driver.find_element(*self.EXT_GEN341_BUTTON).click()\"

```

```

    }

```

```

]

```

```

}

```

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Selenium Python page object classes using provided DOM information. Use Selenium WebDriver Python conventions with proper By locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."

    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n```\nhtml\n<a style=\"color: black;\" href=\"/crmsfa/control/main?externalLoginKey=EL601288709152\">\nCRM/SFA\n</a>\n<input class=\"decorativeSubmit\" style=\"width:65px; margin-left:1px;\" type=\"submit\" value=\"Logout\">\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for HomePage.\n    /// </summary>\n    public class HomePage\n    {\n        private readonly IWebDriver driver;\n\n        public HomePage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement CRMSFALink =>\n        driver.FindElement(By.LinkText(\"CRM/SFA\"));\n        private IWebElement LogoutButton =>\n        driver.FindElement(By.XPath(\"//input[@value='Logout']\"));\n\n        /// <summary>\n        /// Clicks the CRM/SFA element.\n        /// </summary>\n        public HomePage ClickCRMSFA()\n        {\n            CRMSFALink.Click();\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Logout element.\n        /// </summary>\n        public HomePage ClickLogout()\n        {\n            LogoutButton.Click();\n            return this;\n        }\n    }\n}\n```\nGenerate a Selenium Python page object class for this DOM."

    },
    {
      "role": "assistant",

      "content": "from selenium.webdriver.common.by import By\nfrom selenium.webdriver.remote.webdriver import WebDriver\n\nclass GeneratedPage:\n    \"\"\"Page Object for the Generated page.\"\"\"\n    C_R_M_S_F_A_BUTTON = (By.CSS_SELECTOR, \"a\")\n    LOGOUT_BUTTON = (By.CSS_SELECTOR, \"input[type='submit']\")\n\n    def __init__(self, driver: WebDriver) -> None:\n        self.driver = driver\n\n    def click_c_r_m_s_f_a(self) -> None:\n        \"\"\"Click the CRMSFA.\"\"\"\n        self.driver.find_element(*self.C_R_M_S_F_A_BUTTON).click()\n\n    def click_logout(self) -> None:\n        \"\"\"Click the Logout.\"\"\"\n        self.driver.find_element(*self.LOGOUT_BUTTON).click()

    }
  ]
}

```

```
}
```

```
{
```

```
"messages": [
```

```
{
```

```
"role": "system",
```

```
"content": "You are an expert in generating Selenium Python page object classes using provided DOM information. Use Selenium WebDriver Python conventions with proper By locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."
```

```
},
```

```
{
```

```
"role": "user",
```

```
"content": "Given the following DOM structure:\n`html\n<input class=\"inputLogin\" type=\"text\" id=\"username\" name=\"USERNAME\" size=\"50\">\n<input class=\"inputLogin\" type=\"password\" id=\"password\" name=\"PASSWORD\" size=\"50\">\n<input class=\"decorativeSubmit\" type=\"submit\" value=\"Login\">\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for LoginPage.\n    /// </summary>\n    public class LoginPage\n    {\n        private readonly IWebDriver driver;\n\n        public LoginPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement USERNAMEInput => driver.FindElement(By.Id(\"username\"));\n        private IWebElement PASSWORDPasswordInput => driver.FindElement(By.Id(\"password\"));\n        private IWebElement LoginButton => driver.FindElement(By.XPath(\"//input[@value='Login']\"));\n\n        /// <summary>\n        /// Enters a value in the USERNAME field.\n        /// </summary>\n        public LoginPage EnterUSERNAME(string uUSERNAME)\n        {\n            USERNAMEInput.Clear();\n            USERNAMEInput.SendKeys(uUSERNAME);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the PASSWORD field.\n        /// </summary>\n        public LoginPage EnterPASSWORD(string pPASSWORD)\n        {\n            PASSWORDPasswordInput.Clear();\n            PASSWORDPasswordInput.SendKeys(pPASSWORD);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Login element.\n        /// </summary>\n        public LoginPage ClickLogin()\n        {\n            LoginButton.Click();\n            return this;\n        }\n    }\n}\n\nGenerate a Selenium Python page object class for this DOM."
```

```
},
```

```
{
```

```
"role": "assistant",
```

```
"content": "from selenium.webdriver.common.by import By\nfrom selenium.webdriver.remote.webdriver import WebDriver\n\nclass GeneratedPage:\n    \"\"\"Page Object for the Generated page.\"\"\"\n    USERNAME_INPUT = (By.ID, \"username\")\n    PASSWORD_INPUT = (By.ID, \"password\")\n    LOGIN_BUTTON = (By.CSS_SELECTOR,
```



```



```

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Selenium Python page object classes using provided\n      DOM information. Use Selenium WebDriver Python conventions with proper By locators, and insert\n      TODO comments only when a mapping is missing. Make sure every page method includes docstrings\n      in the generated code. Generate only code grounded in the supplied DOM."

    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n`html\n<a\nhref=\"/crmsfa/control/leadsMain\" id=\"ext-gen614\">Leads</a>\n\n===C#SHARP===\nusing\nOpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object\n    generated strictly from the supplied HTML DOM for MyHomePage.\n    /// </summary>\n    public\n    class MyHomePage\n    {\n        private readonly IWebDriver driver;\n        public\n        MyHomePage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n        private\n        IWebElement LeadsLink => driver.FindElement(By.LinkText(\"Leads\"));\n        /// <summary>\n        /// Clicks the Leads element.\n        /// </summary>\n        public MyHomePage ClickLeads()\n        {\n            LeadsLink.Click();\n            return this;\n        }\n    }\n}\n`Generate a Selenium Python page object\n    class for this DOM."

    },
    {
      "role": "assistant",

      "content": "from selenium.webdriver.common.by import By\nfrom\nselenium.webdriver.remote.webdriver import WebDriver\n\nclass GeneratedPage:\n    \"\"\"Page\n    Object for the Generated page.\"\"\"\n    EXT_GEN614_BUTTON = (By.ID, \"ext-gen614\")\n\n    def __init__(self, driver: WebDriver) -> None:\n        self.driver = driver\n\n    def

```

```
click_ext_gen614(self) -> None:\n    \\\nClick the ext-gen614.\\\n\nself.driver.find_element(*self.EXT_GEN614_BUTTON).click()"
```

```
}
```

```
]
```

```
}
```

```
{
```

```
"messages": [
```

```
{
```

```
"role": "system",
```

```
"content": "You are an expert in generating Selenium Python page object classes using provided DOM information. Use Selenium WebDriver Python conventions with proper By locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."
```

```
},
```

```
{
```

```
"role": "user",
```

```
"content": "Given the following DOM structure:\n<html>\n<a href=\\\"/crmsfa/control/createLeadForm\\\" id=\\\"ext-gen876\\\">Create Lead</a>\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for MyLeadsPage.\n    /// </summary>\n    public class MyLeadsPage\n    {\n        private readonly IWebDriver driver;\n\n        public MyLeadsPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement CreateLeadLink => driver.FindElement(By.LinkText(\\\"Create Lead\\\"));\n\n        /// <summary>\n        /// Clicks the Create Lead element.\n        /// </summary>\n        public MyLeadsPage ClickCreateLead()\n        {\n            CreateLeadLink.Click();\n            return this;\n        }\n    }\n}\n\nGenerate a Selenium Python page object class for this DOM."
```

```
},
```

```
{
```

```
"role": "assistant",
```

```
"content": "from selenium.webdriver.common.by import By\nfrom selenium.webdriver.remote.webdriver import WebDriver\n\nclass GeneratedPage:\n    \\\nPage Object for the Generated page.\\\n\n    EXT_GEN876_BUTTON = (By.ID, \\\"ext-gen876\\\")\n\n    def __init__(self, driver: WebDriver) -> None:\n        self.driver = driver\n\n    def click_ext_gen876(self) -> None:\n        \\\nClick the ext-gen876.\\\n\n        self.driver.find_element(*self.EXT_GEN876_BUTTON).click()"
```

```
}
```

```
]
}
```

```
{
  "messages": [
```

```
  {
    "role": "system",
```

"content": "You are an expert in generating Selenium Python page object classes using provided DOM information. Use Selenium WebDriver Python conventions with proper By locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes docstrings in the generated code. Generate only code grounded in the supplied DOM."

```
  },
```

```
  {
    "role": "user",
```

"content": "Given the following DOM structure:\n```html\n<input class=\"XdijitInputField dijitInputFieldValidationNormal\" type=\"text\" autocomplete=\"off\" name=\"ComboBox_productId\" dojoattachevent=\"onkeypress, onkeyup, onfocus, onblur, compositionend\" dojoattachpoint=\"textbox, focusNode\" id=\"ComboBox_productId\" tabindex=\"1\" size=\"15\" maxlength=\"50\" wairole=\"combobox\" role=\"wairole:combobox\" value=\"\" valuenow=\"\" invalid=\"false\" disabled=\"false\">\n<input id=\"quantity\" name=\"quantity\" type=\"text\" size=\"10\" maxlength=\"\" class=\"inputBox\" value=\"1\" onchange=\"\" tabindex=\"2\">\nUpdate\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for OrderEntryHeaderPage.\n /// </summary>\n public class OrderEntryHeaderPage\n {\n private readonly IWebDriver driver;\n\n public OrderEntryHeaderPage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement ProductIdInput => driver.FindElement(By.Id(\"ComboBox_productId\"));\n private IWebElement QuantityInput => driver.FindElement(By.Id(\"quantity\"));\n private IWebElement UpdateLink => driver.FindElement(By.LinkText(\"Update\"));\n\n /// <summary>\n /// Enters a value in the productId field.\n /// </summary>\n public OrderEntryHeaderPage EnterProductId(string productId)\n {\n ProductIdInput.Clear();\n ProductIdInput.SendKeys(productId);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the quantity field.\n /// </summary>\n public OrderEntryHeaderPage EnterQuantity(string quantity)\n {\n QuantityInput.Clear();\n QuantityInput.SendKeys(quantity);\n return this;\n }\n\n /// <summary>\n /// Clicks the Update element.\n /// </summary>\n public OrderEntryHeaderPage ClickUpdate()\n {\n UpdateLink.Click();\n return this;\n }\n }\n}\n```\nGenerate a Selenium Python page object class for this DOM."

```
  },
```

```
  {
```

"role": "assistant",

```
"content": "from selenium.webdriver.common.by import By\nfrom\nselenium.webdriver.remote.webdriver import WebDriver\n\n\nclass GeneratedPage:\n    \"\"\"Page\n    Object for the Generated page.\"\"\"\n\n    COMBO_BOX_PRODUCT_ID_INPUT = (By.ID,\n    \"ComboBox_productId\")\n    QUANTITY_INPUT = (By.ID, \"quantity\")\n    EXT_GEN173_BUTTON =\n    (By.ID, \"ext-gen173\")\n\n    def __init__(self, driver: WebDriver) -> None:\n        self.driver =\n        driver\n\n    def enter_combo_box_product_id(self, combo_box_product_id: str) -> None:\n    \"\"\"Enter ComboBox_productId into the field.\"\"\"\n\n    self.driver.find_element(*self.COMBO_BOX_PRODUCT_ID_INPUT).send_keys(combo_box_product_i\n    d)\n\n    def enter_quantity(self, quantity: str) -> None:\n    \"\"\"Enter quantity into the\n    field.\"\"\"\n\n    self.driver.find_element(*self.QUANTITY_INPUT).send_keys(quantity)\n\n    def\n    click_ext_gen173(self) -> None:\n    \"\"\"Click the ext-gen173.\"\"\"\n\n    self.driver.find_element(*self.EXT_GEN173_BUTTON).click()\n\n}\n\n]\n\n}
```

```
{\n\n    \"messages\": [\n\n        {\n\n            \"role\": \"system\", \n\n            \"content\": \"You are an expert in generating Selenium Python page object classes using provided\n            DOM information. Use Selenium WebDriver Python conventions with proper By locators, and insert\n            TODO comments only when a mapping is missing. Make sure every page method includes docstrings\n            in the generated code. Generate only code grounded in the supplied DOM.\"\n\n        },\n\n        {\n\n            \"role\": \"user\", \n\n            \"content\": \"Given the following DOM structure:\n            <html>\n            <input id='uploadedFile'\n            name='uploadedFile' type='file' size='30' maxlength='' class='inputBox'\n            onchange='>\n            <input type='submit' value='Upload and Import' class='smallSubmit'\n            onclick='submitFormAndReplaceButtonTextWithSingleClick(this, 'Uploading... Please Wait');'\n            id='ext-gen593'>\n            </html>\n            ===CSHARP===\n            using OpenQA.Selenium;\n            namespace\n            LeafTaps.Pages\n            {\n            /// <summary>\n            /// Page object generated strictly from the supplied HTML\n            DOM for UploadPage.\n            /// </summary>\n            public class UploadPage\n            {\n            private readonly\n            IWebDriver driver;\n            public UploadPage(IWebDriver driver)\n            {\n            this.driver =\n            driver;\n            }\n            private IWebElement FileFileInput =>\n            driver.FindElement(By.Id(\"uploadedFile\"));\n            private IWebElement UploadAndImportButton =>\n            driver.FindElement(By.XPath(\"//input[@value='Upload and Import']\"));\n            </html>\n            <summary>\n            Uploads a file using the File field.\n            </summary>\n            public UploadPage
```

```
\n\n        },\n\n        {\n\n            \"role\": \"user\", \n\n            \"content\": \"Given the following DOM structure:\n            <html>\n            <input id='uploadedFile'\n            name='uploadedFile' type='file' size='30' maxlength='' class='inputBox'\n            onchange='>\n            <input type='submit' value='Upload and Import' class='smallSubmit'\n            onclick='submitFormAndReplaceButtonTextWithSingleClick(this, 'Uploading... Please Wait');'\n            id='ext-gen593'>\n            </html>\n            ===CSHARP===\n            using OpenQA.Selenium;\n            namespace\n            LeafTaps.Pages\n            {\n            /// <summary>\n            /// Page object generated strictly from the supplied HTML\n            DOM for UploadPage.\n            /// </summary>\n            public class UploadPage\n            {\n            private readonly\n            IWebDriver driver;\n            public UploadPage(IWebDriver driver)\n            {\n            this.driver =\n            driver;\n            }\n            private IWebElement FileFileInput =>\n            driver.FindElement(By.Id(\"uploadedFile\"));\n            private IWebElement UploadAndImportButton =>\n            driver.FindElement(By.XPath(\"//input[@value='Upload and Import']\"));\n            </html>\n            <summary>\n            Uploads a file using the File field.\n            </summary>\n            public UploadPage
```

```

UploadFile(string filePath)\n    {\n        FileFileInput.SendKeys(filePath);\n        return this;\n    }\n\n    /// <summary>\n    /// Clicks the Upload and Import element.\n    /// </summary>\n    public UploadPage ClickUploadAndImport()\n    {\n        UploadAndImportButton.Click();\n        return this;\n    }\n}\n\nGenerate a Selenium Python page object class for this DOM."

},

{
    "role": "assistant",

    "content": "from selenium.webdriver.common.by import By\nfrom\nselenium.webdriver.remote.webdriver import WebDriver\n\nclass GeneratedPage:\n    \"\"\"Page\n    Object for the Generated page.\"\"\"\n    UPLOADED_FILE_INPUT = (By.ID, \"uploadedFile\")\n    EXT_GEN593_BUTTON = (By.ID, \"ext-gen593\")\n    def __init__(self, driver: WebDriver) ->\n    None:\n        self.driver = driver\n    def enter_uploaded_file(self, uploaded_file: str) -> None:\n    \"\"\"Enter uploadedFile into the field.\"\"\"\n    self.driver.find_element(*self.UPLOADED_FILE_INPUT).send_keys(uploaded_file)\n    def\n    click_ext_gen593(self) -> None:\n    \"\"\"Click the ext-gen593.\"\"\"\n    self.driver.find_element(*self.EXT_GEN593_BUTTON).click()\"

}

]

}

{

    "messages": [

        {

            "role": "system",

            "content": "You are an expert in generating Selenium Python page object classes using provided\nDOM information. Use Selenium WebDriver Python conventions with proper By locators, and insert\nTODO comments only when a mapping is missing. Make sure every page method includes docstrings\nin the generated code. Generate only code grounded in the supplied DOM."

        },

        {

            "role": "user",

            "content": "Given the following DOM structure:\n<html>\n<div class=\"x-grid3-cell-inner x-grid3-\ncol-partyId\" unselectable=\"on\" id=\"ext-gen781\"><a class=\"linktext\"\nhref=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen839\">10196</a></div>\n<div\nclass=\"x-grid3-cell-inner x-grid3-col-firstName\" unselectable=\"on\" id=\"ext-gen840\"><a\nclass=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-\ngen841\">TCS</a></div>\n<div class=\"x-grid3-cell-inner x-grid3-col-lastName\"\nunselectable=\"on\" id=\"ext-gen842\"><a class=\"linktext\"

```

```

href="/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen874\">Abd</a></div>\n<div
class=\"x-grid3-cell-inner x-grid3-col-companyName\" unselectable=\"on\" id=\"ext-gen857\"><a
class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen858\">M
S</a></div>\n\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n
/// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for
ViewLeadPage.\n    /// </summary>\n    public class ViewLeadPage\n    {\n        private readonly
IWebDriver driver;\n\n        public ViewLeadPage(IWebDriver driver)\n        {\n            this.driver =
driver;\n        }\n\n        private IWebElement PartyIdText => driver.FindElement(By.Id(\"ext-
gen781\"));\n        private IWebElement Value10196Link =>
driver.FindElement(By.LinkText(\"10196\"));\n        private IWebElement FirstNameText =>
driver.FindElement(By.Id(\"ext-gen840\"));\n        private IWebElement TCSLink =>
driver.FindElement(By.LinkText(\"TCS\"));\n        private IWebElement LastNameText =>
driver.FindElement(By.Id(\"ext-gen842\"));\n        private IWebElement AbdLink =>
driver.FindElement(By.LinkText(\"Abd\"));\n        private IWebElement CompanyNameText =>
driver.FindElement(By.Id(\"ext-gen857\"));\n        private IWebElement MSLink =>
driver.FindElement(By.LinkText(\"M S\"));\n\n        /// <summary>\n        /// Gets the visible text from
the partyId element.\n        /// </summary>\n        public string GetPartyIdText()\n        {\n
return PartyIdText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the partyId
element is displayed.\n        /// </summary>\n        public bool IsPartyIdVisible()\n        {\n
return PartyIdText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the 10196 element.\n
        /// </summary>\n        public ViewLeadPage ClickValue10196()\n        {\n
Value10196Link.Click();\n        return this;\n        }\n\n        /// <summary>\n        /// Gets the visible
text from the firstName element.\n        /// </summary>\n        public string GetFirstNameText()\n
        {\n            return FirstNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the
firstName element is displayed.\n        /// </summary>\n        public bool IsFirstNameVisible()\n
        {\n            return FirstNameText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the TCS
element.\n        /// </summary>\n        public ViewLeadPage ClickTCS()\n        {\n
TCSLink.Click();\n        return this;\n        }\n\n        /// <summary>\n        /// Gets the visible text
from the lastName element.\n        /// </summary>\n        public string GetLastNameText()\n        {\n
return LastNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the lastName
element is displayed.\n        /// </summary>\n        public bool IsLastNameVisible()\n        {\n
return LastNameText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the Abd element.\n
        /// </summary>\n        public ViewLeadPage ClickAbd()\n        {\n            AbdLink.Click();\n
return this;\n        }\n\n        /// <summary>\n        /// Gets the visible text from the companyName
element.\n        /// </summary>\n        public string GetCompanyNameText()\n        {\n            return
CompanyNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the
companyName element is displayed.\n        /// </summary>\n        public bool
IsCompanyNameVisible()\n        {\n            return CompanyNameText.Displayed;\n        }\n\n        ///
<summary>\n        /// Clicks the M S element.\n        /// </summary>\n        public ViewLeadPage
ClickMS()\n        {\n            MSLink.Click();\n            return this;\n        }\n    }\n}\n\nGenerate a
Selenium Python page object class for this DOM.\"

```

```

},

```

```

{

```

```

    "role": "assistant",

```

```

    "content": "from selenium.webdriver.common.by import By\nfrom
selenium.webdriver.remote.webdriver import WebDriver\n\n\nclass GeneratedPage\n    \"\"\"Page

```

```

Object for the Generated page.\\"\\\"\\n\\n  EXT_GEN839_BUTTON = (By.ID, \"ext-gen839\")\\n
EXT_GEN841_BUTTON = (By.ID, \"ext-gen841\")\\n  EXT_GEN874_BUTTON = (By.ID, \"ext-
gen874\")\\n  EXT_GEN858_BUTTON = (By.ID, \"ext-gen858\")\\n\\n  def __init__(self, driver:
WebDriver) -> None:\\n      self.driver = driver\\n\\n  def click_ext_gen839(self) -> None:\\n
\\\"\\\"\\\"Click the ext-gen839.\\\"\\\"\\\"\\n
self.driver.find_element(*self.EXT_GEN839_BUTTON).click()\\n\\n  def click_ext_gen841(self) ->
None:\\n      \\\"\\\"\\\"Click the ext-gen841.\\\"\\\"\\\"\\n
self.driver.find_element(*self.EXT_GEN841_BUTTON).click()\\n\\n  def click_ext_gen874(self) ->
None:\\n      \\\"\\\"\\\"Click the ext-gen874.\\\"\\\"\\\"\\n
self.driver.find_element(*self.EXT_GEN874_BUTTON).click()\\n\\n  def click_ext_gen858(self) ->
None:\\n      \\\"\\\"\\\"Click the ext-gen858.\\\"\\\"\\\"\\n
self.driver.find_element(*self.EXT_GEN858_BUTTON).click()

    }

]

}

```

```

{

  "messages": [

    {

      "role": "system",

      "content": "You are an expert in generating Selenium C# page object classes using provided DOM
information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments
only when a mapping is missing. Make sure every page method includes XML doc comments in the
generated code. Generate only code grounded in the supplied DOM."

    },

    {

      "role": "user",

      "content": "Given the following DOM structure:\\n```html\\n<input type=\\\"text\\\"
class=\\\"inputBox\\\" name=\\\"companyName\\\" size=\\\"30\\\" maxlength=\\\"100\\\"
id=\\\"createLeadForm_companyName\\\">\\n<input type=\\\"text\\\" class=\\\"inputBox\\\"
name=\\\"firstName\\\" size=\\\"30\\\" maxlength=\\\"100\\\" id=\\\"createLeadForm_firstName\\\">\\n<input
type=\\\"text\\\" class=\\\"inputBox\\\" name=\\\"lastName\\\" size=\\\"30\\\" maxlength=\\\"100\\\"
id=\\\"createLeadForm_lastName\\\">\\n<input type=\\\"submit\\\" class=\\\"smallSubmit\\\"
name=\\\"submitButton\\\" value=\\\"Create Lead\\\" id=\\\"ext-gen652\\\">\\n```\\nGenerate a Selenium C#
page object class for this DOM."

    },

    {

      "role": "assistant",

```

```

    "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for EditLeadPage.\n    ///\n    </summary>\n    public class EditLeadPage\n    {\n        private readonly IWebDriver driver;\n\n        public EditLeadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement CompanyNameInput =>\n        driver.FindElement(By.Id(\"createLeadForm_companyName\"));\n\n        private IWebElement\n        FirstNameInput => driver.FindElement(By.Id(\"createLeadForm_firstName\"));\n\n        private IWebElement\n        LastNameInput => driver.FindElement(By.Id(\"createLeadForm_lastName\"));\n\n        private IWebElement\n        CreateLeadButton => driver.FindElement(By.XPath(\"//input[@value='Create\n        Lead']\"));\n\n        /// <summary>\n        /// Enters a value in the companyName field.\n        ///\n        </summary>\n        public EditLeadPage EnterCompanyName(string companyName)\n        {\n            CompanyNameInput.Clear();\n            CompanyNameInput.SendKeys(companyName);\n            return\n            this;\n        }\n\n        /// <summary>\n        /// Enters a value in the firstName field.\n        ///\n        </summary>\n        public EditLeadPage EnterFirstName(string firstName)\n        {\n            FirstNameInput.Clear();\n            FirstNameInput.SendKeys(firstName);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the lastName field.\n        ///\n        </summary>\n        public EditLeadPage EnterLastName(string lastName)\n        {\n            LastNameInput.Clear();\n            LastNameInput.SendKeys(lastName);\n            return this;\n        }\n\n        /// <summary>\n        ///\n        Clicks the Create Lead element.\n        </summary>\n        public EditLeadPage ClickCreateLead()\n        {\n            CreateLeadButton.Click();\n            return this;\n        }\n    }\n}

```

```

{
    "messages": [
        {
            "role": "system",

```

"content": "You are an expert in generating Selenium C# page object classes using provided DOM information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."

```

    },
    {
        "role": "user",

```

"content": "Given the following DOM structure:\n`html`<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen246\" name=\"id\" class=\"x-form-text x-form-field \" style=\"width: 214px;\"> <input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen248\" name=\"firstName\" class=\"x-form-text x-form-field \" style=\"width: 214px;\"> <input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen250\" name=\"lastName\" class=\"x-form-text x-form-field \" style=\"width: 214px;\"> <input type=\"text\" size=\"20\"

autocomplete=\"off\" id=\"ext-gen252\" name=\"companyName\" class=\"x-form-text x-form-field
\" style=\"width: 214px;\"> \n<button class=\"x-btn-text\" type=\"button\" id=\"ext-gen334\">Find
Leads</button>\n``\nGenerate a Selenium C# page object class for this DOM."

```
},  
  
{  
    "role": "assistant",  
  
    "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for FindLeadsPage.\n    /// </summary>\n    public class FindLeadsPage\n    {\n        private readonly IWebDriver driver;\n        public FindLeadsPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n        private IWebElement IdInput => driver.FindElement(By.Name(\"id\"));\n        private IWebElement FirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n        private IWebElement LastNameInput => driver.FindElement(By.Name(\"lastName\"));\n        private IWebElement CompanyNameInput => driver.FindElement(By.Name(\"companyName\"));\n        private IWebElement FindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-space()='Find Leads']\"));\n        /// <summary>\n        /// Enters a value in the id field.\n        /// </summary>\n        public FindLeadsPage EnterId(string id)\n        {\n            IdInput.Clear();\n            IdInput.SendKeys(id);\n            return this;\n        }\n        /// <summary>\n        /// Enters a value in the firstName field.\n        /// </summary>\n        public FindLeadsPage EnterFirstName(string firstName)\n        {\n            FirstNameInput.Clear();\n            FirstNameInput.SendKeys(firstName);\n            return this;\n        }\n        /// <summary>\n        /// Enters a value in the lastName field.\n        /// </summary>\n        public FindLeadsPage EnterLastName(string lastName)\n        {\n            LastNameInput.Clear();\n            LastNameInput.SendKeys(lastName);\n            return this;\n        }\n        /// <summary>\n        /// Enters a value in the companyName field.\n        /// </summary>\n        public FindLeadsPage EnterCompanyName(string companyName)\n        {\n            CompanyNameInput.Clear();\n            CompanyNameInput.SendKeys(companyName);\n            return this;\n        }\n        /// <summary>\n        /// Clicks the Find Leads element.\n        /// </summary>\n        public FindLeadsPage ClickFindLeads()\n        {\n            FindLeadsButton.Click();\n            return this;\n        }\n    }\n}
```

```
{  
    "messages": [  
        {  
            "role": "system",  
  
            "content": "You are an expert in generating Selenium C# page object classes using provided DOM  
information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments  
only when a mapping is missing. Make sure every page method includes XML doc comments in the  
generated code. Generate only code grounded in the supplied DOM."}
```

```

    },
    {
        "role": "user",

        "content": "Given the following DOM structure:\n```\nhtml\n<input type=\"text\" size=\"20\" \nautocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\" x-form-text x-form-field\" \nstyle=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen255\" \nname=\"firstName\" class=\" x-form-text x-form-field\" style=\"width: 214px;\">\n<input \ntype=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\" x-form-text \nx-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" \nid=\"ext-gen253\" name=\"id\" class=\" x-form-text x-form-field\" style=\"width: \n214px;\">\n<button class=\"x-btn-text\" type=\"button\" id=\"ext-gen341\">Find \nLeads</button>\n```\nGenerate a Selenium C# page object class for this DOM."

    },
    {
        "role": "assistant",

        "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for FindLeadsUpdatedPage.\n    /// </summary>\n    public class FindLeadsUpdatedPage\n    {\n        private readonly IWebDriver \ndriver;\n        public FindLeadsUpdatedPage(IWebDriver driver)\n        {\n            this.driver = \ndriver;\n        }\n        private IWebElement IdInput => \ndriver.FindElement(By.XPath(\"//input[@name='id']\")[1]);\n        private IWebElement \nFirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n        private IWebElement IdInput2 \n=> driver.FindElement(By.XPath(\"//input[@name='id']\")[2]);\n        private IWebElement IdInput3 \n=> driver.FindElement(By.XPath(\"//input[@name='id']\")[3]);\n        private IWebElement \nFindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-space()='Find Leads']\"));\n        \n        /// <summary>\n        /// Enters a value in the id field.\n        /// </summary>\n        public \nFindLeadsUpdatedPage EnterId(string id)\n        {\n            IdInput.Clear();\n            IdInput.SendKeys(id);\n            return this;\n        }\n        \n        /// <summary>\n        /// Enters a value in \nthe firstName field.\n        /// </summary>\n        public FindLeadsUpdatedPage \nEnterFirstName(string firstName)\n        {\n            FirstNameInput.Clear();\n            FirstNameInput.SendKeys(firstName);\n            return this;\n        }\n        \n        /// <summary>\n        /// \nEnter a value in the id field.\n        /// </summary>\n        public FindLeadsUpdatedPage \nEnterId2(string id)\n        {\n            IdInput2.Clear();\n            IdInput2.SendKeys(id);\n            return \nthis;\n        }\n        \n        /// <summary>\n        /// Enters a value in the id field.\n        /// </summary>\n        public FindLeadsUpdatedPage EnterId3(string id)\n        {\n            IdInput3.Clear();\n            IdInput3.SendKeys(id);\n            return this;\n        }\n        \n        /// <summary>\n        /// Clicks the Find \nLeads element.\n        /// </summary>\n        public FindLeadsUpdatedPage ClickFindLeads()\n        {\n            FindLeadsButton.Click();\n            return this;\n        }\n    }\n}

```

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Selenium C# page object classes using provided DOM
information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments
only when a mapping is missing. Make sure every page method includes XML doc comments in the
generated code. Generate only code grounded in the supplied DOM."

    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n```html\n<a style=\"color: black;\"
href=\"/crmsfa/control/main?externalLoginKey=EL601288709152\">\nCRM/SFA\n</a>\n<input
class=\"decorativeSubmit\" style=\"width:65px; margin-left:1px;\" type=\"submit\"
value=\"Logout\">\n```\nGenerate a Selenium C# page object class for this DOM."

    },
    {
      "role": "assistant",

      "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for HomePage.\n    ///
</summary>\n    public class HomePage\n    {\n        private readonly IWebDriver driver;\n\n        public HomePage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private
IWebElement CRMSFALink => driver.FindElement(By.LinkText(\"CRM/SFA\"));\n        private
IWebElement LogoutButton => driver.FindElement(By.XPath(\"//input[@value='Logout']\"));\n\n        /// <summary>\n        /// Clicks the CRM/SFA element.\n        /// </summary>\n        public HomePage
ClickCRMSFA()\n        {\n            CRMSFALink.Click();\n            return this;\n        }\n\n        ///
<summary>\n        /// Clicks the Logout element.\n        /// </summary>\n        public HomePage
ClickLogout()\n        {\n            LogoutButton.Click();\n            return this;\n        }\n    }\n}

  ]
}

{
  "messages": [
    {
      "role": "system",

```

"content": "You are an expert in generating Selenium C# page object classes using provided DOM information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."

},

{

"role": "user",

"content": "Given the following DOM structure:\n```html\n<input class=\"inputLogin\" type=\"text\" id=\"username\" name=\"USERNAME\" size=\"50\">\n<input class=\"inputLogin\" type=\"password\" id=\"password\" name=\"PASSWORD\" size=\"50\">\n<input class=\"decorativeSubmit\" type=\"submit\" value=\"Login\">\n```\nGenerate a Selenium C# page object class for this DOM."

},

{

"role": "assistant",

"content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for LoginPage.\n /// </summary>\n public class LoginPage\n {\n private readonly IWebDriver driver;\n\n public LoginPage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement USERNAMEInput => driver.FindElement(By.Id(\"username\"));\n private IWebElement PASSWORDPasswordInput => driver.FindElement(By.Id(\"password\"));\n private IWebElement LoginButton => driver.FindElement(By.XPath(\"//input[@value='Login']\"));\n\n /// <summary>\n /// Enters a value in the USERNAME field.\n /// </summary>\n public LoginPage EnterUSERNAME(string uSERNAME)\n {\n USERNAMEInput.Clear();\n USERNAMEInput.SendKeys(uSERNAME);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the PASSWORD field.\n /// </summary>\n public LoginPage EnterPASSWORD(string pASSWORD)\n {\n PASSWORDPasswordInput.Clear();\n PASSWORDPasswordInput.SendKeys(pASSWORD);\n return this;\n }\n\n /// <summary>\n /// Clicks the Login element.\n /// </summary>\n public LoginPage ClickLogin()\n {\n LoginButton.Click();\n return this;\n }\n }\n}

}

]

}

{

"messages": [

{

"role": "system",

"content": "You are an expert in generating Selenium C# page object classes using provided DOM information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."

},

{

"role": "user",

"content": "Given the following DOM structure:\n```html\nLeads\n```\nGenerate a Selenium C# page object class for this DOM."

},

{

"role": "assistant",

"content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for MyHomePage.\n /// </summary>\n public class MyHomePage\n {\n private readonly IWebDriver driver;\n\n public MyHomePage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement LeadsLink => driver.FindElement(By.LinkText(\"Leads\"));\n\n /// <summary>\n /// Clicks the Leads element.\n /// </summary>\n public MyHomePage ClickLeads()\n {\n LeadsLink.Click();\n\n return this;\n }\n }\n}

}

]

}

{

"messages": [

{

"role": "system",

"content": "You are an expert in generating Selenium C# page object classes using provided DOM information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."

},

{

"role": "user",

"content": "Given the following DOM structure:\n```html\nCreate Lead\n```\nGenerate a Selenium C# page object class for this DOM."

},

{

"role": "assistant",

"content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for MyLeadsPage.\n /// </summary>\n public class MyLeadsPage\n {\n private readonly IWebDriver driver;\n\n public MyLeadsPage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement CreateLeadLink => driver.FindElement(By.LinkText(\"Create Lead\"));\n\n /// <summary>\n /// Clicks the Create Lead element.\n /// </summary>\n public MyLeadsPage ClickCreateLead()\n {\n CreateLeadLink.Click();\n return this;\n }\n }\n}"

}

}

}

{

"messages": [

{

"role": "system",

"content": "You are an expert in generating Selenium C# page object classes using provided DOM information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."

},

{

"role": "user",

"content": "Given the following DOM structure:\n```html\n<input class=\"XdijitInputField dijitInputFieldValidationNormal\" type=\"text\" autocomplete=\"off\" name=\"ComboBox_productId\" dojoattachevent=\"onkeypress, onkeyup, onfocus, onblur, compositionend\" dojoattachpoint=\"textbox, focusNode\" id=\"ComboBox_productId\" tabindex=\"1\" size=\"15\" maxlength=\"50\" wairole=\"combobox\" role=\"wairole:combobox\" value=\"\" valuenow=\"\" invalid=\"false\" disabled=\"false\">\n<input id=\"quantity\" name=\"quantity\" type=\"text\" size=\"10\" maxlength=\"\" class=\"inputBox\" value=\"1\" onchange=\"\" tabindex=\"2\">\n<a class=\"subMenuButton\"

href=\"javascript:document.cartform.submit();\" id=\"ext-gen173\">Update\n```\nGenerate a Selenium C# page object class for this DOM."

```
},
{
    "role": "assistant",

    "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for OrderEntryHeaderPage.\n    /// </summary>\n    public class OrderEntryHeaderPage\n    {\n        private readonly IWebDriver\n        driver;\n\n        public OrderEntryHeaderPage(IWebDriver driver)\n        {\n            this.driver =\n            driver;\n        }\n\n        private IWebElement ProductIdInput =>\n        driver.FindElement(By.Id(\"ComboBox_productId\"));\n        private IWebElement QuantityInput =>\n        driver.FindElement(By.Id(\"quantity\"));\n        private IWebElement UpdateLink =>\n        driver.FindElement(By.LinkText(\"Update\"));\n\n        /// <summary>\n        /// Enters a value in the\n        productId field.\n        /// </summary>\n        public OrderEntryHeaderPage EnterProductId(string\n        productId)\n        {\n            ProductIdInput.Clear();\n            ProductIdInput.SendKeys(productId);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the quantity field.\n        /// </summary>\n        public OrderEntryHeaderPage EnterQuantity(string quantity)\n        {\n            QuantityInput.Clear();\n            QuantityInput.SendKeys(quantity);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Update element.\n        /// </summary>\n        public\n        OrderEntryHeaderPage ClickUpdate()\n        {\n            UpdateLink.Click();\n            return this;\n        }\n    }\n}
```

```
{
    "messages": [
        {
            "role": "system",

            "content": "You are an expert in generating Selenium C# page object classes using provided DOM\ninformation. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments\nonly when a mapping is missing. Make sure every page method includes XML doc comments in the\ngenerated code. Generate only code grounded in the supplied DOM."
```

```
},
{
    "role": "user",

    "content": "Given the following DOM structure:\n<html>\n<input id=\"uploadedFile\"\nname=\"uploadedFile\" type=\"file\" size=\"30\" maxlength=\"\" class=\"inputBox\">
```

```
onchange="">\n<input type="submit" value="Upload and Import" class="smallSubmit"
onclick="submitFormAndReplaceButtonTextWithSingleClick(this, 'Uploading... Please Wait');"
id="ext-gen593">\n```\nGenerate a Selenium C# page object class for this DOM."
```

```
},
{
    "role": "assistant",
    "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for UploadPage.\n    /// </summary>\n    public class UploadPage\n    {\n        private readonly IWebDriver driver;\n        public UploadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n        private\n        IWebElement FileFileInput => driver.FindElement(By.Id(\"uploadedFile\"));\n        private\n        IWebElement UploadAndImportButton => driver.FindElement(By.XPath(\"//input[@value='Upload\nand Import']\"));\n        /// <summary>\n        /// Uploads a file using the File field.\n        /// </summary>\n        public UploadPage UploadFile(string filePath)\n        {\n            FileFileInput.SendKeys(filePath);\n            return this;\n        }\n        /// <summary>\n        /// Clicks\n        the Upload and Import element.\n        /// </summary>\n        public UploadPage\n        ClickUploadAndImport()\n        {\n            UploadAndImportButton.Click();\n            return this;\n        }\n    }\n}
```

```
{
    "messages": [
        {
            "role": "system",
            "content": "You are an expert in generating Selenium C# page object classes using provided DOM\ninformation. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments\nonly when a mapping is missing. Make sure every page method includes XML doc comments in the\ngenerated code. Generate only code grounded in the supplied DOM."
        }
    ]
}
```

```
},
{
    "role": "user",
    "content": "Given the following DOM structure:\n```\nhtml\n<div class=\"x-grid3-cell-inner x-grid3-col-partyId\" unselectable=\"on\" id=\"ext-gen781\"><a class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen839\">10196</a></div>\n<div class=\"x-grid3-cell-inner x-grid3-col-firstName\" unselectable=\"on\" id=\"ext-gen840\"><a class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-
```



```

gen841">TCS</a></div>\n<div class=\"x-grid3-cell-inner x-grid3-col-lastName\"
unselectable=\"on\" id=\"ext-gen842\"><a class=\"linktext\"
href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen874\">Abd</a></div>\n<div
class=\"x-grid3-cell-inner x-grid3-col-companyName\" unselectable=\"on\" id=\"ext-gen857\"><a
class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen858\">M
S</a></div>\n``\nGenerate a Selenium C# page object class for this DOM."

```

```

},

```

```

{

```

```

    "role": "assistant",

```

```

    "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for ViewLeadPage.\n    /// </summary>\n    public class ViewLeadPage\n    {\n        private readonly IWebDriver driver;\n\n        public ViewLeadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement PartyIdText => driver.FindElement(By.Id(\"ext-gen781\"));\n        private IWebElement Value10196Link => driver.FindElement(By.LinkText(\"10196\"));\n        private IWebElement FirstNameText => driver.FindElement(By.Id(\"ext-gen840\"));\n        private IWebElement TCSLink => driver.FindElement(By.LinkText(\"TCS\"));\n        private IWebElement LastNameText => driver.FindElement(By.Id(\"ext-gen842\"));\n        private IWebElement AbdLink => driver.FindElement(By.LinkText(\"Abd\"));\n        private IWebElement CompanyNameText => driver.FindElement(By.Id(\"ext-gen857\"));\n        private IWebElement MSLink => driver.FindElement(By.LinkText(\"M S\"));\n\n        /// <summary>\n        /// Gets the visible text from the partyId element.\n        /// </summary>\n        public string GetPartyIdText()\n        {\n            return PartyIdText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the partyId element is displayed.\n        /// </summary>\n        public bool IsPartyIdVisible()\n        {\n            return PartyIdText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the 10196 element.\n        /// </summary>\n        public ViewLeadPage ClickValue10196()\n        {\n            Value10196Link.Click();\n            return this;\n        }\n\n        /// <summary>\n        /// Gets the visible text from the firstName element.\n        /// </summary>\n        public string GetFirstNameText()\n        {\n            return FirstNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the firstName element is displayed.\n        /// </summary>\n        public bool IsFirstNameVisible()\n        {\n            return FirstNameText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the TCS element.\n        /// </summary>\n        public ViewLeadPage ClickTCS()\n        {\n            TCSLink.Click();\n            return this;\n        }\n\n        /// <summary>\n        /// Gets the visible text from the lastName element.\n        /// </summary>\n        public string GetLastNameText()\n        {\n            return LastNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the lastName element is displayed.\n        /// </summary>\n        public bool IsLastNameVisible()\n        {\n            return LastNameText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the Abd element.\n        /// </summary>\n        public ViewLeadPage ClickAbd()\n        {\n            AbdLink.Click();\n            return this;\n        }\n\n        /// <summary>\n        /// Gets the visible text from the companyName element.\n        /// </summary>\n        public string GetCompanyNameText()\n        {\n            return CompanyNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the companyName element is displayed.\n        /// </summary>\n        public bool IsCompanyNameVisible()\n        {\n            return CompanyNameText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the M S element.\n        /// </summary>\n        public ViewLeadPage ClickMS()\n        {\n            MSLink.Click();\n            return this;\n        }\n    }\n}

```

```

    }
  ]
}

```

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Selenium C# page object classes using provided DOM
information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments
only when a mapping is missing. Make sure every page method includes XML doc comments in the
generated code. Generate only code grounded in the supplied DOM."

    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n`html\n<input type=\"text\"
class=\"inputBox\" name=\"companyName\" size=\"30\" maxlength=\"100\"
id=\"createLeadForm_companyName\">\n<input type=\"text\" class=\"inputBox\"
name=\"firstName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_firstName\">\n<input
type=\"text\" class=\"inputBox\" name=\"lastName\" size=\"30\" maxlength=\"100\"
id=\"createLeadForm_lastName\">\n<input type=\"submit\" class=\"smallSubmit\"
name=\"submitButton\" value=\"Create Lead\" id=\"ext-gen652\">\n```\nGenerate a Selenium C#
page object class for this DOM."

    },
    {
      "role": "assistant",

      "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for EditLeadPage.\n    ///
</summary>\n    public class EditLeadPage\n    {\n        private readonly IWebDriver driver;\n\n        public EditLeadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private
IWebElement CompanyNameInput =>
driver.FindElement(By.Id(\"createLeadForm_companyName\"));\n        private IWebElement
FirstNameInput => driver.FindElement(By.Id(\"createLeadForm_firstName\"));\n        private
IWebElement LastNameInput => driver.FindElement(By.Id(\"createLeadForm_lastName\"));\n
        private IWebElement CreateLeadButton => driver.FindElement(By.XPath(\"//input[@value='Create
Lead']\"));\n\n        /// <summary>\n        /// Enters a value in the companyName field.\n        ///
</summary>\n        public EditLeadPage EnterCompanyName(string companyName)\n        {\n
            CompanyNameInput.Clear();\n            CompanyNameInput.SendKeys(companyName);\n            return
this;\n        }\n\n        /// <summary>\n        /// Enters a value in the firstName field.\n        ///

```

```

</summary>\n    public EditLeadPage EnterFirstName(string firstName)\n    {\n
FirstNameInput.Clear();\n    FirstNameInput.SendKeys(firstName);\n    return this;\n
}\n\n    /// <summary>\n    /// Enters a value in the lastName field.\n    /// </summary>\n
public EditLeadPage EnterLastName(string lastName)\n    {\n    LastNameInput.Clear();\n
LastNameInput.SendKeys(lastName);\n    return this;\n    }\n\n    /// <summary>\n    ///
Clicks the Create Lead element.\n    /// </summary>\n    public EditLeadPage ClickCreateLead()\n
{\n    CreateLeadButton.Click();\n    return this;\n    }\n }\n}"
}
]
}

```

```

{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Selenium C# page object classes using provided DOM
information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments
only when a mapping is missing. Make sure every page method includes XML doc comments in the
generated code. Generate only code grounded in the supplied DOM."
    },

```

```

    },
    {
      "role": "user",
      "content": "Given the following DOM structure:\n```html\n<input type=\"text\" size=\"20\"
autocomplete=\"off\" id=\"ext-gen246\" name=\"id\" class=\" x-form-text x-form-field \"
style=\"width: 214px;\"> \n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen248\"
name=\"firstName\" class=\" x-form-text x-form-field \" style=\"width: 214px;\"> \n<input
type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen250\" name=\"lastName\" class=\" x-
form-text x-form-field \" style=\"width: 214px;\"> \n<input type=\"text\" size=\"20\"
autocomplete=\"off\" id=\"ext-gen252\" name=\"companyName\" class=\" x-form-text x-form-field
\" style=\"width: 214px;\"> \n<button class=\"x-btn-text\" type=\"button\" id=\"ext-gen334\">Find
Leads</button>\n```\nGenerate a Selenium C# page object class for this DOM."
    },

```

```

    },
    {
      "role": "assistant",
      "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for FindLeadsPage.\n    ///
</summary>\n    public class FindLeadsPage\n    {\n        private readonly IWebDriver driver;\n\n        public FindLeadsPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n        private

```

```

IWebElement IdInput => driver.FindElement(By.Name("id"));
private IWebElement
FirstNameInput => driver.FindElement(By.Name("firstName"));
private IWebElement
LastNameInput => driver.FindElement(By.Name("lastName"));
private IWebElement
CompanyNameInput => driver.FindElement(By.Name("companyName"));
private IWebElement
FindLeadsButton => driver.FindElement(By.XPath("//button[normalize-space()='Find Leads']"));
/// <summary>
/// Enters a value in the id field.
/// </summary>
public FindLeadsPage EnterId(string id)
{
    IdInput.Clear();
    IdInput.SendKeys(id);
    return this;
}
/// <summary>
/// Enters a value in the firstName field.
/// </summary>
public FindLeadsPage EnterFirstName(string firstName)
{
    FirstNameInput.Clear();
    FirstNameInput.SendKeys(firstName);
    return this;
}
/// <summary>
/// Enters a value in the lastName field.
/// </summary>
public FindLeadsPage EnterLastName(string lastName)
{
    LastNameInput.Clear();
    LastNameInput.SendKeys(lastName);
    return this;
}
/// <summary>
/// Enters a value in the companyName field.
/// </summary>
public FindLeadsPage EnterCompanyName(string companyName)
{
    CompanyNameInput.Clear();
    CompanyNameInput.SendKeys(companyName);
    return this;
}
/// <summary>
/// Clicks the Find Leads element.
/// </summary>
public FindLeadsPage ClickFindLeads()
{
    FindLeadsButton.Click();
    return this;
}
}
]
}

```

```

{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Selenium C# page object classes using provided DOM information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."
    },
    {
      "role": "user",
      "content": "Given the following DOM structure:\n`html\n<input type='text' size='20'\nautocomplete='off' id='ext-gen253' name='id' class='x-form-text x-form-field'\nstyle='width: 214px;'\n>\n<input type='text' size='20' autocomplete='off' id='ext-gen255'\nname='firstName' class='x-form-text x-form-field' style='width: 214px;'\n>\n<input\n type='text' size='20' autocomplete='off' id='ext-gen253' name='id' class='x-form-text\n x-form-field' style='width: 214px;'\n>\n<input type='text' size='20' autocomplete='off'\nid='ext-gen253' name='id' class='x-form-text x-form-field' style='width:"

```

214px;">\n<button class="x-btn-text" type="button" id="ext-gen341">Find Leads</button>\n``\nGenerate a Selenium C# page object class for this DOM."

```
},
{
    "role": "assistant",
    "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for FindLeadsUpdatedPage.\n    /// </summary>\n    public class FindLeadsUpdatedPage\n    {\n        private readonly IWebDriver\n        driver;\n\n        public FindLeadsUpdatedPage(IWebDriver driver)\n        {\n            this.driver =\n            driver;\n        }\n\n        private IWebElement IdInput =>\n        driver.FindElement(By.XPath(\"//input[@name='id']\")[1]);\n        private IWebElement\n        FirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n        private IWebElement IdInput2\n        => driver.FindElement(By.XPath(\"//input[@name='id']\")[2]);\n        private IWebElement IdInput3\n        => driver.FindElement(By.XPath(\"//input[@name='id']\")[3]);\n        private IWebElement\n        FindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-space()='Find Leads']\"));\n\n        /// <summary>\n        /// Enters a value in the id field.\n        /// </summary>\n        public\n        FindLeadsUpdatedPage EnterId(string id)\n        {\n            IdInput.Clear();\n            IdInput.SendKeys(id);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in\n        the firstName field.\n        /// </summary>\n        public FindLeadsUpdatedPage\n        EnterFirstName(string firstName)\n        {\n            FirstNameInput.Clear();\n            FirstNameInput.SendKeys(firstName);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the id field.\n        /// </summary>\n        public FindLeadsUpdatedPage\n        EnterId2(string id)\n        {\n            IdInput2.Clear();\n            IdInput2.SendKeys(id);\n            return\n            this;\n        }\n\n        /// <summary>\n        /// Enters a value in the id field.\n        /// </summary>\n        public FindLeadsUpdatedPage EnterId3(string id)\n        {\n            IdInput3.Clear();\n            IdInput3.SendKeys(id);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Find\n        Leads element.\n        /// </summary>\n        public FindLeadsUpdatedPage ClickFindLeads()\n        {\n            FindLeadsButton.Click();\n            return this;\n        }\n    }\n}
```

```
{
    "messages": [
        {
            "role": "system",
            "content": "You are an expert in generating Selenium C# page object classes using provided DOM\ninformation. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments\nonly when a mapping is missing. Make sure every page method includes XML doc comments in the\ngenerated code. Generate only code grounded in the supplied DOM."
        }
    ]
}
```

```

    },
    {
        "role": "user",

        "content": "Given the following DOM structure:\n```html\n<a style=\"color: black;\"  
href=\"/crmsfa/control/main?externalLoginKey=EL601288709152\">\nCRM/SFA\n</a>\n<input  
class=\"decorativeSubmit\" style=\"width:65px; margin-left:1px;\" type=\"submit\"  
value=\"Logout\">\n```\nGenerate a Selenium C# page object class for this DOM."

    },
    {
        "role": "assistant",

        "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for HomePage.\n    /// </summary>\n    public class HomePage\n    {\n        private readonly IWebDriver driver;\n\n        public HomePage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private  
IWebElement CRMSFALink => driver.FindElement(By.LinkText(\"CRM/SFA\"));\n        private  
IWebElement LogoutButton => driver.FindElement(By.XPath(\"//input[@value='Logout']\"));\n\n        /// <summary>\n        /// Clicks the CRM/SFA element.\n        /// </summary>\n        public HomePage  
ClickCRMSFA()\n        {\n            CRMSFALink.Click();\n            return this;\n        }\n\n        ///  
<summary>\n        /// Clicks the Logout element.\n        /// </summary>\n        public HomePage  
ClickLogout()\n        {\n            LogoutButton.Click();\n            return this;\n        }\n    }\n}

]
}

{
    "messages": [
        {
            "role": "system",

            "content": "You are an expert in generating Selenium C# page object classes using provided DOM  
information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments  
only when a mapping is missing. Make sure every page method includes XML doc comments in the  
generated code. Generate only code grounded in the supplied DOM."

        },
        {
            "role": "user",

            "content": "Given the following DOM structure:\n```html\n<input class=\"inputLogin\"  
type=\"text\" id=\"username\" name=\"USERNAME\" size=\"50\">\n<input class=\"inputLogin\"

```

type=\"password\" id=\"password\" name=\"PASSWORD\" size=\"50\">\n<input
class=\"decorativeSubmit\" type=\"submit\" value=\"Login\">\n```\nGenerate a Selenium C# page
object class for this DOM."

```
    },  
  
    {  
  
        "role": "assistant",  
  
        "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for LoginPage.\n    /// </summary>\n    public class LoginPage\n    {\n        private readonly IWebDriver driver;\n\n        public LoginPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private  
        IWebElement USERNAMEInput => driver.FindElement(By.Id(\"username\"));\n        private  
        IWebElement PASSWORDPasswordInput => driver.FindElement(By.Id(\"password\"));\n        private  
        IWebElement LoginButton => driver.FindElement(By.XPath(\"//input[@value='Login']\"));\n\n        /// <summary>\n        /// Enters a value in the USERNAME field.\n        /// </summary>\n        public  
        LoginPage EnterUSERNAME(string uUSERNAME)\n        {\n            USERNAMEInput.Clear();\n            USERNAMEInput.SendKeys(uUSERNAME);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the PASSWORD field.\n        /// </summary>\n        public LoginPage  
        EnterPASSWORD(string pPASSWORD)\n        {\n            PASSWORDPasswordInput.Clear();\n            PASSWORDPasswordInput.SendKeys(pPASSWORD);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Login element.\n        /// </summary>\n        public LoginPage  
        ClickLogin()\n        {\n            LoginButton.Click();\n            return this;\n        }\n    }\n}\n\n{\n\n    \"messages\": [  
  
        {  
  
            \"role\": \"system\",  
  
            \"content\": \"You are an expert in generating Selenium C# page object classes using provided DOM  
information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments  
only when a mapping is missing. Make sure every page method includes XML doc comments in the  
generated code. Generate only code grounded in the supplied DOM.\"  
  
        },  
  
        {  
  
            \"role\": \"user\",
```

"content": "Given the following DOM structure:\n```html\nLeads\n```\nGenerate a Selenium C# page object class for this DOM."

},

{

"role": "assistant",

"content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for MyHomePage.\n /// </summary>\n public class MyHomePage\n {\n private readonly IWebDriver driver;\n\n public MyHomePage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement LeadsLink => driver.FindElement(By.LinkText(\"Leads\"));\n\n /// <summary>\n /// Clicks the Leads element.\n /// </summary>\n public MyHomePage ClickLeads()\n {\n LeadsLink.Click();\n return this;\n }\n }\n}

}

]

}

{

"messages": [

{

"role": "system",

"content": "You are an expert in generating Selenium C# page object classes using provided DOM information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."

},

{

"role": "user",

"content": "Given the following DOM structure:\n```html\nCreate Lead\n```\nGenerate a Selenium C# page object class for this DOM."

},

{

"role": "assistant",

"content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for MyLeadsPage.\n /// </summary>


```

</summary>\n    public class MyLeadsPage\n    {\n        private readonly IWebDriver driver;\n\n        public MyLeadsPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement CreateLeadLink => driver.FindElement(By.LinkText("Create Lead"));\n\n        /// <summary>\n        /// Clicks the Create Lead element.\n        /// </summary>\n        public MyLeadsPage ClickCreateLead()\n        {\n            CreateLeadLink.Click();\n\n            return this;\n        }\n    }\n}

```

```
{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Selenium C# page object classes using provided DOM information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments only when a mapping is missing. Make sure every page method includes XML doc comments in the generated code. Generate only code grounded in the supplied DOM."
    }
  ]
}
```

```

    },
    {
      "role": "user",
      "content": "Given the following DOM structure:\n```\n<html>\n<input class=\"XdijitInputField dijitInputFieldValidationNormal\" type=\"text\" autocomplete=\"off\" name=\"ComboBox_productId\" dojoattachevent=\"onkeypress, onkeyup, onfocus, onblur, compositionend\" dojoattachpoint=\"textbox, focusNode\" id=\"ComboBox_productId\" tabIndex=\"1\" size=\"15\" maxLength=\"50\" wairole=\"combobox\" role=\"wairole:combobox\" value=\"\" valuenow=\"\" invalid=\"false\" disabled=\"false\">\n<input id=\"quantity\" name=\"quantity\" type=\"text\" size=\"10\" maxLength=\"\" class=\"inputBox\" value=\"1\" onChange=\"\" tabIndex=\"2\">\n<a class=\"subMenuButton\" href=\"javascript:document.cartform.submit();\" id=\"ext-gen173\">Update</a>\n```\nGenerate a Selenium C# page object class for this DOM."
    }
  ]
}
```

```

    },
    {
        "role": "assistant",
        "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for OrderEntryHeaderPage.\n    /// </summary>\n    public class OrderEntryHeaderPage\n    {\n        private readonly IWebDriver\n        driver;\n\n        public OrderEntryHeaderPage(IWebDriver driver)\n        {\n            this.driver =

```

```

driver;\n    }\n\n    private IWebElement ProductIdInput =>
driver.FindElement(By.Id(\"ComboBox_productId\"));\n    private IWebElement QuantityInput =>
driver.FindElement(By.Id(\"quantity\"));\n    private IWebElement UpdateLink =>
driver.FindElement(By.LinkText(\"Update\"));\n\n    /// <summary>\n    /// Enters a value in the
productId field.\n    /// </summary>\n    public OrderEntryHeaderPage EnterProductId(string
productId)\n    {\n        ProductIdInput.Clear();\n        ProductIdInput.SendKeys(productId);\n
return this;\n    }\n\n    /// <summary>\n    /// Enters a value in the quantity field.\n    ///
</summary>\n    public OrderEntryHeaderPage EnterQuantity(string quantity)\n    {\n
QuantityInput.Clear();\n        QuantityInput.SendKeys(quantity);\n        return this;\n    }\n\n
/// <summary>\n    /// Clicks the Update element.\n    /// </summary>\n    public
OrderEntryHeaderPage ClickUpdate()\n    {\n        UpdateLink.Click();\n        return this;\n
    }\n }\n}"
}
]
}

```

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Selenium C# page object classes using provided DOM
information. Use Selenium WebDriver C# conventions, proper locators, and insert TODO comments
only when a mapping is missing. Make sure every page method includes XML doc comments in the
generated code. Generate only code grounded in the supplied DOM."
    },

```

```

    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n```html\n<input id=\"uploadedFile\"
name=\"uploadedFile\" type=\"file\" size=\"30\" maxlength=\"\" class=\"inputBox\"
onchange=\"\">\n<input type=\"submit\" value=\"Upload and Import\" class=\"smallSubmit\"
onclick=\"submitFormAndReplaceButtonTextWithSingleClick(this, 'Uploading... Please Wait');\"
id=\"ext-gen593\">\n```\nGenerate a Selenium C# page object class for this DOM."
    },

```

```

    },
    {
      "role": "assistant",

      "content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for UploadPage.\n    ///
</summary>\n    public class UploadPage\n    {\n        private readonly IWebDriver driver;\n\n

```

$$\left. \begin{array}{l} \} \\] \\ \} \end{array} \right\}$$
$$\left. \begin{array}{l} \{ \\ \} \end{array} \right\}$$
$$\left. \begin{array}{l} \} \\ \{ \end{array} \right\}$$

```

"content": "using OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for ViewLeadPage.\n    /// </summary>\n    public class ViewLeadPage\n    {\n        private readonly IWebDriver driver;\n\n        public ViewLeadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement PartyIdText => driver.FindElement(By.Id(\"ext-gen781\"));\n        private IWebElement Value10196Link => driver.FindElement(By.LinkText(\"10196\"));\n        private IWebElement FirstNameText => driver.FindElement(By.Id(\"ext-gen840\"));\n        private IWebElement TCSLink => driver.FindElement(By.LinkText(\"TCS\"));\n        private IWebElement LastNameText => driver.FindElement(By.Id(\"ext-gen842\"));\n        private IWebElement AbdLink => driver.FindElement(By.LinkText(\"Abd\"));\n        private IWebElement CompanyNameText => driver.FindElement(By.Id(\"ext-gen857\"));\n        private IWebElement MSLink => driver.FindElement(By.LinkText(\"M S\"));\n\n        /// <summary>\n        /// Gets the visible text from the partyId element.\n        /// </summary>\n        public string GetPartyIdText()\n        {\n            return PartyIdText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the partyId element is displayed.\n        /// </summary>\n        public bool IsPartyIdVisible()\n        {\n            return PartyIdText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the 10196 element.\n        /// </summary>\n        public ViewLeadPage ClickValue10196()\n        {\n            Value10196Link.Click();\n            return this;\n        }\n\n        /// <summary>\n        /// Gets the visible text from the firstName element.\n        /// </summary>\n        public string GetFirstNameText()\n        {\n            return FirstNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the firstName element is displayed.\n        /// </summary>\n        public bool IsFirstNameVisible()\n        {\n            return FirstNameText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the TCS element.\n        /// </summary>\n        public ViewLeadPage ClickTCS()\n        {\n            TCSLink.Click();\n            return this;\n        }\n\n        /// <summary>\n        /// Gets the visible text from the lastName element.\n        /// </summary>\n        public string GetLastNameText()\n        {\n            return LastNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the lastName element is displayed.\n        /// </summary>\n        public bool IsLastNameVisible()\n        {\n            return LastNameText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the Abd element.\n        /// </summary>\n        public ViewLeadPage ClickAbd()\n        {\n            AbdLink.Click();\n            return this;\n        }\n\n        /// <summary>\n        /// Gets the visible text from the companyName element.\n        /// </summary>\n        public string GetCompanyNameText()\n        {\n            return CompanyNameText.Text;\n        }\n\n        /// <summary>\n        /// Checks whether the companyName element is displayed.\n        /// </summary>\n        public bool IsCompanyNameVisible()\n        {\n            return CompanyNameText.Displayed;\n        }\n\n        /// <summary>\n        /// Clicks the M S element.\n        /// </summary>\n        public ViewLeadPage ClickMS()\n        {\n            MSLink.Click();\n            return this;\n        }\n    }\n}\n"

```

```

{
    "messages": [
        {

```

"role": "system",

"content": "You are an expert in generating Selenium Java page object classes using provided DOM information. Follow the framework guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO comments if a mapping is missing. Make sure every page method includes comments in the generated code. Generate only code grounded in the supplied DOM."

},

{

"role": "user",

"content": "Given the following DOM structure:\n```html\n<input type=\"text\" class=\"inputBox\" name=\"companyName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_companyName\">\n<input type=\"text\" class=\"inputBox\" name=\"firstName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_firstName\">\n<input type=\"text\" class=\"inputBox\" name=\"lastName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_lastName\">\n<input type=\"submit\" class=\"smallSubmit\" name=\"submitButton\" value=\"Create Lead\" id=\"ext-gen652\">\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for EditLeadPage.\n /// </summary>\n public class EditLeadPage\n {\n private readonly IWebDriver driver;\n\n public EditLeadPage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement CompanyNameInput =>\n driver.FindElement(By.Id(\"createLeadForm_companyName\"));\n\n private IWebElement FirstNameInput =>\n driver.FindElement(By.Id(\"createLeadForm_firstName\"));\n\n private IWebElement LastNameInput =>\n driver.FindElement(By.Id(\"createLeadForm_lastName\"));\n\n private IWebElement CreateLeadButton =>\n driver.FindElement(By.XPath(\"//input[@value='Create Lead']\"));\n\n /// <summary>\n /// Enters a value in the companyName field.\n /// </summary>\n public EditLeadPage EnterCompanyName(string companyName)\n {\n CompanyNameInput.Clear();\n CompanyNameInput.SendKeys(companyName);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the firstName field.\n /// </summary>\n public EditLeadPage EnterFirstName(string firstName)\n {\n FirstNameInput.Clear();\n FirstNameInput.SendKeys(firstName);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the lastName field.\n /// </summary>\n public EditLeadPage EnterLastName(string lastName)\n {\n LastNameInput.Clear();\n LastNameInput.SendKeys(lastName);\n return this;\n }\n\n /// <summary>\n /// Clicks the Create Lead element.\n /// </summary>\n public EditLeadPage ClickCreateLead()\n {\n CreateLeadButton.Click();\n return this;\n }\n }\n}\n```\nGenerate a Selenium Java page object class for this DOM."

},

{

"role": "assistant",

"content": "import org.openqa.selenium.By;\nimport org.openqa.selenium.WebDriver;\n\npublic class GeneratedPage {\n private WebDriver driver;\n\n private By companyNameField = By.id(\"createLeadForm_companyName\");\n private By firstNameField = By.id(\"createLeadForm_firstName\");\n private By lastNameField =

```

By.id(\"createLeadForm_lastName\");\n    private By submitButtons = By.id(\"ext-
gen652\");\n\n    public GeneratedPage(WebDriver driver) { this.driver = driver; }\n\n    /** Enter
companyName value */\n    public void enterCompanyName(String companyName) {\n
driver.findElement(companyNameField).sendKeys(companyName);\n    }\n\n    /** Enter firstName
value */\n    public void enterFirstName(String firstName) {\n
driver.findElement(firstNameField).sendKeys(firstName);\n    }\n\n    /** Enter lastName value */\n
public void enterLastName(String lastName) {\n
driver.findElement(lastNameField).sendKeys(lastName);\n    }\n\n    /** Click the submitButtons */\n
public void clickSubmitButtons() {\n        driver.findElement(submitButtons).click();\n    }\n}

}

}

```

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Selenium Java page object classes using provided
DOM information. Follow the framework guidelines: use SeleniumBase wrapper methods, proper
locators, and insert TODO comments if a mapping is missing. Make sure every page method includes
comments in the generated code. Generate only code grounded in the supplied DOM."
    }
  ],

```

```

{
  "role": "user",

  "content": "Given the following DOM structure:\n`html<input type='text' size='20'
autocomplete='off' id='ext-gen246' name='id' class='x-form-text x-form-field '
style='width: 214px;'> <input type='text' size='20' autocomplete='off' id='ext-gen248'
name='firstName' class='x-form-text x-form-field ' style='width: 214px;'> <input
type='text' size='20' autocomplete='off' id='ext-gen250' name='lastName' class='x-
form-text x-form-field ' style='width: 214px;'> <input type='text' size='20'
autocomplete='off' id='ext-gen252' name='companyName' class='x-form-text x-form-field
' style='width: 214px;'> <button class='x-btn-text' type='button' id='ext-gen334'>Find
Leads</button>\n\n===C#===\nusing OpenQA.Selenium;\n\nnamespace LeafTap.Pages\n{\n
/// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for
FindLeadsPage.\n    /// </summary>\n    public class FindLeadsPage\n    {\n        private readonly
IWebDriver driver;\n\n        public FindLeadsPage(IWebDriver driver)\n        {\n            this.driver =
driver;\n        }\n\n        private IWebElement IdInput => driver.FindElement(By.Name(\"id\"));\n
private IWebElement FirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n        private
IWebElement LastNameInput => driver.FindElement(By.Name(\"lastName\"));\n        private
IWebElement CompanyNameInput => driver.FindElement(By.Name(\"companyName\"));\n        private
IWebElement FindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-

```

```

space()='Find Leads']\");\n\n    /// <summary>\n    /// Enters a value in the id field.\n    ///
</summary>\n    public FindLeadsPage EnterId(string id)\n    {\n        IdInput.Clear();\n        IdInput.SendKeys(id);\n        return this;\n    }\n\n    /// <summary>\n    /// Enters a value in
the firstName field.\n    /// </summary>\n    public FindLeadsPage EnterFirstName(string
firstName)\n    {\n        FirstNameInput.Clear();\n        FirstNameInput.SendKeys(firstName);\n
return this;\n    }\n\n    /// <summary>\n    /// Enters a value in the lastName field.\n    ///
</summary>\n    public FindLeadsPage EnterLastName(string lastName)\n    {\n
        LastNameInput.Clear();\n        LastNameInput.SendKeys(lastName);\n        return this;\n
    }\n\n    /// <summary>\n    /// Enters a value in the companyName field.\n    ///
</summary>\n    public FindLeadsPage EnterCompanyName(string companyName)\n    {\n
        CompanyNameInput.Clear();\n        CompanyNameInput.SendKeys(companyName);\n        return
this;\n    }\n\n    /// <summary>\n    /// Clicks the Find Leads element.\n    ///
</summary>\n    public FindLeadsPage ClickFindLeads()\n    {\n        FindLeadsButton.Click();\n
return this;\n    }\n}\n\n```\nGenerate a Selenium Java page object class for this DOM."

```

```

},

```

```

{

```

```

    "role": "assistant",

```

```

    "content": "import org.openqa.selenium.By;\nimport org.openqa.selenium.WebDriver;\n\npublic
class GeneratedPage {\n    private WebDriver driver;\n\n    private By idField = By.id(\"ext-
gen246\");\n    private By firstNameField = By.id(\"ext-gen248\");\n    private By lastNameField =
By.id(\"ext-gen250\");\n    private By companyNameField = By.id(\"ext-gen252\");\n    private By
extGen334Button = By.id(\"ext-gen334\");\n\n    public GeneratedPage(WebDriver driver) {\n
this.driver = driver;\n    }\n\n    /** Enter id value */\n    public void enterId(String id) {\n
driver.findElement(idField).sendKeys(id);\n    }\n\n    /** Enter firstName value */\n    public void
enterFirstName(String firstName) {\n        driver.findElement(firstNameField).sendKeys(firstName);\n
    }\n\n    /** Enter lastName value */\n    public void enterLastName(String lastName) {\n
driver.findElement(lastNameField).sendKeys(lastName);\n    }\n\n    /** Enter companyName value
*/\n    public void enterCompanyName(String companyName) {\n
driver.findElement(companyNameField).sendKeys(companyName);\n    }\n\n    /** Click the ext-
gen334 */\n    public void clickExtGen334() {\n        driver.findElement(extGen334Button).click();\n
    }\n}

```

```

}

```

```

]

```

```

}

```

```

{

```

```

    "messages": [

```

```

    {

```

```

        "role": "system",

```

```

        "content": "You are an expert in generating Selenium Java page object classes using provided
DOM information. Follow the framework guidelines: use SeleniumBase wrapper methods, proper

```

locators, and insert TODO comments if a mapping is missing. Make sure every page method includes comments in the generated code. Generate only code grounded in the supplied DOM."

},

{

"role": "user",

"content": "Given the following DOM structure:\n```\nhtml\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen255\" name=\"firstName\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<input type=\"text\" size=\"20\" autocomplete=\"off\" id=\"ext-gen253\" name=\"id\" class=\"x-form-text x-form-field\" style=\"width: 214px;\">\n<button class=\"x-btn-text\" type=\"button\" id=\"ext-gen341\">Find Leads</button>\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for FindLeadsUpdatedPage.\n /// </summary>\n public class FindLeadsUpdatedPage\n {\n private readonly IWebDriver driver;\n\n public FindLeadsUpdatedPage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement IdInput => driver.FindElement(By.XPath(\"//input[@name='id']\"));\n private IWebElement FirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n private IWebElement IdInput2 => driver.FindElement(By.XPath(\"//input[@name='id']\"));\n private IWebElement IdInput3 => driver.FindElement(By.XPath(\"//input[@name='id']\"));\n private IWebElement FindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-space()='Find Leads']\"));\n\n /// <summary>\n /// Enters a value in the id field.\n /// </summary>\n public FindLeadsUpdatedPage EnterId(string id)\n {\n IdInput.Clear();\n IdInput.SendKeys(id);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the firstName field.\n /// </summary>\n public FindLeadsUpdatedPage EnterFirstName(string firstName)\n {\n FirstNameInput.Clear();\n FirstNameInput.SendKeys(firstName);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the id field.\n /// </summary>\n public FindLeadsUpdatedPage EnterId2(string id)\n {\n IdInput2.Clear();\n IdInput2.SendKeys(id);\n return this;\n }\n\n /// <summary>\n /// Enters a value in the id field.\n /// </summary>\n public FindLeadsUpdatedPage EnterId3(string id)\n {\n IdInput3.Clear();\n IdInput3.SendKeys(id);\n return this;\n }\n\n /// <summary>\n /// Clicks the Find Leads element.\n /// </summary>\n public FindLeadsUpdatedPage ClickFindLeads()\n {\n FindLeadsButton.Click();\n return this;\n }\n }\n}\n```\nGenerate a Selenium Java page object class for this DOM."

},

{

"role": "assistant",

"content": "import org.openqa.selenium.By;\nimport org.openqa.selenium.WebDriver;\n\npublic class GeneratedPage {\n private WebDriver driver;\n\n private By idField = By.id(\"ext-gen253\");\n private By firstNameField = By.id(\"ext-gen255\");\n private By extGen341Button =


```

By.id(\"ext-gen341\");\n\n public GeneratedPage(WebDriver driver) { this.driver = driver; }\n\n /** Enter id value */\n public void enterId(String id) {\n driver.findElement(idField).sendKeys(id);\n }\n\n /** Enter firstName value */\n public void enterFirstName(String firstName) {\n driver.findElement(firstNameField).sendKeys(firstName);\n }\n\n /** Click the ext-gen341 */\n public void clickExtGen341() {\n driver.findElement(extGen341Button).click();\n }\n\n }\n\n ]\n\n }

```

```

{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Selenium Java page object classes using provided DOM information. Follow the framework guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO comments if a mapping is missing. Make sure every page method includes comments in the generated code. Generate only code grounded in the supplied DOM."
    },
    {
      "role": "user",
      "content": "Given the following DOM structure:\n```html\n<a style=\"color: black;\" href=\"/crmsfa/control/main?externalLoginKey=EL601288709152\">\nCRM/SFA\n</a>\n<input class=\"decorativeSubmit\" style=\"width:65px; margin-left:1px;\" type=\"submit\" value=\"Logout\">\n\n===C#HARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for HomePage.\n /// </summary>\n public class HomePage\n {\n private readonly IWebDriver driver;\n\n public HomePage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement CRMSFALink => driver.FindElement(By.LinkText(\"CRM/SFA\"));\n private IWebElement LogoutButton => driver.FindElement(By.XPath(\"//input[@value='Logout']\"));\n\n /// <summary>\n /// Clicks the CRM/SFA element.\n /// </summary>\n public HomePage ClickCRMSFA()\n {\n CRMSFALink.Click();\n return this;\n }\n\n /// <summary>\n /// Clicks the Logout element.\n /// </summary>\n public HomePage ClickLogout()\n {\n LogoutButton.Click();\n return this;\n }\n }\n}\n```\nGenerate a Selenium Java page object class for this DOM."
    },
    {
      "role": "assistant",

```

```

"content": "import org.openqa.selenium.By;\nimport org.openqa.selenium.WebDriver;\n\npublic
class GeneratedPage {\n  private WebDriver driver;\n\n  private By cRMSFAButton =
By.cssSelector(\"a\");\n  private By logoutButton = By.cssSelector(\"input[type=\"submit\"]\");\n\n
public GeneratedPage(WebDriver driver) { this.driver = driver; }\n\n  /** Click the CRMSFA */\n
public void clickCRMSFA() {\n    driver.findElement(cRMSFAButton).click();\n  }\n\n  /** Click the
Logout */\n  public void clickLogout() {\n    driver.findElement(logoutButton).click();\n  }\n}"
}
]
}

```

```

{
  "messages": [
    {
      "role": "system",

```

"content": "You are an expert in generating Selenium Java page object classes using provided DOM information. Follow the framework guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO comments if a mapping is missing. Make sure every page method includes comments in the generated code. Generate only code grounded in the supplied DOM."

```

},
{
  "role": "user",

  "content": "Given the following DOM structure:\n```\nhtml\n<input class=\"inputLogin\"
type=\"text\" id=\"username\" name=\"USERNAME\" size=\"50\">\n<input class=\"inputLogin\"
type=\"password\" id=\"password\" name=\"PASSWORD\" size=\"50\">\n<input
class=\"decorativeSubmit\" type=\"submit\" value=\"Login\">\n\n===CSHARP===\nusing
OpenQA.Selenium;\n\nnamespace LeafTaps.Pages{\n\n  /// <summary>\n  /// Page object
generated strictly from the supplied HTML DOM for LoginPage.\n  /// </summary>\n  public class
LoginPage\n  {\n    private readonly IWebDriver driver;\n\n    public LoginPage(IWebDriver
driver)\n    {\n      this.driver = driver;\n    }\n\n    private IWebElement USERNAMEInput =>
driver.FindElement(By.Id(\"username\"));\n    private IWebElement PASSWORDPasswordInput =>
driver.FindElement(By.Id(\"password\"));\n    private IWebElement LoginButton =>
driver.FindElement(By.XPath(\"//input[@value='Login']\"));\n\n    /// <summary>\n    /// Enters
a value in the USERNAME field.\n    /// </summary>\n    public LoginPage
EnterUSERNAME(string uSERNAME)\n    {\n      USERNAMEInput.Clear();\n      USERNAMEInput.SendKeys(uSERNAME);\n      return this;\n    }\n\n    /// <summary>\n    /// Enters a value in the PASSWORD field.\n    /// </summary>\n    public LoginPage
EnterPASSWORD(string pASSWORD)\n    {\n      PASSWORDPasswordInput.Clear();\n      PASSWORDPasswordInput.SendKeys(pASSWORD);\n      return this;\n    }\n\n    ///
<summary>\n    /// Clicks the Login element.\n    /// </summary>\n    public LoginPage
ClickLogin()\n    {\n      LoginButton.Click();\n      return this;\n    }\n  }\n}\n```\nGenerate a
Selenium Java page object class for this DOM."

```

```
},  
  
{  
    "role": "assistant",  
  
    "content": "import org.openqa.selenium.By;\nimport org.openqa.selenium.WebDriver;\n\npublic  
class GeneratedPage {\n    private WebDriver driver;\n\n    private By usernameField =  
By.id(\"username\");\n    private By passwordField = By.id(\"password\");\n    private By loginButton  
= By.cssSelector(\"input[type=\"submit\"]\");\n\n    public GeneratedPage(WebDriver driver) {\n        this.driver = driver; \n    }\n\n    /** Enter username value */\n    public void enterUsername(String  
username) {\n        driver.findElement(usernameField).sendKeys(username);\n    }\n\n    /** Enter  
password value */\n    public void enterPassword(String password) {\n        driver.findElement(passwordField).sendKeys(password);\n    }\n\n    /** Click the Login */\n    public  
void clickLogin() {\n        driver.findElement(loginButton).click();\n    }\n}  
  
]  
  
}  
  
{  
  
    "messages": [  
  
        {  
  
            "role": "system",  
  
            "content": "You are an expert in generating Selenium Java page object classes using provided  
DOM information. Follow the framework guidelines: use SeleniumBase wrapper methods, proper  
locators, and insert TODO comments if a mapping is missing. Make sure every page method includes  
comments in the generated code. Generate only code grounded in the supplied DOM."  
  
        },  
  
        {  
  
            "role": "user",  
  
            "content": "Given the following DOM structure:\n```\nhtml\n<a  
href=\"/crmsfa/control/leadsMain\" id=\"ext-gen614\">Leads</a>\n\n===C#SHARP===\nusing  
OpenQA.Selenium;\nnamespace LeafTaps.Pages{\n    /// <summary>\n    /// Page object  
generated strictly from the supplied HTML DOM for MyHomePage.\n    /// </summary>\n    public  
class MyHomePage\n    {\n        private readonly IWebDriver driver;\n\n        public  
MyHomePage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private  
IWebElement LeadsLink => driver.FindElement(By.LinkText(\"Leads\"));\n\n        /// <summary>\n        /// Clicks the Leads element.\n        /// </summary>\n        public MyHomePage ClickLeads()\n        {\n            LeadsLink.Click();\n            return this;\n        }\n    }\n}\n```\nGenerate a Selenium Java page object  
class for this DOM."
```

```
{
  "role": "assistant",

  "content": "import org.openqa.selenium.By;\nimport org.openqa.selenium.WebDriver;\n\npublic
class GeneratedPage {\n  private WebDriver driver;\n\n  private By extGen614Button = By.id(\"ext-
gen614\");\n\n  public GeneratedPage(WebDriver driver) { this.driver = driver; }\n\n  /** Click the
ext-gen614 *\n  public void clickExtGen614() {\n
driver.findElement(extGen614Button).click();\n  }\n}"

}

]
```

```
{
  "messages": [

    {

      "role": "system",

      "content": "You are an expert in generating Selenium Java page object classes using provided
DOM information. Follow the framework guidelines: use SeleniumBase wrapper methods, proper
locators, and insert TODO comments if a mapping is missing. Make sure every page method includes
comments in the generated code. Generate only code grounded in the supplied DOM."
```

```
    },

    {

      "role": "user",

      "content": "Given the following DOM structure:\n```html\n<a
href=\"/crmsfa/control/createLeadForm\" id=\"ext-gen876\">Create
Lead</a>\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n  ///
<summary>\n  /// Page object generated strictly from the supplied HTML DOM for MyLeadsPage.\n
/// </summary>\n  public class MyLeadsPage\n  {\n    private readonly IWebDriver driver;\n\n
public MyLeadsPage(IWebDriver driver)\n    {\n      this.driver = driver;\n    }\n\n    private
IWebElement CreateLeadLink => driver.FindElement(By.LinkText(\"Create Lead\"));\n\n    ///
<summary>\n    /// Clicks the Create Lead element.\n    /// </summary>\n    public
MyLeadsPage ClickCreateLead()\n    {\n      CreateLeadLink.Click();\n      return this;\n    }\n
}\n}\n```\nGenerate a Selenium Java page object class for this DOM."
```

```
    },

    {

      "role": "assistant",

      "content": "import org.openqa.selenium.By;\nimport org.openqa.selenium.WebDriver;\n\npublic
class GeneratedPage {\n  private WebDriver driver;\n\n  private By extGen876Button = By.id(\"ext-
```

```
gen876\");\n\n public GeneratedPage(WebDriver driver) { this.driver = driver; }\n\n /** Click the
ext-gen876 */\n public void clickExtGen876() {\n
driver.findElement(extGen876Button).click();\n } \n}"
```

```

}
]
}

```

```
{
  "messages": [
    {
      "role": "system",
      "content": "You are an expert in generating Selenium Java page object classes using provided
DOM information. Follow the framework guidelines: use SeleniumBase wrapper methods, proper
locators, and insert TODO comments if a mapping is missing. Make sure every page method includes
comments in the generated code. Generate only code grounded in the supplied DOM."
```

```
    },
    {
      "role": "user",
      "content": "Given the following DOM structure:\n```\nhtml\n<input class=\"XdijitInputField
dijitInputFieldValidationNormal\" type=\"text\" autocomplete=\"off\"
name=\"ComboBox_productId\" dojoattachevent=\"onkeypress, onkeyup, onfocus, onblur,
compositionend\" dojoattachpoint=\"textbox, focusNode\" id=\"ComboBox_productId\"
tabindex=\"1\" size=\"15\" maxlength=\"50\" wairole=\"combobox\" role=\"wairole:combobox\"
value=\"\" valuenow=\"\" invalid=\"false\" disabled=\"false\">\n<input id=\"quantity\"
name=\"quantity\" type=\"text\" size=\"10\" maxlength=\"\" class=\"inputBox\" value=\"1\"
onchange=\"\" tabindex=\"2\">\n<a class=\"subMenuButton\"
href=\"javascript:document.cartform.submit();\" id=\"ext-
gen173\">Update</a>\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace
LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML
DOM for OrderEntryHeaderPage.\n /// </summary>\n public class OrderEntryHeaderPage\n {\n
private readonly IWebDriver driver;\n\n public OrderEntryHeaderPage(IWebDriver driver)\n
{\n this.driver = driver;\n } \n\n private IWebElement ProductIdInput =>
driver.FindElement(By.Id(\"ComboBox_productId\"));\n private IWebElement QuantityInput =>
driver.FindElement(By.Id(\"quantity\"));\n private IWebElement UpdateLink =>
driver.FindElement(By.LinkText(\"Update\"));\n\n /// <summary>\n /// Enters a value in the
productId field.\n /// </summary>\n public OrderEntryHeaderPage EnterProductId(string
productId)\n {\n ProductIdInput.Clear();\n ProductIdInput.SendKeys(productId);\n
return this;\n } \n\n /// <summary>\n /// Enters a value in the quantity field.\n ///
</summary>\n public OrderEntryHeaderPage EnterQuantity(string quantity)\n {\n
QuantityInput.Clear();\n QuantityInput.SendKeys(quantity);\n return this;\n } \n\n
/// <summary>\n /// Clicks the Update element.\n /// </summary>\n public
```

```
OrderEntryHeaderPage ClickUpdate()\n    {\n        UpdateLink.Click();\n        return this;\n    }\n}\n```\nGenerate a Selenium Java page object class for this DOM."
```

```
},\n{\n    "role": "assistant",\n\n    "content": "import org.openqa.selenium.By;\nimport org.openqa.selenium.WebDriver;\n\npublic class GeneratedPage {\n    private WebDriver driver;\n\n    private By comboBoxProductIdField =\n        By.id(\"ComboBox_productId\");\n    private By quantityField = By.id(\"quantity\");\n    private By extGen173Button = By.id(\"ext-gen173\");\n\n    public GeneratedPage(WebDriver driver) {\n        this.driver = driver; }\n\n    /** Enter ComboBox_productId value */\n    public void enterComboBoxProductId(String comboBoxProductId) {\n        driver.findElement(comboBoxProductIdField).sendKeys(comboBoxProductId);\n    }\n\n    /** Enter quantity value */\n    public void enterQuantity(String quantity) {\n        driver.findElement(quantityField).sendKeys(quantity);\n    }\n\n    /** Click the ext-gen173 */\n    public void clickExtGen173() {\n        driver.findElement(extGen173Button).click();\n    }\n}\n}\n}
```

```
{\n    "messages": [\n\n        {\n\n            "role": "system",\n\n            "content": "You are an expert in generating Selenium Java page object classes using provided DOM information. Follow the framework guidelines: use SeleniumBase wrapper methods, proper locators, and insert TODO comments if a mapping is missing. Make sure every page method includes comments in the generated code. Generate only code grounded in the supplied DOM."
```



```

gen841\">TCS</a></div>\n<div class=\"x-grid3-cell-inner x-grid3-col-lastName\"
unselectable=\"on\" id=\"ext-gen842\"><a class=\"linktext\"
href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen874\">Abd</a></div>\n<div
class=\"x-grid3-cell-inner x-grid3-col-companyName\" unselectable=\"on\" id=\"ext-gen857\"><a
class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen858\">M
S</a></div>\n\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n
/// <summary>\n /// Page object generated strictly from the supplied HTML DOM for
ViewLeadPage.\n /// </summary>\n public class ViewLeadPage\n {\n private readonly
IWebDriver driver;\n\n public ViewLeadPage(IWebDriver driver)\n {\n this.driver =
driver;\n }\n\n private IWebElement PartyIdText => driver.FindElement(By.Id(\"ext-
gen781\"));\n private IWebElement Value10196Link =>
driver.FindElement(By.LinkText(\"10196\"));\n private IWebElement FirstNameText =>
driver.FindElement(By.Id(\"ext-gen840\"));\n private IWebElement TCSLink =>
driver.FindElement(By.LinkText(\"TCS\"));\n private IWebElement LastNameText =>
driver.FindElement(By.Id(\"ext-gen842\"));\n private IWebElement AbdLink =>
driver.FindElement(By.LinkText(\"Abd\"));\n private IWebElement CompanyNameText =>
driver.FindElement(By.Id(\"ext-gen857\"));\n private IWebElement MSLink =>
driver.FindElement(By.LinkText(\"M S\"));\n\n /// <summary>\n /// Gets the visible text from
the partyId element.\n /// </summary>\n public string GetPartyIdText()\n {\n
return PartyIdText.Text;\n }\n\n /// <summary>\n /// Checks whether the partyId
element is displayed.\n /// </summary>\n public bool IsPartyIdVisible()\n {\n
return PartyIdText.Displayed;\n }\n\n /// <summary>\n /// Clicks the 10196 element.\n
/// </summary>\n public ViewLeadPage ClickValue10196()\n {\n
Value10196Link.Click();\n return this;\n }\n\n /// <summary>\n /// Gets the visible
text from the firstName element.\n /// </summary>\n public string GetFirstNameText()\n
{\n return FirstNameText.Text;\n }\n\n /// <summary>\n /// Checks whether the
firstName element is displayed.\n /// </summary>\n public bool IsFirstNameVisible()\n
{\n return FirstNameText.Displayed;\n }\n\n /// <summary>\n /// Clicks the TCS
element.\n /// </summary>\n public ViewLeadPage ClickTCS()\n {\n
TCSLink.Click();\n return this;\n }\n\n /// <summary>\n /// Gets the visible text
from the lastName element.\n /// </summary>\n public string GetLastNameText()\n {\n
return LastNameText.Text;\n }\n\n /// <summary>\n /// Checks whether the lastName
element is displayed.\n /// </summary>\n public bool IsLastNameVisible()\n {\n
return LastNameText.Displayed;\n }\n\n /// <summary>\n /// Clicks the Abd element.\n
/// </summary>\n public ViewLeadPage ClickAbd()\n {\n
AbdLink.Click();\n return this;\n }\n\n /// <summary>\n /// Gets the visible text from the companyName
element.\n /// </summary>\n public string GetCompanyNameText()\n {\n return
CompanyNameText.Text;\n }\n\n /// <summary>\n /// Checks whether the
companyName element is displayed.\n /// </summary>\n public bool
IsCompanyNameVisible()\n {\n return CompanyNameText.Displayed;\n }\n\n ///
<summary>\n /// Clicks the M S element.\n /// </summary>\n public ViewLeadPage
ClickMS()\n {\n MSLink.Click();\n return this;\n }\n }\n}\n\nGenerate a
Selenium Java page object class for this DOM."

```

```

},

```

```

{

```

```

    "role": "assistant",

```



```
"content": "import org.openqa.selenium.By;\nimport org.openqa.selenium.WebDriver;\n\npublic class GeneratedPage {\n    private WebDriver driver;\n\n    private By extGen839Button = By.id(\"ext-gen839\");\n    private By extGen841Button = By.id(\"ext-gen841\");\n    private By extGen874Button = By.id(\"ext-gen874\");\n    private By extGen858Button = By.id(\"ext-gen858\");\n\n    public GeneratedPage(WebDriver driver) { this.driver = driver; }\n\n    /** Click the ext-gen839 */\n    public void clickExtGen839() {\n        driver.findElement(extGen839Button).click();\n    }\n\n    /** Click the ext-gen841 */\n    public void clickExtGen841() {\n        driver.findElement(extGen841Button).click();\n    }\n\n    /** Click the ext-gen874 */\n    public void clickExtGen874() {\n        driver.findElement(extGen874Button).click();\n    }\n\n    /** Click the ext-gen858 */\n    public void clickExtGen858() {\n        driver.findElement(extGen858Button).click();\n    }\n}\n\n}\n\n]
```

```
{\n\n    "messages": [\n\n        {\n\n            "role": "system",\n\n            "content": "You are an expert in generating Playwright TypeScript page object classes using provided DOM information. Use @playwright/test conventions, proper locators, async methods, and insert TODO comments only when a mapping is missing. Make sure every page method includes JSDoc comments in the generated code. Generate only code grounded in the supplied DOM." \n\n        },\n\n        {\n\n            "role": "user",\n\n            "content": "Given the following DOM structure:\n<html>\n<input type=\"text\" class=\"inputBox\" name=\"companyName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_companyName\">\n<input type=\"text\" class=\"inputBox\" name=\"firstName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_firstName\">\n<input type=\"text\" class=\"inputBox\" name=\"lastName\" size=\"30\" maxlength=\"100\" id=\"createLeadForm_lastName\">\n<input type=\"submit\" class=\"smallSubmit\" name=\"submitButton\" value=\"Create Lead\" id=\"ext-gen652\">\n\n====CSHARP====\nusing OpenQA.Selenium;\nnamespace LeafTaps.Pages{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for EditLeadPage.\n    /// </summary>\n    public class EditLeadPage{\n        private readonly IWebDriver driver;\n\n        public EditLeadPage(IWebDriver driver){\n            this.driver = driver;\n        }\n\n        private IWebElement CompanyNameInput =>\n            driver.FindElement(By.Id(\"createLeadForm_companyName\"));\n        private IWebElement FirstNameInput => driver.FindElement(By.Id(\"createLeadForm_firstName\"));\n        private IWebElement LastNameInput => driver.FindElement(By.Id(\"createLeadForm_lastName\"));\n        private IWebElement SubmitButton => driver.FindElement(By.Id(\"ext-gen652\"));\n    }\n}\n\n}
```

```

IWebElement LastNameInput => driver.FindElement(By.Id(\"createLeadForm_lastName\"));\n
private IWebElement CreateLeadButton => driver.FindElement(By.XPath(\"//input[@value='Create\n
Lead']\"));\n\n    /// <summary>\n    /// Enters a value in the companyName field.\n    ///\n    </summary>\n    public EditLeadPage EnterCompanyName(string companyName)\n    {\n    CompanyNameInput.Clear();\n    CompanyNameInput.SendKeys(companyName);\n    return\n    this;\n    }\n\n    /// <summary>\n    /// Enters a value in the firstName field.\n    ///\n    </summary>\n    public EditLeadPage EnterFirstName(string firstName)\n    {\n    FirstNameInput.Clear();\n    FirstNameInput.SendKeys(firstName);\n    return this;\n    }\n\n    /// <summary>\n    /// Enters a value in the lastName field.\n    /// </summary>\n    public EditLeadPage EnterLastName(string lastName)\n    {\n    LastNameInput.Clear();\n    LastNameInput.SendKeys(lastName);\n    return this;\n    }\n\n    /// <summary>\n    /// Clicks the Create Lead element.\n    /// </summary>\n    public EditLeadPage ClickCreateLead()\n    {\n    CreateLeadButton.Click();\n    return this;\n    }\n}\n\nGenerate a Playwright\nTypeScript page object class for this DOM."

```

```

},

```

```

{

```

```

    "role": "assistant",

```

```

    "content": "import { Page, Locator } from '@playwright/test';\n\nexport class GeneratedPage {\n  readonly page: Page;\n  readonly companyNameInput: Locator;\n  readonly firstNameInput: Locator;\n  readonly lastNameInput: Locator;\n  readonly submitButtonButton: Locator;\n\n  constructor(page: Page) {\n    this.page = page;\n    this.companyNameInput =\n    page.locator(\"#createLeadForm_companyName\");\n    this.firstNameInput =\n    page.locator(\"#createLeadForm_firstName\");\n    this.lastNameInput =\n    page.locator(\"#createLeadForm_lastName\");\n    this.submitButtonButton = page.locator(\"#ext-\n    gen652\");\n  }\n\n  /** Fill the companyName field */\n  async\n  enterCompanyName(companyName: string): Promise<void> {\n    await\n    this.companyNameInput.fill(companyName);\n  }\n\n  /** Fill the firstName field */\n  async\n  enterFirstName(firstName: string): Promise<void> {\n    await this.firstNameInput.fill(firstName);\n  }\n\n  /** Fill the lastName field */\n  async\n  enterLastName(lastName: string): Promise<void> {\n    await this.lastNameInput.fill(lastName);\n  }\n\n  /** Click the submitButton */\n  async\n  clickSubmitButton(): Promise<void> {\n    await this.submitButtonButton.click();\n  }\n}

```

```

}

```

```

]

```

```

}

```

```

{

```

```

    "messages": [

```

```

    {

```

```

        "role": "system",

```

```

        "content": "You are an expert in generating Playwright TypeScript page object classes using\n        provided DOM information. Use @playwright/test conventions, proper locators, async methods, and

```

insert TODO comments only when a mapping is missing. Make sure every page method includes JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."

```
    },  
    {  
      "role": "user",  
      "content": "Given the following DOM structure:\n`html<input type='text' size='20'\nautocomplete='off' id='ext-gen246' name='id' class=' x-form-text x-form-field '\nstyle='width: 214px;'/> <input type='text' size='20' autocomplete='off' id='ext-gen248'\nname='firstName' class=' x-form-text x-form-field ' style='width: 214px;'/> <input\ntype='text' size='20' autocomplete='off' id='ext-gen250' name='lastName' class=' x-\nform-text x-form-field ' style='width: 214px;'/> <input type='text' size='20'\nautocomplete='off' id='ext-gen252' name='companyName' class=' x-form-text x-form-field\n' style='width: 214px;'/> <button class='x-btn-text' type='button' id='ext-gen334'\n>Find Leads</button>\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for\n    FindLeadsPage.\n    /// </summary>\n    public class FindLeadsPage\n    {\n        private readonly\n        IWebDriver driver;\n        public FindLeadsPage(IWebDriver driver)\n        {\n            this.driver =\n            driver;\n        }\n        private IWebElement IdInput => driver.FindElement(By.Name(\"id\"));\n        private IWebElement FirstNameInput => driver.FindElement(By.Name(\"firstName\"));\n        private IWebElement LastNameInput => driver.FindElement(By.Name(\"lastName\"));\n        private IWebElement CompanyNameInput => driver.FindElement(By.Name(\"companyName\"));\n        private IWebElement FindLeadsButton => driver.FindElement(By.XPath(\"//button[normalize-\nspace()='Find Leads']\"));\n        \n        /// <summary>\n        /// Enters a value in the id field.\n        /// </summary>\n        public FindLeadsPage EnterId(string id)\n        {\n            IdInput.Clear();\n            IdInput.SendKeys(id);\n            return this;\n        }\n        \n        /// <summary>\n        /// Enters a value in\n        the firstName field.\n        /// </summary>\n        public FindLeadsPage EnterFirstName(string\n        firstName)\n        {\n            FirstNameInput.Clear();\n            FirstNameInput.SendKeys(firstName);\n            return this;\n        }\n        \n        /// <summary>\n        /// Enters a value in the lastName field.\n        /// </summary>\n        public FindLeadsPage EnterLastName(string lastName)\n        {\n            LastNameInput.Clear();\n            LastNameInput.SendKeys(lastName);\n            return this;\n        }\n        \n        /// <summary>\n        /// Enters a value in the companyName field.\n        /// </summary>\n        public FindLeadsPage EnterCompanyName(string companyName)\n        {\n            CompanyNameInput.Clear();\n            CompanyNameInput.SendKeys(companyName);\n            return\n            this;\n        }\n        \n        /// <summary>\n        /// Clicks the Find Leads element.\n        /// </summary>\n        public FindLeadsPage ClickFindLeads()\n        {\n            FindLeadsButton.Click();\n            return this;\n        }\n    }\n}\n`  
Generate a Playwright TypeScript page object class for this DOM."`  
    },  
    {  
      "role": "assistant",  
      "content": "import { Page, Locator } from '@playwright/test';\n\nexport class GeneratedPage {\n  readonly page: Page;\n  readonly idInput: Locator;\n  readonly firstNameInput: Locator;\n  readonly lastNameInput: Locator;\n  readonly companyNameInput: Locator;\n  readonly\n  extGen334Button: Locator;\n\n  constructor(page: Page) {\n    this.page = page;\n    this.idInput
```

```

= page.locator("#ext-gen246");\n    this.firstNameInput = page.locator("#ext-gen248");\n
this.lastNameInput = page.locator("#ext-gen250");\n    this.companyNameInput =
page.locator("#ext-gen252");\n    this.extGen334Button = page.locator("#ext-gen334");\n
}\n\n /** Fill the id field */\n async enterId(id: string): Promise<void> {\n    await
this.idInput.fill(id);\n  }\n\n /** Fill the firstName field */\n async enterFirstName(firstName:
string): Promise<void> {\n    await this.firstNameInput.fill(firstName);\n  }\n\n /** Fill the
lastName field */\n async enterLastName(lastName: string): Promise<void> {\n    await
this.lastNameInput.fill(lastName);\n  }\n\n /** Fill the companyName field */\n async
enterCompanyName(companyName: string): Promise<void> {\n    await
this.companyNameInput.fill(companyName);\n  }\n\n /** Click the ext-gen334 */\n async
clickExtGen334(): Promise<void> {\n    await this.extGen334Button.click();\n  }\n}"
}
]
}

```

```

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Playwright TypeScript page object classes using
provided DOM information. Use @playwright/test conventions, proper locators, async methods, and
insert TODO comments only when a mapping is missing. Make sure every page method includes
JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."

    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n`html<input type='text' size='20'
autocomplete='off' id='ext-gen253' name='id' class='x-form-text x-form-field'
style='width: 214px;'>\n<input type='text' size='20' autocomplete='off' id='ext-gen255'
name='firstName' class='x-form-text x-form-field' style='width: 214px;'>\n<input
type='text' size='20' autocomplete='off' id='ext-gen253' name='id' class='x-form-text
x-form-field' style='width: 214px;'>\n<input type='text' size='20' autocomplete='off'
id='ext-gen253' name='id' class='x-form-text x-form-field' style='width:
214px;'>\n<button class='x-btn-text' type='button' id='ext-gen341'>Find
Leads</button>\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n
/// <summary>\n /// Page object generated strictly from the supplied HTML DOM for
FindLeadsUpdatedPage.\n /// </summary>\n public class FindLeadsUpdatedPage\n {\n
private readonly IWebDriver driver;\n\n    public FindLeadsUpdatedPage(IWebDriver driver)\n
{\n    this.driver = driver;\n  }\n\n    private IWebElement IdInput =>
driver.FindElement(By.XPath("//input[@name='id'])[1]")); \n    private IWebElement
FirstNameInput => driver.FindElement(By.Name("firstName")); \n    private IWebElement IdInput2

```

```

=> driver.FindElement(By.XPath("//input[@name='id']")); private IWebElement IdInput3
=> driver.FindElement(By.XPath("//input[@name='id']")); private IWebElement
FindLeadsButton => driver.FindElement(By.XPath("//button[normalize-space()='Find Leads']"));
/// <summary>\n    /// Enters a value in the id field.\n    /// </summary>\n    public
FindLeadsUpdatedPage EnterId(string id)\n    {\n        IdInput.Clear();\n
IdInput.SendKeys(id);\n        return this;\n    }\n    /// <summary>\n    /// Enters a value in
the firstName field.\n    /// </summary>\n    public FindLeadsUpdatedPage
EnterFirstName(string firstName)\n    {\n        FirstNameInput.Clear();\n
FirstNameInput.SendKeys(firstName);\n        return this;\n    }\n    /// <summary>\n    ///
Enters a value in the id field.\n    /// </summary>\n    public FindLeadsUpdatedPage
EnterId2(string id)\n    {\n        IdInput2.Clear();\n        IdInput2.SendKeys(id);\n        return
this;\n    }\n    /// <summary>\n    /// Enters a value in the id field.\n    /// </summary>\n
public FindLeadsUpdatedPage EnterId3(string id)\n    {\n        IdInput3.Clear();\n
IdInput3.SendKeys(id);\n        return this;\n    }\n    /// <summary>\n    /// Clicks the Find
Leads element.\n    /// </summary>\n    public FindLeadsUpdatedPage ClickFindLeads()\n
{\n        FindLeadsButton.Click();\n        return this;\n    }\n}\n\nGenerate a Playwright
TypeScript page object class for this DOM."

```

```

},

```

```

{

```

```

    "role": "assistant",

```

```

    "content": "import { Page, Locator } from '@playwright/test';\n\nexport class GeneratedPage {\n
readonly page: Page;\n    readonly idInput: Locator;\n    readonly firstNameInput: Locator;\n
readonly extGen341Button: Locator;\n\n    constructor(page: Page) {\n        this.page = page;\n
this.idInput = page.locator("#ext-gen253");\n        this.firstNameInput = page.locator("#ext-
gen255");\n        this.extGen341Button = page.locator("#ext-gen341");\n    }\n\n    /** Fill the id
field */\n    async enterId(id: string): Promise<void> {\n        await this.idInput.fill(id);\n    }\n\n    /**
Fill the firstName field */\n    async enterFirstName(firstName: string): Promise<void> {\n        await
this.firstNameInput.fill(firstName);\n    }\n\n    /** Click the ext-gen341 */\n    async
clickExtGen341(): Promise<void> {\n        await this.extGen341Button.click();\n    }\n}"

```

```

}

```

```

]

```

```

}

```

```

{

```

```

    "messages": [

```

```

    {

```

```

        "role": "system",

```

```

        "content": "You are an expert in generating Playwright TypeScript page object classes using
provided DOM information. Use @playwright/test conventions, proper locators, async methods, and
insert TODO comments only when a mapping is missing. Make sure every page method includes
JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."

```

```

    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n```\nhtml\n<a style=\"color: black;\"\nhref=\"/crmsfa/control/main?externalLoginKey=EL601288709152\"\n>\nCRM/SFA\n</a>\n<input\n  class=\"decorativeSubmit\"\n  style=\"width:65px; margin-left:1px;\"\n  type=\"submit\"\n  value=\"Logout\"\n>\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace\nLeafTaps.Pages\n{\n  /// <summary>\n  /// Page object generated strictly from the supplied HTML\n  DOM for HomePage.\n  /// </summary>\n  public class HomePage\n  {\n    private readonly\n    IWebDriver driver;\n\n    public HomePage(IWebDriver driver)\n    {\n      this.driver =\n      driver;\n    }\n\n    private IWebElement CRMSFALink =>\n    driver.FindElement(By.LinkText(\"CRM/SFA\"));\n    private IWebElement LogoutButton =>\n    driver.FindElement(By.XPath(\"//input[@value='Logout']\"));\n\n    /// <summary>\n    /// Clicks\n    the CRM/SFA element.\n    /// </summary>\n    public HomePage ClickCRMSFA()\n    {\n      CRMSFALink.Click();\n      return this;\n    }\n\n    /// <summary>\n    /// Clicks the Logout\n    element.\n    /// </summary>\n    public HomePage ClickLogout()\n    {\n      LogoutButton.Click();\n      return this;\n    }\n  }\n}\n```\nGenerate a Playwright TypeScript\npage object class for this DOM."

    },
    {
      "role": "assistant",

      "content": "import { Page, Locator } from '@playwright/test';\n\nexport class GeneratedPage {\n  readonly page: Page;\n  readonly cRMSFAButton: Locator;\n  readonly logoutButton: Locator;\n\n  constructor(page: Page) {\n    this.page = page;\n    this.cRMSFAButton = page.locator(\"a\");\n    this.logoutButton = page.locator(\"input[type='submit']\");\n  }\n\n  /** Click the CRMSFA */\n  async clickCRMSFA(): Promise<void> {\n    await this.cRMSFAButton.click();\n  }\n\n  /** Click the\n  Logout */\n  async clickLogout(): Promise<void> {\n    await this.logoutButton.click();\n  }\n}"

    }
  ]
}

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Playwright TypeScript page object classes using\nprovided DOM information. Use @playwright/test conventions, proper locators, async methods, and\ninsert TODO comments only when a mapping is missing. Make sure every page method includes\nJSDoc comments in the generated code. Generate only code grounded in the supplied DOM."
    }
  ]
}

```

```

    },
    {
        "role": "user",

        "content": "Given the following DOM structure:\n```\nhtml\n<input class=\"inputLogin\" type=\"text\" id=\"username\" name=\"USERNAME\" size=\"50\">\n<input class=\"inputLogin\" type=\"password\" id=\"password\" name=\"PASSWORD\" size=\"50\">\n<input class=\"decorativeSubmit\" type=\"submit\" value=\"Login\">\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for LoginPage.\n    /// </summary>\n    public class LoginPage\n    {\n        private readonly IWebDriver driver;\n\n        public LoginPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement USERNAMEInput => driver.FindElement(By.Id(\"username\"));\n        private IWebElement PASSWORDPasswordInput => driver.FindElement(By.Id(\"password\"));\n        private IWebElement LoginButton => driver.FindElement(By.XPath(\"//input[@value='Login']\"));\n\n        /// <summary>\n        /// Enters a value in the USERNAME field.\n        /// </summary>\n        public LoginPage EnterUSERNAME(string USERNAME)\n        {\n            USERNAMEInput.Clear();\n            USERNAMEInput.SendKeys(USERNAME);\n            return this;\n        }\n\n        /// <summary>\n        /// Enters a value in the PASSWORD field.\n        /// </summary>\n        public LoginPage EnterPASSWORD(string pASSWORD)\n        {\n            PASSWORDPasswordInput.Clear();\n            PASSWORDPasswordInput.SendKeys(pASSWORD);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Login element.\n        /// </summary>\n        public LoginPage ClickLogin()\n        {\n            LoginButton.Click();\n            return this;\n        }\n    }\n}\n\nGenerate a Playwright TypeScript page object class for this DOM."

    },
    {
        "role": "assistant",

        "content": "import { Page, Locator } from '@playwright/test';\n\nexport class GeneratedPage {\n    readonly page: Page;\n    readonly usernameInput: Locator;\n    readonly passwordInput: Locator;\n    readonly loginButton: Locator;\n\n    constructor(page: Page) {\n        this.page = page;\n        this.usernameInput = page.locator(\"#username\");\n        this.passwordInput = page.locator(\"#password\");\n        this.loginButton = page.locator(\"input[type='submit']\");\n    }\n\n    /** Fill the username field */\n    async enterUsername(username: string): Promise<void> {\n        await this.usernameInput.fill(username);\n    }\n\n    /** Fill the password field */\n    async enterPassword(password: string): Promise<void> {\n        await this.passwordInput.fill(password);\n    }\n\n    /** Click the Login */\n    async clickLogin(): Promise<void> {\n        await this.loginButton.click();\n    }\n}"
    }
}

{

```

```

"messages": [
  {
    "role": "system",
    "content": "You are an expert in generating Playwright TypeScript page object classes using
provided DOM information. Use @playwright/test conventions, proper locators, async methods, and
insert TODO comments only when a mapping is missing. Make sure every page method includes
JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."
  },
  {
    "role": "user",
    "content": "Given the following DOM structure:\n```html\n<a
href=\"/crmsfa/control/leadsMain\" id=\"ext-gen614\">Leads</a>\n\n===CSHARP===\nusing
OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n  /// <summary>\n  /// Page object
generated strictly from the supplied HTML DOM for MyHomePage.\n  /// </summary>\n  public
class MyHomePage\n  {\n    private readonly IWebDriver driver;\n    public
MyHomePage(IWebDriver driver)\n    {\n      this.driver = driver;\n    }\n    private
IWebElement LeadsLink => driver.FindElement(By.LinkText(\"Leads\"));\n    /// <summary>\n
/// Clicks the Leads element.\n    /// </summary>\n    public MyHomePage ClickLeads()\n    {\n
LeadsLink.Click();\n      return this;\n    }\n  }\n}\n```\nGenerate a Playwright TypeScript page
object class for this DOM."
  },
  {
    "role": "assistant",
    "content": "import { Page, Locator } from '@playwright/test';\n\nexport class GeneratedPage {\n
  readonly page: Page;\n  readonly extGen614Button: Locator;\n\n  constructor(page: Page) {\n
    this.page = page;\n    this.extGen614Button = page.locator(\"#ext-gen614\");\n  }\n\n  /** Click
the ext-gen614 */\n  async clickExtGen614(): Promise<void> {\n    await
this.extGen614Button.click();\n  }\n}

```

```

{
  "messages": [
    {
      "role": "system",

```


"content": "You are an expert in generating Playwright TypeScript page object classes using provided DOM information. Use @playwright/test conventions, proper locators, async methods, and insert TODO comments only when a mapping is missing. Make sure every page method includes JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."

},

{

"role": "user",

"content": "Given the following DOM structure:\n```html\nCreate Lead\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n /// <summary>\n /// Page object generated strictly from the supplied HTML DOM for MyLeadsPage.\n /// </summary>\n public class MyLeadsPage\n {\n private readonly IWebDriver driver;\n\n public MyLeadsPage(IWebDriver driver)\n {\n this.driver = driver;\n }\n\n private IWebElement CreateLeadLink => driver.FindElement(By.LinkText(\"Create Lead\"));\n\n /// <summary>\n /// Clicks the Create Lead element.\n /// </summary>\n public MyLeadsPage ClickCreateLead()\n {\n CreateLeadLink.Click();\n return this;\n }\n }\n}\n```\nGenerate a Playwright TypeScript page object class for this DOM."

},

{

"role": "assistant",

"content": "import { Page, Locator } from '@playwright/test';\n\nexport class GeneratedPage {\n readonly page: Page;\n readonly extGen876Button: Locator;\n\n constructor(page: Page) {\n this.page = page;\n this.extGen876Button = page.locator(\"#ext-gen876\");\n }\n\n /** Click the ext-gen876 */\n async clickExtGen876(): Promise<void> {\n await this.extGen876Button.click();\n }\n}

}

]

}

{

"messages": [

{

"role": "system",

"content": "You are an expert in generating Playwright TypeScript page object classes using provided DOM information. Use @playwright/test conventions, proper locators, async methods, and insert TODO comments only when a mapping is missing. Make sure every page method includes JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."

},

```

{
  "role": "user",

  "content": "Given the following DOM structure:\n```\nhtml\n<input class=\"XdijitInputField\n  dijitInputFieldValidationNormal\" type=\"text\" autocomplete=\"off\"\n  name=\"ComboBox_productId\" dojoattachevent=\"onkeypress, onkeyup, onfocus, onblur,\n  compositionend\" dojoattachpoint=\"textbox, focusNode\" id=\"ComboBox_productId\"\n  tabindex=\"1\" size=\"15\" maxlength=\"50\" wairole=\"combobox\" role=\"wairole:combobox\"\n  value=\"\" valuenow=\"\" invalid=\"false\" disabled=\"false\">\n<input id=\"quantity\"\n  name=\"quantity\" type=\"text\" size=\"10\" maxlength=\"\" class=\"inputBox\" value=\"1\"\n  onchange=\"\" tabindex=\"2\">\n<a class=\"subMenuButton\"\n  href=\"javascript:document.cartform.submit();\" id=\"ext-\n  gen173\">Update</a>\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace\n  LeafTaps.Pages\n{\n  /// <summary>\n  /// Page object generated strictly from the supplied HTML\n  DOM for OrderEntryHeaderPage.\n  /// </summary>\n  public class OrderEntryHeaderPage\n  {\n    private readonly IWebDriver driver;\n\n    public OrderEntryHeaderPage(IWebDriver driver)\n    {\n      this.driver = driver;\n    }\n\n    private IWebElement ProductIdInput =>\n      driver.FindElement(By.Id(\"ComboBox_productId\"));\n    private IWebElement QuantityInput =>\n      driver.FindElement(By.Id(\"quantity\"));\n    private IWebElement UpdateLink =>\n      driver.FindElement(By.LinkText(\"Update\"));\n\n    /// <summary>\n    /// Enters a value in the\n    productId field.\n    /// </summary>\n    public OrderEntryHeaderPage EnterProductId(string\n      productId)\n    {\n      ProductIdInput.Clear();\n      ProductIdInput.SendKeys(productId);\n      return this;\n    }\n\n    /// <summary>\n    /// Enters a value in the quantity field.\n    /// </summary>\n    public OrderEntryHeaderPage EnterQuantity(string quantity)\n    {\n      QuantityInput.Clear();\n      QuantityInput.SendKeys(quantity);\n      return this;\n    }\n\n    /// <summary>\n    /// Clicks the Update element.\n    /// </summary>\n    public\n      OrderEntryHeaderPage ClickUpdate()\n    {\n      UpdateLink.Click();\n      return this;\n    }\n  }\n}\n```\nGenerate a Playwright TypeScript page object class for this DOM."

  },

  {
    "role": "assistant",

    "content": "import { Page, Locator } from '@playwright/test';\n\nexport class GeneratedPage {\n  readonly page: Page;\n  readonly comboBoxProductIdInput: Locator;\n  readonly quantityInput:\n    Locator;\n  readonly extGen173Button: Locator;\n\n  constructor(page: Page) {\n    this.page =\n      page;\n    this.comboBoxProductIdInput = page.locator(\"#ComboBox_productId\");\n    this.quantityInput = page.locator(\"#quantity\");\n    this.extGen173Button = page.locator(\"#ext-\n      gen173\");\n  }\n\n  /** Fill the ComboBox_productId field */\n  async\n    enterComboBoxProductId(comboBoxProductId: string): Promise<void> {\n    await\n      this.comboBoxProductIdInput.fill(comboBoxProductId);\n  }\n\n  /** Fill the quantity field */\n  async\n    enterQuantity(quantity: string): Promise<void> {\n    await this.quantityInput.fill(quantity);\n  }\n\n  /** Click the ext-gen173 */\n  async\n    clickExtGen173(): Promise<void> {\n    await\n      this.extGen173Button.click();\n  }\n}

```

```
}
```

```
{
```

```
  "messages": [
```

```
    {
```

```
      "role": "system",
```

```
      "content": "You are an expert in generating Playwright TypeScript page object classes using provided DOM information. Use @playwright/test conventions, proper locators, async methods, and insert TODO comments only when a mapping is missing. Make sure every page method includes JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."
```

```
    },
```

```
    {
```

```
      "role": "user",
```

```
      "content": "Given the following DOM structure:\n`html\n<input id=\"uploadedFile\" name=\"uploadedFile\" type=\"file\" size=\"30\" maxlength=\"\" class=\"inputBox\" onchange=\"\">\n<input type=\"submit\" value=\"Upload and Import\" class=\"smallSubmit\" onclick=\"submitFormAndReplaceButtonTextWithSingleClick(this, 'Uploading... Please Wait');\" id=\"ext-gen593\">\n\n===C#SHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n    /// <summary>\n    /// Page object generated strictly from the supplied HTML DOM for UploadPage.\n    /// </summary>\n    public class UploadPage\n    {\n        private readonly IWebDriver driver;\n\n        public UploadPage(IWebDriver driver)\n        {\n            this.driver = driver;\n        }\n\n        private IWebElement FileFileInput =>\n            driver.FindElement(By.Id(\"uploadedFile\"));\n\n        private IWebElement UploadAndImportButton =>\n            driver.FindElement(By.XPath(\"//input[@value='Upload and Import']\"));\n\n        /// <summary>\n        /// Uploads a file using the File field.\n        /// </summary>\n        public UploadPage UploadFile(string filePath)\n        {\n            FileFileInput.SendKeys(filePath);\n            return this;\n        }\n\n        /// <summary>\n        /// Clicks the Upload and Import element.\n        /// </summary>\n        public UploadPage ClickUploadAndImport()\n        {\n            UploadAndImportButton.Click();\n            return this;\n        }\n    }\n}\n\nGenerate a Playwright TypeScript page object class for this DOM."
```

```
    },
```

```
  }
```

```
  "role": "assistant",
```

```
  "content": "import { Page, Locator } from '@playwright/test';\n\nexport class GeneratedPage {\n  readonly page: Page;\n  readonly uploadedFileInput: Locator;\n  readonly extGen593Button: Locator;\n\n  constructor(page: Page) {\n    this.page = page;\n    this.uploadedFileInput = page.locator(\"#uploadedFile\");\n    this.extGen593Button = page.locator(\"#ext-gen593\");\n  }\n\n  /** Fill the uploadedFile field */\n  async enterUploadedFile(uploadedFile: string): Promise<void> {\n    await this.uploadedFileInput.fill(uploadedFile);\n  }\n\n  /** Click the ext-gen593 */\n  async clickExtGen593(): Promise<void> {\n    await this.extGen593Button.click();\n  }\n}"
```

```

    }
  ]
}

{
  "messages": [
    {
      "role": "system",

      "content": "You are an expert in generating Playwright TypeScript page object classes using
provided DOM information. Use @playwright/test conventions, proper locators, async methods, and
insert TODO comments only when a mapping is missing. Make sure every page method includes
JSDoc comments in the generated code. Generate only code grounded in the supplied DOM."

    },
    {
      "role": "user",

      "content": "Given the following DOM structure:\n```\nhtml\n<div class=\"x-grid3-cell-inner x-grid3-
col-partyId\" unselectable=\"on\" id=\"ext-gen781\"><a class=\"linktext\"
href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen839\">10196</a></div>\n<div
class=\"x-grid3-cell-inner x-grid3-col-firstName\" unselectable=\"on\" id=\"ext-gen840\"><a
class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-
gen841\">TCS</a></div>\n<div class=\"x-grid3-cell-inner x-grid3-col-lastName\"
unselectable=\"on\" id=\"ext-gen842\"><a class=\"linktext\"
href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen874\">Abd</a></div>\n<div
class=\"x-grid3-cell-inner x-grid3-col-companyName\" unselectable=\"on\" id=\"ext-gen857\"><a
class=\"linktext\" href=\"/crmsfa/control/viewLead?partyId=10196\" id=\"ext-gen858\">M
S</a></div>\n\n\n===CSHARP===\nusing OpenQA.Selenium;\n\nnamespace LeafTaps.Pages\n{\n
/// <summary>\n /// Page object generated strictly from the supplied HTML DOM for
ViewLeadPage.\n /// </summary>\n public class ViewLeadPage\n {\n   private readonly
IWebDriver driver;\n\n   public ViewLeadPage(IWebDriver driver)\n   {\n     this.driver =
driver;\n   }\n\n   private IWebElement PartyIdText => driver.FindElement(By.Id(\"ext-
gen781\"));\n   private IWebElement Value10196Link =>
driver.FindElement(By.LinkText(\"10196\"));\n   private IWebElement FirstNameText =>
driver.FindElement(By.Id(\"ext-gen840\"));\n   private IWebElement TCSLink =>
driver.FindElement(By.LinkText(\"TCS\"));\n   private IWebElement LastNameText =>
driver.FindElement(By.Id(\"ext-gen842\"));\n   private IWebElement AbdLink =>
driver.FindElement(By.LinkText(\"Abd\"));\n   private IWebElement CompanyNameText =>
driver.FindElement(By.Id(\"ext-gen857\"));\n   private IWebElement MSLink =>
driver.FindElement(By.LinkText(\"M S\"));\n\n   /// <summary>\n   /// Gets the visible text from
the partyId element.\n   /// </summary>\n   public string GetPartyIdText()\n   {\n
return PartyIdText.Text;\n   }\n\n   /// <summary>\n   /// Checks whether the partyId
element is displayed.\n   /// </summary>\n   public bool IsPartyIdVisible()\n   {\n

```

