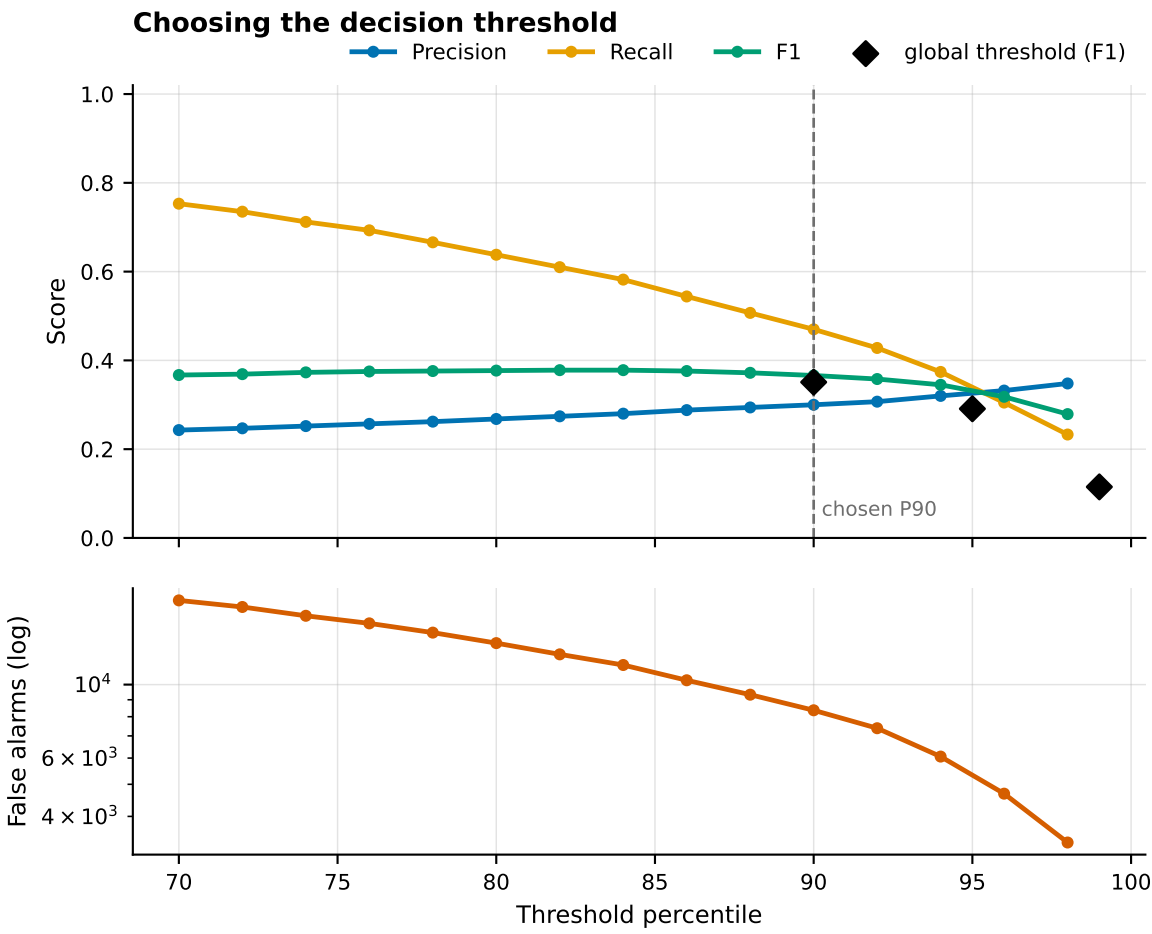

Thresholds are learned on each field's clean calibration window and applied unchanged to its test window, so no boundary is ever fitted to the data it judges.